Analysis report for sample: 5616aabff05e209108b5dac66a398b5a

This report has been generated by a set of tools for semi-supervised behavioral analysis of executables.

More information about these reports at **http://www.vallejo.cc**.

This work is licensed under a Creative Commons Attribution 4.0 International License. To view a copy of this license visit http://creativecommons.org/licenses/by/4.0/.

Report classification: 2869 (indicates the level of interest of the report, based on the amount of information collected about the sample).

Index

- Sample
- AV detections
- Original source url
- Virustotal url
- Yara matches
- Snapshot
- Threads tree
- Running processes
- Most interesting actions
- Most interesting strings
- Involved hosts
- Dns queries
- Connections and readable network traffic
- Threads behavioural information
- Malware processes' network events
- Sample's unpacked / injected modules

Sample

•md5: 5616aabff05e209108b5dac66a398b5a

AV detections

• Microsoft: Backdoor:Win32/Vawtrak.E
• Kaspersky: Backdoor.Win32.Androm.ldnx
• Symantec: Trojan.Snifula.F
• Malwarebytes: Trojan.Zbot

Original source url

• hxxp://landsurveyor.net/wp-content/themes/twentythirteen/inst.exe

Virustotal url

• https://virustotal.com/es/file/b6192a93ba0e5e3194e9113a8d86203ac832baf4a3625e75ed8e5fedfef88555/analysis

Yara matches

The following yara rules have matched injected or unpacked modules's code or data areas.

• Str_Win32_Wininet_Library (Match Windows Inet API library declaration)
• Str_Win32_Internet_API (Match Windows Inet API call)
• Str_Win32_Http_API (Match Windows Http API call)
• Microsoft_Visual_Cpp_v50v60_MFC ()
• Borland_Delphi_30_additional ()
• Borland_Delphi_30_ ()
• Borland_Delphi_v40_v50 ()
• Borland_Delphi_v30 ()
• Borland_Delphi_DLL ()
• IsPE32 ()
• IsWindowsGUI ()
• IsPacked (Entropy Check)
• HasDebugData (DebugData Check)
• HasRichSignature (Rich Signature Check)
• network_http (Communications over HTTP)
• network_ftp (Communications over FTP)
• win_files_operation (Affect private profile)
• without_attachments (Rule to detect the no presence of any attachment)
• without_images (Rule to detect the no presence of any image)
• without_urls (Rule to detect the no presence of any url)
• contentis_base64 (This rule finds for base64 strings)
• IsDLL ()
• HasOverlay (Overlay Check)
• antisb_threatExpert (Anti-Sandbox checks for ThreatExpert)
• inject_thread (Code injection with CreateRemoteThread in a remote process)
• network_dns (Communications use DNS)
• network_dga (Communication using dga)
• escalate_priv (Escalade priviledges)
• win_mutex (Create or check mutex)
• win_registry (Affect system registries)
• win_token (Affect system token)
• Advapi_Hash_API (Looks for advapi API functions)

- CRC32_poly_Constant (Look for CRC32 [poly])
- Microsoft_Visual_Cpp_8_additional ()
- Microsoft_Visual_Cpp_8 ()

Snapshot

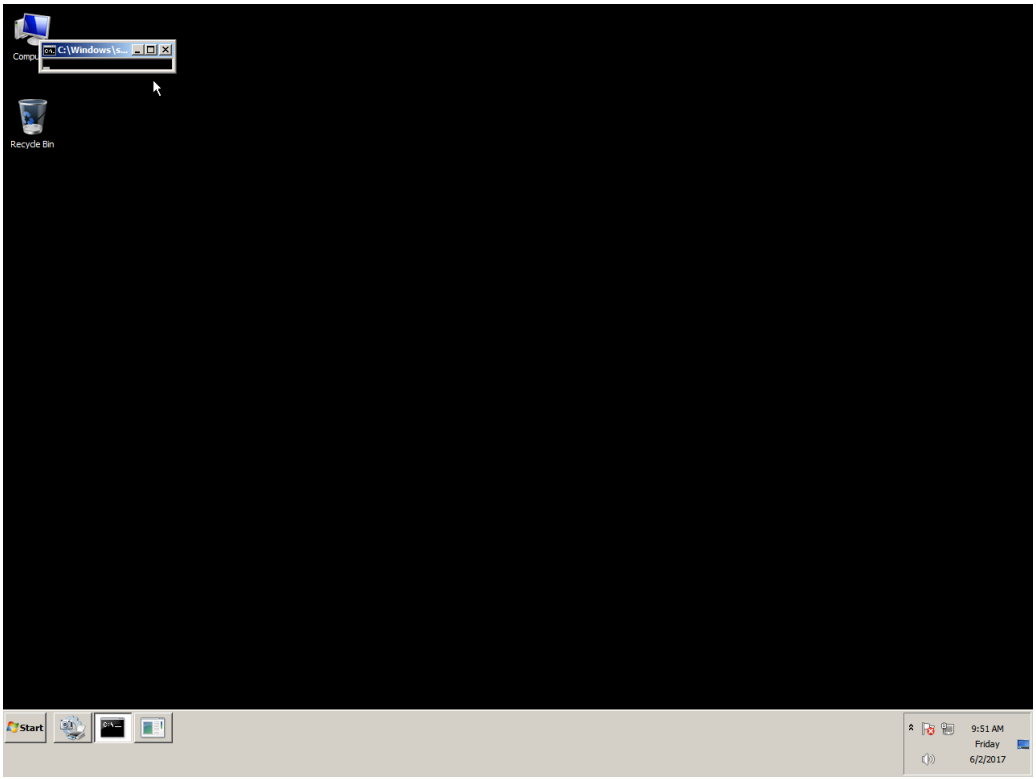

Threads tree

The following tree represents sample's threads. T<index> is an alias for sample's threads (numeration is done in the order of threads creation). P<index> is an alias for processes owning sample's threads.

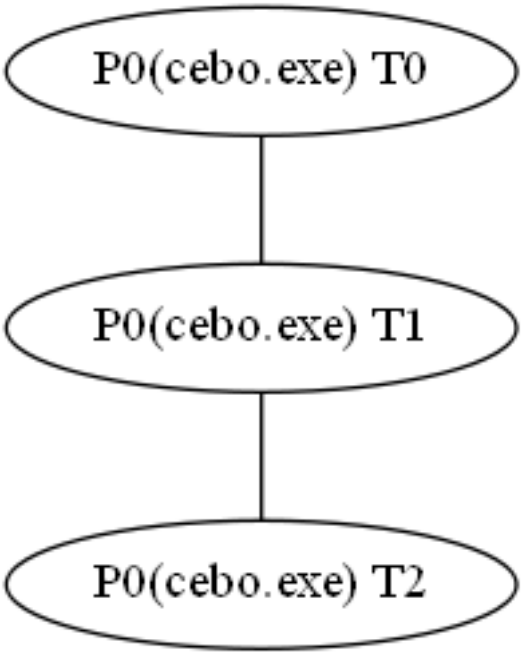

Running processes

Here it is the list of running processes after sample execution.

Processes with sample' threads

- Name cebo.exe Alias P0

Other processes

- Name System
- Name smss.exe
- Name csrss.exe
- Name wininit.exe
- Name csrss.exe
- Name winlogon.exe
- Name services.exe
- Name lsass.exe
- Name lsm.exe
- Name svchost.exe
- Name svchost.exe
- Name svchost.exe
- Name svchost.exe
- Name svchost.exe
- Name audiodg.exe
- Name TrustedInstaller.exe
- Name svchost.exe
- Name svchost.exe
- Name spoolsv.exe
- Name svchost.exe
- Name svchost.exe
- Name vmtoolse.exe
- Name svchost.exe
- Name dllhost.exe
- Name msdtc.exe
- Name sppsvc.exe
- Name taskhost.exe
- Name dwm.exe
- Name explorer.exe
- Name vmtoolse.exe
- Name SearchIndexer.exe
- Name svchost.exe
- Name wmpnetwk.exe
- Name WmiPrvSE.exe
- Name chrome.exe
- Name WmiPrvSE.exe
- Name SearchFilterHost.exe
- Name taskhost.exe
- Name SearchProtocolHost.exe
- Name cmd.exe
- Name conhost.exe
- Name UI0Detect.exe
- Name UI0Detect.exe
- Name pxxx.exe
- Name dllhost.exe
- Name cmd.exe

- Name conhost.exe
- Name cmd.exe
- Name conhost.exe
- Name int3.exe
- Name explorer.exe
- Name explorer.exe
- Name cmd.exe
- Name conhost.exe
- Name UI0Detect.exe
- Name cmd.exe
- Name conhost.exe
- Name cmd.exe
- Name conhost.exe
- Name explorer.exe
- Name explorer.exe
- Name cmd.exe
- Name conhost.exe
- Name taskkill.exe
- Name mode.com
- Name conhost.exe
- Name WmiPrvSE.exe
- Name cmd.exe
- Name conhost.exe
- Name cmd.exe
- Name UI0Detect.exe
- Name conhost.exe
- Name int3.exe

Most interesting actions

The following list it's a collection of the most interesting events captured. This list is ordered by the score assigned to the event. In the section "Threads behavioural information" it's possible to find all the actions performed by each sample's thread ordered chronologically.

- RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Run Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Run\\{7FCFFCF4-1D01-4E92-B673-F4607D5B11DE} Type: REG_SZ, Length: 96, Data: "C:\\Users\\javi\\AppData\\Roaming\\Qanaq\\Fiwfi.exe")

Most interesting strings

The following list it's a collection of the most interesting strings found in the sample's modules code or data. A complete list of strings for each sample's module can be found in the section "Sample's unpacked / injected modules."

- url | valid domains | tlds: www.amazon.com
- url | valid domains | tlds: google.com
- url | valid domains | tlds: 5.vI"-vO!.v
- url | valid domains | tlds: .VG|
- url | valid domains | tlds: (.Dj
- url | valid domains | tlds: .Nf?
- api | frequently used by malware: InternetWriteFile
- api | frequently used by malware: AdjustTokenPrivileges
- api | frequently used by malware: OpenProcessToken
- api | frequently used by malware: DeviceIoControl
- api | frequently used by malware: CreateRemoteThread
- api | frequently used by malware: GetThreadContext
- api | frequently used by malware: VirtualAllocEx
- api | frequently used by malware: OpenProcess
- api | frequently used by malware: WriteProcessMemory
- api | frequently used by malware: CreateToolhelp32Snapshot
- api | frequently used by malware: Process32Next
- api | frequently used by malware: VirtualProtectEx
- api | frequently used by malware: ReadProcessMemory
- api | frequently used by malware: Process32First
- api | frequently used by malware: WriteFile
- api | frequently used by malware: QueryPerformanceCounter
- api | frequently used by malware: MapViewOfFile
- api | frequently used by malware: CreateThread
- api | frequently used by malware: GetAdaptersInfo
- api | frequently used by malware: InternetCloseHandle
- api | frequently used by malware: InternetReadFile
- api | frequently used by malware: InternetQueryDataAvailable
- api | frequently used by malware: PFXImportCertStore
- api | frequently used by malware: CoCreateInstance
- api | frequently used by malware: RegCloseKey
- api | frequently used by malware: WinExec
- api | frequently used by malware: GetTickCount
- api | frequently used by malware: ExitProcess
- api | frequently used by malware: ResumeThread
- api | frequently used by malware: SuspendThread
- api | frequently used by malware: GetProcAddress
- api | frequently used by malware: Sleep
- api | frequently used by malware: LdrLoadDll
- api | frequently used by malware: Accept-Encoding: gzip, deflate
- api | frequently used by malware: Accept-Language: en-US;q=0.5,en;q=0.3
- api | frequently used by malware: Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8
- api | frequently used by malware: DllRegisterServer
- api | frequently used by malware: LoadResource
- url | http tag: https://
- url | http tag: http://
- api | wininet: HttpAddRequestHeadersA
- api | wininet: HttpEndRequestA
- api | wininet: HttpSendRequestExA
- api | wininet: InternetQueryOptionA
- api | wininet: InternetOpenA

- api | wininet: HttpSendRequestA
- api | wininet: HttpOpenRequestA
- api | wininet: InternetSetOptionA
- api | wininet: InternetConnectA
- api | wininet: HttpQueryInfoA
- api | crypt32: CertGetCertificateContextProperty
- api | crypt32: CertFreeCertificateChain
- api | crypt32: CryptDecodeObject
- api | crypt32: CertEnumCertificatesInStore
- api | crypt32: CertCloseStore
- api | crypt32: CertAddCertificateContextToStore
- api | crypt32: CertFreeCertificateContext
- api | crypt32: CertOpenStore
- api | netapi: NetUserGetInfo
- api | advapi32: CryptHashData
- api | advapi32: CryptDestroyHash
- api | advapi32: CryptVerifySignatureA
- api | advapi32: CryptDestroyKey
- api | advapi32: CryptCreateHash
- api | advapi32: CryptImportKey
- api | advapi32: CryptAcquireContextA
- api | advapi32: ConvertStringSecurityDescriptorToSecurityDescriptorA
- api | advapi32: LookupPrivilegeValueA
- api | advapi32: RegCreateKeyA
- api | kernel32: RegSetValueExA
- api | advapi32: GetTokenInformation
- api | advapi32: GetSidSubAuthorityCount
- api | advapi32: GetUserNameW
- api | advapi32: GetSidSubAuthority
- api | user32: wvsprintfA
- api | kernel32: GetOverlappedResult
- api | kernel32: SetUnhandledExceptionFilter
- api | kernel32: VirtualFreeEx
- api | kernel32: GetLocalTime
- api | kernel32: ReleaseMutex
- api | kernel32: CreateMutexA
- api | kernel32: lstrcmpiW
- api | kernel32: GetModuleFileNameW
- api | kernel32: VirtualAlloc
- api | kernel32: GetProcessHeap
- api | kernel32: VirtualFree
- api | kernel32: HeapFree
- api | kernel32: HeapAlloc
- api | kernel32: HeapReAlloc
- api | kernel32: FindClose
- api | kernel32: FindFirstFileA
- api | kernel32: CreateDirectoryA
- api | kernel32: ReadFile
- api | kernel32: GetFileAttributesW
- api | kernel32: GetFileAttributesA
- api | kernel32: GetFileSize
- api | kernel32: SetLastError
- api | kernel32: GetTempPathA
- api | kernel32: GetVersionExA
- api | kernel32: QueryPerformanceFrequency
- api | kernel32: GetSystemInfo
- api | kernel32: GetVolumeInformationA

- api | kernel32: GetSystemTimeAsFileTime
- api | kernel32: GetCurrentProcess
- api | kernel32: SetErrorMode
- api | kernel32: DeleteCriticalSection
- api | kernel32: MultiByteToWideChar
- api | kernel32: lstrcmpA
- api | kernel32: CreateFileMappingA
- api | kernel32: UnmapViewOfFile
- api | kernel32: GetCurrentThreadId
- api | kernel32: TerminateThread
- api | kernel32: TlsSetValue
- api | kernel32: TlsGetValue
- api | dnsapi: DnsFree
- api | dnsapi: DnsQuery_A
- api | netapi: NetWkstaGetInfo
- api | netapi: NetApiBufferFree
- api | kernel32: RegOpenKeyExW
- api | kernel32: RegOpenKeyExA
- api | kernel32: RegQueryValueExA
- api | advapi32: RegEnumKeyW
- api | kernel32: RegCreateKeyExA
- api | kernel32: RegNotifyChangeKeyValue
- api | kernel32: RegEnumValueA
- api | kernel32: RegDeleteValueA
- api | advapi32: InitiateSystemShutdownExA
- api | user32: wsprintfW
- api | user32: wsprintfA
- api | kernel32: DeleteFileA
- api | kernel32: EnterCriticalSection
- api | kernel32: LeaveCriticalSection
- api | kernel32: InitializeCriticalSection
- api | kernel32: DeleteFileW
- api | kernel32: GetWindowsDirectoryW
- api | kernel32: CopyFileW
- api | kernel32: GetWindowsDirectoryA
- api | kernel32: SetFilePointer
- api | kernel32: GetExitCodeThread
- api | kernel32: GetTempPathW
- api | kernel32: CreateFileW
- api | kernel32: GetSystemDirectoryA
- api | kernel32: CreateDirectoryW
- api | kernel32: GetSystemDirectoryW
- api | kernel32: RegisterWaitForSingleObject
- api | kernel32: CreateProcessA
- api | kernel32: GetExitCodeProcess
- api | kernel32: UnregisterWait
- api | kernel32: PulseEvent
- api | kernel32: IsBadCodePtr
- api | kernel32: LocalFree
- api | kernel32: TlsFree
- api | kernel32: TlsAlloc
- api | kernel32: lstrcmpiA
- api | kernel32: lstrcpyW
- api | kernel32: lstrcatW
- api | kernel32: GetModuleHandleA
- api | kernel32: WaitForMultipleObjects
- api | kernel32: lstrlenW

- api | kernel32: lstrcpyA
- api | kernel32: GetCurrentProcessId
- api | kernel32: GetLastError
- api | kernel32: TerminateProcess
- api | kernel32: GetModuleFileNameA
- api | kernel32: LoadLibraryA
- api | kernel32: GetCurrentThread
- api | kernel32: GetModuleHandleExA
- api | kernel32: CloseHandle
- api | kernel32: OpenEventA
- api | kernel32: lstrcatA
- api | kernel32: CreateEventA
- api | kernel32: SetEvent
- api | kernel32: WaitForSingleObject
- api | kernel32: lstrlenA
- api | kernel32: CreateFileA
- api | kernel32: GetCommandLineA
- api | kernel32: IsWow64Process
- api | ntdll: NtWow64WriteVirtualMemory64
- api | ntdll: NtWow64ReadVirtualMemory64
- api | ntdll: NtProtectVirtualMemory
- api | ntdll: NtGetContextThread
- api | kernel32: RegGetValueW
- api | user32: MessageBoxW
- api | kernel32: VirtualProtect
- api | kernel32: LockResource
- api | kernel32: SizeofResource
- api | kernel32: FreeResource
- api | kernel32: FindResourceA

Involved hosts

Dns queries

- 2.133.168.192.in-addr.arpa ---> no answers

Connections and readable network traffic

The analysis environment captures network traffic happened while sample execution. It classifies the traffic and tries to extract the most significant parts from the communications data.

In this section it's possible to find parts of the communication data that are easier to be read.

Threads behavioural information

In this section it's possible to find information about sample's threads, such as the actions performed by each sample's thread ordered chronologically.

- **Thread T0 (in process P0, cebo.exe) description**
  - **Thread's childs**
    - Thread T1 (in process P0, cebo.exe)
  - **Thread' events**
    - Thread Create (Thread ID: T1)
- **Thread T1 (in process P0, cebo.exe) description**
  - **Thread's childs**
    - Thread T2 (in process P0, cebo.exe)
  - **Thread' events**
    - Thread Create (Thread ID: T2)
    - RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Run Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
    - RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Run\\{7FCFFCF4-1D01-4E92-B673-F4607D5B11DE} Type: REG_SZ, Length: 96, Data: "C:\\Users\\javi\\AppData\\Roaming\\Qanaq\\Fiwfi.exe")
- **Thread T2 (in process P0, cebo.exe) description**
  - **Thread's childs**
  - **Thread' events**
    - Thread Create (Thread ID: TUNKALIAS)

Malware processes' network events

The analysis environment tries to capture and collect network actions performed by sample's threads.

Sample's unpacked / injected modules

In this section it's possible to find information about sample's modules, such as the rich signatures, strings, yara rules matching the module,...

The analysis environment performs an heuristic search trying to find sample's injected or unpacked modules in memory, dumping and analyzing them.

• Module 1 (probably unpacked / injected by the sample)

• Module 1 rich signatures

• 44616e530000000000000000000000000fc77b90002000000e81f040002000000831c0e0001000000ddffce0003000000ddffcb00190000000000000100ef0000001e529500010000000d52e400520000000d52de00

• Module 1 yara matches

• Str_Win32_Wininet_Library (Match Windows Inet API library declaration)
• Str_Win32_Internet_API (Match Windows Inet API call)
• Str_Win32_Http_API (Match Windows Http API call)
• IsPE32 ()
• IsDLL ()
• IsWindowsGUI ()
• HasOverlay (Overlay Check)
• HasRichSignature (Rich Signature Check)
• antisb_threatExpert (Anti-Sandbox checks for ThreatExpert)
• inject_thread (Code injection with CreateRemoteThread in a remote process)
• network_http (Communications over HTTP)
• network_dns (Communications use DNS)
• network_dga (Communication using dga)
• escalate_priv (Escalade priviledges)
• win_mutex (Create or check mutex)
• win_registry (Affect system registries)
• win_token (Affect system token)
• win_files_operation (Affect private profile)
• without_attachments (Rule to detect the no presence of any attachment)
• without_images (Rule to detect the no presence of any image)
• without_urls (Rule to detect the no presence of any url)
• contentis_base64 (This rule finds for base64 strings)
• Advapi_Hash_API (Looks for advapi API functions)
• CRC32_poly_Constant (Look for CRC32 [poly])

• Module 1 strings

• Module 1 most interesting strings

• url | valid domains | tlds: www.amazon.com
• url | valid domains | tlds: google.com
• url | valid domains | tlds: 5.vI"-vO!.v
• api | frequently used by malware: InternetWriteFile
• api | frequently used by malware: AdjustTokenPrivileges
• api | frequently used by malware: OpenProcessToken
• api | frequently used by malware: DeviceIoControl
• api | frequently used by malware: CreateRemoteThread
• api | frequently used by malware: GetThreadContext
• api | frequently used by malware: VirtualAllocEx
• api | frequently used by malware: OpenProcess

- api | frequently used by malware: WriteProcessMemory
- api | frequently used by malware: CreateToolhelp32Snapshot
- api | frequently used by malware: Process32Next
- api | frequently used by malware: VirtualProtectEx
- api | frequently used by malware: ReadProcessMemory
- api | frequently used by malware: Process32First
- api | frequently used by malware: WriteFile
- api | frequently used by malware: QueryPerformanceCounter
- api | frequently used by malware: MapViewOfFile
- api | frequently used by malware: CreateThread
- api | frequently used by malware: GetAdaptersInfo
- api | frequently used by malware: InternetCloseHandle
- api | frequently used by malware: InternetReadFile
- api | frequently used by malware: InternetQueryDataAvailable
- api | frequently used by malware: PFXImportCertStore
- api | frequently used by malware: CoCreateInstance
- api | frequently used by malware: RegCloseKey
- api | frequently used by malware: WinExec
- api | frequently used by malware: GetTickCount
- api | frequently used by malware: ExitProcess
- api | frequently used by malware: ResumeThread
- api | frequently used by malware: SuspendThread
- api | frequently used by malware: GetProcAddress
- api | frequently used by malware: Sleep
- api | frequently used by malware: CreateRemoteThread
- api | frequently used by malware: LdrLoadDll
- api | frequently used by malware: Accept-Encoding: gzip, deflate
- api | frequently used by malware: Accept-Language: en-US;q=0.5,en;q=0.3
- api | frequently used by malware: Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8
- api | frequently used by malware: DllRegisterServer
- url | http tag: https://
- url | http tag: http://
- api | wininet: HttpAddRequestHeadersA
- api | wininet: HttpEndRequestA
- api | wininet: HttpSendRequestExA
- api | wininet: InternetQueryOptionA
- api | wininet: InternetOpenA
- api | wininet: HttpSendRequestA
- api | wininet: HttpOpenRequestA
- api | wininet: InternetSetOptionA
- api | wininet: InternetConnectA
- api | wininet: HttpQueryInfoA
- api | crypt32: CertGetCertificateContextProperty
- api | crypt32: CertFreeCertificateChain
- api | crypt32: CryptDecodeObject
- api | crypt32: CertEnumCertificatesInStore
- api | crypt32: CertCloseStore
- api | crypt32: CertAddCertificateContextToStore
- api | crypt32: CertFreeCertificateContext
- api | crypt32: CertOpenStore
- api | netapi: NetUserGetInfo
- api | advapi32: CryptHashData
- api | advapi32: CryptDestroyHash
- api | advapi32: CryptVerifySignatureA
- api | advapi32: CryptDestroyKey
- api | advapi32: CryptCreateHash
- api | advapi32: CryptImportKey

- api | advapi32: CryptAcquireContextA
- api | advapi32: ConvertStringSecurityDescriptorToSecurityDescriptorA
- api | advapi32: LookupPrivilegeValueA
- api | advapi32: RegCreateKeyA
- api | kernel32: RegSetValueExA
- api | advapi32: GetTokenInformation
- api | advapi32: GetSidSubAuthorityCount
- api | advapi32: GetUserNameW
- api | advapi32: GetSidSubAuthority
- api | user32: wvsprintfA
- api | kernel32: GetOverlappedResult
- api | kernel32: SetUnhandledExceptionFilter
- api | kernel32: VirtualFreeEx
- api | kernel32: GetLocalTime
- api | kernel32: ReleaseMutex
- api | kernel32: CreateMutexA
- api | kernel32: lstrcmpiW
- api | kernel32: GetModuleFileNameW
- api | kernel32: VirtualAlloc
- api | kernel32: GetProcessHeap
- api | kernel32: VirtualFree
- api | kernel32: HeapFree
- api | kernel32: HeapAlloc
- api | kernel32: HeapReAlloc
- api | kernel32: FindClose
- api | kernel32: FindFirstFileA
- api | kernel32: CreateDirectoryA
- api | kernel32: ReadFile
- api | kernel32: GetFileAttributesW
- api | kernel32: GetFileAttributesA
- api | kernel32: GetFileSize
- api | kernel32: SetLastError
- api | kernel32: GetTempPathA
- api | kernel32: GetVersionExA
- api | kernel32: QueryPerformanceFrequency
- api | kernel32: GetSystemInfo
- api | kernel32: GetVolumeInformationA
- api | kernel32: GetSystemTimeAsFileTime
- api | kernel32: GetCurrentProcess
- api | kernel32: SetErrorMode
- api | kernel32: DeleteCriticalSection
- api | kernel32: MultiByteToWideChar
- api | kernel32: lstrcmpA
- api | kernel32: CreateFileMappingA
- api | kernel32: UnmapViewOfFile
- api | kernel32: GetCurrentThreadId
- api | kernel32: TerminateThread
- api | kernel32: TlsSetValue
- api | kernel32: TlsGetValue
- api | dnsapi: DnsFree
- api | dnsapi: DnsQuery_A
- api | netapi: NetWkstaGetInfo
- api | netapi: NetApiBufferFree
- api | kernel32: RegOpenKeyExW
- api | kernel32: RegOpenKeyExA
- api | kernel32: RegQueryValueExA
- api | advapi32: RegEnumKeyW

- api | kernel32: RegCreateKeyExA
- api | kernel32: RegNotifyChangeKeyValue
- api | kernel32: RegEnumValueA
- api | kernel32: RegDeleteValueA
- api | advapi32: InitiateSystemShutdownExA
- api | user32: wsprintfW
- api | user32: wsprintfA
- api | kernel32: DeleteFileA
- api | kernel32: EnterCriticalSection
- api | kernel32: LeaveCriticalSection
- api | kernel32: InitializeCriticalSection
- api | kernel32: DeleteFileW
- api | kernel32: GetWindowsDirectoryW
- api | kernel32: CopyFileW
- api | kernel32: GetWindowsDirectoryA
- api | kernel32: SetFilePointer
- api | kernel32: GetExitCodeThread
- api | kernel32: GetTempPathW
- api | kernel32: CreateFileW
- api | kernel32: GetSystemDirectoryA
- api | kernel32: CreateDirectoryW
- api | kernel32: GetSystemDirectoryW
- api | kernel32: RegisterWaitForSingleObject
- api | kernel32: CreateProcessA
- api | kernel32: GetExitCodeProcess
- api | kernel32: UnregisterWait
- api | kernel32: PulseEvent
- api | kernel32: IsBadCodePtr
- api | kernel32: LocalFree
- api | kernel32: TlsFree
- api | kernel32: TlsAlloc
- api | kernel32: lstrcmpiA
- api | kernel32: lstrcpyW
- api | kernel32: lstrcatW
- api | kernel32: GetModuleHandleA
- api | kernel32: WaitForMultipleObjects
- api | kernel32: lstrlenW
- api | kernel32: lstrcpyA
- api | kernel32: GetCurrentProcessId
- api | kernel32: GetLastError
- api | kernel32: TerminateProcess
- api | kernel32: GetModuleFileNameA
- api | kernel32: LoadLibraryA
- api | kernel32: GetCurrentThread
- api | kernel32: GetModuleHandleExA
- api | kernel32: CloseHandle
- api | kernel32: OpenEventA
- api | kernel32: lstrcatA
- api | kernel32: CreateEventA
- api | kernel32: SetEvent
- api | kernel32: WaitForSingleObject
- api | kernel32: lstrlenA
- api | kernel32: CreateFileA
- api | kernel32: GetCommandLineA
- api | kernel32: IsWow64Process
- api | ntdll: NtWow64WriteVirtualMemory64
- api | ntdll: NtWow64ReadVirtualMemory64

- api | ntdll: NtProtectVirtualMemory
- api | ntdll: NtGetContextThread
- api | kernel32: RegGetValueW
- api | user32: MessageBoxW
- api | kernel32: VirtualProtect

• Module 1 other strings

- \\System32\\kernelbase.dll
- \\System32\\KERNEL32.DLL
- chrome.exe
- explorer.exe
- firefox.exe
- iexplore.exe
- open
- test
- command
- DelegateExecute
- root
- 12345
- !1Aa
- 0$0,040<0D0L0T0\\0d0l0t0|0
- 8 8$8(8,8084888<8@8D8H8L8P8T8X8\\8`8d8
- 3 3&363=3B3g3v3|3
- 5/6R6a6y6
- 2+2T2r2
- 0Q1f1s1
- 0_0h0
- 9"9E9b9l9r9z9
- 8*868J8S8Y8`8
- 3%494G4X4f4q4y4
- 3>3Q3a3m3
- 122c2
- 0+141Y1
- <4=E=f=
- 8'8/8A8
- 6/6U6
- 435U5v5
- 2*2@2M2r2
- 0V1u1
- 0a0k0
- 9D9x9
- 8>8s8
- 6:6C6Z6
- 4'4.4:4A4X4
- 2$2]2
- 1*1\\1
- 0*0:0N0]0l0{0
- 9:9P9U9c9
- 7*888_8
- 667K7Z7a7k7
- 5\t6"656i6
- 2#22282p2
- 0:1@1L1Y1`1f1l1r1
- _0e0r0{0
- =(=A=

- 9&9U9^9v9
- 8:8G8t8
- 606?6O6a6w6}6
- 5E5b5
- 3'464>4y4
- @0z0
- 9S9^9
- 8&8Z8y8
- 797}7
- 5`6z6
- 5W5^5t5
- 4-4;4V4c4i4
- 2.2C2H2U2h2u2
- 1Y1`1l1
- 0P0W0f0
- <U<l<
- 9+9@9F9S9[9a9j9z9
- 8%8C8
- 697T7
- 4t5~5
- 4)4i4
- 3-343:3F3`3m3{3
- 282X2
- "0E0
- 9!9^9s9
- 8%8.8:8F8
- 7*7:7M7R7X7`7
- 6<6j6o6
- 5P5j5
- 444R4W4`4k4q4}4
- 1$131:1?1o1
- 9%9/9
- 515X5_5
- 3!4S4`4
- 102O2}2Q3
- ;0;O;\\;t;
- 526?6P6u6
- 3,373
- 1B2H2M2^2
- 1/1>1`1
- SHDeleteValueA
- SHGetValueA
- StrCmpNIA
- DNSAPI.dll
- _except_handler3
- IPHLPAPI.DLL
- WININET.dll
- SHSetValueA
- PathRemoveFileSpecW
- PathFindFileNameW
- SHGetValueW
- StrToIntA
- StrToIntExA
- StrStrIA
- NETAPI32.dll
- OLEAUT32.dll
- ole32.dll

- CoGetObject
- CoInitialize
- IIDFromString
- SHELL32.dll
- SHGetFolderPathA
- ShellExecuteA
- ADVAPI32.dll
- USER32.dll
- KERNEL32.dll
- Microsoft Base Cryptographic Provider v1.0
- MiniDumpWriteDump
- D:(A;OICI;GA;;;WD)
- PID: %u [%0.2u:%0.2u:%0.2u]
- abcdefghijklmnop
- aeiou
- Cache-Control: max-age=0
- Connection: keep-alive
- Set-Cookie
- POST
- .dat
- 2500
- I)\t/
- 8{:N
- Error
- SDio:
- 6oZj
- C=3\V
- 0 .\t\\
- ~@,i
- SHCreateItemFromParsingName
- ,SHELL32.DLL
- c}FZ4
- Content-Type: application/x-www-form-urlencoded
- !?}&(2}a
- iertutil.dll
- Interface
- JaIa0
- \\notepad.exe
- command
- shell
- }IG*
- s6/Yw
- ISHDocVwBroker
- OFc4
- 0 .B\\
- ~L,9
- eFh4
- /index.php
- Content-Type: application/octet-stream
- 0123456789ABCDEF
- /auth?
- kernelbase.dll
- SOFTWARE\\
- user32.dll
- %u(%u)\t%s
- open
- @@AD

- @A@@@@@@@@@@@@A@@@@@@@A@AAA@
- |$@A_A^A]A\\
- t$8H
- l$0H
- 8@:<
- @:;u
- raL;
- ruH;
- X$E;
- x ATAUAVAWE3
- KERNEL32.DLL
- _vEr3
- FL0`
- TI(`
- 5;<Tp
- >.1c=
- 4P_/
- #.Bce
- E)b]
- Ov5Y
- 7)`K
- Z?i}&
- H{Hi=
- Z1Myuz
- WOW64
- WIN32
- #Eue[
- 4q}$
- .exe
- INv>
- F>ve
- pUXt
- 5.vr
- "-va8.vej/v
- A/v(7.v
- 3.vQ3.vL
- 3.v\\9.v
- G-vA
- m,v3
-]/v6
- kCku
- 9d]g
- T$ 3
- SUVW
- 9D$X
- L$<I
- 9D$@w
- I9l$@vQ
- L$ I
- D$p8
- t$t3
- D$82
- SUVW
- QSUVW
- v:SV3
- r/9\\$
- s59L$

- r;9\\$
- QQUW
- SUV3
- Hu28E
- I$,3
- \\$<3
- SUVW
- |$0f
- D$0W
- t!O;
- QSUV
- (SUV
- QQSUVW3
- /GFJu
- t$4V
- D$ 3
- t$0Q
- IPf;
- D$0r
- 9D$4w
- 9D$,
- <0PE
- 9/t>
- +z4t
- QSUV
- UWWh
- tDUW
- SUVW3
- SUV3
- UUUURPj
- UUUU
- RPUUUUj
- VW9-
- 4_^[
- L$$3
- SUVW
- QSUVW
- tZS3
- tl;u
- t=V3
- QUVW
- t$8P
- t*9}
- SVW3
- t\t9u
- SUVW
- SUVW
- SUVW3
- QSUV
- SVW3
- SUVW3
- SUVW
- :u0j
- QQS3
- SUVW
- T9~$t
- F9~$t

- 9~$t
- L$L3
- D$4(
- PjAV
- SUVW
- PPUS
- Pj2j
- SUVW
- t*f9n
- L$ US
- QSUVW
- s(iE
- UVW3
- f9L8
- SUVW
- SUVW
- SUVW
- IIuR
- t[ItKIt;It
- UVWh
- uA9l$
- ub9l$
- SUWj
- QQSU
- WPW3
- SVW3
- D$$EPU
- D$4PPU
- t$8S
- D$8Pj
- SUV3
- u@9l$
- UUUU
- VWC3
- jD^V2
- D$4Pj
- D$0P
- dSUVW
- u.!=0
- D$(3
- D$p3
- @SVW3
- Pj2j
- @ucj
- SSS3
- SUVW3
- VVPU
- t 9t$
- SUVW3
- PjiU
- Pj 3
- 0SUW
- t?9}
- 9D$
- QQSU
- tFUV
- D$8P

- t!It
- 9l$$t
- jSVU
- Uj h
- D$0PU
- D$0Ph
- jD^V2
- D$(PU
- %SU3
- tKV3
- SPh4
- D$*3
- u\t_^[
- $SVW3
- WSUV
- PWSU
- PWSU
- SUVW
- E;l$
- SUVWj
- .reloc
- @.data
- .rdata
- .text
- Rich
- !This program cannot be run in DOS mode.
- .tmp
- %s\\%s.txt
- --
- #+3;CScs
- (jjh
- (jjh
- <$<(<4<8<D<H<
- 4P:\\:x:
- :,:2:N:Y:b:
- >)>0>D>K>h>q>x>
- <,=C=P=Y=f=
- :7;^;h;n;
- :!:':j:r:x:
- >1>6>F>V>v>{>
- <$<><K<
- :V;k;
- :5:;:A:p:}:
- =$=/===D=M=`=o=
- <-<3<8<C<Q<d<l<
- ;!;-;7;=;F;i;q;
- :(:U:q:
- :%:L:
- ?>?H?
- <&<.<
- ;L;R;
- >1>B>N>m>v>
- =(=R=r=
- <,<]<o<
- :";-;O;
- :2:S:n:t:
- ?J?Q?]?

- =">(>J>
- <1=Z=`=
- ;";T;Y;j;p;v;
- 9\t:7:F:L:t:
- ?+?;?E?K?
- >8>=>H>`>j>y>
- =<=A=M=~=
- <2<T<m<}<
- :&:G:k:}:
- >$?3?:?
- <+<@<I<X<k<q<y<
- =->~>
- <(<d<r<w<|<
- :-:3:>:D:S:X:d:n:
- MSVCRT.dll
- SHLWAPI.dll
- StrCmpIW
- StrStrIW
- StrChrA
- CRYPT32.dll
- \\%u.dmp
- dbghelp.dll
- ntdll.dll
- S:(ML;;NW;;;LW)
- bcdfghjklmnpqrstvwxyz
- cdfghlmnrstw
- "%s"
- Jt+c
- Px,fy
- .Z%&
- ;wPp
- :_HT
- ~Q,h
- :bHT
- _""pPn
- .tmp
- Jb.+
- =v"L
- y- w
- @@EMPTY
- @@@@@@@@!!!!
- @@@@
- !!!!!!!!!!!!!!!ADAA@@@@@@@@@@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@@@@@@@@@@

- @@@@
- \\$(H
- sfL;
- rkL;
- spL;
- HcQ<H
- Jk-f~
- Hp\\P
- JpVB
- >-:T
- ^wj&Pxj5;
- (Qkg
- .dll
- Mv}LNv
- uMv]^Nv
- @vH2>vq
- ,v&<.v
- /.v=D/v
- -.vb
- wQJ.v
- ,v+E.v
- -v]7.v
- K/v;
- -v!>-v
- -v1#-v
- `/vd
-)vb
- @.v`
- -v%9-v
- %./f
- CDPMNo}
- @_^][
- T$ l;]
- D$$J;
- tNHt>Ht2Hug
- D$$;
- @_^][
- +L$x
- GT$p
- ;t$l
- +D$H
- |$,?w(
- +D$H
- D$`;
- ;T$h
- T$\\;
- L$T;
- T$@+
- D$`=
- T$hf9<
- D$D;T$
- T$\\;T$4
- !\\$L
- !\\$(
- D$lSUV
- ^][Y
- @_^][YY

-]@[_^
- ^[_]YY
- _^][
- t$ W
- _^][YY
- t$WV
- rCWj
- QQSUVW
- _^][
- _^][
- L$,;L$
- D$tj
- Y^][
- WjHY
- _^][Y
- _^][
- D$<v
- _^][YY
- _[^]
- t!SS
- PSSh
- QSSh
- _^][
- G;|$
- t$$W
- _^][
- G;|$
- t$(Q
- 9D$$t(
- D$$;{
- L$,;
- SVQP
- SVWj@h
- _]^[YY
- Yf;F
- @_^][Y
- @_^][YY
- ^_][
- G(Pj
- tCVVWh3
- PPPP
- PPQP
- @jLY
- @_^][Y
- _^][
- j X_^
-]_^[
- _^][
- _^][
- SVW
- D_^][
- D$,P
- D$,P
- RPVQ
- RPWV
- RPQW
- D$`H

- VWQj
- _^][
- D$$j
- _^][
- FQWS
- _^][
- _^][Y
- t!WWW
- VWPj(
- t,SSSj
- Vj Y
- ^[_Y
- Y_^][Y
- YY_^[
- QSVW
- @_^[
- @_^]Y
- L$@Q
- w&r;
- w'r
- PVRQ
- [_^]
- _^][Y
- t$(h
- t:WPVU
- t$(h
- tnWVVU
- _^][
- _^][Y
- t/WW
- @_^][
- WVPP
- QQQRh
- QPQh
- _^][
- _^][Y
- _^][
- _^][
- SSSS
- PSSj
- _^][
- tK9^$t
- _^][
- tK9^$t
- >9~$_t
- V ;V
- SVSWj
- h|\t)
- ht\t)
- _^][
- D$ Ph
- PPPV
- L$ Q
- D$<PV
- PPPPV
- hX\t)
- h@\t)

- h \t)
- t$,h
- QQSV
- _^][
- _^][
- RPRRR
- QQQQP
- D$ P
- _^][Y
- QPQj
- [_^]
- [_]^
- Wj,Y
- ;F(r
- _^][
- _^][
- bSVSj
- t@PPVh
- D$hPh
- D$$P
- D$XPh
- D$(P
- D$XPh
- D$dP
- D$XPh
- YY^[
- _^][
- s!V
- _^][
- _^][
- tThX
- jXh@
- < s}
- FVVj
- D$$P
- ^_][
- t$ P
- T$HYYU
- D$@Ph
- D$LP
- D$$P
- D$@Ph
- D$<P
- D$<Ph
- _^][YY
- WPVV
- GSWh
- D$$PSS
- D$,P
- $SWPj
- D$$P
- D$xP
- D$lPt
- D$,P
- QQQh
- QPQh?
- QQQh

- QPQh?
- QQQh
- QPQh?
- QPQh?
- D$<P
- D$tPhp
- D$,PQ
- RQh\\
- _^][
- D$<P
- t$(P
- D$ VWS
- D$<P
- D$DPP
- Pt(h
- D$DP
- PWWj
- D$,P
- D$$P
- @_^[
- QQSVW
- VVVV
-]@[^
- @_^[
- PWWWWWW
- <_^[
- @_^][
- D$TP
- v'j\tY
- L$<P
- D$$P
- PPPPW
- D$ SSSPh
- PjMV
- _^][
- _^][
- L$$V
- <.t
- YYPV
- r h<
- hx:(
- VWQ
- _^][
- YYPW
- l$hVW
- _][YY
- @[_^
- ^]_[Y
- t$$YY
- T$LY
- t.Jt
- (_^][
- D$@P
- D$ Ph
- $_^][
- >PhX
- G\tPQ

- VWj\t^
- QQPQ
- QQVW
- _^][
- ^[YY
- QQSV
- X_^]
- X_^][YY
- t"Vj
- tNVhm((
- VWh$
- X_^[
- j Y;
- SSSWSS
- D$lPSSj
- t$hP
- D$$Ph
- D$$Ph
- X][_^
- Vj@Y
- [^_]
- Vj,Y
- X_^]
- X_^]
- X_^]
- X_^]
- @_^[
- VVVV
- D$(j
- D$ f
- WPjfj
- _^][
- D$(P
- D$$P
- _^][
- L$$P
- L$$P
- D$(P
- D$(B
- D$(<
- Y_^[
- `bss

• Module 2 (probably unpacked / injected by the sample)

• Module 2 rich signatures

- 44616e530000000000000000000000000d52e40009000000ddffcb0009000000000001002a0000000d52e000010000000d52de00

• Module 2 yara matches

- Microsoft_Visual_Cpp_8_additional ()
- Microsoft_Visual_Cpp_8 ()
- IsPE32 ()
- IsWindowsGUI ()
- IsPacked (Entropy Check)

- HasOverlay (Overlay Check)
- HasRichSignature (Rich Signature Check)
- win_token (Affect system token)
- without_attachments (Rule to detect the no presence of any attachment)
- without_images (Rule to detect the no presence of any image)
- without_urls (Rule to detect the no presence of any url)
- contentis_base64 (This rule finds for base64 strings)
- CRC32_poly_Constant (Look for CRC32 [poly])

• Module 2 strings

• Module 2 most interesting strings

- url | valid domains | tlds: .VG|
- url | valid domains | tlds: (.Dj
- url | valid domains | tlds: .Nf?
- api | frequently used by malware: OpenProcessToken
- api | frequently used by malware: LoadResource
- api | frequently used by malware: ExitProcess
- api | advapi32: GetTokenInformation
- api | advapi32: GetSidSubAuthorityCount
- api | advapi32: GetSidSubAuthority
- api | kernel32: LockResource
- api | kernel32: SetLastError
- api | kernel32: SizeofResource
- api | kernel32: FreeResource
- api | kernel32: FindResourceA
- api | kernel32: CloseHandle
- api | kernel32: GetVersionExA
- api | kernel32: GetLastError
- api | kernel32: GetProcessHeap
- api | kernel32: HeapFree
- api | kernel32: HeapAlloc
- api | kernel32: GetModuleHandleA
- api | kernel32: GetModuleFileNameA
- api | kernel32: VirtualFree
- api | kernel32: VirtualAlloc
- api | kernel32: GetCurrentProcessId

• Module 2 other strings

- L0BE
- _$EB
- e. o
- n~xu
- e`uv&U;
- gvU>
- R&b5;
- 4 Ybk
- c$ur
- 4[(
- qP1"
- O0}@f[
- ?I]t
- DUj?Ph5
- 6\\%8Ct

- Cg0.y
- q#b5
- >v%0
- @]6eJ
- 1U P
- h^{8
- N,)au
- u$(4
- =}Oi_
- DT5$W
- {N7B
- qK3t
- aF"
- f4LN
- Nwo"
- xp#3W
- C7e&+
- |!Rke
- |Q8'q
- PU+o
- >2e!
- b,3Da
- YVeh
- Y,EX&
- 9M8p
- F/}u0
- ~`oR
- []qQa
- O~s
- @ut|
- .\\Xo
- ?A%+
- I<ZiCV
- 'Ou.
- DzU\\
- UC24
- 2C[2
- oFfa
- i)I<*8
- 2X12
- ygQu
- 2vA"M
- hyl1
- V#,#E
- bih#
- =kd"I
- U$t#k
- %l'a
- o`f>
- 4cLR
- VZ7<U7W
- k\\I&
- [m9qZ
- %m44
- 7_Yq
- {,o5\\<
- W5\\<

- Tu8\\e:
- LJo%
- 8o_(z
- 5_jHwE
- >\tHu
- x`9]
- s,]3
- b[9#
- ^ @O
-)5=,
- O1SkR
- _Ldu
- `A'|
- ;Ei@
- !E,x
- oSy&
- 4$q.
- 30yF
- 9"\'C9
- 3vxl
- ~O|H
- *O0/*
- ,u<%
- %\t'8
- f7)l
- >&o;_
- ngi%
- Wu%X
- 2427
- LReQ
- 7wtF
- N>BO
- 9bRHl
- P9Un
- ukR)
- IRs_
- K\\9Uu
- .yuL
- f'4X
- Wt{7
- U>W2
- #~2Xn
- >,a#
- ,,*6
- +ET.
- v9g)
- VY<u
- !]OMm
- $s.8
- t~[a
- i(_L
- &Z7s;
- d6J@o
- sB7!b
- OO}j
- 1]VM
- $c?T9

- ryma
- oz^-
- 4s:O$
- J*vA
- -xuS
- an`z
- m;8[
- Oh}1$9x
- 0]yG
- +1&r;
- 4lgo
- mIqp$
- XuA|
- nj7v
- o@$)
- r%La
- T\\d2
- r};};=a.l;
- e0x;K7Vm
- G8wN
- h1_"
- 9kL}*
- \\x;4
-)B7[
- Wo?{z
- qJ5
- hNrXA
- o>R=
- FI'\\
- g3KC8
- u*vF5
- w>q5
- ;E&A;
- EY}+s
- !Hy1[
- M3yN
- x#8H:
- 8M/6oM
- 5j26
- 7hjlp
- '%K1
- GhK8
- Ebk6SO
- i?y%
- d:M2\te
- 8tVk
- Tot&
- f9e/E
- "0,v
- 8CZ?
- o8jV
- ?.\\a
- ;0qT
- eIR$
- Z:_hu
- ,8tn
- &52?

- z[i@
- &=;2
- .CpE)
- V+8bx
- IxV?
- [MLdu
- OpR*
- ,4Z[I!
- #A>T
- 0\\2h
- J#[A
- }L6&
- kT`.U
- R9kd
- <qJOX
- C 3(K
- k3w+
- eC.X
- L|EJc
- -G5|
- K|x7
- @0g>
- F[3<O
- `+kK1
- u;i/|
- "i&;
- 5[Qj
- 1cQW
- wl5d
- ~eL\\
- z4c1
- a%yn
- voH)
- 2KB}
- H84yl
- 06J.f
- \\VP%A
- bHOt
- %B!OP(5
- 1]!x_
- 1"K\t?
- cR /A
- RNep
- 8by6D_Tb
- -S5Z3_v
- G0TL
- kEz
- b>019
- cx,4
- AMJ8%
- JOh>
- K@eK
- ':Ku4H
-)!\\Q4
- 'iU6
- $'\\8
- U^TcC

- M:olxUPR
- vi]F
- j_8n
- v[4>+i
- =X&0
- NoP@
- ;i?m
- 9zs}
- go cvO
- S(e{P
- 3{nF
- kR60
- d|juO
- @6_r
- <P9a
- if,^
- Vwv2
- 621B{w@
- I\t&l;
- 6&0
- 'Emq
- UC"22
- W5Ftg
- E'us
- zXJI+
- [3x*&
- ,W u
- AlyT
- \\2oU
- _5cC{
- +n4F
- Uve6
- 4el$f
- JQeGM3
- XK-o
- Q3_R
- ,e9oGX
- Vvv8
- 9Ud'\\
- yx8J[
- %(v9L
- \\21y
- ,&zy4;
- -31&
- q8m`
- z;8B
- 2#T'j
- QAn~
- EFh3c
- 85n+
- e`g
- $c 5
- 5=2S
- w6uqA7{
- =^b*iA
- E*Lk
- dh9\tM

- #OXW
- *)7}@
- #ku\\
- >iz;LU^&
- L7EC
- >"pO@
- r7]?
- ohO_k
- w;.;6
- |5kD
- dI(fZ
- {oZM
- JeuI
- iN*M}
- l"3Da
- gaom37
- ~6lnJ
- wN,63
- &Iq;#
- 2~\t;
- Ea*4
- }I,D
- Hn8D
- EZV"
- w2'_
- q+aa%
- %3Oy
- oazU A
- \\rwEJ4
- CdO.
-)_^7
- u@U4
- +Uy?
- 'UhS
- B3E7l
- ShqE~
- ?6ue
- /0P
- {6F4
- sI!:
- 9.'J
- 7Cb@
- u;zvg
- Om-j=
- >9w$1
- AUDa
- !4@x
- o+x0Q
- ^"145
- 5Y8Oz
- Bm6q
- \\aOS
- IhKD
- aFT{
- Ke`/
- ikQy
- v*nE

- (9.)d
- ~i/}
- BuBM
- m0@\\C
- 0wEk
- @2@g
- aeki.
- 9${o
- ~W6/
- n}cVi
- :sH3
- 5Vmc
- 'T=7
- ^yIg
- c[]I
- +49B
- m7kf
- 9=2[
- H3Fet
- e/Nm
- P6^W
- NWNE
- z|0*N
- my;7
- "jp8Q
-)RW96
- 8].{
- Bg}e
- ~#bA]
- 7*E5
- 5B40
- Qu_{
- 2* 8?
- y5asd
- 6*|(
- 'ue$
- #cv1{
- L`p%4
- U?Iq
- C;YU
- r4\\B
- S '1
-],E-
- +'S4
- m%lE4
- s]i5
- Lde6I
-)oe?+
- 7YV1?u
- AU~J.
- x5^/
- EH,l7
- qV%8'
- rk23
- G2&N;
- *@fA
- pEe7

- u7!q
- $t!d6
- WQW5r
- oQa5d
- CyOO
- 8.'W
- IR#
- H9=c
- DoGt
-)QK51
- %a)C
- jQV5u
- sQT5%
- ^QP5o
- j&fO;
- ?\\eNe
- 19>[e
- Yan:
- l5-;
- AK'7}
- PIno
- u{6$
- <B7v
- %o6.Z_n%
- ^LyUx
- #`a^
- U(\tO
- FeOm
- x9[nj
- F0U[
- O/js0
- jh=2
- F}K5W
- 6GS3
- PINo
- 6iiq
- apV9
- {:}l
- >E>+
- L?)v#82
- cR}9
- b!9~
- >lpl
- G2nz
- y!d0
- L+P6
- t{i#x
- Ir{LY
- M45hWY
- {2_0
- G.3&
- oz<x
- +Iph
- V$Ba\t$3
- k#k8
- '/L6f
- OLQ

- 7-TD[
- RYU$
- <1FZy
- <M&IOV;
- G9#oB]
- |GUF
- gw6hl
- o.s,
- b8Y
- 3t14
- Zgu~V
- 4I"F
- "{j3a^
- 2~hv
- WM1\\
- O#_}.U
- }ErQE
- 6\tHq~UD
- gxM9
- }Ul/
- 10/l
- $Fel
- 8lUU
- ,^Pr9
- u&4l
- T3}Z
- 7$VX
- lM6Nu
- -uGD*
- ~enZ!
- P-^O
- ulZ*b7
- j8^6F
- x9:H/
- rx@A
- d3qdT
- Va!t,
- Q8|
- (uTX
- %zD 2
- 6lpU
- s4=/?
- u)9-
- 1LK7*
- 0ct'
- YRu!
- *~l\\
- m1BJ
- d8+y8
- uh=m
- CO<<~
- 4^cy
- o Y6
- ^C9\\
- oh!r
- (D.8A
- c76'f

- BI%E
- _e$Uc7*
- !c0E
- "4]n{
- cy"3
- S5TG
- pf5E
- N3#&
- 8\\#D"
- uV=8
- l"N1l
- Tu<Y
- A"{7
- 7hQC
- !8&M;
- w[:ge
- |9JB
- kN'If
- A%(nG
- Xj^e
- cSem4
- CJAG
- 7\t 9
- UeEy
- 'nen
- |$fO
- ^8t8\t+
- =|a@
- :A[d
- }2WzA
- .XO'P
- MKo%S(iX
- \\DeR
- 3H+8L
- Zy8?
- e\t*x
- 4NRe
- EzN)u
- jTUY|
- p,v 9D/5
- 8Tg*.
- zS"|O
- yR=ou<]LB
- ;.9!
- c&Gr9;
- ^daZ
- _Ye!@
- oItP]p
- f2k0n
- h;gU,
- N|Va
- ^lTOz
-]42@
- G41A
- ml1[
- erK-
- m0LZ

- >$6-
- \\e{M
- E\\Ai`
- 9W9)/
- p3or
- go1\\u
- xun3p
- @]g6
- %f9o
- >BSE
- A.UC
- RP>=8
- ^[an
- fO*|1
- BoCm1
- D];d90
- #5guy
- h[UF
- 6@39
- c6P
- ovh<@
- ;6RYEu
- -/ge
- 0P^t
- 5U~CS.n
- Mu#R
- TkBa
- +\t8L
-)n!E
- 86su>Nb
- 6%d5
- P</a
- FOz?
-]5f%F
- 9M=Q
- VwP4
- 8blr
- I1vQ
- *o&7
- "\'O}S
- 1kcfx
- o~P4
- 4O9,LG
- yd>2
- K6<0
- Dqd0
- VA~2
- hA+F
- !~SE;
- '2qFB
- <B\\B1
- 1^|.
- @ga3H
- 844F
- LZiW
- ;o~ G
- zWif

- 43JL
- ~+wz9i(
- $_1S
- V"A3
-
-]hsha
- K4^7
- e6q1
- ~38+
- Ij~f
- AHqRx
- w`-5
- EM\tK
- :G6]
- ~j~<I2
- !z8k
-]c1O
- iJP6'
- [ASf
- =RA1
- Vid'
- aY9@~
- O#Ix
- 5tO
- \\\t2R(
- `~GvMAI
- C:"~i
- 4[~)
- Ce?Op
- O_iN
- E-=B
- K>zK7
- ?H1g
- G<OS
- eY)I
- AK!G
- 7D]7
- G-EM
- c4[t
- ~.ta
- MUZV/
- 7!>j^
- Ca=&
- x5*ub
- {a~6
- 13<T
- T2Ga@
- O-FR
- Z2$e
- O0Pvgj
- 8]kTq
- VIxA
- p@0Q
- 3#Hn
- 7i!
- 18I2V;
- 6@#o

- &O7V;
- G6D1
- A !v
- UBQ
-)@0]p
- *pAm
- oPJt
- tVo#^
- O+H=
- wbu[
- L2eM
- h!X6L
- Ytie
- <>ow7
- >A]%
- U`p1%
- 9@)Wb
- ?)&O;
- NK(U
- S7/>e
- @4(!
- >Us*
- YGe`
- 5>m.
- UO4W]v
- !Ci::
- O#.~?
- DQfY3
- o&\tq.7
- 4nar
- NGUnv
- wePy
- +)0`
- Zi*n
- zA /
- yYNe
- F3Z(
- &]uA"
- yPAx6
- X}\\74
- V-!E
- UQ?C@
- ,6}r
- NX52
- ^SAb
- Lwqz9
- IoM/
- Xq0n
- C|8Ah
- *K*i
- =AxF
- OI]3
- 9/Ez
- FvEQ6zcT
- kd[a3
- KRLA
- 0wV#

- =x?0
- QINe
- lwGO
- ADVAPI32.dll
- KERNEL32.dll
- -va8.v|
- VPjej
- T$ 3
- SUVW
- SUVW
- SUVW
- SUVW
- QQS3
- .rdata
- .text
- !This program cannot be run in DOS mode.
- LPPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDING XXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDING PADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXX PADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPA DD
- $Fs]
- Z'@j
- nYc.
- <x{Y
- h,-nC
- -6\\g\t{
- !ZRh
- C$Jt
- yM.#
- Zn?!MrO
- D]K]
- +T#bH
- n^_b
- w rB
- l<apr$
- "mSvL
- RvQ=
- ?TMP
- t~;"
- W#5:Xr-
- TSTw#
- Xh":
- -)%t
- ZR)~
- .P!
- vgF)
- b=T+
- #\\"X
- 7`k:@]
- D+b#
- (1H/M]
- Q#Lr7h
- ?][<PM
- t`+n
- LK(s
-]Gkl

- dMbS
- $}SS
- LT)<
- F}/|?
- y)Q#"
- N/W7|.
- JPVtB
- y;QXj9
- (DF&
- jm^X
- SY:x
- z;~/
- xJ,]
- `[M[{
- w]\tZ
- CZf}
-)wJw
- z?n|s
- ;SHx
- h_H[
- PK%L
- Zydq
- yDYL
- L]m(W
- NBW~
- (qGs
-]{ctwH
- s<=d
- G*jf
- <GTk
-)|<K
- #R]v
- DDF
- P#p!
- bZknF
- a&>Cq[
- d+~.
- %*M>
- V\\\t<
- zGp.
- }h=
- [Kt/
- [Q-p$~F
- ?R-r
- g.L_
- H,xwS
- tmy"
- m"W(
- 2ZxM~f
- BgBM
- ["?d
- @n>=p
- %TGf`
- Twt'j
- !MV[
- l_]CWr
- d\\[L\tr7

- c-\\b
- ,m~mc
- m'sVY
- >()-
- rx d\\
- >s+z
- >>j$
- ."sW
-]SrD
- }%yQ
- G/#*
- G\tNM
- 4?*p VR>
- ?!F+x
- h7{_}{
- ^ZC;
- E\tRD(s
- %G-[
- L"dQ
- #l{k
- @@Sj$A&
- Y4{"%r
- wJ&K0;[
- 'TcY
- W>R&
- n"A#v@
- =h R$
- J={Y
- {C=F
- LCCT
- FsYJ
- nc]@
- =SJ1PH
- _kdG
- B{gP
- TPQK)
- ;{s=
- =p<>
- !Q&'$
- _Sr
- ?({;
- $.?Y
- :_FPj
- >Zh?J
- RdN+
- qvYd
- RRrZ
- kwns
- Qy\\s,
- *\t}Y
- n\tHh
- {mqt
- \\<M@vpI
- ".-S
- $~J
- ?%\t>
- N)?G

- L>Nm
- pdkM
- CPuP '
- ^pB:
- h'z`
- +j_;
- g{xW
- |5H H
- cPBg
-]Q}/k
- `x?W
- pt.H-
- qj}K
- w&XJ;
- bK*HK
- G`x$
- rc/H/
- [Km(HZ
- &y;!x
- T$lp
- p2ThW*
- D]XYFQ
- Fdk:
- MZ)j
- %GK$
- |qs[
- DK`#kd
- S+Wp
- ?I_^:#
- ._?&
- OFW"`@
- rd%O>WYk
- /TKK
- X"CC
- ^g%P
- r*JH
- /GBv
- S<~*
- <.#&
- %F-_
- nC}g
- !^FBb
- `GO<-Y
- _&h;`
- !!\tcttR9
- p+>*
- ,z\"'A,n
- :D?;&
- ;Z}_
- (NFTh
- X(-T>>
- `sp}
- &{j$H
- "^N
- (\td]
- Zw G'
- =G(B

- (CHX
- %njt
- QwJG
- &F;\\;
- :(v
- %`@<RX
- T.h{
- SP~3Pn
- HfN"
- {;|
- j-0@/`
- +qGs
- K_HJ
- TdqBG
- ,/P)
- [0Xl=j
- XZs\tC
- V\tD\\
- `pHm
- Rfh~
- >*}>
- <!>*
- |Xm{
- k@!g
- C`~x
- cnfwm{
- rd<.
- [Z.^{
- L!wk
- Wg?Kly
- hj@t
- $,![,
- p_.y
- @C?|
- PDqhG0x
- qD(w
- c~c|`
- .]MZb
- ^-<yY
- q.=)
- +]Z~
- Z'$r
- ^\\,wx
- _r[Z
- Nt=.
- kLNv
- -VxQ
- -)?x
- V vr
- {{#v
- v(~
- >SWs
- fZJN
- (G <\\
- /')L
- PmXw9`N
-)_>r

- T{F}
- V*(D
- <*\\^x
- yVBS
- WKSx
-)"T|
- /?B)
- L-JWx
- GtyM
- []y'
- NY;G
- .L,xZ+9
- W}Rk
- :xXX
- Z/8,FB
- V:<X
- ~xj&
- B!@Nn
- IT:#
- =FxD$r
- C@z.
- zCm$
- =c,Njz
- B\tX\t"<TD
- KD,!=
- $\td?J(
- %fS}
- H,z=
- TITQS
- *|pC
- &b;*F
- GZCxG
- NHH>
- BYMjWv
- /?<j~
- NT,k
- Fl"(
- %c)
- \\yd-
- }R$7x|
- B<Bdr
- xQ:v
- xcQpS;
- yTKL
- Sn?D
- =p;n
- O$}Z[@B
- !(`l
-]~q-
- dsMS~
- C\tSj
- ?*/L{
- })t[
- sxR@x3l
- P-s$
- `v"^
- cSCn

- w@Q&
- ZP U%q
- Nv%
- bgV=
- K[{`Z
- Fw2hwl
- H,Vt
- oVzgzc
-)+K#
- }J(=
- trqj
- P>yw/;NJA
- kK/M
- b?\tj
- "(MM
- @~Zc
- CM}^M#
- .>4-)%
- P[~d
- k)C$T8
- r;_s
- e#{}]Z
- Z- %
- *\t]_/
- Sn#/
- vp/=
- N;Y]&
- vpT)
- JnbZ
- *L(Z
- `k~@
- (.L"T
- pGlYt
- `?&J;
- ^?K>
- Fp:^K?
- !FmN
- B#?RBF%?
- vVDPW{
- *`4Q]?
- Xtwj=|
- (\tsy
- QJ5\tN@
- $_ZX
- yt<-}^|
- ,tv[
- k"Y#
- ;{JF
- s@@P
- <B?}
- L}?K
- Jf\t$c
- RufK*!x
- +-l=zB
- D}'s^5N
- Cml:$
- QVvo$j*Y

- VGF&
- .P"
- cg~(#
- s-(d
- Y,s,t
- b;@,
- N*}
- W(~m
- gM=@Z`q9
- W!NR
- "M=s
- L&ZB;
- mNym
- yD$SS
- tjy:
- 'QRd
- YQ`|
- QqS<d
- >RP!r
- `Fq>
- rJFc
- ?%%Q<
- [S*r
- fmB]
- W>$b
- "R_Y
- zL<\tL
- g!wFV
- ~/sL
- HK~N
- rw*L
- L|.\\
- n`BUF@
- TXL\tw
- "\'n[
- $N:x
- m,zB
- YmFB
- `V@k
- Nmhc
- <M-w
- <~"p+
- !J0[:w
- g#L$
- YP^`>
- G~mbY
- wYft]
-)"AvHP
- &Kp;\tq
- qj}r
- fNk`:
- JZ*z$f
- hP\tJ
- >!_
- p-G3%kx"
- !(HI
- fIc?.+

- f<dMS"x
- QLY[
- *F !
-]pHt
- +Ay <,
- p&HT;
- :n,n
- L~sx
- s(rF
- K`-
- /C:T
- pMhc
- <}y Jhg
- -FVYab
- |;Fx
- YCHc
- yd%'
- bXD#
- $DkkU,s;
- <@.%>
- ?bPw
- &H;!h
- }!?S
- vwCC
- {vv?lmZ
- |"XqvI
- V>$c
- K=/3fZc~
- @*/w
- xJn%C
- $#scxjU
- ~pZD..
- >JP)
- %yFZF.
- k(Gq
- z(Dsk
- ^z\tw
- F$PKpH
- +,?:
- Dl{#[,
- :JZYv
- v%E(]TY
- X]Z#
- ,H$|
- my]
- B@V=
- MH`l
- P.F<
- #:G}MSh
- ldgzK<
- {pp<
- ~-.|
- J>\\g
- HpNbS:
- B@Kyf(
- Rf~!PGt
- ~ @w

- SM@N
- DMV#
- ;d{b
- z;Bk
- f\t]n
- /xMq"8Tv
- 'W*k
- lY);Hv
- NTZy
- .WH`
- &.`[
- +D\tRl
- =M%?bEg
- T(mZ
- S\t/:
- dYJK
- !R\'"
- y)#C
- <db)g+
- WVMxlu
- ;$6\\x$<:
- XK&%
- Hnp'
- DKJF
- ?m>x
-)^DZ9,
- H0^vW/
- !l:IGH
- dCfK
- [D,[>n
- /=v"
- /.vO!.v
- t;j@h
- @_^][
- T$ l;]
- D$$J;
- tNHt>Ht2Hug
- D$$;
- _^][
- _^][
- = @
- PSSj
- @.rsrc
- `bss
- RichWPp

• Module 3 (probably unpacked / injected by the sample)

• Module 3 rich signatures

- 44616e530000000000000000000000000d52e40009000000ddffcb0009000000000000001002a0000000d52e000010000000d52de00

• Module 3 yara matches

- Microsoft_Visual_Cpp_8_additional ()
- Microsoft_Visual_Cpp_8 ()

- IsPE32 ()
- IsWindowsGUI ()
- IsPacked (Entropy Check)
- HasOverlay (Overlay Check)
- HasRichSignature (Rich Signature Check)
- win_token (Affect system token)
- without_attachments (Rule to detect the no presence of any attachment)
- without_images (Rule to detect the no presence of any image)
- without_urls (Rule to detect the no presence of any url)
- contentis_base64 (This rule finds for base64 strings)
- CRC32_poly_Constant (Look for CRC32 [poly])

• Module 3 strings

• Module 3 most interesting strings

- url | valid domains | tlds: .VG|
- url | valid domains | tlds: (.Dj
- url | valid domains | tlds: .Nf?
- api | frequently used by malware: OpenProcessToken
- api | frequently used by malware: LoadResource
- api | frequently used by malware: ExitProcess
- api | advapi32: GetTokenInformation
- api | advapi32: GetSidSubAuthorityCount
- api | advapi32: GetSidSubAuthority
- api | kernel32: LockResource
- api | kernel32: SetLastError
- api | kernel32: SizeofResource
- api | kernel32: FreeResource
- api | kernel32: FindResourceA
- api | kernel32: CloseHandle
- api | kernel32: GetVersionExA
- api | kernel32: GetLastError
- api | kernel32: GetProcessHeap
- api | kernel32: HeapFree
- api | kernel32: HeapAlloc
- api | kernel32: GetModuleHandleA
- api | kernel32: GetModuleFileNameA
- api | kernel32: VirtualFree
- api | kernel32: VirtualAlloc
- api | kernel32: GetCurrentProcessId

• Module 3 other strings

- L0BE
- _$EB
- e. o
- n~xu
- e`uv&U;
- gvU>
- R&b5;
- 4 Ybk
- c$ur
- 4[(
- qP1"
- O0}@f[

- ?I]t
- DUj?Ph5
- 6\\%8Ct
- Cg0.y
- q#b5
- >v%0
- @]6eJ
- 1U P
- h^{8
- N,)au
- u$(4
- =}Oi_
- DT5$W
- {N7B
- qK3t
- aF"
- f4LN
- Nwo"
- xp#3W
- C7e&+
- |!Rke
- |Q8'q
- PU+o
- >2e!
- b,3Da
- YVeh
- Y,EX&
- 9M8p
- F/}u0
- ~`oR
- []qQa
- O~s
- @ut|
- .\\Xo
- ?A%+
- I<ZiCV
- 'Ou.
- DzU\\
- UC24
- 2C[2
- oFfa
- i)I<*8
- 2X12
- ygQu
- 2vA"M
- hyl1
- V#,#E
- bih#
- =kd"I
- U$t#k
- %l'a
- o`f>
- 4cLR
- VZ7<U7W
- k\\l&
- [m9qZ
- %m44

- 7_Yq
- {,o5\\<
- W5\\<
- Tu8\\e:
- LJo%
- 8o_(z
- 5_jHwE
- >\tHu
- x`9]
- s,]3
- b[9#
- ^ @O
-)5=,
- O1SkR
- _Ldu
- `A'|
- ;Ei@
- !E,x
- oSy&
- 4$q.
- 30yF
- 9"\'C9
- 3vxl
- ~O|H
- *O0/*
- ,u<%
- %\t'8
- f7)l
- >&o;_
- ngi%
- Wu%X
- 2427
- LReQ
- 7wtF
- N>BO
- 9bRHl
- P9Un
- ukR)
- IRs_
- K\\9Uu
- .yuL
- f'4X
- Wt{7
- U>W2
- #~2Xn
- >,a#
- ,,*6
- +ET.
- v9g)
- VY<u
- !]OMm
- $s.8
- t~[a
- i(_L
- &Z7s;
- d6J@o
- sB7!b

- OO}j
- 1]VM
- $c?T9
- ryma
- oz^-
- 4s:O$
- J*vA
- -xuS
- an`z
- m;8[
- Oh}1$9x
- 0]yG
- +1&r;
- 4lgo
- mIqp$
- XuA|
- nj7v
- o@$)
- r%La
- T\\d2
- r};};=a.l;
- e0x;K7Vm
- G8wN
- h1_"
- 9kL}*
- \\x;4
-)B7[
- Wo?{z
- qJ5
- hNrXA
- o>R=
- FI'\\
- g3KC8
- u*vF5
- w>q5
- ;E&A;
- EY}+s
- !Hy1[
- M3yN
- x#8H:
- 8M/6oM
- 5j26
- 7hjlp
- '%K1
- GhK8
- Ebk6SO
- i?y%
- d:M2\te
- 8tVk
- Tot&
- f9e/E
- "0,v
- 8CZ?
- o8jV
- ?.\\a
- ;0qT
- eIR$

- Z:_hu
- ,8tn
- &52?
- z[i@
- &=;2
- .CpE)
- V+8bx
- IxV?
- [MLdu
- OpR*
- ,4Z[I!
- #A>T
- 0\\2h
- J#[A
- }L6&
- kT`.U
- R9kd
- <qJOX
- C 3(K
- k3w+
- eC.X
- L|EJc
- -G5|
- K|x7
- @0g>
- F[3<O
- `+kK1
- u;i/|
- "i&;
- 5[Qj
- 1cQW
- wl5d
- ~eL\\
- z4c1
- a%yn
- voH)
- 2KB}
- H84yl
- 06J.f
- \\VP%A
- bHOt
- %B!OP(5
- 1]!x_
- 1"K\t?
- cR /A
- RNep
- 8by6D_Tb
- -S5Z3_v
- G0TL
- kEz
- b>019
- cx,4
- AMJ8%
- JOh>
- K@eK
- ':Ku4H
-)!\\Q4

- 'iU6
- $'\\8
- U^TcC
- M:olxUPR
- vi]F
- j_8n
- v[4>+i
- =X&0
- NoP@
- ;i?m
- 9zs}
- go cvO
- S(e{P
- 3{nF
- kR60
- d|juO
- @6_r
- <P9a
- if,^
- Vwv2
- 621B{w@
- l\t&l;
- 6&0
- 'Emq
- UC"22
- W5Ftg
- E'us
- zXJI+
- [3x*&
- ,W u
- AlyT
- \\2oU
- _5cC{
- +n4F
- Uve6
- 4el$f
- JQeGM3
- XK-o
- Q3_R
- ,e9oGX
- Vvv8
- 9Ud'\\
- yx8J[
- %(v9L
- \\21y
- ,&zy4;
- -31&
- q8m`
- z;8B
- 2#T'j
- QAn~
- EFh3c
- 85n+
- e`g
- $c 5
- 5=2S
- w6uqA7{

- =^b*iA
- E*Lk
- dh9\tM
- #OXW
- *)7}@
- #ku\\
- >iz;LU^&
- L7EC
- >"pO@
- r7]?
- ohO_k
- w;.;6
- |5kD
- dI(fZ
- {oZM
- JeuI
- iN*M}
- I"3Da
- gaom37
- ~6lnJ
- wN,63
- &Iq;#
- 2~\t;
- Ea*4
- }I,D
- Hn8D
- EZV"
- w2'_
- q+aa%
- %3Oy
- oazU A
- \\rwEJ4
- CdO.
-)_^7
- u@U4
- +Uy?
- 'UhS
- B3E7l
- ShqE~
- ?6ue
- /0P
- {6F4
- sI!:
- 9.'J
- 7Cb@
- u;zvg
- Om-j=
- >9w$1
- AUDa
- !4@x
- o+x0Q
- ^"145
- 5Y8Oz
- Bm6q
- \\aOS
- IhKD
- aFT{

- Ke`/
- ikQy
- v*nE
- (9.)d
- ~i/}
- BuBM
- m0@\\C
- 0wEk
- @2@g
- aeki.
- 9${o
- ~W6/
- n}cVi
- :sH3
- 5Vmc
- 'T=7
- ^yIg
- c[]I
- +49B
- m7kf
- 9=2[
- H3Fet
- e/Nm
- P6^W
- NWNE
- z|0*N
- my;7
- "jp8Q
-)RW96
- 8].{
- Bg}e
- ~#bA]
- 7*E5
- 5B40
- Qu_{
- 2* 8?
- y5asd
- 6*|(
- 'ue$
- #cv1{
- L`p%4
- U?Iq
- C;YU
- r4\\B
- S '1
-],E-
- +'S4
- m%lE4
- s]i5
- Lde6I
-)oe?+
- 7YV1?u
- AU~J.
- x5^/
- EH,l7
- qV%8'
- rk23

- G2&N;
- *@fA
- pEe7
- u7!q
- $t!d6
- WQW5r
- oQa5d
- CyOO
- 8.'W
- IR#
- H9=c
- DoGt
-)QK51
- %a)C
- jQV5u
- sQT5%
- ^QP5o
- j&fO;
- ?\\eNe
- 19>[e
- Yan:
- l5-;
- AK'7}
- PIno
- u{6$
- <B7v
- %o6.Z_n%
- ^LyUx
- #`a^
- U(\tO
- FeOm
- x9[nj
- F0U[
- O/js0
- jh=2
- F}K5W
- 6GS3
- PINo
- 6iiq
- apV9
- {:}l
- >E>+
- L?)v#82
- cR}9
- b!9~
- >IpI
- G2nz
- y!d0
- L+P6
- t{i#x
- Ir{LY
- M45hWY
- {2_0
- G.3&
- oz<x
- +Iph
- V$Ba\t$3

- k#k8
- '/L6f
- OLQ
- 7-TD[
- RYU$
- <1FZy
- <M&IOV;
- G9#oB]
- |GUF
- gw6hl
- o.s,
- b8Y
- 3t14
- Zgu~V
- 4I"F
- "{j3a^
- 2~hv
- WM1\\
- O#_}.U
- }ErQE
- 6\tHq~UD
- gxM9
- }Ul/
- 10/l
- $FeI
- 8lUU
- ,^Pr9
- u&4I
- T3}Z
- 7$VX
- lM6Nu
- -uGD*
- ~enZ!
- P-^O
- ulZ*b7
- j8^6F
- x9:H/
- rx@A
- d3qdT
- Va!t,
- Q8|
- (uTX
- %zD 2
- 6lpU
- s4=/?
- u)9-
- 1LK7*
- 0ct'
- YRu!
- *~l\\
- m1BJ
- d8+y8
- uh=m
- CO<<~
- 4^cy
- o Y6
- ^C9\\

- oh!r
- (D.8A
- c76'f
- BI%E
- _e$Uc7*
- !c0E
- "4]n{
- cy"3
- S5TG
- pf5E
- N3#&
- 8\\#D"
- uV=8
- l"N1l
- Tu<Y
- A"{7
- 7hQC
- !8&M;
- w[:ge
- |9JB
- kN'lf
- A%(nG
- Xj^e
- cSem4
- CJAG
- 7\t 9
- UeEy
- 'nen
- |$fO
- ^8t8\t+
- =|a@
- :A[d
- }2WzA
- .XO'P
- MKo%S(iX
- \\DeR
- 3H+8L
- Zy8?
- e\t*x
- 4NRe
- EzN)u
- jTUY|
- p,v 9D/5
- 8Tg*.
- zS"|O
- yR=ou<]LB
- ;.9!
- c&Gr9;
- ^daZ
- _Ye!@
- oItP]p
- f2k0n
- h;gU,
- N|Va
- ^lTOz
-]42@
- G41A

- ml1[
- erK-
- m0LZ
- >$6-
- \\e{M
- E\\Ai`
- 9W9)/
- p3or
- go1\\u
- xun3p
- @]g6
- %f9o
- >BSE
- A.UC
- RP>=8
- ^[an
- fO*|1
- BoCm1
- D];d90
- #5guy
- h[UF
- 6@39
- c6P
- ovh<@
- ;6RYEu
- -/ge
- 0P^t
- 5U~CS.n
- Mu#R
- TkBa
- +\t8L
-)n!E
- 86su>Nb
- 6%d5
- P</a
- FOz?
-]5f%F
- 9M=Q
- VwP4
- 8blr
- l1vQ
- *o&7
- "\'O}S
- 1kcfx
- o~P4
- 4O9,LG
- yd>2
- K6<0
- Dqd0
- VA~2
- hA+F
- !~SE;
- '2qFB
- <B\\B1
- 1^|.
- @ga3H
- 844F

- LZiW
- ;o~ G
- zWif
- 43JL
- ~+wz9i(
- $_1S
- V"A3
-
-]hsha
- K4^7
- e6q1
- ~38+
- lj~f
- AHqRx
- w`-5
- EM\tK
- :G6]
- ~j~<I2
- !z8k
-]c1O
- iJP6'
- [ASf
- =RA1
- Vid'
- aY9@~
- O#lx
- 5tO
- \\\t2R(
- `~GvMAI
- C:"~i
- 4[~)
- Ce?Op
- O_iN
- E-=B
- K>zK7
- ?H1g
- G<OS
- eY)I
- AK!G
- 7D]7
- G-EM
- c4[t
- ~.ta
- MUZV/
- 7!>j^
- Ca=&
- x5*ub
- {a~6
- 13<T
- T2Ga@
- O-FR
- Z2$e
- O0Pvgj
- 8]kTq
- VIxA
- p@0Q
- 3#Hn

- 7i!
- 18I2V;
- 6@#o
- &O7V;
- G6D1
- A !v
- UBQ
-)@0]p
- *pAm
- oPJt
- tVo#^
- O+H=
- wbu[
- L2eM
- h!X6L
- Ytie
- <>ow7
- >A]%
- U`p1%
- 9@)Wb
- ?)&O;
- NK(U
- S7/>e
- @4(!
- >Us*
- YGe`
- 5>m.
- UO4W]v
- !Ci::
- O#.~?
- DQfY3
- o&\tq.7
- 4nar
- NGUnv
- wePy
- +)0`
- Zi*n
- zA /
- yYNe
- F3Z(
- &]uA"
- yPAx6
- X}\\74
- V-!E
- UQ?C@
- ,6}r
- NX52
- ^SAb
- Lwqz9
- IoM/
- Xq0n
- C|8Ah
- *K*i
- =AxF
- OI]3
- 9/Ez
- FvEQ6zcT

• kd[a3
• KRLA
• 0wV#
• =x?0
• QINe
• lwGO
• ADVAPI32.dll
• KERNEL32.dll
• -va8.v|
• VPjej
• T$ 3
• SUVW
• SUVW
• SUVW
• SUVW
• QQS3
• .rdata
• .text
• !This program cannot be run in DOS mode.
• LPPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDING
XXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDING
PADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXX
PADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPADDINGXXPADDINGPA
DD
• $Fs]
• Z'@j
• nYc.
• <x{Y
• h,-nC
• -6\\g\t{
• !ZRh
• C$Jt
• yM.#
• Zn?!MrO
• D]K]
• +T#bH
• n^_b
• w rB
• l<apr$
• "mSvL
• RvQ=
• ?TMP
• t~;"
• W#5:Xr-
• TSTw#
• Xh":
• -)%t
• ZR)~
• .P!
• vgF)
• b=T+
• #\\"X
• 7`k:@]
• D+b#
• (1H/M]
• Q#Lr7h
• ?][<PM

- t`+n
- LK(s
-]Gkl
- dMbS
- $}SS
- LT)<
- F}/|?
- y)Q#"
- N/W7|.
- JPVtB
- y;QXj9
- (DF&
- jm^X
- SY:x
- z;~/
- xJ,]
- `[M[{
- w]\tZ
- CZf}
-)wJw
- z?n|s
- ;SHx
- h_H[
- PK%L
- Zydq
- yDYL
- L]m(W
- NBW~
- (qGs
-]{ctwH
- s<=d
- G*jf
- <GTk
-)|<K
- #R]v
- DDF
- P#p!
- bZknF
- a&>Cq[
- d+~.
- %*M>
- V\\t<
- zGp.
- }h=
- [Kt/
- [Q-p$~F
- ?R-r
- g.L_
- H,xwS
- tmy"
- m"W(
- 2ZxM~f
- BgBM
- ["?d
- @n>=p
- %TGf`
- Twt'j

- !MV[
- I_]CWr
- d\\[L\tr7
- c-\\b
- ,m~mc
- m'sVY
- >()-
- rx d\\
- >s+z
- >>j$
- ."sW
-]SrD
- }%yQ
- G/#*
- G\tNM
- 4?*p VR>
- ?!F+x
- h7{_}{
- ^ZC;
- E\tRD(s
- %G-[
- L"dQ
- #l{k
- @@Sj$A&
- Y4{"%r
- wJ&K0;[
- 'TcY
- W>R&
- n"A#v@
- =h R$
- J={Y
- {C=F
- LCCT
- FsYJ
- nc]@
- =SJ1PH
- _kdG
- B{gP
- TPQK)
- ;{s=
- =p<>
- !Q&'$
- _Sr
- ?({;
- $.?Y
- :_FPj
- >Zh?J
- RdN+
- qvYd
- RRrZ
- kwns
- Qy\\s,
- *\t}Y
- n\tHh
- {mqt
- \\<M@vpI
- ".-S

- $~J
- ?%\t>
- N)?G
- L>Nm
- pdkM
- CPuP '
- ^pB:
- h'z`
- +j_;
- g{xW
- |5H H
- cPBg
-]Q}/k
- `x?W
- pt.H-
- qj}K
- w&XJ;
- bK*HK
- G`x$
- rc/H/
- [Km(HZ
- &y;!x
- T$lp
- p2ThW*
- D]XYFQ
- Fdk:
- MZ)j
- %GK$
- |qs[
- DK`#kd
- S+Wp
- ?I_^:#
- ,_?&
- OFW"`@
- rd%O>WYk
- /TKK
- X"CC
- ^g%P
- r*JH
- /GBv
- S<~*
- <.#&
- %F-_
- nC}g
- !^FBb
- `GO<-Y
- _&h;`
- !!\tcttR9
- p+>*
- ,z\'"A,n
- :D?;&
- ;Z}_
- (NFTh
- X(-T>>
- `sp}
- &{j$H
- "^N

- (\td]
- Zw G'
- =G(B
- (CHX
- %njt
- QwJG
- &F;\\;
- :(v
- %`@<RX
- T.h{
- SP~3Pn
- HfN"
- {;|
- j-0@/`
- +qGs
- K_HJ
- TdqBG
- ,/P)
- [0Xl=j
- XZs\tC
- V\tD\\
- `pHm
- Rfh~
- >*}>
- <!>*
- |Xm{
- k@!g
- C`~x
- cnfwm{
- rd<.
- [Z.^{
- L!wk
- Wg?Kly
- hj@t
- $,![,
- p_.y
- @C?|
- PDqhG0x
- qD(w
- c~c|`
- .]MZb
- ^-<yY
- q.=)
- +]Z~
- Z'$r
- ^\\,wx
- _r[Z
- Nt=.
- kLNv
- -VxQ
- -)?x
- V vr
- {{#v
- v(~
- >SWs
- fZJN
- (G <\\

- /')L
- PmXw9`N
-)_>r
- T{F}
- V*(D
- <*\\^x
- yVBS
- WKSx
-)"T|
- /?B)
- L-JWx
- GtyM
- []y'
- NY;G
- .L,xZ+9
- W}Rk
- :xXX
- Z/8,FB
- V:<X
- ~xj&
- B!@Nn
- IT:#
- =FxD$r
- C@z.
- zCm$
- =c,Njz
- B\tX\t"<TD
- KD,!=
- $\td?J(
- %fS}
- H,z=
- TITQS
- *|pC
- &b;*F
- GZCxG
- NHH>
- BYMjWv
- /?<j~
- NT,k
- Fl"(
- %c)
- \\yd-
- }R$7x|
- B<Bdr
- xQ:v
- xcQpS;
- yTKL
- Sn?D
- =p;n
- O$}Z[@B
- !(`I
-]~q-
- dsMS~
- C\tSj
- ?*/L{
- })t[
- sxR@x3l

- P-s$
- `v"^
- cSCn
- w@Q&
- ZP U%q
- Nv%
- bgV=
- K[{`Z
- Fw2hwl
- H,Vt
- oVzgzc
-)+K#
- }J(=
- trqj
- P>yw/;NJA
- kK/M
- b?\tj
- "(MM
- @~Zc
- CM}^M#
- .>4-)%
- P[~d
- k)C$T8
- r;_s
- e#(}]Z
- Z- %
- *\t]_/
- Sn#/
- vp/=
- N;Y]&
- vpT)
- JnbZ
- *L(Z
- `k~@
- (.L"T
- pGlYt
- `?&J;
- ^?K>
- Fp:^K?
- !FmN
- B#?RBF%?
- vVDPW{
- *`4Q]?
- Xtwj=|
- (\tsy
- QJ5\tN@
- $_ZX
- yt<-}^|
- ,tv[
- k"Y#
- ;{JF
- s@@P
- <B?}
- L}?K
- Jf\t$c
- RufK*!x
- +-l=zB

- D}'s^5N
- Cml:$
- QVvo$j*Y
- VGF&
- .P"
- cg~(#
- s-(d
- Y,s,t
- b;@,
- N*'}
- W(~m
- gM=@Z`q9
- W!NR
- "M=s
- L&ZB;
- mNym
- yD$SS
- tjy:
- 'QRd
- YQ`|
- QqS<d
- >RP!r
- `Fq>
- rJFc
- ?%%Q<
- [S*r
- fmB]
- W>$b
- "R_Y
- zL<\tL
- g!wFV
- ~/sL
- HK~N
- rw*L
- L|.\\
- n`BUF@
- TXL\tw
- "\'n[
- $N:x
- m,zB
- YmFB
- `V@k
- Nmhc
- <M-w
- <~"p+
- !J0[:w
- g#L$
- YP^`>
- G~mbY
- wYft]
-)"AvHP
- &Kp;\tq
- qj}r
- fNk`:
- JZ*z$f
- hP\tJ
- >!_

- p-G3%kx"
- !(Hl
- fIc?.+
- f<dMS"x
- QLY[
- *F !
-]pHt
- +Ay <,
- p&HT;
- :n,n
- L~sx
- s(rF
- K`-
- /C:T
- pMhc
- <}y Jhg
- -FVYab
- |;Fx
- YCHc
- yd%'
- bXD#
- $DkkU,s;
- <@.%>
- ?bPw
- &H;!h
- }!?S
- vwCC
- {vv?lmZ
- |"XqvI
- V>$c
- K=/3fZc~
- @*/w
- xJn%C
- $#scxjU
- ~pZD..
- >JP)
- %yFZF.
- k(Gq
- z(Dsk
- ^z\tw
- F$PKpH
- +,?:
- Dl{#[,
- :JZYv
- v%E(]TY
- X]Z#
- ,H$|
- my]
- B@V=
- MH`l
- P.F<
- #:G}MSh
- ldgzK<
- {pp<
- ~-.|
- J>\\g
- HpNbS:

- B@Kyf(
- Rf~!PGt
- ~ @w
- SM@N
- DMV#
- ;d{b
- z;Bk
- f\t]n
- /xMq"8Tv
- 'W*k
- lY);Hv
- NTZy
- .WH`
- &.`[
- +D\tRl
- =M%?bEg
- T(mZ
- S\t/:
- dYJK
- !R\'"
- y)#C
- <db)g+
- WVMxlu
- ;$6\\x$<:
- XK&%
- Hnp'
- DKJF
- ?m>x
-)^DZ9,
- H0^vW/
- !l:IGH
- dCfK
- [D,[>n
- /=v"
- /.vO!.v
- t;j@h
- @_^][
- T$ l;]
- D$$J;
- tNHt>Ht2Hug
- D$$;
- _^][
- _^][
- = @
- PSSj
- @.rsrc
- `bss
- RichWPp

• Module 4 (probably unpacked / injected by the sample)

• Module 4 rich signatures

- 44616e530000000000000000000000000fc77b90002000000e81f040002000000831c0e0001000000ddffce0003000000ddffcb00190000000000000100ef0000001e529500010000000d52e400520000000d52de00

• Module 4 yara matches

- Str_Win32_Wininet_Library (Match Windows Inet API library declaration)
- Str_Win32_Internet_API (Match Windows Inet API call)
- Str_Win32_Http_API (Match Windows Http API call)
- IsPE32 ()
- IsDLL ()
- IsWindowsGUI ()
- HasOverlay (Overlay Check)
- HasRichSignature (Rich Signature Check)
- antisb_threatExpert (Anti-Sandbox checks for ThreatExpert)
- inject_thread (Code injection with CreateRemoteThread in a remote process)
- network_http (Communications over HTTP)
- network_dns (Communications use DNS)
- network_dga (Communication using dga)
- escalate_priv (Escalade priviledges)
- win_mutex (Create or check mutex)
- win_registry (Affect system registries)
- win_token (Affect system token)
- win_files_operation (Affect private profile)
- without_attachments (Rule to detect the no presence of any attachment)
- without_images (Rule to detect the no presence of any image)
- without_urls (Rule to detect the no presence of any url)
- contentis_base64 (This rule finds for base64 strings)
- Advapi_Hash_API (Looks for advapi API functions)
- CRC32_poly_Constant (Look for CRC32 [poly])

• Module 4 strings

• Module 4 most interesting strings

- url | valid domains | tlds: www.amazon.com
- url | valid domains | tlds: google.com
- url | valid domains | tlds: 5.vI"-vO!.v
- api | frequently used by malware: InternetWriteFile
- api | frequently used by malware: AdjustTokenPrivileges
- api | frequently used by malware: OpenProcessToken
- api | frequently used by malware: DeviceIoControl
- api | frequently used by malware: CreateRemoteThread
- api | frequently used by malware: GetThreadContext
- api | frequently used by malware: VirtualAllocEx
- api | frequently used by malware: OpenProcess
- api | frequently used by malware: WriteProcessMemory
- api | frequently used by malware: CreateToolhelp32Snapshot
- api | frequently used by malware: Process32Next
- api | frequently used by malware: VirtualProtectEx
- api | frequently used by malware: ReadProcessMemory
- api | frequently used by malware: Process32First
- api | frequently used by malware: WriteFile
- api | frequently used by malware: QueryPerformanceCounter
- api | frequently used by malware: MapViewOfFile
- api | frequently used by malware: CreateThread
- api | frequently used by malware: GetAdaptersInfo
- api | frequently used by malware: InternetCloseHandle
- api | frequently used by malware: InternetReadFile
- api | frequently used by malware: InternetQueryDataAvailable

- api | frequently used by malware: PFXImportCertStore
- api | frequently used by malware: CoCreateInstance
- api | frequently used by malware: RegCloseKey
- api | frequently used by malware: WinExec
- api | frequently used by malware: GetTickCount
- api | frequently used by malware: ExitProcess
- api | frequently used by malware: ResumeThread
- api | frequently used by malware: SuspendThread
- api | frequently used by malware: GetProcAddress
- api | frequently used by malware: Sleep
- api | frequently used by malware: CreateRemoteThread
- api | frequently used by malware: LdrLoadDll
- api | frequently used by malware: Accept-Encoding: gzip, deflate
- api | frequently used by malware: Accept-Language: en-US;q=0.5,en;q=0.3
- api | frequently used by malware: Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8
- api | frequently used by malware: DllRegisterServer
- url | http tag: https://
- url | http tag: http://
- api | wininet: HttpAddRequestHeadersA
- api | wininet: HttpEndRequestA
- api | wininet: HttpSendRequestExA
- api | wininet: InternetQueryOptionA
- api | wininet: InternetOpenA
- api | wininet: HttpSendRequestA
- api | wininet: HttpOpenRequestA
- api | wininet: InternetSetOptionA
- api | wininet: InternetConnectA
- api | wininet: HttpQueryInfoA
- api | crypt32: CertGetCertificateContextProperty
- api | crypt32: CertFreeCertificateChain
- api | crypt32: CryptDecodeObject
- api | crypt32: CertEnumCertificatesInStore
- api | crypt32: CertCloseStore
- api | crypt32: CertAddCertificateContextToStore
- api | crypt32: CertFreeCertificateContext
- api | crypt32: CertOpenStore
- api | netapi: NetUserGetInfo
- api | advapi32: CryptHashData
- api | advapi32: CryptDestroyHash
- api | advapi32: CryptVerifySignatureA
- api | advapi32: CryptDestroyKey
- api | advapi32: CryptCreateHash
- api | advapi32: CryptImportKey
- api | advapi32: CryptAcquireContextA
- api | advapi32: ConvertStringSecurityDescriptorToSecurityDescriptorA
- api | advapi32: LookupPrivilegeValueA
- api | advapi32: RegCreateKeyA
- api | kernel32: RegSetValueExA
- api | advapi32: GetTokenInformation
- api | advapi32: GetSidSubAuthorityCount
- api | advapi32: GetUserNameW
- api | advapi32: GetSidSubAuthority
- api | user32: wvsprintfA
- api | kernel32: GetOverlappedResult
- api | kernel32: SetUnhandledExceptionFilter
- api | kernel32: VirtualFreeEx
- api | kernel32: GetLocalTime

- api | kernel32: ReleaseMutex
- api | kernel32: CreateMutexA
- api | kernel32: lstrcmpiW
- api | kernel32: GetModuleFileNameW
- api | kernel32: VirtualAlloc
- api | kernel32: GetProcessHeap
- api | kernel32: VirtualFree
- api | kernel32: HeapFree
- api | kernel32: HeapAlloc
- api | kernel32: HeapReAlloc
- api | kernel32: FindClose
- api | kernel32: FindFirstFileA
- api | kernel32: CreateDirectoryA
- api | kernel32: ReadFile
- api | kernel32: GetFileAttributesW
- api | kernel32: GetFileAttributesA
- api | kernel32: GetFileSize
- api | kernel32: SetLastError
- api | kernel32: GetTempPathA
- api | kernel32: GetVersionExA
- api | kernel32: QueryPerformanceFrequency
- api | kernel32: GetSystemInfo
- api | kernel32: GetVolumeInformationA
- api | kernel32: GetSystemTimeAsFileTime
- api | kernel32: GetCurrentProcess
- api | kernel32: SetErrorMode
- api | kernel32: DeleteCriticalSection
- api | kernel32: MultiByteToWideChar
- api | kernel32: lstrcmpA
- api | kernel32: CreateFileMappingA
- api | kernel32: UnmapViewOfFile
- api | kernel32: GetCurrentThreadId
- api | kernel32: TerminateThread
- api | kernel32: TlsSetValue
- api | kernel32: TlsGetValue
- api | dnsapi: DnsFree
- api | dnsapi: DnsQuery_A
- api | netapi: NetWkstaGetInfo
- api | netapi: NetApiBufferFree
- api | kernel32: RegOpenKeyExW
- api | kernel32: RegOpenKeyExA
- api | kernel32: RegQueryValueExA
- api | advapi32: RegEnumKeyW
- api | kernel32: RegCreateKeyExA
- api | kernel32: RegNotifyChangeKeyValue
- api | kernel32: RegEnumValueA
- api | kernel32: RegDeleteValueA
- api | advapi32: InitiateSystemShutdownExA
- api | user32: wsprintfW
- api | user32: wsprintfA
- api | kernel32: DeleteFileA
- api | kernel32: EnterCriticalSection
- api | kernel32: LeaveCriticalSection
- api | kernel32: InitializeCriticalSection
- api | kernel32: DeleteFileW
- api | kernel32: GetWindowsDirectoryW
- api | kernel32: CopyFileW

- api | kernel32: GetWindowsDirectoryA
- api | kernel32: SetFilePointer
- api | kernel32: GetExitCodeThread
- api | kernel32: GetTempPathW
- api | kernel32: CreateFileW
- api | kernel32: GetSystemDirectoryA
- api | kernel32: CreateDirectoryW
- api | kernel32: GetSystemDirectoryW
- api | kernel32: RegisterWaitForSingleObject
- api | kernel32: CreateProcessA
- api | kernel32: GetExitCodeProcess
- api | kernel32: UnregisterWait
- api | kernel32: PulseEvent
- api | kernel32: IsBadCodePtr
- api | kernel32: LocalFree
- api | kernel32: TlsFree
- api | kernel32: TlsAlloc
- api | kernel32: lstrcmpiA
- api | kernel32: lstrcpyW
- api | kernel32: lstrcatW
- api | kernel32: GetModuleHandleA
- api | kernel32: WaitForMultipleObjects
- api | kernel32: lstrlenW
- api | kernel32: lstrcpyA
- api | kernel32: GetCurrentProcessId
- api | kernel32: GetLastError
- api | kernel32: TerminateProcess
- api | kernel32: GetModuleFileNameA
- api | kernel32: LoadLibraryA
- api | kernel32: GetCurrentThread
- api | kernel32: GetModuleHandleExA
- api | kernel32: CloseHandle
- api | kernel32: OpenEventA
- api | kernel32: lstrcatA
- api | kernel32: CreateEventA
- api | kernel32: SetEvent
- api | kernel32: WaitForSingleObject
- api | kernel32: lstrlenA
- api | kernel32: CreateFileA
- api | kernel32: GetCommandLineA
- api | kernel32: IsWow64Process
- api | ntdll: NtWow64WriteVirtualMemory64
- api | ntdll: NtWow64ReadVirtualMemory64
- api | ntdll: NtProtectVirtualMemory
- api | ntdll: NtGetContextThread
- api | kernel32: RegGetValueW
- api | user32: MessageBoxW
- api | kernel32: VirtualProtect

• Module 4 other strings

- \\System32\\kernelbase.dll
- \\System32\\KERNEL32.DLL
- chrome.exe
- explorer.exe
- firefox.exe

- iexplore.exe
- open
- test
- command
- DelegateExecute
- root
- 12345
- !1Aa
- 0$0,040<0D0L0T0\\0d0l0t0|0
- 8 8$8(8,8084888<8@8D8H8L8P8T8X8\\8`8d8
- 3 3&363=3B3g3v3|3
- 5/6R6a6y6
- 2+2T2r2
- 0Q1f1s1
- 0_0h0
- 9"9E9b9l9r9z9
- 8*868J8S8Y8`8
- 3%494G4X4f4q4y4
- 3>3Q3a3m3
- 122c2
- 0+141Y1
- <4=E=f=
- 8'8/8A8
- 6/6U6
- 435U5v5
- 2*2@2M2r2
- 0V1u1
- 0a0k0
- 9D9x9
- 8>8s8
- 6:6C6Z6
- 4'4.4:4A4X4
- 2$2]2
- 1*1\\1
- 0*0:0N0]0l0{0
- 9:9P9U9c9
- 7*888_8
- 667K7Z7a7k7
- 5\t6"656i6
- 2#22282p2
- 0:1@1L1Y1`1f1l1r1
- _0e0r0{0
- =(=A=
- 9&9U9^9v9
- 8:8G8t8
- 606?6O6a6w6}6
- 5E5b5
- 3'464>4y4
- @0z0
- 9S9^9
- 8&8Z8y8
- 797}7
- 5`6z6
- 5W5^5t5
- 4-4;4V4c4i4
- 2.2C2H2U2h2u2
- 1Y1`1l1

- 0P0W0f0
- <U<l<
- 9+9@9F9S9[9a9j9z9
- 8%8C8
- 697T7
- 4t5~5
- 4)4i4
- 3-343:3F3`3m3{3
- 282X2
- "0E0
- 9!9^9s9
- 8%8.8:8F8
- 7*7:7M7R7X7`7
- 6<6j6o6
- 5P5j5
- 444R4W4`4k4q4}4
- 1$131:1?1o1
- 9%9/9
- 515X5_5
- 3!4S4`4
- 102O2}2Q3
- ;0;O;\\;t;
- 526?6P6u6
- 3,373
- 1B2H2M2^2
- 1/1>1`1
- SHDeleteValueA
- SHGetValueA
- StrCmpNIA
- DNSAPI.dll
- _except_handler3
- IPHLPAPI.DLL
- WININET.dll
- SHSetValueA
- PathRemoveFileSpecW
- PathFindFileNameW
- SHGetValueW
- StrToIntA
- StrToIntExA
- StrStrIA
- NETAPI32.dll
- OLEAUT32.dll
- ole32.dll
- CoGetObject
- CoInitialize
- IIDFromString
- SHELL32.dll
- SHGetFolderPathA
- ShellExecuteA
- ADVAPI32.dll
- USER32.dll
- KERNEL32.dll
- Microsoft Base Cryptographic Provider v1.0
- MiniDumpWriteDump
- D:(A;OICI;GA;;;WD)
- PID: %u [%0.2u:%0.2u:%0.2u]
- abcdefghijklmnop

- aeiou
- Cache-Control: max-age=0
- Connection: keep-alive
- Set-Cookie
- POST
- .dat
- 2500
- I)\t/
- 8{:N
- Error
- SDio:
- 6oZj
- C=3\V
- 0 .\t\\
- ~@,i
- SHCreateItemFromParsingName
- ,SHELL32.DLL
- c}FZ4
- Content-Type: application/x-www-form-urlencoded
- !?}&(2}a
- iertutil.dll
- Interface
- JaIa0
- \\notepad.exe
- command
- shell
- }IG*
- s6/Yw
- ISHDocVwBroker
- OFc4
- 0 .B\\
- ~L,9
- eFh4
- /index.php
- Content-Type: application/octet-stream
- 0123456789ABCDEF
- /auth?
- kernelbase.dll
- SOFTWARE\\
- user32.dll
- %u(%u)\t%s
- open
- @@AD
- @A@@@@@@@@@@@@A@@@@@@@A@AAA@
- |$@A_A^A]A\\
- t$8H
- l$0H
- 8@:<
- @:;u
- raL;
- ruH;
- X$E;
- x ATAUAVAWE3
- KERNEL32.DLL
- _vEr3
- FL0`
- TI(`

- 5;<Tp
- >.1c=
- 4P_/
- #.Bce
- E)b]
- Ov5Y
- 7)`K
- Z?i}&
- H{Hi=
- Z1Myuz
- WOW64
- WIN32
- #Eue[
- 4q}$
- .exe
- INv>
- F>ve
- pUXt
- 5.vr
- "-va8.vej/v
- A/v(7.v
- 3.vQ3.vL
- 3.v\\9.v
- G-vA
- m,v3
-]/v6
- kCku
- 9d]g
- T$ 3
- SUVW
- 9D$X
- L$<I
- 9D$@w
- I9I$@vQ
- L$ I
- D$p8
- t$t3
- D$82
- SUVW
- QSUVW
- v:SV3
- r/9\\$
- s59L$
- r;9\\$
- QQUW
- SUV3
- Hu28E
- I$,3
- \\$<3
- SUVW
- |$0f
- D$0W
- t!O;
- QSUV
- (SUV
- QQSUVW3
- /GFJu

- t$4V
- D$ 3
- t$0Q
- IPf;
- D$0r
- 9D$4w
- 9D$,
- <0PE
- 9/t>
- +z4t
- QSUV
- UWWh
- tDUW
- SUVW3
- SUV3
- UUUURPj
- UUUU
- RPUUUUj
- VW9-
- 4_^[
- L$$3
- SUVW
- QSUVW
- tZS3
- tl;u
- t=V3
- QUVW
- t$8P
- t*9}
- SVW3
- t\t9u
- SUVW
- SUVW
- SUVW3
- QSUV
- SVW3
- SUVW3
- SUVW
- :u0j
- QQS3
- SUVW
- T9~$t
- F9~$t
- 9~$t
- L$L3
- D$4(
- PjAV
- SUVW
- PPUS
- Pj2j
- SUVW
- t*f9n
- L$ US
- QSUVW
- s(iE
- UVW3
- f9L8

- SUVW
- SUVW
- SUVW
- IIuR
- t[ItKIt;It
- UVWh
- uA9l$
- ub9l$
- SUWj
- QQSU
- WPW3
- SVW3
- D$$EPU
- D$4PPU
- t$8S
- D$8Pj
- SUV3
- u@9l$
- UUUU
- VWC3
- jD^V2
- D$4Pj
- D$0P
- dSUVW
- u.!=0
- D$(3
- D$p3
- @SVW3
- Pj2j
- @ucj
- SSS3
- SUVW3
- VVPU
- t 9t$
- SUVW3
- PjiU
- Pj 3
- 0SUW
- t?9}
- 9D$
- QQSU
- tFUV
- D$8P
- t!It
- 9l$$t
- jSVU
- Uj h
- D$0PU
- D$0Ph
- jD^V2
- D$(PU
- %SU3
- tKV3
- SPh4
- D$*3
- u\t_^[
- $SVW3

- WSUV
- PWSU
- PWSU
- SUVW
- E;l$
- SUVWj
- .reloc
- @.data
- .rdata
- .text
- Rich
- !This program cannot be run in DOS mode.
- .tmp
- %s\\%s.txt
- --
- #+3;CScs
- <$<(<4<8<D<H<
- 4P:\\:x:
- :,:2:N:Y:b:
- >)>0>D>K>h>q>x>
- <,=C=P=Y=f=
- :7;^;h;n;
- :!:':j:r:x:
- >1>6>F>V>v>{>
- <$<><K<
- :V;k;
- :5:;:A:p:}:
- =$=/===D=M=`=o=
- <-<3<8<C<Q<d<l<
- :!;-;7;=;F;i;q;
- :(:U:q:
- :%:L:
- ?>?H?
- <&<.<
- ;L;R;
- >1>B>N>m>v>
- =(=R=r=
- <,<]<o<
- :";-;O;
- :2:S:n:t:
- ?J?Q?]?
- =">(>J>
- <1=Z=`=
- ;";T;Y;j;p;v;
- 9\t:7:F:L:t:
- ?+?;?E?K?
- >8>=>H>`>j>y>
- =<=A=M=~=
- <2<T<m<}<
- :&:G:k:}:
- >$?3?:?
- <+<@<I<X<k<q<y<
- =->~>
- <(<d<r<w<|<
- :-:3:>:D:S:X:d:n:
- MSVCRT.dll
- SHLWAPI.dll

- StrCmpIW
- StrStrIW
- StrChrA
- CRYPT32.dll
- \\%u.dmp
- dbghelp.dll
- ntdll.dll
- S:(ML;;NW;;;LW)
- bcdfghjklmnpqrstvwxyz
- cdfghlmnrstw
- "%s"
- Jt+c
- Px,fy
- .Z%&
- ;wPp
- :_HT
- ~Q,h
- :bHT
- _""pPn
- .tmp
- Jb.+
- =v"L
- y- w
- @@EMPTY
- @@@@@@@@!!!!
- @@@@
- !!!!!!!!!!!!!!ADAA@@@@@@@@@@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@@@@@@@@@@

- ,v&<.v
- /.v=D/v
- -.vb
- wQJ.v
- ,v+E.v
- -v]7.v
- K/v;
- -v!>-v
- -v1#-v
- `/vd
-)vb
- @.v`
- -v%9-v
- %./f
- CDPMNo}
- @_^][
- T$ I;]
- D$$J;
- tNHt>Ht2Hug
- D$$;
- @_^][
- +L$x
- GT$p
- ;t$l
- +D$H
- |$,?w(
- +D$H
- D$`;
- ;T$h
- T$\\;
- L$T;
- T$@+
- D$`=
- T$hf9<
- D$D;T$
- T$\\;T$4
- !\\$L
- !\\$(
- D$lSUV
- ^][Y
- @_^][YY
-]@[_^
- ^[_]YY
- _^][
- t$ W
- _^][YY
- t$WV
- rCWj
- QQSUVW
- _^][
- _^][
- L$,;L$
- D$tj
- Y^][
- WjHY
- _^][Y
- _^][

- D$<v
- _^][YY
- _[^]
- t!SS
- PSSh
- QSSh
- _^][
- G;|$
- t$$W
- _^][
- G;|$
- t$(Q
- 9D$$t(
- D$$;{
- L$,;
- SVQP
- SVWj@h
- _]^[YY
- Yf;F
- @_^][Y
- @_^][YY
- ^_][
- G(Pj
- tCVVWh3
- PPPP
- PPQP
- @jLY
- @_^][Y
- _^][
- j X_^
-]_^[
- _^][
- _^][
- SVW
- D_^][
- D$,P
- D$,P
- RPVQ
- RPWV
- RPQW
- D$`H
- VWQj
- _^][
- D$$j
- _^][
- FQWS
- _^][
- _^][Y
- t!WWW
- VWPj(
- t,SSSj
- Vj Y
- ^[_Y
- Y_^][Y
- YY_^[
- QSVW
- @_^[

- @_^]Y
- L$@Q
- w&r;
- w'r
- PVRQ
- [_^]
- _^][Y
- t$(h
- t:WPVU
- t$(h
- tnWVVU
- _^][
- _^][Y
- t/WW
- @_^][
- WVPP
- QQQRh
- QPQh
- _^][
- _^][Y
- _^][
- _^][
- SSSS
- PSSj
- _^][
- tK9^$t
- _^][
- tK9^$t
- >9~$_t
- V ;V
- SVSWj
- h|\t(
- ht\t(
- _^][
- D$ Ph
- PPPV
- L$ Q
- D$<PV
- PPPPV
- hX\t(
- h@\t(
- h \t(
- t$,h
- QQSV
- _^][
- _^][
- RPRRR
- QQQQP
- D$ P
- _^][Y
- QPQj
- [_^]
- [_]^
- Wj,Y
- ;F(r
- _^][
- _^][

- bSVSj
- t@PPVh
- D$hPh
- D$$P
- D$XPh
- D$(P
- D$XPh
- D$dP
- D$XPh
- YY^[
- _^][
- s!V
- _^][
- _^][
- tThX
- jXh@
- < s}
- FVVj
- D$$P
- ^_][
- t$ P
- T$HYYU
- D$@Ph
- D$LP
- D$$P
- D$@Ph
- D$<P
- D$<Ph
- _^][YY
- WPVV
- GSWh
- D$$PSS
- D$,P
- $SWPj
- D$$P
- D$xP
- D$lPt
- D$,P
- QQQh
- QPQh?
- QQQh
- QPQh?
- QQQh
- QPQh?
- QPQh?
- D$<P
- D$tPhp
- D$,PQ
- RQh\\
- _^][
- D$<P
- t$(P
- D$ VWS
- D$<P
- D$DPP
- Pt(h
- D$DP

- PWWj
- D$,P
- D$$P
- @_^[
- QQSVW
- VVVV
-]@[^
- @_^[
- PWWWWWW
- <_^[
- @_^][
- D$TP
- v'j\tY
- L$<P
- D$$P
- PPPPW
- D$ SSSPh
- PjMV
- _^][
- _^][
- L$$V
- <.t
- YYPV
- r h<
- hx:'
- VWQ
- _^][
- YYPW
- l$hVW
- _][YY
- @[_^
- ^]_[Y
- t$$YY
- T$LY
- t.Jt
- (_^][
- D$@P
- D$ Ph
- $_^][
- >PhX
- G\tPQ
- VWj\t^
- QQPQ
- QQVW
- _^][
- ^[YY
- QQSV
- X_^]
- X_^][YY
- t"Vj
- tNVhm('
- VWh$
- X_^[
- j Y;
- SSSWSS
- D$lPSSj
- t$hP

- D$$Ph
- D$$Ph
- X][_^
- Vj@Y
- [^_]
- Vj,Y
- X_^]
- X_^]
- X_^]
- X_^]
- @_^[
- VVVV
- D$(j
- D$ f
- WPjfj
- _^][
- D$(P
- D$$P
- _^][
- L$$P
- L$$P
- D$(P
- D$(B
- D$(<
- Y_^[
- `bss

• Module 5 (probably unpacked / injected by the sample)

• Module 5 rich signatures

- 44616e530000000000000000000000000fc77b90002000000e81f040002000000831c0e0001000000ddffce0003000000ddffcb00190000000000000100ef0000001e529500010000000d52e400520000000d52de00

• Module 5 yara matches

- Str_Win32_Wininet_Library (Match Windows Inet API library declaration)
- Str_Win32_Internet_API (Match Windows Inet API call)
- Str_Win32_Http_API (Match Windows Http API call)
- IsPE32 ()
- IsDLL ()
- IsWindowsGUI ()
- HasOverlay (Overlay Check)
- HasRichSignature (Rich Signature Check)
- antisb_threatExpert (Anti-Sandbox checks for ThreatExpert)
- inject_thread (Code injection with CreateRemoteThread in a remote process)
- network_http (Communications over HTTP)
- network_dns (Communications use DNS)
- network_dga (Communication using dga)
- escalate_priv (Escalade priviledges)
- win_mutex (Create or check mutex)
- win_registry (Affect system registries)
- win_token (Affect system token)
- win_files_operation (Affect private profile)
- without_attachments (Rule to detect the no presence of any attachment)
- without_images (Rule to detect the no presence of any image)

- without_urls (Rule to detect the no presence of any url)
- contentis_base64 (This rule finds for base64 strings)
- Advapi_Hash_API (Looks for advapi API functions)
- CRC32_poly_Constant (Look for CRC32 [poly])

• Module 5 strings

• Module 5 most interesting strings

- url | valid domains | tlds: www.amazon.com
- url | valid domains | tlds: google.com
- url | valid domains | tlds: 5.vI"-vO!.v
- api | frequently used by malware: InternetWriteFile
- api | frequently used by malware: AdjustTokenPrivileges
- api | frequently used by malware: OpenProcessToken
- api | frequently used by malware: DeviceIoControl
- api | frequently used by malware: CreateRemoteThread
- api | frequently used by malware: GetThreadContext
- api | frequently used by malware: VirtualAllocEx
- api | frequently used by malware: OpenProcess
- api | frequently used by malware: WriteProcessMemory
- api | frequently used by malware: CreateToolhelp32Snapshot
- api | frequently used by malware: Process32Next
- api | frequently used by malware: VirtualProtectEx
- api | frequently used by malware: ReadProcessMemory
- api | frequently used by malware: Process32First
- api | frequently used by malware: WriteFile
- api | frequently used by malware: QueryPerformanceCounter
- api | frequently used by malware: MapViewOfFile
- api | frequently used by malware: CreateThread
- api | frequently used by malware: GetAdaptersInfo
- api | frequently used by malware: InternetCloseHandle
- api | frequently used by malware: InternetReadFile
- api | frequently used by malware: InternetQueryDataAvailable
- api | frequently used by malware: PFXImportCertStore
- api | frequently used by malware: CoCreateInstance
- api | frequently used by malware: RegCloseKey
- api | frequently used by malware: WinExec
- api | frequently used by malware: GetTickCount
- api | frequently used by malware: ExitProcess
- api | frequently used by malware: ResumeThread
- api | frequently used by malware: SuspendThread
- api | frequently used by malware: GetProcAddress
- api | frequently used by malware: Sleep
- api | frequently used by malware: CreateRemoteThread
- api | frequently used by malware: LdrLoadDll
- api | frequently used by malware: Accept-Encoding: gzip, deflate
- api | frequently used by malware: Accept-Language: en-US;q=0.5,en;q=0.3
- api | frequently used by malware: Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8
- api | frequently used by malware: DllRegisterServer
- url | http tag: https://
- url | http tag: http://
- api | wininet: HttpAddRequestHeadersA
- api | wininet: HttpEndRequestA
- api | wininet: HttpSendRequestExA
- api | wininet: InternetQueryOptionA

- api | wininet: InternetOpenA
- api | wininet: HttpSendRequestA
- api | wininet: HttpOpenRequestA
- api | wininet: InternetSetOptionA
- api | wininet: InternetConnectA
- api | wininet: HttpQueryInfoA
- api | crypt32: CertGetCertificateContextProperty
- api | crypt32: CertFreeCertificateChain
- api | crypt32: CryptDecodeObject
- api | crypt32: CertEnumCertificatesInStore
- api | crypt32: CertCloseStore
- api | crypt32: CertAddCertificateContextToStore
- api | crypt32: CertFreeCertificateContext
- api | crypt32: CertOpenStore
- api | netapi: NetUserGetInfo
- api | advapi32: CryptHashData
- api | advapi32: CryptDestroyHash
- api | advapi32: CryptVerifySignatureA
- api | advapi32: CryptDestroyKey
- api | advapi32: CryptCreateHash
- api | advapi32: CryptImportKey
- api | advapi32: CryptAcquireContextA
- api | advapi32: ConvertStringSecurityDescriptorToSecurityDescriptorA
- api | advapi32: LookupPrivilegeValueA
- api | advapi32: RegCreateKeyA
- api | kernel32: RegSetValueExA
- api | advapi32: GetTokenInformation
- api | advapi32: GetSidSubAuthorityCount
- api | advapi32: GetUserNameW
- api | advapi32: GetSidSubAuthority
- api | user32: wvsprintfA
- api | kernel32: GetOverlappedResult
- api | kernel32: SetUnhandledExceptionFilter
- api | kernel32: VirtualFreeEx
- api | kernel32: GetLocalTime
- api | kernel32: ReleaseMutex
- api | kernel32: CreateMutexA
- api | kernel32: lstrcmpiW
- api | kernel32: GetModuleFileNameW
- api | kernel32: VirtualAlloc
- api | kernel32: GetProcessHeap
- api | kernel32: VirtualFree
- api | kernel32: HeapFree
- api | kernel32: HeapAlloc
- api | kernel32: HeapReAlloc
- api | kernel32: FindClose
- api | kernel32: FindFirstFileA
- api | kernel32: CreateDirectoryA
- api | kernel32: ReadFile
- api | kernel32: GetFileAttributesW
- api | kernel32: GetFileAttributesA
- api | kernel32: GetFileSize
- api | kernel32: SetLastError
- api | kernel32: GetTempPathA
- api | kernel32: GetVersionExA
- api | kernel32: QueryPerformanceFrequency
- api | kernel32: GetSystemInfo

- api | kernel32: GetVolumeInformationA
- api | kernel32: GetSystemTimeAsFileTime
- api | kernel32: GetCurrentProcess
- api | kernel32: SetErrorMode
- api | kernel32: DeleteCriticalSection
- api | kernel32: MultiByteToWideChar
- api | kernel32: lstrcmpA
- api | kernel32: CreateFileMappingA
- api | kernel32: UnmapViewOfFile
- api | kernel32: GetCurrentThreadId
- api | kernel32: TerminateThread
- api | kernel32: TlsSetValue
- api | kernel32: TlsGetValue
- api | dnsapi: DnsFree
- api | dnsapi: DnsQuery_A
- api | netapi: NetWkstaGetInfo
- api | netapi: NetApiBufferFree
- api | kernel32: RegOpenKeyExW
- api | kernel32: RegOpenKeyExA
- api | kernel32: RegQueryValueExA
- api | advapi32: RegEnumKeyW
- api | kernel32: RegCreateKeyExA
- api | kernel32: RegNotifyChangeKeyValue
- api | kernel32: RegEnumValueA
- api | kernel32: RegDeleteValueA
- api | advapi32: InitiateSystemShutdownExA
- api | user32: wsprintfW
- api | user32: wsprintfA
- api | kernel32: DeleteFileA
- api | kernel32: EnterCriticalSection
- api | kernel32: LeaveCriticalSection
- api | kernel32: InitializeCriticalSection
- api | kernel32: DeleteFileW
- api | kernel32: GetWindowsDirectoryW
- api | kernel32: CopyFileW
- api | kernel32: GetWindowsDirectoryA
- api | kernel32: SetFilePointer
- api | kernel32: GetExitCodeThread
- api | kernel32: GetTempPathW
- api | kernel32: CreateFileW
- api | kernel32: GetSystemDirectoryA
- api | kernel32: CreateDirectoryW
- api | kernel32: GetSystemDirectoryW
- api | kernel32: RegisterWaitForSingleObject
- api | kernel32: CreateProcessA
- api | kernel32: GetExitCodeProcess
- api | kernel32: UnregisterWait
- api | kernel32: PulseEvent
- api | kernel32: IsBadCodePtr
- api | kernel32: LocalFree
- api | kernel32: TlsFree
- api | kernel32: TlsAlloc
- api | kernel32: lstrcmpiA
- api | kernel32: lstrcpyW
- api | kernel32: lstrcatW
- api | kernel32: GetModuleHandleA
- api | kernel32: WaitForMultipleObjects

- api | kernel32: lstrlenW
- api | kernel32: lstrcpyA
- api | kernel32: GetCurrentProcessId
- api | kernel32: GetLastError
- api | kernel32: TerminateProcess
- api | kernel32: GetModuleFileNameA
- api | kernel32: LoadLibraryA
- api | kernel32: GetCurrentThread
- api | kernel32: GetModuleHandleExA
- api | kernel32: CloseHandle
- api | kernel32: OpenEventA
- api | kernel32: lstrcatA
- api | kernel32: CreateEventA
- api | kernel32: SetEvent
- api | kernel32: WaitForSingleObject
- api | kernel32: lstrlenA
- api | kernel32: CreateFileA
- api | kernel32: GetCommandLineA
- api | kernel32: IsWow64Process
- api | ntdll: NtWow64WriteVirtualMemory64
- api | ntdll: NtWow64ReadVirtualMemory64
- api | ntdll: NtProtectVirtualMemory
- api | ntdll: NtGetContextThread
- api | kernel32: RegGetValueW
- api | user32: MessageBoxW
- api | kernel32: VirtualProtect

• Module 5 other strings

- \\System32\\kernelbase.dll
- \\System32\\KERNEL32.DLL
- chrome.exe
- explorer.exe
- firefox.exe
- iexplore.exe
- open
- test
- command
- DelegateExecute
- root
- 12345
- !1Aa
- ijjh
- ijjh
- 0$0,040<0D0L0T0\\0d0l0t0|0
- 8 8$8(8,8084888<8@8D8H8L8P8T8X8\\8`8d8
- 3 3&363=3B3g3v3|3
- 5/6R6a6y6
- 2+2T2r2
- 0Q1f1s1
- 0_0h0
- 9"9E9b9l9r9z9
- 8*868J8S8Y8`8
- 3%494G4X4f4q4y4
- 3>3Q3a3m3
- 122c2

- 0+141Y1
- <4=E=f=
- 8'8/8A8
- 6/6U6
- 435U5v5
- 2*2@2M2r2
- 0V1u1
- 0a0k0
- 9D9x9
- 8>8s8
- 6:6C6Z6
- 4'4.4:4A4X4
- 2$2]2
- 1*1\\1
- 0*0:0N0]0l0{0
- 9:9P9U9c9
- 7*888_8
- 667K7Z7a7k7
- 5\t6"656i6
- 2#22282p2
- 0:1@1L1Y1`1f1l1r1
- _0e0r0{0
- =(=A=
- 9&9U9^9v9
- 8:8G8t8
- 606?6O6a6w6}6
- 5E5b5
- 3'464>4y4
- @0z0
- 9S9^9
- 8&8Z8y8
- 797}7
- 5`6z6
- 5W5^5t5
- 4-4;4V4c4i4
- 2.2C2H2U2h2u2
- 1Y1`1l1
- 0P0W0f0
- <U<l<
- 9+9@9F9S9[9a9j9z9
- 8%8C8
- 697T7
- 4t5~5
- 4)4i4
- 3-343:3F3`3m3{3
- 282X2
- "0E0
- 9!9^9s9
- 8%8.8:8F8
- 7*7:7M7R7X7`7
- 6<6j6o6
- 5P5j5
- 444R4W4`4k4q4}4
- 1$131:1?1o1
- 9%9/9
- 515X5_5
- 3!4S4`4

- 102O2}2Q3
- ;0;O;\\;t;
- 526?6P6u6
- 3,373
- 1B2H2M2^2
- 1/1>1`1
- SHDeleteValueA
- SHGetValueA
- StrCmpNIA
- DNSAPI.dll
- _except_handler3
- IPHLPAPI.DLL
- WININET.dll
- SHSetValueA
- PathRemoveFileSpecW
- PathFindFileNameW
- SHGetValueW
- StrToIntA
- StrToIntExA
- StrStrIA
- NETAPI32.dll
- OLEAUT32.dll
- ole32.dll
- CoGetObject
- CoInitialize
- IIDFromString
- SHELL32.dll
- SHGetFolderPathA
- ShellExecuteA
- ADVAPI32.dll
- USER32.dll
- KERNEL32.dll
- Microsoft Base Cryptographic Provider v1.0
- MiniDumpWriteDump
- D:(A;OICI;GA;;;WD)
- PID: %u [%0.2u:%0.2u:%0.2u]
- abcdefghijklmnop
- aeiou
- Cache-Control: max-age=0
- Connection: keep-alive
- Set-Cookie
- POST
- .dat
- 2500
- I)\t/
- 8{:N
- Error
- SDio:
- 6oZj
- C=3\V
- 0 .\t\\
- ~@,i
- SHCreateItemFromParsingName
- ,SHELL32.DLL
- c}FZ4
- Content-Type: application/x-www-form-urlencoded
- !?}&(2}a

- iertutil.dll
- Interface
- JaIa0
- \\notepad.exe
- command
- shell
- }IG*
- s6/Yw
- ISHDocVwBroker
- OFc4
- 0 .B\\
- ~L,9
- eFh4
- /index.php
- Content-Type: application/octet-stream
- 0123456789ABCDEF
- /auth?
- kernelbase.dll
- SOFTWARE\\
- user32.dll
- %u(%u)\t%s
- open
- @@AD
- @A@@@@@@@@@@@@A@@@@@@@A@AAA@
- |$@A_A^A]A\\
- t$8H
- l$0H
- 8@:<
- @:;u
- raL;
- ruH;
- X$E;
- x ATAUAVAWE3
- KERNEL32.DLL
- _vEr3
- FL0`
- TI(`
- 5;<Tp
- >.1c=
- 4P_/
- #.Bce
- E)b]
- Ov5Y
- 7)`K
- Z?i}&
- H{Hi=
- Z1Myuz
- WOW64
- WIN32
- #Eue[
- 4q}$
- .exe
- INv>
- F>ve
- pUXt
- 5.vr
- "-va8.vej/v

- A/v(7.v
- 3.vQ3.vL
- 3.v\\9.v
- G-vA
- m,v3
-]/v6
- kCku
- 9d]g
- T$ 3
- SUVW
- 9D$X
- L$<I
- 9D$@w
- I9I$@vQ
- L$ I
- D$p8
- t$t3
- D$82
- SUVW
- QSUVW
- v:SV3
- r/9\\$
- s59L$
- r;9\\$
- QQUW
- SUV3
- Hu28E
- I$,3
- \\$<3
- SUVW
- |$0f
- D$0W
- t!O;
- QSUV
- (SUV
- QQSUVW3
- /GFJu
- t$4V
- D$ 3
- t$0Q
- IPf;
- D$0r
- 9D$4w
- 9D$,
- <0PE
- 9/t>
- +z4t
- QSUV
- UWWh
- tDUW
- SUVW3
- SUV3
- UUUURPj
- UUUU
- RPUUUUj
- VW9-
- 4_^[

- L$$3
- SUVW
- QSUVW
- tZS3
- tl;u
- t=V3
- QUVW
- t$8P
- t*9}
- SVW3
- t\t9u
- SUVW
- SUVW
- SUVW3
- QSUV
- SVW3
- SUVW3
- SUVW
- :u0j
- QQS3
- SUVW
- T9~$t
- F9~$t
- 9~$t
- L$L3
- D$4(
- PjAV
- SUVW
- PPUS
- Pj2j
- SUVW
- t*f9n
- L$ US
- QSUVW
- s(iE
- UVW3
- f9L8
- SUVW
- SUVW
- SUVW
- IIuR
- t[ItKIt;It
- UVWh
- uA9l$
- ub9l$
- SUWj
- QQSU
- WPW3
- SVW3
- D$$EPU
- D$4PPU
- t$8S
- D$8Pj
- SUV3
- u@9l$
- UUUU
- VWC3

- jD^V2
- D$4Pj
- D$0P
- dSUVW
- u.!=0
- D$(3
- D$p3
- @SVW3
- Pj2j
- @ucj
- SSS3
- SUVW3
- VVPU
- t 9t$
- SUVW3
- PjiU
- Pj 3
- 0SUW
- t?9}
- hx:i
- 9D$
- QQSU
- tFUV
- D$8P
- t!It
- 9l$$t
- jSVU
- Uj h
- D$0PU
- D$0Ph
- jD^V2
- D$(PU
- %SU3
- tKV3
- SPh4
- D$*3
- u\t_^[
- $SVW3
- WSUV
- PWSU
- PWSU
- SUVW
- E;l$
- SUVWj
- .reloc
- @.data
- .rdata
- .text
- Rich
- !This program cannot be run in DOS mode.
- .tmp
- %s\\%s.txt
- --
- #+3;CScs
- <$<(<4<8<D<H<
- 4P:\\:x:
- :,:2:N:Y:b:

- >)>0>D>K>h>q>x>
- <,=C=P=Y=f=
- :7;^;h;n;
- :!:':j:r:x:
- >1>6>F>V>v>{>
- <$<><K<
- :V;k;
- :5:;:A:p:}:
- =$=/===D=M=`=o=
- <-<3<8<C<Q<d<l<
- ;!;-;7;=;F;i;q;
- :(:U:q:
- :%:L:
- ?>?H?
- <&<.<
- ;L;R;
- >1>B>N>m>v>
- =(=R=r=
- <,<]<o<
- :";-;O;
- :2:S:n:t:
- ?J?Q?]?
- =">(>J>
- <1=Z=`=
- ;";T;Y;j;p;v;
- 9\t:7:F:L:t:
- ?+?;?E?K?
- >8>=>H>`>j>y>
- =<=A=M=~=
- <2<T<m<}<
- :&:G:k:}:
- >$?3?:?
- <+<@<I<X<k<q<y<
- =->~>
- <(<d<r<w<|<
- :-:3:>:D:S:X:d:n:
- MSVCRT.dll
- SHLWAPI.dll
- StrCmpIW
- StrStrIW
- StrChrA
- CRYPT32.dll
- \\%u.dmp
- dbghelp.dll
- ntdll.dll
- S:(ML;;NW;;;LW)
- bcdfghjklmnpqrstvwxyz
- cdfghlmnrstw
- "%s"
- Jt+c
- Px,fy
- .Z%&
- ;wPp
- :_HT
- ~Q,h
- :bHT
- _""pPn

- .tmp
- Jb.+
- =v"L
- y- w
- @@EMPTY
- @@@@@@@@!!!!
- @@@@
- !!!!!!!!!!!!!!ADAA@@@@@@@@@@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@@@@@@@@@@

- D$$;
- @_^][
- +L$x
- GT$p
- ;t$l
- +D$H
- |$,?w(
- +D$H
- D$`;
- ;T$h
- T$\\;
- L$T;
- T$@+
- D$`=
- T$hf9<
- D$D;T$
- T$\\;T$4
- !\\$L
- !\\$(
- D$lSUV
- ^][Y
- @_^][YY
-]@[_^
- ^[_]YY
- _^][
- t$ W
- _^][YY
- t$WV
- rCWj
- QQSUVW
- _^][
- _^][
- L$,;L$
- D$tj
- Y^][
- WjHY
- _^][Y
- _^][
- D$<v
- _^][YY
- _[^]
- t!SS
- PSSh
- QSSh
- _^][
- G;|$
- t$$W
- _^][
- G;|$
- t$(Q
- 9D$$t(
- D$$;{
- L$,;
- SVQP
- SVWj@h
- _]^[YY
- Yf;F

- @_^][Y
- @_^][YY
- ^_][
- G(Pj
- tCVVWh3
- PPPP
- PPQP
- @jLY
- @_^][Y
- _^][
- j X_^
-]_^[
- _^][
- _^][
- SVW
- D_^][
- D$,P
- D$,P
- RPVQ
- RPWV
- RPQW
- D$`H
- VWQj
- _^][
- D$$j
- _^][
- FQWS
- _^][
- _^][Y
- t!WWW
- VWPj(
- t,SSSj
- Vj Y
- ^[_Y
- Y_^][Y
- YY_^[
- QSVW
- @_^[
- @_^]Y
- L$@Q
- w&r;
- w'r
- PVRQ
- [_^]
- _^][Y
- t$(h
- t:WPVU
- t$(h
- tnWVVU
- _^][
- _^][Y
- t/WW
- @_^][
- WVPP
- QQQRh
- QPQh
- _^][

- _^][Y
- _^][
- _^][
- SSSS
- PSSj
- _^][
- tK9^$t
- _^][
- tK9^$t
- >9~$_t
- V ;V
- SVSWj
- h|\tj
- ht\tj
- _^][
- D$ Ph
- PPPV
- L$ Q
- D$<PV
- PPPPV
- hX\tj
- h@\tj
- h \tj
- t$,h
- QQSV
- _^][
- _^][
- RPRRR
- QQQQP
- D$ P
- _^][Y
- QPQj
- [_^]
- [_]^
- Wj,Y
- ;F(r
- _^][
- _^][
- bSVSj
- t@PPVh
- D$hPh
- D$$P
- D$XPh
- D$(P
- D$XPh
- D$dP
- D$XPh
- YY^[
- _^][
- s!V
- _^][
- _^][
- tThX
- jXh@
- < s}
- FVVj
- D$$P

- ^_][
- t$ P
- T$HYYU
- D$@Ph
- D$LP
- D$$P
- D$@Ph
- D$<P
- D$<Ph
- _^][YY
- WPVV
- GSWh
- D$$PSS
- D$,P
- $SWPj
- D$$P
- D$xP
- D$lPt
- D$,P
- QQQh
- QPQh?
- QQQh
- QPQh?
- QQQh
- QPQh?
- QPQh?
- D$<P
- D$tPhp
- D$,PQ
- RQh\\
- _^][
- D$<P
- t$(P
- D$ VWS
- D$<P
- D$DPP
- Pt(h
- D$DP
- PWWj
- D$,P
- D$$P
- @_^[
- QQSVW
- VVVV
-]@[^
- @_^[
- PWWWWWW
- <_^[
- @_^][
- D$TP
- v'j\tY
- L$<P
- D$$P
- PPPPW
- D$ SSSPh
- PjMV
- _^][

- _^][
- L$$V
- <.t
- YYPV
- r h<
- VWQ
- _^][
- YYPW
- l$hVW
- _][YY
- @[_^
- ^]_[Y
- t$$YY
- T$LY
- t.Jt
- (_^][
- D$@P
- D$ Ph
- $_^][
- >PhX
- G\tPQ
- VWj\t^
- QQPQ
- QQVW
- _^][
- ^[YY
- QQSV
- X_^]
- X_^][YY
- t"Vj
- tNVhm(i
- VWh$
- X_^[
- j Y;
- SSSWSS
- D$lPSSj
- t$hP
- D$$Ph
- D$$Ph
- X][_^
- Vj@Y
- [^_]
- Vj,Y
- X_^]
- X_^]
- X_^]
- X_^]
- @_^[
- VVVV
- D$(j
- D$ f
- WPjfj
- _^][
- D$(P
- D$$P
- _^][
- L$$P

- L$$P
- D$(P
- D$(B
- D$(<
- Y_^[
- `bss

• Module 6 (probably unpacked / injected by the sample)

• Module 6 rich signatures

- 44616e530000000000000000000000000fc77b90002000000e81f040002000000831c0e0001000000ddffce0003000000ddffcb00190000000000000100ef00000 01e529500010000000d52e400520000000d52de00

• Module 6 yara matches

- Str_Win32_Wininet_Library (Match Windows Inet API library declaration)
- Str_Win32_Internet_API (Match Windows Inet API call)
- Str_Win32_Http_API (Match Windows Http API call)
- IsPE32 ()
- IsDLL ()
- IsWindowsGUI ()
- HasOverlay (Overlay Check)
- HasRichSignature (Rich Signature Check)
- antisb_threatExpert (Anti-Sandbox checks for ThreatExpert)
- inject_thread (Code injection with CreateRemoteThread in a remote process)
- network_http (Communications over HTTP)
- network_dns (Communications use DNS)
- network_dga (Communication using dga)
- escalate_priv (Escalade priviledges)
- win_mutex (Create or check mutex)
- win_registry (Affect system registries)
- win_token (Affect system token)
- win_files_operation (Affect private profile)
- without_attachments (Rule to detect the no presence of any attachment)
- without_images (Rule to detect the no presence of any image)
- without_urls (Rule to detect the no presence of any url)
- contentis_base64 (This rule finds for base64 strings)
- Advapi_Hash_API (Looks for advapi API functions)
- CRC32_poly_Constant (Look for CRC32 [poly])

• Module 6 strings

• Module 6 most interesting strings

- url | valid domains | tlds: www.amazon.com
- url | valid domains | tlds: google.com
- url | valid domains | tlds: 5.vI"-vO!.v
- api | frequently used by malware: InternetWriteFile
- api | frequently used by malware: AdjustTokenPrivileges
- api | frequently used by malware: OpenProcessToken
- api | frequently used by malware: DeviceIoControl
- api | frequently used by malware: CreateRemoteThread
- api | frequently used by malware: GetThreadContext
- api | frequently used by malware: VirtualAllocEx

- api | frequently used by malware: OpenProcess
- api | frequently used by malware: WriteProcessMemory
- api | frequently used by malware: CreateToolhelp32Snapshot
- api | frequently used by malware: Process32Next
- api | frequently used by malware: VirtualProtectEx
- api | frequently used by malware: ReadProcessMemory
- api | frequently used by malware: Process32First
- api | frequently used by malware: WriteFile
- api | frequently used by malware: QueryPerformanceCounter
- api | frequently used by malware: MapViewOfFile
- api | frequently used by malware: CreateThread
- api | frequently used by malware: GetAdaptersInfo
- api | frequently used by malware: InternetCloseHandle
- api | frequently used by malware: InternetReadFile
- api | frequently used by malware: InternetQueryDataAvailable
- api | frequently used by malware: PFXImportCertStore
- api | frequently used by malware: CoCreateInstance
- api | frequently used by malware: RegCloseKey
- api | frequently used by malware: WinExec
- api | frequently used by malware: GetTickCount
- api | frequently used by malware: ExitProcess
- api | frequently used by malware: ResumeThread
- api | frequently used by malware: SuspendThread
- api | frequently used by malware: GetProcAddress
- api | frequently used by malware: Sleep
- api | frequently used by malware: CreateRemoteThread
- api | frequently used by malware: LdrLoadDll
- api | frequently used by malware: Accept-Encoding: gzip, deflate
- api | frequently used by malware: Accept-Language: en-US;q=0.5,en;q=0.3
- api | frequently used by malware: Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8
- api | frequently used by malware: DllRegisterServer
- url | http tag: https://
- url | http tag: http://
- api | wininet: HttpAddRequestHeadersA
- api | wininet: HttpEndRequestA
- api | wininet: HttpSendRequestExA
- api | wininet: InternetQueryOptionA
- api | wininet: InternetOpenA
- api | wininet: HttpSendRequestA
- api | wininet: HttpOpenRequestA
- api | wininet: InternetSetOptionA
- api | wininet: InternetConnectA
- api | wininet: HttpQueryInfoA
- api | crypt32: CertGetCertificateContextProperty
- api | crypt32: CertFreeCertificateChain
- api | crypt32: CryptDecodeObject
- api | crypt32: CertEnumCertificatesInStore
- api | crypt32: CertCloseStore
- api | crypt32: CertAddCertificateContextToStore
- api | crypt32: CertFreeCertificateContext
- api | crypt32: CertOpenStore
- api | netapi: NetUserGetInfo
- api | advapi32: CryptHashData
- api | advapi32: CryptDestroyHash
- api | advapi32: CryptVerifySignatureA
- api | advapi32: CryptDestroyKey
- api | advapi32: CryptCreateHash

- api | advapi32: CryptImportKey
- api | advapi32: CryptAcquireContextA
- api | advapi32: ConvertStringSecurityDescriptorToSecurityDescriptorA
- api | advapi32: LookupPrivilegeValueA
- api | advapi32: RegCreateKeyA
- api | kernel32: RegSetValueExA
- api | advapi32: GetTokenInformation
- api | advapi32: GetSidSubAuthorityCount
- api | advapi32: GetUserNameW
- api | advapi32: GetSidSubAuthority
- api | user32: wvsprintfA
- api | kernel32: GetOverlappedResult
- api | kernel32: SetUnhandledExceptionFilter
- api | kernel32: VirtualFreeEx
- api | kernel32: GetLocalTime
- api | kernel32: ReleaseMutex
- api | kernel32: CreateMutexA
- api | kernel32: lstrcmpiW
- api | kernel32: GetModuleFileNameW
- api | kernel32: VirtualAlloc
- api | kernel32: GetProcessHeap
- api | kernel32: VirtualFree
- api | kernel32: HeapFree
- api | kernel32: HeapAlloc
- api | kernel32: HeapReAlloc
- api | kernel32: FindClose
- api | kernel32: FindFirstFileA
- api | kernel32: CreateDirectoryA
- api | kernel32: ReadFile
- api | kernel32: GetFileAttributesW
- api | kernel32: GetFileAttributesA
- api | kernel32: GetFileSize
- api | kernel32: SetLastError
- api | kernel32: GetTempPathA
- api | kernel32: GetVersionExA
- api | kernel32: QueryPerformanceFrequency
- api | kernel32: GetSystemInfo
- api | kernel32: GetVolumeInformationA
- api | kernel32: GetSystemTimeAsFileTime
- api | kernel32: GetCurrentProcess
- api | kernel32: SetErrorMode
- api | kernel32: DeleteCriticalSection
- api | kernel32: MultiByteToWideChar
- api | kernel32: lstrcmpA
- api | kernel32: CreateFileMappingA
- api | kernel32: UnmapViewOfFile
- api | kernel32: GetCurrentThreadId
- api | kernel32: TerminateThread
- api | kernel32: TlsSetValue
- api | kernel32: TlsGetValue
- api | dnsapi: DnsFree
- api | dnsapi: DnsQuery_A
- api | netapi: NetWkstaGetInfo
- api | netapi: NetApiBufferFree
- api | kernel32: RegOpenKeyExW
- api | kernel32: RegOpenKeyExA
- api | kernel32: RegQueryValueExA

- api | advapi32: RegEnumKeyW
- api | kernel32: RegCreateKeyExA
- api | kernel32: RegNotifyChangeKeyValue
- api | kernel32: RegEnumValueA
- api | kernel32: RegDeleteValueA
- api | advapi32: InitiateSystemShutdownExA
- api | user32: wsprintfW
- api | user32: wsprintfA
- api | kernel32: DeleteFileA
- api | kernel32: EnterCriticalSection
- api | kernel32: LeaveCriticalSection
- api | kernel32: InitializeCriticalSection
- api | kernel32: DeleteFileW
- api | kernel32: GetWindowsDirectoryW
- api | kernel32: CopyFileW
- api | kernel32: GetWindowsDirectoryA
- api | kernel32: SetFilePointer
- api | kernel32: GetExitCodeThread
- api | kernel32: GetTempPathW
- api | kernel32: CreateFileW
- api | kernel32: GetSystemDirectoryA
- api | kernel32: CreateDirectoryW
- api | kernel32: GetSystemDirectoryW
- api | kernel32: RegisterWaitForSingleObject
- api | kernel32: CreateProcessA
- api | kernel32: GetExitCodeProcess
- api | kernel32: UnregisterWait
- api | kernel32: PulseEvent
- api | kernel32: IsBadCodePtr
- api | kernel32: LocalFree
- api | kernel32: TlsFree
- api | kernel32: TlsAlloc
- api | kernel32: lstrcmpiA
- api | kernel32: lstrcpyW
- api | kernel32: lstrcatW
- api | kernel32: GetModuleHandleA
- api | kernel32: WaitForMultipleObjects
- api | kernel32: lstrlenW
- api | kernel32: lstrcpyA
- api | kernel32: GetCurrentProcessId
- api | kernel32: GetLastError
- api | kernel32: TerminateProcess
- api | kernel32: GetModuleFileNameA
- api | kernel32: LoadLibraryA
- api | kernel32: GetCurrentThread
- api | kernel32: GetModuleHandleExA
- api | kernel32: CloseHandle
- api | kernel32: OpenEventA
- api | kernel32: lstrcatA
- api | kernel32: CreateEventA
- api | kernel32: SetEvent
- api | kernel32: WaitForSingleObject
- api | kernel32: lstrlenA
- api | kernel32: CreateFileA
- api | kernel32: GetCommandLineA
- api | kernel32: IsWow64Process
- api | ntdll: NtWow64WriteVirtualMemory64

- api | ntdll: NtWow64ReadVirtualMemory64
- api | ntdll: NtProtectVirtualMemory
- api | ntdll: NtGetContextThread
- api | kernel32: RegGetValueW
- api | user32: MessageBoxW
- api | kernel32: VirtualProtect

• Module 6 other strings

- \\System32\\kernelbase.dll
- \\System32\\KERNEL32.DLL
- chrome.exe
- explorer.exe
- firefox.exe
- iexplore.exe
- open
- test
- command
- DelegateExecute
- root
- 12345
- !1Aa
- 0$0,040<0D0L0T0\\0d0l0t0|0
- 8 8$8(8,8084888<8@8D8H8L8P8T8X8\\8`8d8
- 3 3&363=3B3g3v3|3
- 5/6R6a6y6
- 2+2T2r2
- 0Q1f1s1
- 0_0h0
- 9"9E9b9l9r9z9
- 8*868J8S8Y8`8
- 3%494G4X4f4q4y4
- 3>3Q3a3m3
- 122c2
- 0+141Y1
- <4=E=f=
- 8'8/8A8
- 6/6U6
- 435U5v5
- 2*2@2M2r2
- 0V1u1
- 0a0k0
- 9D9x9
- 8>8s8
- 6:6C6Z6
- 4'4.4:4A4X4
- 2$2]2
- 1*1\\1
- 0*0:0N0]0l0{0
- 9:9P9U9c9
- 7*888_8
- 667K7Z7a7k7
- 5\t6"656i6
- 2#22282p2
- 0:1@1L1Y1`1f1l1r1
- _0e0r0{0

- =(=A=
- 9&9U9^9v9
- 8:8G8t8
- 606?6O6a6w6}6
- 5E5b5
- 3'464>4y4
- @0z0
- 9S9^9
- 8&8Z8y8
- 797}7
- 5`6z6
- 5W5^5t5
- 4-4;4V4c4i4
- 2.2C2H2U2h2u2
- 1Y1`1l1
- 0P0W0f0
- <U<l<
- 9+9@9F9S9[9a9j9z9
- 8%8C8
- 697T7
- 4t5~5
- 4)4i4
- 3-343:3F3`3m3{3
- 282X2
- "0E0
- 9!9^9s9
- 8%8.8:8F8
- 7*7:7M7R7X7`7
- 6<6j6o6
- 5P5j5
- 444R4W4`4k4q4}4
- 1$131:1?1o1
- 9%9/9
- 515X5_5
- 3!4S4`4
- 102O2}2Q3
- ;0;O;\\;t;
- 526?6P6u6
- 3,373
- 1B2H2M2^2
- 1/1>1`1
- SHDeleteValueA
- SHGetValueA
- StrCmpNIA
- DNSAPI.dll
- _except_handler3
- IPHLPAPI.DLL
- WININET.dll
- SHSetValueA
- PathRemoveFileSpecW
- PathFindFileNameW
- SHGetValueW
- StrToIntA
- StrToIntExA
- StrStrIA
- NETAPI32.dll
- OLEAUT32.dll

- ole32.dll
- CoGetObject
- CoInitialize
- IIDFromString
- SHELL32.dll
- SHGetFolderPathA
- ShellExecuteA
- ADVAPI32.dll
- USER32.dll
- KERNEL32.dll
- Microsoft Base Cryptographic Provider v1.0
- MiniDumpWriteDump
- D:(A;OICI;GA;;;WD)
- PID: %u [%0.2u:%0.2u:%0.2u]
- abcdefghijklmnop
- aeiou
- Cache-Control: max-age=0
- Connection: keep-alive
- Set-Cookie
- POST
- .dat
- 2500
- I)\t/
- 8{:N
- Error
- SDio:
- 6oZj
- C=3\V
- 0 .\t\\
- ~@,i
- SHCreateItemFromParsingName
- ,SHELL32.DLL
- c}FZ4
- Content-Type: application/x-www-form-urlencoded
- !?}&(2}a
- iertutil.dll
- Interface
- JaIa0
- \\notepad.exe
- command
- shell
- }IG*
- s6/Yw
- ISHDocVwBroker
- OFc4
- 0 .B\\
- ~L,9
- eFh4
- /index.php
- Content-Type: application/octet-stream
- 0123456789ABCDEF
- /auth?
- kernelbase.dll
- SOFTWARE\\
- user32.dll
- %u(%u)\t%s
- open

- @@AD
- @A@@@@@@@@@@@@A@@@@@@@A@AAA@
- |$@A_A^A]A\\
- t$8H
- l$0H
- 8@:<
- @:;u
- raL;
- ruH;
- X$E;
- x ATAUAVAWE3
- KERNEL32.DLL
- _vEr3
- FL0`
- TI(`
- 5;<Tp
- >.1c=
- 4P_/
- #.Bce
- E)b]
- Ov5Y
- 7)`K
- Z?i}&
- H{Hi=
- Z1Myuz
- WOW64
- WIN32
- #Eue[
- 4q}$
- .exe
- INv>
- F>ve
- pUXt
- 5.vr
- "-va8.vej/v
- A/v(7.v
- 3.vQ3.vL
- 3.v\\9.v
- G-vA
- m,v3
-]/v6
- kCku
- 9d]g
- T$ 3
- SUVW
- 9D$X
- L$<I
- 9D$@w
- I9I$@vQ
- L$ I
- D$p8
- t$t3
- D$82
- SUVW
- QSUVW
- v:SV3
- r/9\\$

- s59L$
- r;9\\$
- QQUW
- SUV3
- Hu28E
- l$,3
- \\$<3
- SUVW
- |$0f
- D$0W
- t!O;
- QSUV
- (SUV
- QQSUVW3
- /GFJu
- t$4V
- D$ 3
- t$0Q
- IPf;
- D$0r
- 9D$4w
- 9D$,
- <0PE
- 9/t>
- +z4t
- QSUV
- UWWh
- tDUW
- SUVW3
- SUV3
- UUUURPj
- UUUU
- RPUUUUj
- VW9-
- 4_^[
- L$$3
- SUVW
- QSUVW
- tZS3
- tl;u
- t=V3
- QUVW
- t$8P
- t*9}
- SVW3
- t\t9u
- SUVW
- SUVW
- SUVW3
- QSUV
- SVW3
- SUVW3
- SUVW
- :u0j
- QQS3
- SUVW
- T9~$t

- F9~$t
- 9~$t
- L$L3
- D$4(
- PjAV
- SUVW
- PPUS
- Pj2j
- SUVW
- t*f9n
- L$ US
- QSUVW
- s(iE
- UVW3
- f9L8
- SUVW
- SUVW
- SUVW
- IIuR
- t[ItKIt;It
- UVWh
- uA9l$
- ub9l$
- SUWj
- QQSU
- WPW3
- SVW3
- D$$EPU
- D$4PPU
- t$8S
- D$8Pj
- SUV3
- u@9l$
- UUUU
- VWC3
- jD^V2
- D$4Pj
- D$0P
- dSUVW
- u.!=0
- D$(3
- D$p3
- @SVW3
- Pj2j
- @ucj
- SSS3
- SUVW3
- VVPU
- t 9t$
- SUVW3
- PjiU
- Pj 3
- 0SUW
- t?9}
- 9D$
- QQSU
- tFUV

- D$8P
- t!It
- 9l$$t
- jSVU
- Uj h
- D$0PU
- D$0Ph
- jD^V2
- D$(PU
- %SU3
- tKV3
- SPh4
- D$*3
- u\t_^[
- $SVW3
- WSUV
- PWSU
- PWSU
- SUVW
- E;l$
- SUVWj
- .reloc
- @.data
- .rdata
- .text
- Rich
- !This program cannot be run in DOS mode.
- .tmp
- %s\\%s.txt
- --
- #+3;CScs
- <$<(<4<8<D<H<
- 4P:\\:x:
- :,:2:N:Y:b:
- >)>0>D>K>h>q>x>
- <,=C=P=Y=f=
- :7;^;h;n;
- :!:':j:r:x:
- >1>6>F>V>v>{>
- <$<><K<
- :V;k;
- :5:;:A:p:}:
- =$=/===D=M=`=o=
- <-<3<8<C<Q<d<l<
- ;!;-;7;=;F;i;q;
- :(:U:q:
- :%:L:
- ?>?H?
- <&<.<
- ;L;R;
- >1>B>N>m>v>
- =(=R=r=
- <,<]<o<
- :";-;O;
- :2:S:n:t:
- ?J?Q?]?
- =">(>J>

- <1=Z=`=
- ;";T;Y;j;p;v;
- 9\t:7:F:L:t:
- ?+?;?E?K?
- >8>=>H>`>j>y>
- =<=A=M=~=
- <2<T<m<}<
- :&:G:k:}:
- >$?3?:?
- <+<@<I<X<k<q<y<
- =->~>
- <(<d<r<w<|<
- :-:3:>:D:S:X:d:n:
- MSVCRT.dll
- SHLWAPI.dll
- StrCmpIW
- StrStrIW
- StrChrA
- CRYPT32.dll
- \\%u.dmp
- dbghelp.dll
- ntdll.dll
- S:(ML;;NW;;;LW)
- bcdfghjklmnpqrstvwxyz
- cdfghlmnrstw
- "%s"
- Jt+c
- Px,fy
- .Z%&
- ;wPp
- :_HT
- ~Q,h
- :bHT
- _""pPn
- .tmp
- Jb.+
- =v"L
- y- w
- @@EMPTY
- @@@@@@@@!!!!
- @@@@
- !!!!!!!!!!!!!!ADAA@@@@@@@@@@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@@@@@@@@@@

- \\$(H
- sfL;
- rkL;
- spL;
- HcQ<H
- Jk-f~
- Hp\\P
- JpVB
- >-:T
- ^wj&Pxj5;
- (Qkg
- .dll
- Mv}LNv
- uMv]^Nv
- @vH2>vq
- ,v&<.v
- /.v=D/v
- -.vb
- wQJ.v
- ,v+E.v
- -v]7.v
- K/v;
- -v!>-v
- -v1#-v
- `/vd
-)vb
- @.v`
- -v%9-v
- %./f
- CDPMNo}
- @_^][
- T$ I;]
- D$$J;
- tNHt>Ht2Hug
- D$$;
- @_^][
- +L$x
- GT$p
- ;t$l
- +D$H
- |$,?w(
- +D$H
- D$`;
- ;T$h
- T$\\;
- L$T;
- T$@+
- D$`=
- T$hf9<
- D$D;T$
- T$\\;T$4
- !\\$L
- !\\$(
- D$lSUV
- ^][Y
- @_^][YY
-]@[_^

- ^[_]YY
- _^][
- t$ W
- _^][YY
- t$WV
- rCWj
- QQSUVW
- _^][
- _^][
- L$,;L$
- D$tj
- Y^][
- WjHY
- _^][Y
- _^][
- D$<v
- _^][YY
- _[^]
- t!SS
- PSSh
- QSSh
- _^][
- G;|$
- t$$W
- _^][
- G;|$
- t$(Q
- 9D$$t(
- D$$;{
- L$,;
- SVQP
- SVWj@h
- _]^[YY
- Yf;F
- @_^][Y
- @_^][YY
- ^_][
- G(Pj
- tCVVWh3
- PPPP
- PPQP
- @jLY
- @_^][Y
- _^][
- j X_^
-]_^[
- _^][
- _^][
- SVW
- D_^][
- D$,P
- D$,P
- RPVQ
- RPWV
- RPQW
- D$`H
- VWQj

- _^][
- D$$j
- _^][
- FQWS
- _^][
- _^][Y
- t!WWW
- VWPj(
- t,SSSj
- Vj Y
- ^[_Y
- Y_^][Y
- YY_^[
- QSVW
- @_^[
- @_^]Y
- L$@Q
- w&r;
- w'r
- PVRQ
- [_^]
- _^][Y
- t$(h
- t:WPVU
- t$(h
- tnWVVU
- _^][
- _^][Y
- t/WW
- @_^][
- WVPP
- QQQRh
- QPQh
- _^][
- _^][Y
- _^][
- _^][
- SSSS
- PSSj
- _^][
- tK9^$t
- _^][
- tK9^$t
- >9~$_t
- V ;V
- SVSWj
- _^][
- D$ Ph
- PPPV
- L$ Q
- D$<PV
- PPPPV
- t$,h
- QQSV
- _^][
- _^][
- RPRRR

- QQQQP
- D$ P
- _^][Y
- QPQj
- [_^]
- [_]^
- Wj,Y
- ;F(r
- _^][
- _^][
- bSVSj
- t@PPVh
- D$hPh
- D$$P
- D$XPh
- D$(P
- D$XPh
- D$dP
- D$XPh
- YY^[
- _^][
- s!V
- _^][
- _^][
- tThX
- jXh@
- < s}
- FVVj
- D$$P
- ^_][
- t$ P
- T$HYYU
- D$@Ph
- D$LP
- D$$P
- D$@Ph
- D$<P
- D$<Ph
- _^][YY
- WPVV
- GSWh
- D$$PSS
- D$,P
- $SWPj
- D$$P
- D$xP
- D$lPt
- D$,P
- QQQh
- QPQh?
- QQQh
- QPQh?
- QQQh
- QPQh?
- QPQh?
- D$<P
- D$tPhp

- D$,PQ
- RQh\\
- _^][
- D$<P
- t$(P
- D$ VWS
- D$<P
- D$DPP
- Pt(h
- D$DP
- PWWj
- D$,P
- D$$P
- @_^[
- QQSVW
- VVVV
-]@[^
- @_^[
- PWWWWWW
- <_^[
- @_^][
- D$TP
- v'j\tY
- L$<P
- D$$P
- PPPPW
- D$ SSSPh
- PjMV
- _^][
- _^][
- L$$V
- <.t
- YYPV
- r h<
- VWQ
- _^][
- YYPW
- l$hVW
- _][YY
- @[_^
- ^]_[Y
- t$$YY
- T$LY
- t.Jt
- (_^][
- D$@P
- D$ Ph
- $_^][
- >PhX
- G\tPQ
- VWj\t^
- QQPQ
- QQVW
- _^][
- ^[YY
- QQSV
- X_^]

- X_^][YY
- t"Vj
- tNVhm(
- VWh$
- X_^[
- j Y;
- SSSWSS
- D$lPSSj
- t$hP
- D$$Ph
- D$$Ph
- X][_^
- Vj@Y
- [^_]
- Vj,Y
- X_^]
- X_^]
- X_^]
- X_^]
- @_^[
- VVVV
- D$(j
- D$ f
- WPjfj
- _^][
- D$(P
- D$$P
- _^][
- L$$P
- L$$P
- D$(P
- D$(B
- D$(<
- Y_^[
- `bss

• Module 7 (probably unpacked / injected by the sample)

• Module 7 rich signatures

- 44616e530000000000000000000000000fc77b90002000000e81f040002000000831c0e0001000000ddffce0003000000ddffcb00190000000000000100ef0000001e529500010000000d52e400520000000d52de00

• Module 7 yara matches

- Str_Win32_Wininet_Library (Match Windows Inet API library declaration)
- Str_Win32_Internet_API (Match Windows Inet API call)
- Str_Win32_Http_API (Match Windows Http API call)
- IsPE32 ()
- IsDLL ()
- IsWindowsGUI ()
- HasOverlay (Overlay Check)
- HasRichSignature (Rich Signature Check)
- antisb_threatExpert (Anti-Sandbox checks for ThreatExpert)
- inject_thread (Code injection with CreateRemoteThread in a remote process)
- network_http (Communications over HTTP)

- network_dns (Communications use DNS)
- network_dga (Communication using dga)
- escalate_priv (Escalade priviledges)
- win_mutex (Create or check mutex)
- win_registry (Affect system registries)
- win_token (Affect system token)
- win_files_operation (Affect private profile)
- without_attachments (Rule to detect the no presence of any attachment)
- without_images (Rule to detect the no presence of any image)
- without_urls (Rule to detect the no presence of any url)
- contentis_base64 (This rule finds for base64 strings)
- Advapi_Hash_API (Looks for advapi API functions)
- CRC32_poly_Constant (Look for CRC32 [poly])

• Module 7 strings

• Module 7 most interesting strings

- url | valid domains | tlds: www.amazon.com
- url | valid domains | tlds: google.com
- url | valid domains | tlds: 5.vI"-vO!.v
- api | frequently used by malware: InternetWriteFile
- api | frequently used by malware: AdjustTokenPrivileges
- api | frequently used by malware: OpenProcessToken
- api | frequently used by malware: DeviceIoControl
- api | frequently used by malware: CreateRemoteThread
- api | frequently used by malware: GetThreadContext
- api | frequently used by malware: VirtualAllocEx
- api | frequently used by malware: OpenProcess
- api | frequently used by malware: WriteProcessMemory
- api | frequently used by malware: CreateToolhelp32Snapshot
- api | frequently used by malware: Process32Next
- api | frequently used by malware: VirtualProtectEx
- api | frequently used by malware: ReadProcessMemory
- api | frequently used by malware: Process32First
- api | frequently used by malware: WriteFile
- api | frequently used by malware: QueryPerformanceCounter
- api | frequently used by malware: MapViewOfFile
- api | frequently used by malware: CreateThread
- api | frequently used by malware: GetAdaptersInfo
- api | frequently used by malware: InternetCloseHandle
- api | frequently used by malware: InternetReadFile
- api | frequently used by malware: InternetQueryDataAvailable
- api | frequently used by malware: PFXImportCertStore
- api | frequently used by malware: CoCreateInstance
- api | frequently used by malware: RegCloseKey
- api | frequently used by malware: WinExec
- api | frequently used by malware: GetTickCount
- api | frequently used by malware: ExitProcess
- api | frequently used by malware: ResumeThread
- api | frequently used by malware: SuspendThread
- api | frequently used by malware: GetProcAddress
- api | frequently used by malware: Sleep
- api | frequently used by malware: CreateRemoteThread
- api | frequently used by malware: LdrLoadDll
- api | frequently used by malware: Accept-Encoding: gzip, deflate

- api | frequently used by malware: Accept-Language: en-US;q=0.5,en;q=0.3
- api | frequently used by malware: Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8
- api | frequently used by malware: DllRegisterServer
- url | http tag: https://
- url | http tag: http://
- api | wininet: HttpAddRequestHeadersA
- api | wininet: HttpEndRequestA
- api | wininet: HttpSendRequestExA
- api | wininet: InternetQueryOptionA
- api | wininet: InternetOpenA
- api | wininet: HttpSendRequestA
- api | wininet: HttpOpenRequestA
- api | wininet: InternetSetOptionA
- api | wininet: InternetConnectA
- api | wininet: HttpQueryInfoA
- api | crypt32: CertGetCertificateContextProperty
- api | crypt32: CertFreeCertificateChain
- api | crypt32: CryptDecodeObject
- api | crypt32: CertEnumCertificatesInStore
- api | crypt32: CertCloseStore
- api | crypt32: CertAddCertificateContextToStore
- api | crypt32: CertFreeCertificateContext
- api | crypt32: CertOpenStore
- api | netapi: NetUserGetInfo
- api | advapi32: CryptHashData
- api | advapi32: CryptDestroyHash
- api | advapi32: CryptVerifySignatureA
- api | advapi32: CryptDestroyKey
- api | advapi32: CryptCreateHash
- api | advapi32: CryptImportKey
- api | advapi32: CryptAcquireContextA
- api | advapi32: ConvertStringSecurityDescriptorToSecurityDescriptorA
- api | advapi32: LookupPrivilegeValueA
- api | advapi32: RegCreateKeyA
- api | kernel32: RegSetValueExA
- api | advapi32: GetTokenInformation
- api | advapi32: GetSidSubAuthorityCount
- api | advapi32: GetUserNameW
- api | advapi32: GetSidSubAuthority
- api | user32: wvsprintfA
- api | kernel32: GetOverlappedResult
- api | kernel32: SetUnhandledExceptionFilter
- api | kernel32: VirtualFreeEx
- api | kernel32: GetLocalTime
- api | kernel32: ReleaseMutex
- api | kernel32: CreateMutexA
- api | kernel32: lstrcmpiW
- api | kernel32: GetModuleFileNameW
- api | kernel32: VirtualAlloc
- api | kernel32: GetProcessHeap
- api | kernel32: VirtualFree
- api | kernel32: HeapFree
- api | kernel32: HeapAlloc
- api | kernel32: HeapReAlloc
- api | kernel32: FindClose
- api | kernel32: FindFirstFileA
- api | kernel32: CreateDirectoryA

- api | kernel32: ReadFile
- api | kernel32: GetFileAttributesW
- api | kernel32: GetFileAttributesA
- api | kernel32: GetFileSize
- api | kernel32: SetLastError
- api | kernel32: GetTempPathA
- api | kernel32: GetVersionExA
- api | kernel32: QueryPerformanceFrequency
- api | kernel32: GetSystemInfo
- api | kernel32: GetVolumeInformationA
- api | kernel32: GetSystemTimeAsFileTime
- api | kernel32: GetCurrentProcess
- api | kernel32: SetErrorMode
- api | kernel32: DeleteCriticalSection
- api | kernel32: MultiByteToWideChar
- api | kernel32: lstrcmpA
- api | kernel32: CreateFileMappingA
- api | kernel32: UnmapViewOfFile
- api | kernel32: GetCurrentThreadId
- api | kernel32: TerminateThread
- api | kernel32: TlsSetValue
- api | kernel32: TlsGetValue
- api | dnsapi: DnsFree
- api | dnsapi: DnsQuery_A
- api | netapi: NetWkstaGetInfo
- api | netapi: NetApiBufferFree
- api | kernel32: RegOpenKeyExW
- api | kernel32: RegOpenKeyExA
- api | kernel32: RegQueryValueExA
- api | advapi32: RegEnumKeyW
- api | kernel32: RegCreateKeyExA
- api | kernel32: RegNotifyChangeKeyValue
- api | kernel32: RegEnumValueA
- api | kernel32: RegDeleteValueA
- api | advapi32: InitiateSystemShutdownExA
- api | user32: wsprintfW
- api | user32: wsprintfA
- api | kernel32: DeleteFileA
- api | kernel32: EnterCriticalSection
- api | kernel32: LeaveCriticalSection
- api | kernel32: InitializeCriticalSection
- api | kernel32: DeleteFileW
- api | kernel32: GetWindowsDirectoryW
- api | kernel32: CopyFileW
- api | kernel32: GetWindowsDirectoryA
- api | kernel32: SetFilePointer
- api | kernel32: GetExitCodeThread
- api | kernel32: GetTempPathW
- api | kernel32: CreateFileW
- api | kernel32: GetSystemDirectoryA
- api | kernel32: CreateDirectoryW
- api | kernel32: GetSystemDirectoryW
- api | kernel32: RegisterWaitForSingleObject
- api | kernel32: CreateProcessA
- api | kernel32: GetExitCodeProcess
- api | kernel32: UnregisterWait
- api | kernel32: PulseEvent

- api | kernel32: IsBadCodePtr
- api | kernel32: LocalFree
- api | kernel32: TlsFree
- api | kernel32: TlsAlloc
- api | kernel32: lstrcmpiA
- api | kernel32: lstrcpyW
- api | kernel32: lstrcatW
- api | kernel32: GetModuleHandleA
- api | kernel32: WaitForMultipleObjects
- api | kernel32: lstrlenW
- api | kernel32: lstrcpyA
- api | kernel32: GetCurrentProcessId
- api | kernel32: GetLastError
- api | kernel32: TerminateProcess
- api | kernel32: GetModuleFileNameA
- api | kernel32: LoadLibraryA
- api | kernel32: GetCurrentThread
- api | kernel32: GetModuleHandleExA
- api | kernel32: CloseHandle
- api | kernel32: OpenEventA
- api | kernel32: lstrcatA
- api | kernel32: CreateEventA
- api | kernel32: SetEvent
- api | kernel32: WaitForSingleObject
- api | kernel32: lstrlenA
- api | kernel32: CreateFileA
- api | kernel32: GetCommandLineA
- api | kernel32: IsWow64Process
- api | ntdll: NtWow64WriteVirtualMemory64
- api | ntdll: NtWow64ReadVirtualMemory64
- api | ntdll: NtProtectVirtualMemory
- api | ntdll: NtGetContextThread
- api | kernel32: RegGetValueW
- api | user32: MessageBoxW
- api | kernel32: VirtualProtect

• Module 7 other strings

- \\System32\\kernelbase.dll
- \\System32\\KERNEL32.DLL
- chrome.exe
- explorer.exe
- firefox.exe
- iexplore.exe
- open
- test
- command
- DelegateExecute
- root
- 12345
- !1Aa
- 0$0,040<0D0L0T0\\0d0l0t0|0
- 8 8$8(8,8084888<8@8D8H8L8P8T8X8\\8`8d8
- 3 3&363=3B3g3v3|3
- 5/6R6a6y6
- 2+2T2r2

- 0Q1f1s1
- 0_0h0
- 9"9E9b9l9r9z9
- 8*868J8S8Y8`8
- 3%494G4X4f4q4y4
- 3>3Q3a3m3
- 122c2
- 0+141Y1
- <4=E=f=
- 8'8/8A8
- 6/6U6
- 435U5v5
- 2*2@2M2r2
- 0V1u1
- 0a0k0
- 9D9x9
- 8>8s8
- 6:6C6Z6
- 4'4.4:4A4X4
- 2$2]2
- 1*1\\1
- 0*0:0N0]0l0{0
- 9:9P9U9c9
- 7*888_8
- 667K7Z7a7k7
- 5\t6"656i6
- 2#22282p2
- 0:1@1L1Y1`1f1l1r1
- _0e0r0{0
- =(=A=
- 9&9U9^9v9
- 8:8G8t8
- 606?6O6a6w6}6
- 5E5b5
- 3'464>4y4
- @0z0
- 9S9^9
- 8&8Z8y8
- 797}7
- 5`6z6
- 5W5^5t5
- 4-4;4V4c4i4
- 2.2C2H2U2h2u2
- 1Y1`1l1
- 0P0W0f0
- <U<l<
- 9+9@9F9S9[9a9j9z9
- 8%8C8
- 697T7
- 4t5~5
- 4)4i4
- 3-343:3F3`3m3{3
- 282X2
- "0E0
- 9!9^9s9
- 8%8.8:8F8
- 7*7:7M7R7X7`7

- 6<6j6o6
- 5P5j5
- 444R4W4`4k4q4}4
- 1$131:1?1o1
- 9%9/9
- 515X5_5
- 3!4S4`4
- 102O2}2Q3
- ;0;O;\\;t;
- 526?6P6u6
- 3,373
- 1B2H2M2^2
- 1/1>1`1
- SHDeleteValueA
- SHGetValueA
- StrCmpNIA
- DNSAPI.dll
- _except_handler3
- IPHLPAPI.DLL
- WININET.dll
- SHSetValueA
- PathRemoveFileSpecW
- PathFindFileNameW
- SHGetValueW
- StrToIntA
- StrToIntExA
- StrStrIA
- NETAPI32.dll
- OLEAUT32.dll
- ole32.dll
- CoGetObject
- CoInitialize
- IIDFromString
- SHELL32.dll
- SHGetFolderPathA
- ShellExecuteA
- ADVAPI32.dll
- USER32.dll
- KERNEL32.dll
- Microsoft Base Cryptographic Provider v1.0
- MiniDumpWriteDump
- D:(A;OICI;GA;;;WD)
- PID: %u [%0.2u:%0.2u:%0.2u]
- abcdefghijklmnop
- aeiou
- Cache-Control: max-age=0
- Connection: keep-alive
- Set-Cookie
- POST
- .dat
- 2500
- I)\t/
- 8{:N
- Error
- SDio:
- 6oZj
- C=3\V

- 0 .\t\\
- ~@,i
- SHCreateItemFromParsingName
- ,SHELL32.DLL
- c}FZ4
- Content-Type: application/x-www-form-urlencoded
- !?}&(2}a
- iertutil.dll
- Interface
- JaIa0
- \\notepad.exe
- command
- shell
- }IG*
- s6/Yw
- ISHDocVwBroker
- OFc4
- 0 .B\\
- ~L,9
- eFh4
- /index.php
- Content-Type: application/octet-stream
- 0123456789ABCDEF
- /auth?
- kernelbase.dll
- SOFTWARE\\
- user32.dll
- %u(%u)\t%s
- open
- @@AD
- @A@@@@@@@@@@@@A@@@@@@@A@AAA@
- |$@A_A^A]A\\
- t$8H
- l$0H
- 8@:<
- @:;u
- raL;
- ruH;
- X$E;
- x ATAUAVAWE3
- KERNEL32.DLL
- _vEr3
- FL0`
- TI(`
- 5;<Tp
- >.1c=
- 4P_/
- #.Bce
- E)b]
- Ov5Y
- 7)`K
- Z?i}&
- H{Hi=
- Z1Myuz
- WOW64
- WIN32
- #Eue[

- 4q]$
- .exe
- lNv>
- F>ve
- pUXt
- 5.vr
- "-va8.vej/v
- A/v(7.v
- 3.vQ3.vL
- 3.v\\9.v
- G-vA
- m,v3
-]/v6
- kCku
- 9d]g
- T$ 3
- SUVW
- 9D$X
- L$<I
- 9D$@w
- I9I$@vQ
- L$ I
- D$p8
- t$t3
- D$82
- SUVW
- QSUVW
- v:SV3
- r/9\\$
- s59L$
- r;9\\$
- QQUW
- SUV3
- Hu28E
- I$,3
- \\$<3
- SUVW
- |$0f
- D$0W
- t!O;
- QSUV
- (SUV
- QQSUVW3
- /GFJu
- t$4V
- D$ 3
- t$0Q
- IPf;
- D$0r
- 9D$4w
- 9D$,
- <0PE
- 9/t>
- +z4t
- QSUV
- UWWh
- tDUW

- SUVW3
- SUV3
- UUUURPj
- 2UUUU
- RPUUUUj
- VW9-
- 4_^[
- L$$3
- SUVW
- QSUVW
- 2Ph<
- tZS3
- tl;u
- t=V3
- QUVW
- t$8P
- t*9}
- SVW3
- t\t9u
- SUVW
- SUVW
- SUVW3
- QSUV
- 2_^[
- SVW3
- SUVW3
- SUVW
- 2SSSS
- :u0j
- QQS3
- SUVW
- T9~$t
- F9~$t
- 9~$t
- L$L3
- D$4(
- PjAV
- SUVW
- PPUS
- Pj2j
- SUVW
- t*f9n
- L$ US
- QSUVW
- s(iE
- UVW3
- f9L8
- SUVW
- SUVW
- SUVW
- IIuR
- t[ItKIt;It
- UVWh
- uA9l$
- ub9l$
- SUWj
- QQSU

- WPW3
- SVW3
- D$$EPU
- D$4PPU
- t$8S
- D$8Pj
- SUV3
- u@9l$
- UUUU
- VWC3
- jD^V2
- 2Ph4
- D$4Pj
- D$0P
- dSUVW
- 2u.!=0
- D$(3
- D$p3
- @SVW3
- Pj2j
- @ucj
- 2SSj
- SSS3
- SUVW3
- VVPU
- t 9t$
- SUVW3
- PjiU
- Pj 3
- 0SUW
- t?9}
- 2hx:
- 2YYPW
- 9D$
- QQSU
- tFUV
- 2VWj
- D$8P
- 2VW%
- 2_^[
- t!It
- 9l$$t
- jSVU
- Uj h
- 2j Y;
- D$0PU
- D$0Ph
- jD^V2
- D$(PU
- %SU3
- tKV3
- SPh4
- D$*3
- u\t_^[
- $SVW3
- WSUV
- PWSU

- PWSU
- SUVW
- E;l$
- SUVWj
- .reloc
- @.data
- .rdata
- .text
- Rich
- !This program cannot be run in DOS mode.
- .tmp
- %s\\%s.txt
- --
- #+3;CScs
- <$<(<4<8<D<H<
- 4P:\\:x:
- :,:2:N:Y:b:
- >)>0>D>K>h>q>x>
- <,=C=P=Y=f=
- :7;^;h;n;
- :!:':j:r:x:
- >1>6>F>V>v>{>
- <$<><K<
- :V;k;
- :5:;:A:p:}:
- =$=/===D=M=`=o=
- <-<3<8<C<Q<d<l<
- ;!;-;7;=;F;i;q;
- :(:U:q:
- :%:L:
- ?>?H?
- <&<.<
- ;L;R;
- >1>B>N>m>v>
- =(=R=r=
- <,<]<o<
- :";-;O;
- :2:S:n:t:
- ?J?Q?]?
- =">(>J>
- <1=Z=`=
- ;";T;Y;j;p;v;
- 9\t:7:F:L:t:
- ?+?;?E?K?
- >8>=>H>`>j>y>
- =<=A=M=~=
- <2<T<m<}<
- :&:G:k:}:
- >$?3?:?
- <+<@<I<X<k<q<y<
- =->~>
- <(<d<r<w<|<
- :-:3:>:D:S:X:d:n:
- MSVCRT.dll
- SHLWAPI.dll
- StrCmpIW
- StrStrIW

- StrChrA
- CRYPT32.dll
- \\%u.dmp
- dbghelp.dll
- ntdll.dll
- S:(ML;;NW;;;LW)
- bcdfghjklmnpqrstvwxyz
- cdfghlmnrstw
- "%s"
- Jt+c
- Px,fy
- .Z%&
- ;wPp
- :_HT
- ~Q,h
- :bHT
- _""pPn
- .tmp
- Jb.+
- =v"L
- y- w
- @@EMPTY
- @@@@@@@@!!!!
- @@@@
- !!!!!!!!!!!!!!ADAA@@@@@@@@@@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@@@@@@@@@@

- -.vb
- wQJ.v
- ,v+E.v
- -v]7.v
- K/v;
- -v!>-v
- -v1#-v
- `/vd
-)vb
- @.v`
- -v%9-v
- %./f
- CDPMNo}
- @_^][
- T$ I;]
- D$$J;
- tNHt>Ht2Hug
- D$$;
- @_^][
- +L$x
- GT$p
- ;t$l
- +D$H
- |$,?w(
- +D$H
- D$`;
- ;T$h
- T$\\;
- L$T;
- T$@+
- D$`=
- T$hf9<
- D$D;T$
- T$\\;T$4
- !\\$L
- !\\$(
- D$lSUV
- ^][Y
- @_^][YY
-]@[_^
- ^[_]YY
- _^][
- t$ W
- _^][YY
- t$WV
- rCWj
- QQSUVW
- _^][
- _^][
- L$,;L$
- D$tj
- Y^][
- WjHY
- _^][Y
- _^][
- D$<v
- _^][YY

- _[^]
- t!SS
- PSSh
- QSSh
- _^][
- G;|$
- t$$W
- _^][
- G;|$
- t$(Q
- 9D$$t(
- D$$;{
- L$,;
- SVQP
- SVWj@h
- _]^[YY
- Yf;F
- @_^][Y
- @_^][YY
- ^_][
- G(Pj
- tCVVWh3
- PPPP
- PPQP
- @jLY
- @_^][Y
- _^][
- j X_^
-]_^[
- _^][
- _^][
- SVW
- D_^][
- D$,P
- D$,P
- RPVQ
- RPWV
- RPQW
- D$`H
- VWQj
- _^][
- D$$j
- _^][
- FQWS
- _^][
- _^][Y
- t!WWW
- VWPj(
- t,SSSj
- Vj Y
- ^[_Y
- Y_^][Y
- YY_^[
- QSVW
- @_^[
- @_^]Y
- L$@Q

- w&r;
- w'r
- PVRQ
- [_^]
- _^][Y
- t$(h
- t:WPVU
- t$(h
- tnWVVU
- _^][
- _^][Y
- t/WW
- @_^][
- WVPP
- QQQRh
- QPQh
- _^][
- _^][Y
- _^][
- _^][
- PSSj
- _^][
- tK9^$t
- _^][
- tK9^$t
- >9~$_t
- V ;V
- SVSWj
- _^][
- D$ Ph
- PPPV
- L$ Q
- D$<PV
- PPPPV
- t$,h
- QQSV
- _^][
- _^][
- RPRRR
- QQQQP
- D$ P
- _^][Y
- QPQj
- [_^]
- [_]^
- Wj,Y
- ;F(r
- _^][
- _^][
- bSVSj
- t@PPVh
- D$hPh
- D$$P
- D$XPh
- D$(P
- D$XPh
- D$dP

- D$XPh
- YY^[
- _^][
- s!V
- _^][
- _^][
- tThX
- jXh@
- < s}
- FVVj
- D$$P
- ^_][
- t$ P
- T$HYYU
- D$@Ph
- D$LP
- D$$P
- D$@Ph
- D$<P
- D$<Ph
- _^][YY
- WPVV
- GSWh
- D$$PSS
- D$,P
- $SWPj
- D$$P
- D$xP
- D$lPt
- D$,P
- QQQh
- QPQh?
- QQQh
- QPQh?
- QQQh
- QPQh?
- QPQh?
- D$<P
- D$tPhp
- D$,PQ
- RQh\\
- _^][
- D$<P
- t$(P
- D$ VWS
- D$<P
- D$DPP
- Pt(h
- D$DP
- PWWj
- D$,P
- D$$P
- @_^[
- QQSVW
- VVVV
-]@[^
- @_^[

- PWWWWWW
- <_^[
- @_^][
- D$TP
- v'j\tY
- L$<P
- D$$P
- PPPPW
- D$ SSSPh
- PjMV
- _^][
- _^][
- L$$V
- <.t
- YYPV
- r h<
- VWQ
- _^][
- l$hVW
- _][YY
- @[_^
- ^]_[Y
- t$$YY
- T$LY
- t.Jt
- (_^][
- D$@P
- D$ Ph
- $_^][
- >PhX
- G\tPQ
- 2VWj\t^
- QQPQ
- QQVW
- _^][
- ^[YY
- QQSV
- X_^]
- X_^][YY
- t"Vj
- tNVhm(
- VWh$
- X_^[
- SSSWSS
- D$lPSSj
- t$hP
- D$$Ph
- D$$Ph
- X][_^
- Vj@Y
- [^_]
- Vj,Y
- X_^]
- X_^]
- X_^]
- X_^]
- @_^[

- VVVV
- D$(j
- D$ f
- WPjfj
- _^][
- D$(P
- D$$P
- _^][
- L$$P
- L$$P
- D$(P
- D$(B
- D$(<
- Y_^[
- `bss

• Module 8 (probably unpacked / injected by the sample)

• Module 8 rich signatures

- 44616e530000000000000000000000000fc77b90002000000e81f040002000000831c0e0001000000ddffce0003000000ddffcb00190000000000000100ef0000001e529500010000000d52e400520000000d52de00

• Module 8 yara matches

- Str_Win32_Wininet_Library (Match Windows Inet API library declaration)
- Str_Win32_Internet_API (Match Windows Inet API call)
- Str_Win32_Http_API (Match Windows Http API call)
- IsPE32 ()
- IsDLL ()
- IsWindowsGUI ()
- HasOverlay (Overlay Check)
- HasRichSignature (Rich Signature Check)
- antisb_threatExpert (Anti-Sandbox checks for ThreatExpert)
- inject_thread (Code injection with CreateRemoteThread in a remote process)
- network_http (Communications over HTTP)
- network_dns (Communications use DNS)
- network_dga (Communication using dga)
- escalate_priv (Escalade priviledges)
- win_mutex (Create or check mutex)
- win_registry (Affect system registries)
- win_token (Affect system token)
- win_files_operation (Affect private profile)
- without_attachments (Rule to detect the no presence of any attachment)
- without_images (Rule to detect the no presence of any image)
- without_urls (Rule to detect the no presence of any url)
- contentis_base64 (This rule finds for base64 strings)
- Advapi_Hash_API (Looks for advapi API functions)
- CRC32_poly_Constant (Look for CRC32 [poly])

• Module 8 strings

• Module 8 most interesting strings

- url | valid domains | tlds: www.amazon.com

- url | valid domains | tlds: google.com
- url | valid domains | tlds: 5.vI"-vO!.v
- api | frequently used by malware: InternetWriteFile
- api | frequently used by malware: AdjustTokenPrivileges
- api | frequently used by malware: OpenProcessToken
- api | frequently used by malware: DeviceIoControl
- api | frequently used by malware: CreateRemoteThread
- api | frequently used by malware: GetThreadContext
- api | frequently used by malware: VirtualAllocEx
- api | frequently used by malware: OpenProcess
- api | frequently used by malware: WriteProcessMemory
- api | frequently used by malware: CreateToolhelp32Snapshot
- api | frequently used by malware: Process32Next
- api | frequently used by malware: VirtualProtectEx
- api | frequently used by malware: ReadProcessMemory
- api | frequently used by malware: Process32First
- api | frequently used by malware: WriteFile
- api | frequently used by malware: QueryPerformanceCounter
- api | frequently used by malware: MapViewOfFile
- api | frequently used by malware: CreateThread
- api | frequently used by malware: GetAdaptersInfo
- api | frequently used by malware: InternetCloseHandle
- api | frequently used by malware: InternetReadFile
- api | frequently used by malware: InternetQueryDataAvailable
- api | frequently used by malware: PFXImportCertStore
- api | frequently used by malware: CoCreateInstance
- api | frequently used by malware: RegCloseKey
- api | frequently used by malware: WinExec
- api | frequently used by malware: GetTickCount
- api | frequently used by malware: ExitProcess
- api | frequently used by malware: ResumeThread
- api | frequently used by malware: SuspendThread
- api | frequently used by malware: GetProcAddress
- api | frequently used by malware: Sleep
- api | frequently used by malware: CreateRemoteThread
- api | frequently used by malware: LdrLoadDll
- api | frequently used by malware: Accept-Encoding: gzip, deflate
- api | frequently used by malware: Accept-Language: en-US;q=0.5,en;q=0.3
- api | frequently used by malware: Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8
- api | frequently used by malware: DllRegisterServer
- url | http tag: https://
- url | http tag: http://
- api | wininet: HttpAddRequestHeadersA
- api | wininet: HttpEndRequestA
- api | wininet: HttpSendRequestExA
- api | wininet: InternetQueryOptionA
- api | wininet: InternetOpenA
- api | wininet: HttpSendRequestA
- api | wininet: HttpOpenRequestA
- api | wininet: InternetSetOptionA
- api | wininet: InternetConnectA
- api | wininet: HttpQueryInfoA
- api | crypt32: CertGetCertificateContextProperty
- api | crypt32: CertFreeCertificateChain
- api | crypt32: CryptDecodeObject
- api | crypt32: CertEnumCertificatesInStore
- api | crypt32: CertCloseStore

- api | crypt32: CertAddCertificateContextToStore
- api | crypt32: CertFreeCertificateContext
- api | crypt32: CertOpenStore
- api | netapi: NetUserGetInfo
- api | advapi32: CryptHashData
- api | advapi32: CryptDestroyHash
- api | advapi32: CryptVerifySignatureA
- api | advapi32: CryptDestroyKey
- api | advapi32: CryptCreateHash
- api | advapi32: CryptImportKey
- api | advapi32: CryptAcquireContextA
- api | advapi32: ConvertStringSecurityDescriptorToSecurityDescriptorA
- api | advapi32: LookupPrivilegeValueA
- api | advapi32: RegCreateKeyA
- api | kernel32: RegSetValueExA
- api | advapi32: GetTokenInformation
- api | advapi32: GetSidSubAuthorityCount
- api | advapi32: GetUserNameW
- api | advapi32: GetSidSubAuthority
- api | user32: wvsprintfA
- api | kernel32: GetOverlappedResult
- api | kernel32: SetUnhandledExceptionFilter
- api | kernel32: VirtualFreeEx
- api | kernel32: GetLocalTime
- api | kernel32: ReleaseMutex
- api | kernel32: CreateMutexA
- api | kernel32: lstrcmpiW
- api | kernel32: GetModuleFileNameW
- api | kernel32: VirtualAlloc
- api | kernel32: GetProcessHeap
- api | kernel32: VirtualFree
- api | kernel32: HeapFree
- api | kernel32: HeapAlloc
- api | kernel32: HeapReAlloc
- api | kernel32: FindClose
- api | kernel32: FindFirstFileA
- api | kernel32: CreateDirectoryA
- api | kernel32: ReadFile
- api | kernel32: GetFileAttributesW
- api | kernel32: GetFileAttributesA
- api | kernel32: GetFileSize
- api | kernel32: SetLastError
- api | kernel32: GetTempPathA
- api | kernel32: GetVersionExA
- api | kernel32: QueryPerformanceFrequency
- api | kernel32: GetSystemInfo
- api | kernel32: GetVolumeInformationA
- api | kernel32: GetSystemTimeAsFileTime
- api | kernel32: GetCurrentProcess
- api | kernel32: SetErrorMode
- api | kernel32: DeleteCriticalSection
- api | kernel32: MultiByteToWideChar
- api | kernel32: lstrcmpA
- api | kernel32: CreateFileMappingA
- api | kernel32: UnmapViewOfFile
- api | kernel32: GetCurrentThreadId
- api | kernel32: TerminateThread

- api | kernel32: TlsSetValue
- api | kernel32: TlsGetValue
- api | dnsapi: DnsFree
- api | dnsapi: DnsQuery_A
- api | netapi: NetWkstaGetInfo
- api | netapi: NetApiBufferFree
- api | kernel32: RegOpenKeyExW
- api | kernel32: RegOpenKeyExA
- api | kernel32: RegQueryValueExA
- api | advapi32: RegEnumKeyW
- api | kernel32: RegCreateKeyExA
- api | kernel32: RegNotifyChangeKeyValue
- api | kernel32: RegEnumValueA
- api | kernel32: RegDeleteValueA
- api | advapi32: InitiateSystemShutdownExA
- api | user32: wsprintfW
- api | user32: wsprintfA
- api | kernel32: DeleteFileA
- api | kernel32: EnterCriticalSection
- api | kernel32: LeaveCriticalSection
- api | kernel32: InitializeCriticalSection
- api | kernel32: DeleteFileW
- api | kernel32: GetWindowsDirectoryW
- api | kernel32: CopyFileW
- api | kernel32: GetWindowsDirectoryA
- api | kernel32: SetFilePointer
- api | kernel32: GetExitCodeThread
- api | kernel32: GetTempPathW
- api | kernel32: CreateFileW
- api | kernel32: GetSystemDirectoryA
- api | kernel32: CreateDirectoryW
- api | kernel32: GetSystemDirectoryW
- api | kernel32: RegisterWaitForSingleObject
- api | kernel32: CreateProcessA
- api | kernel32: GetExitCodeProcess
- api | kernel32: UnregisterWait
- api | kernel32: PulseEvent
- api | kernel32: IsBadCodePtr
- api | kernel32: LocalFree
- api | kernel32: TlsFree
- api | kernel32: TlsAlloc
- api | kernel32: lstrcmpiA
- api | kernel32: lstrcpyW
- api | kernel32: lstrcatW
- api | kernel32: GetModuleHandleA
- api | kernel32: WaitForMultipleObjects
- api | kernel32: lstrlenW
- api | kernel32: lstrcpyA
- api | kernel32: GetCurrentProcessId
- api | kernel32: GetLastError
- api | kernel32: TerminateProcess
- api | kernel32: GetModuleFileNameA
- api | kernel32: LoadLibraryA
- api | kernel32: GetCurrentThread
- api | kernel32: GetModuleHandleExA
- api | kernel32: CloseHandle
- api | kernel32: OpenEventA

- api | kernel32: lstrcatA
- api | kernel32: CreateEventA
- api | kernel32: SetEvent
- api | kernel32: WaitForSingleObject
- api | kernel32: lstrlenA
- api | kernel32: CreateFileA
- api | kernel32: GetCommandLineA
- api | kernel32: IsWow64Process
- api | ntdll: NtWow64WriteVirtualMemory64
- api | ntdll: NtWow64ReadVirtualMemory64
- api | ntdll: NtProtectVirtualMemory
- api | ntdll: NtGetContextThread
- api | kernel32: RegGetValueW
- api | user32: MessageBoxW
- api | kernel32: VirtualProtect

• Module 8 other strings

- \\System32\\kernelbase.dll
- \\System32\\KERNEL32.DLL
- chrome.exe
- explorer.exe
- firefox.exe
- iexplore.exe
- open
- test
- command
- DelegateExecute
- root
- 12345
- !1Aa
- 0$0,040<0D0L0T0\\0d0l0t0|0
- 8 8$8(8,8084888<8@8D8H8L8P8T8X8\\8`8d8
- 3 3&363=3B3g3v3|3
- 5/6R6a6y6
- 2+2T2r2
- 0Q1f1s1
- 0_0h0
- 9"9E9b9l9r9z9
- 8*868J8S8Y8`8
- 3%494G4X4f4q4y4
- 3>3Q3a3m3
- 122c2
- 0+141Y1
- <4=E=f=
- 8'8/8A8
- 6/6U6
- 435U5v5
- 2*2@2M2r2
- 0V1u1
- 0a0k0
- 9D9x9
- 8>8s8
- 6:6C6Z6
- 4'4.4:4A4X4
- 2$2]2

- 1*1\\1
- 0*0:0N0]0l0{0
- 9:9P9U9c9
- 7*888_8
- 667K7Z7a7k7
- 5\t6"656i6
- 2#22282p2
- 0:1@1L1Y1`1f1l1r1
- _0e0r0{0
- =(=A=
- 9&9U9^9v9
- 8:8G8t8
- 606?6O6a6w6}6
- 5E5b5
- 3'464>4y4
- @0z0
- 9S9^9
- 8&8Z8y8
- 797}7
- 5`6z6
- 5W5^5t5
- 4-4;4V4c4i4
- 2.2C2H2U2h2u2
- 1Y1`1l1
- 0P0W0f0
- <U<l<
- 9+9@9F9S9[9a9j9z9
- 8%8C8
- 697T7
- 4t5~5
- 4)4i4
- 3-343:3F3`3m3{3
- 282X2
- "0E0
- 9!9^9s9
- 8%8.8:8F8
- 7*7:7M7R7X7`7
- 6<6j6o6
- 5P5j5
- 444R4W4`4k4q4}4
- 1$131:1?1o1
- 9%9/9
- 515X5_5
- 3!4S4`4
- 102O2}2Q3
- ;0;O;\\;t;
- 526?6P6u6
- 3,373
- 1B2H2M2^2
- 1/1>1`1
- SHDeleteValueA
- SHGetValueA
- StrCmpNIA
- DNSAPI.dll
- _except_handler3
- IPHLPAPI.DLL
- WININET.dll

- SHSetValueA
- PathRemoveFileSpecW
- PathFindFileNameW
- SHGetValueW
- StrToIntA
- StrToIntExA
- StrStrIA
- NETAPI32.dll
- OLEAUT32.dll
- ole32.dll
- CoGetObject
- CoInitialize
- IIDFromString
- SHELL32.dll
- SHGetFolderPathA
- ShellExecuteA
- ADVAPI32.dll
- USER32.dll
- KERNEL32.dll
- Microsoft Base Cryptographic Provider v1.0
- MiniDumpWriteDump
- D:(A;OICI;GA;;;WD)
- PID: %u [%0.2u:%0.2u:%0.2u]
- abcdefghijklmnop
- aeiou
- Cache-Control: max-age=0
- Connection: keep-alive
- Set-Cookie
- POST
- .dat
- 2500
- I)\t/
- 8{:N
- Error
- SDio:
- 6oZj
- C=3\V
- 0 .\t\\
- ~@,i
- SHCreateItemFromParsingName
- ,SHELL32.DLL
- c}FZ4
- Content-Type: application/x-www-form-urlencoded
- !?}&(2}a
- iertutil.dll
- Interface
- JaIa0
- \\notepad.exe
- command
- shell
- }IG*
- s6/Yw
- ISHDocVwBroker
- OFc4
- 0 .B\\
- ~L,9
- eFh4

- /index.php
- Content-Type: application/octet-stream
- 0123456789ABCDEF
- /auth?
- kernelbase.dll
- SOFTWARE\\
- user32.dll
- %u(%u)\t%s
- open
- @@AD
- @A@@@@@@@@@@@@A@@@@@@@A@AAA@
- |$@A_A^A]A\\
- t$8H
- l$0H
- 8@:<
- @:;u
- raL;
- ruH;
- X$E;
- x ATAUAVAWE3
- KERNEL32.DLL
- _vEr3
- FL0`
- TI(`
- 5;<Tp
- >.1c=
- 4P_/
- #.Bce
- E)b]
- Ov5Y
- 7)`K
- Z?i}&
- H{Hi=
- Z1Myuz
- WOW64
- WIN32
- #Eue[
- 4q}$
- .exe
- INv>
- F>ve
- pUXt
- 5.vr
- "-va8.vej/v
- A/v(7.v
- 3.vQ3.vL
- 3.v\\9.v
- G-vA
- m,v3
-]/v6
- kCku
- 9d]g
- T$ 3
- SUVW
- 9D$X
- L$<I
- 9D$@w

- I9I$@vQ
- L$ I
- D$p8
- t$t3
- D$82
- SUVW
- QSUVW
- v:SV3
- r/9\\$
- s59L$
- r;9\\$
- QQUW
- SUV3
- Hu28E
- I$,3
- \\$<3
- SUVW
- |$0f
- D$0W
- t!O;
- QSUV
- (SUV
- QQSUVW3
- /GFJu
- t$4V
- D$ 3
- t$0Q
- IPf;
- D$0r
- 9D$4w
- 9D$,
- <0PE
- 9/t>
- +z4t
- QSUV
- UWWh
- tDUW
- SUVW3
- SUV3
- UUUURPj
- UUUU
- RPUUUUj
- VW9-
- 4_^[
- L$$3
- SUVW
- QSUVW
- tZS3
- tI;u
- t=V3
- QUVW
- t$8P
- t*9}
- SVW3
- t\t9u
- SUVW
- SUVW

- SUVW3
- QSUV
- SVW3
- SUVW3
- SUVW
- :u0j
- QQS3
- SUVW
- T9~$t
- F9~$t
- 9~$t
- L$L3
- D$4(
- PjAV
- SUVW
- PPUS
- Pj2j
- SUVW
- t*f9n
- L$ US
- QSUVW
- s(iE
- UVW3
- f9L8
- SUVW
- SUVW
- SUVW
- IIuR
- t[ItKIt;It
- UVWh
- uA9l$
- ub9l$
- SUWj
- QQSU
- WPW3
- SVW3
- D$$EPU
- D$4PPU
- t$8S
- D$8Pj
- SUV3
- u@9l$
- UUUU
- VWC3
- jD^V2
- D$4Pj
- D$0P
- dSUVW
- u.!=0
- D$(3
- D$p3
- @SVW3
- Pj2j
- @ucj
- SSS3
- SUVW3
- VVPU

- t 9t$
- SUVW3
- PjiU
- Pj 3
- 0SUW
- t?9}
- 9D$
- QQSU
- tFUV
- D$8P
- t!It
- 9l$$t
- jSVU
- Uj h
- D$0PU
- D$0Ph
- jD^V2
- D$(PU
- %SU3
- tKV3
- SPh4
- D$*3
- u\t_^[
- $SVW3
- WSUV
- PWSU
- PWSU
- SUVW
- E;l$
- SUVWj
- .reloc
- @.data
- .rdata
- .text
- Rich
- !This program cannot be run in DOS mode.
- .tmp
- %s\\%s.txt
- --
- #+3;CScs
- <$<(<4<8<D<H<
- 4P:\\:x:
- :,:2:N:Y:b:
- >)>0>D>K>h>q>x>
- <,=C=P=Y=f=
- :7;^;h;n;
- :!:':j:r:x:
- >1>6>F>V>v>{>
- <$<><K<
- :V;k;
- :5:;:A:p:}:
- =$=/===D=M=`=o=
- <-<3<8<C<Q<d<l<
- :!;-;7;=;F;i;q;
- :(:U:q:
- :%:L:
- ?>?H?

- <&<.<
- ;L;R;
- >1>B>N>m>v>
- =(=R=r=
- <,<]<o<
- :";-;O;
- :2:S:n:t:
- ?J?Q?]?
- =">(>J>
- <1=Z=`=
- ;";T;Y;j;p;v;
- 9\t:7:F:L:t:
- ?+?;?E?K?
- >8>=>H>`>j>y>
- =<=A=M=~=
- <2<T<m<}<
- :&:G:k:}:
- >$?3?:?
- <+<@<I<X<k<q<y<
- =->~>
- <(<d<r<w<|<
- :-:3:>:D:S:X:d:n:
- MSVCRT.dll
- SHLWAPI.dll
- StrCmpIW
- StrStrIW
- StrChrA
- CRYPT32.dll
- \\%u.dmp
- dbghelp.dll
- ntdll.dll
- S:(ML;;NW;;;LW)
- bcdfghjklmnpqrstvwxyz
- cdfghlmnrstw
- "%s"
- Jt+c
- Px,fy
- .Z%&
- ;wPp
- :_HT
- ~Q,h
- :bHT
- _""pPn
- .tmp
- Jb.+
- =v"L
- y- w
- @@EMPTY
- @@@@@@@@!!!!
- @@@@
- !!!!!!!!!!!!!!!ADAA@@@@@@@@@@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@

- @@@@
- @@@@
- @@@@

- T$hf9<
- D$D;T$
- T$\\;T$4
- !\\$L
- !\\$(
- D$lSUV
- ^][Y
- @_^][YY
-]@[_^
- ^[_]YY
- _^][
- t$ W
- _^][YY
- t$WV
- rCWj
- QQSUVW
- _^][
- _^][
- L$,;L$
- D$tj
- Y^][
- WjHY
- _^][Y
- _^][
- D$<v
- _^][YY
- _[^]
- t!SS
- PSSh
- QSSh
- _^][
- G;|$
- t$$W
- _^][
- G;|$
- t$(Q
- 9D$$t(
- D$$;{
- L$,;
- SVQP
- SVWj@h
- _]^[YY
- Yf;F
- @_^][Y
- @_^][YY
- ^_][
- G(Pj
- tCVVWh3
- PPPP
- PPQP
- @jLY
- @_^][Y
- _^][
- j X_^
-]_^[
- _^][
- _^][

- SVW
- D_^][
- D$,P
- D$,P
- RPVQ
- RPWV
- RPQW
- D$`H
- VWQj
- _^][
- D$$j
- _^][
- FQWS
- _^][
- _^][Y
- t!WWW
- VWPj(
- t,SSSj
- Vj Y
- ^[_Y
- Y_^][Y
- YY_^[
- QSVW
- @_^[
- @_^]Y
- L$@Q
- w&r;
- w'r
- PVRQ
- [_^]
- _^][Y
- t$(h
- t:WPVU
- t$(h
- tnWVVU
- _^][
- _^][Y
- t/WW
- @_^][
- WVPP
- QQQRh
- QPQh
- _^][
- _^][Y
- _^][
- _^][
- SSSS
- PSSj
- _^][
- tK9^$t
- _^][
- tK9^$t
- >9~$_t
- V ;V
- SVSWj
- _^][
- D$ Ph

- PPPV
- L$ Q
- D$<PV
- PPPPV
- t$,h
- QQSV
- _^][
- _^][
- RPRRR
- QQQQP
- D$ P
- _^][Y
- QPQj
- [_^]
- [_]^
- Wj,Y
- ;F(r
- _^][
- _^][
- bSVSj
- t@PPVh
- D$hPh
- D$$P
- D$XPh
- D$(P
- D$XPh
- D$dP
- D$XPh
- YY^[
- _^][
- s!V
- _^][
- _^][
- tThX
- jXh@
- < s}
- FVVj
- D$$P
- ^_][
- t$ P
- T$HYYU
- D$@Ph
- D$LP
- D$$P
- D$@Ph
- D$<P
- D$<Ph
- _^][YY
- WPVV
- GSWh
- D$$PSS
- D$,P
- $SWPj
- D$$P
- D$xP
- D$lPt
- D$,P

- QQQh
- QPQh?
- QQQh
- QPQh?
- QQQh
- QPQh?
- QPQh?
- D$<P
- D$tPhp
- D$,PQ
- RQh\\
- _^][
- D$<P
- t$(P
- D$ VWS
- D$<P
- D$DPP
- Pt(h
- D$DP
- PWWj
- D$,P
- D$$P
- @_^[
- QQSVW
- VVVV
-]@[^
- @_^[
- PWWWWWW
- <_^[
- @_^][
- D$TP
- v'j\tY
- L$<P
- D$$P
- PPPPW
- D$ SSSPh
- PjMV
- _^][
- _^][
- L$$V
- <.t
- YYPV
- r h<
- hx:
- VWQ
- _^][
- YYPW
- l$hVW
- _][YY
- @[_^
- ^]_[Y
- t$$YY
- T$LY
- t.Jt
- (_^][
- D$@P
- D$ Ph

- $_^][
- >PhX
- G\tPQ
- VWj\t^
- QQPQ
- QQVW
- _^][
- ^[YY
- QQSV
- X_^]
- X_^][YY
- t"Vj
- tNVhm(
- VWh$
- X_^[
- j Y;
- SSSWSS
- D$lPSSj
- t$hP
- D$$Ph
- D$$Ph
- X][_^
- Vj@Y
- [^_]
- Vj,Y
- X_^]
- X_^]
- X_^]
- X_^]
- @_^[
- VVVV
- D$(j
- D$ f
- WPjfj
- _^][
- D$(P
- D$$P
- _^][
- L$$P
- L$$P
- D$(P
- D$(B
- D$(<
- Y_^[
- `bss

• Module 9 (probably unpacked / injected by the sample)

• Module 9 rich signatures

- 44616e530000000000000000000000000fc77b90002000000e81f040002000000831c0e0001000000ddffce0003000000ddffcb00190000000000000100ef0000001e529500010000000d52e400520000000d52de00

• Module 9 yara matches

- Str_Win32_Wininet_Library (Match Windows Inet API library declaration)

- Str_Win32_Internet_API (Match Windows Inet API call)
- Str_Win32_Http_API (Match Windows Http API call)
- IsPE32 ()
- IsDLL ()
- IsWindowsGUI ()
- HasOverlay (Overlay Check)
- HasRichSignature (Rich Signature Check)
- antisb_threatExpert (Anti-Sandbox checks for ThreatExpert)
- inject_thread (Code injection with CreateRemoteThread in a remote process)
- network_http (Communications over HTTP)
- network_dns (Communications use DNS)
- network_dga (Communication using dga)
- escalate_priv (Escalade priviledges)
- win_mutex (Create or check mutex)
- win_registry (Affect system registries)
- win_token (Affect system token)
- win_files_operation (Affect private profile)
- without_attachments (Rule to detect the no presence of any attachment)
- without_images (Rule to detect the no presence of any image)
- without_urls (Rule to detect the no presence of any url)
- contentis_base64 (This rule finds for base64 strings)
- Advapi_Hash_API (Looks for advapi API functions)
- CRC32_poly_Constant (Look for CRC32 [poly])

• Module 9 strings

• Module 9 most interesting strings

- url | valid domains | tlds: www.amazon.com
- url | valid domains | tlds: google.com
- url | valid domains | tlds: 5.vI"-vO!.v
- api | frequently used by malware: InternetWriteFile
- api | frequently used by malware: AdjustTokenPrivileges
- api | frequently used by malware: OpenProcessToken
- api | frequently used by malware: DeviceIoControl
- api | frequently used by malware: CreateRemoteThread
- api | frequently used by malware: GetThreadContext
- api | frequently used by malware: VirtualAllocEx
- api | frequently used by malware: OpenProcess
- api | frequently used by malware: WriteProcessMemory
- api | frequently used by malware: CreateToolhelp32Snapshot
- api | frequently used by malware: Process32Next
- api | frequently used by malware: VirtualProtectEx
- api | frequently used by malware: ReadProcessMemory
- api | frequently used by malware: Process32First
- api | frequently used by malware: WriteFile
- api | frequently used by malware: QueryPerformanceCounter
- api | frequently used by malware: MapViewOfFile
- api | frequently used by malware: CreateThread
- api | frequently used by malware: GetAdaptersInfo
- api | frequently used by malware: InternetCloseHandle
- api | frequently used by malware: InternetReadFile
- api | frequently used by malware: InternetQueryDataAvailable
- api | frequently used by malware: PFXImportCertStore
- api | frequently used by malware: CoCreateInstance
- api | frequently used by malware: RegCloseKey

- api | frequently used by malware: WinExec
- api | frequently used by malware: GetTickCount
- api | frequently used by malware: ExitProcess
- api | frequently used by malware: ResumeThread
- api | frequently used by malware: SuspendThread
- api | frequently used by malware: GetProcAddress
- api | frequently used by malware: Sleep
- api | frequently used by malware: CreateRemoteThread
- api | frequently used by malware: LdrLoadDll
- api | frequently used by malware: Accept-Encoding: gzip, deflate
- api | frequently used by malware: Accept-Language: en-US;q=0.5,en;q=0.3
- api | frequently used by malware: Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8
- api | frequently used by malware: DllRegisterServer
- url | http tag: https://
- url | http tag: http://
- api | wininet: HttpAddRequestHeadersA
- api | wininet: HttpEndRequestA
- api | wininet: HttpSendRequestExA
- api | wininet: InternetQueryOptionA
- api | wininet: InternetOpenA
- api | wininet: HttpSendRequestA
- api | wininet: HttpOpenRequestA
- api | wininet: InternetSetOptionA
- api | wininet: InternetConnectA
- api | wininet: HttpQueryInfoA
- api | crypt32: CertGetCertificateContextProperty
- api | crypt32: CertFreeCertificateChain
- api | crypt32: CryptDecodeObject
- api | crypt32: CertEnumCertificatesInStore
- api | crypt32: CertCloseStore
- api | crypt32: CertAddCertificateContextToStore
- api | crypt32: CertFreeCertificateContext
- api | crypt32: CertOpenStore
- api | netapi: NetUserGetInfo
- api | advapi32: CryptHashData
- api | advapi32: CryptDestroyHash
- api | advapi32: CryptVerifySignatureA
- api | advapi32: CryptDestroyKey
- api | advapi32: CryptCreateHash
- api | advapi32: CryptImportKey
- api | advapi32: CryptAcquireContextA
- api | advapi32: ConvertStringSecurityDescriptorToSecurityDescriptorA
- api | advapi32: LookupPrivilegeValueA
- api | advapi32: RegCreateKeyA
- api | kernel32: RegSetValueExA
- api | advapi32: GetTokenInformation
- api | advapi32: GetSidSubAuthorityCount
- api | advapi32: GetUserNameW
- api | advapi32: GetSidSubAuthority
- api | user32: wvsprintfA
- api | kernel32: GetOverlappedResult
- api | kernel32: SetUnhandledExceptionFilter
- api | kernel32: VirtualFreeEx
- api | kernel32: GetLocalTime
- api | kernel32: ReleaseMutex
- api | kernel32: CreateMutexA
- api | kernel32: lstrcmpiW

- api | kernel32: GetModuleFileNameW
- api | kernel32: VirtualAlloc
- api | kernel32: GetProcessHeap
- api | kernel32: VirtualFree
- api | kernel32: HeapFree
- api | kernel32: HeapAlloc
- api | kernel32: HeapReAlloc
- api | kernel32: FindClose
- api | kernel32: FindFirstFileA
- api | kernel32: CreateDirectoryA
- api | kernel32: ReadFile
- api | kernel32: GetFileAttributesW
- api | kernel32: GetFileAttributesA
- api | kernel32: GetFileSize
- api | kernel32: SetLastError
- api | kernel32: GetTempPathA
- api | kernel32: GetVersionExA
- api | kernel32: QueryPerformanceFrequency
- api | kernel32: GetSystemInfo
- api | kernel32: GetVolumeInformationA
- api | kernel32: GetSystemTimeAsFileTime
- api | kernel32: GetCurrentProcess
- api | kernel32: SetErrorMode
- api | kernel32: DeleteCriticalSection
- api | kernel32: MultiByteToWideChar
- api | kernel32: lstrcmpA
- api | kernel32: CreateFileMappingA
- api | kernel32: UnmapViewOfFile
- api | kernel32: GetCurrentThreadId
- api | kernel32: TerminateThread
- api | kernel32: TlsSetValue
- api | kernel32: TlsGetValue
- api | dnsapi: DnsFree
- api | dnsapi: DnsQuery_A
- api | netapi: NetWkstaGetInfo
- api | netapi: NetApiBufferFree
- api | kernel32: RegOpenKeyExW
- api | kernel32: RegOpenKeyExA
- api | kernel32: RegQueryValueExA
- api | advapi32: RegEnumKeyW
- api | kernel32: RegCreateKeyExA
- api | kernel32: RegNotifyChangeKeyValue
- api | kernel32: RegEnumValueA
- api | kernel32: RegDeleteValueA
- api | advapi32: InitiateSystemShutdownExA
- api | user32: wsprintfW
- api | user32: wsprintfA
- api | kernel32: DeleteFileA
- api | kernel32: EnterCriticalSection
- api | kernel32: LeaveCriticalSection
- api | kernel32: InitializeCriticalSection
- api | kernel32: DeleteFileW
- api | kernel32: GetWindowsDirectoryW
- api | kernel32: CopyFileW
- api | kernel32: GetWindowsDirectoryA
- api | kernel32: SetFilePointer
- api | kernel32: GetExitCodeThread

- api | kernel32: GetTempPathW
- api | kernel32: CreateFileW
- api | kernel32: GetSystemDirectoryA
- api | kernel32: CreateDirectoryW
- api | kernel32: GetSystemDirectoryW
- api | kernel32: RegisterWaitForSingleObject
- api | kernel32: CreateProcessA
- api | kernel32: GetExitCodeProcess
- api | kernel32: UnregisterWait
- api | kernel32: PulseEvent
- api | kernel32: IsBadCodePtr
- api | kernel32: LocalFree
- api | kernel32: TlsFree
- api | kernel32: TlsAlloc
- api | kernel32: lstrcmpiA
- api | kernel32: lstrcpyW
- api | kernel32: lstrcatW
- api | kernel32: GetModuleHandleA
- api | kernel32: WaitForMultipleObjects
- api | kernel32: lstrlenW
- api | kernel32: lstrcpyA
- api | kernel32: GetCurrentProcessId
- api | kernel32: GetLastError
- api | kernel32: TerminateProcess
- api | kernel32: GetModuleFileNameA
- api | kernel32: LoadLibraryA
- api | kernel32: GetCurrentThread
- api | kernel32: GetModuleHandleExA
- api | kernel32: CloseHandle
- api | kernel32: OpenEventA
- api | kernel32: lstrcatA
- api | kernel32: CreateEventA
- api | kernel32: SetEvent
- api | kernel32: WaitForSingleObject
- api | kernel32: lstrlenA
- api | kernel32: CreateFileA
- api | kernel32: GetCommandLineA
- api | kernel32: IsWow64Process
- api | ntdll: NtWow64WriteVirtualMemory64
- api | ntdll: NtWow64ReadVirtualMemory64
- api | ntdll: NtProtectVirtualMemory
- api | ntdll: NtGetContextThread
- api | kernel32: RegGetValueW
- api | user32: MessageBoxW
- api | kernel32: VirtualProtect

• Module 9 other strings

- \\System32\\kernelbase.dll
- \\System32\\KERNEL32.DLL
- chrome.exe
- explorer.exe
- firefox.exe
- iexplore.exe
- open
- test

- command
- DelegateExecute
- root
- 12345
- !1Aa
- 0$0,040<0D0L0T0\\0d0l0t0|0
- 8 8$8(8,8084888<8@8D8H8L8P8T8X8\\8`8d8
- 3 3&363=3B3g3v3|3
- 5/6R6a6y6
- 2+2T2r2
- 0Q1f1s1
- 0_0h0
- 9"9E9b9l9r9z9
- 8*868J8S8Y8`8
- 3%494G4X4f4q4y4
- 3>3Q3a3m3
- 122c2
- 0+141Y1
- <4=E=f=
- 8'8/8A8
- 6/6U6
- 435U5v5
- 2*2@2M2r2
- 0V1u1
- 0a0k0
- 9D9x9
- 8>8s8
- 6:6C6Z6
- 4'4.4:4A4X4
- 2$2]2
- 1*1\\1
- 0*0:0N0]0l0{0
- 9:9P9U9c9
- 7*888_8
- 667K7Z7a7k7
- 5\t6"656i6
- 2#22282p2
- 0:1@1L1Y1`1f1l1r1
- _0e0r0{0
- =(=A=
- 9&9U9^9v9
- 8:8G8t8
- 606?6O6a6w6}6
- 5E5b5
- 3'464>4y4
- @0z0
- 9S9^9
- 8&8Z8y8
- 797}7
- 5`6z6
- 5W5^5t5
- 4-4;4V4c4i4
- 2.2C2H2U2h2u2
- 1Y1`1l1
- 0P0W0f0
- <U<l<
- 9+9@9F9S9[9a9j9z9

- 8%8C8
- 697T7
- 4t5~5
- 4)4i4
- 3-343:3F3`3m3{3
- 282X2
- "0E0
- 9!9^9s9
- 8%8.8:8F8
- 7*7:7M7R7X7`7
- 6<6j6o6
- 5P5j5
- 444R4W4`4k4q4}4
- 1$131:1?1o1
- 9%9/9
- 515X5_5
- 3!4S4`4
- 102O2}2Q3
- ;0;O;\\;t;
- 526?6P6u6
- 3,373
- 1B2H2M2^2
- 1/1>1`1
- SHDeleteValueA
- SHGetValueA
- StrCmpNIA
- DNSAPI.dll
- _except_handler3
- IPHLPAPI.DLL
- WININET.dll
- SHSetValueA
- PathRemoveFileSpecW
- PathFindFileNameW
- SHGetValueW
- StrToIntA
- StrToIntExA
- StrStrIA
- NETAPI32.dll
- OLEAUT32.dll
- ole32.dll
- CoGetObject
- CoInitialize
- IIDFromString
- SHELL32.dll
- SHGetFolderPathA
- ShellExecuteA
- ADVAPI32.dll
- USER32.dll
- KERNEL32.dll
- Microsoft Base Cryptographic Provider v1.0
- MiniDumpWriteDump
- D:(A;OICI;GA;;;WD)
- PID: %u [%0.2u:%0.2u:%0.2u]
- abcdefghijklmnop
- aeiou
- Cache-Control: max-age=0
- Connection: keep-alive

- Set-Cookie
- POST
- .dat
- 2500
- I)\t/
- 8{:N
- Error
- SDio:
- 6oZj
- C=3\V
- 0 .\t\\
- ~@,i
- SHCreateItemFromParsingName
- ,SHELL32.DLL
- c}FZ4
- Content-Type: application/x-www-form-urlencoded
- !?}&(2}a
- iertutil.dll
- Interface
- JaIa0
- \\notepad.exe
- command
- shell
- }IG*
- s6/Yw
- ISHDocVwBroker
- OFc4
- 0 .B\\
- ~L,9
- eFh4
- /index.php
- Content-Type: application/octet-stream
- 0123456789ABCDEF
- /auth?
- kernelbase.dll
- SOFTWARE\\
- user32.dll
- %u(%u)\t%s
- open
- @@AD
- @A@@@@@@@@@@@@A@@@@@@@A@AAA@
- |$@A_A^A]A\\
- t$8H
- I$0H
- 8@:<
- @:;u
- raL;
- ruH;
- X$E;
- x ATAUAVAWE3
- KERNEL32.DLL
- _vEr3
- FL0`
- TI(`
- 5;<Tp
- >.1c=
- 4P_/

- #.Bce
- E)b]
- Ov5Y
- 7)`K
- Z?i}&
- H{Hi=
- Z1Myuz
- WOW64
- WIN32
- #Eue[
- 4q}$
- .exe
- INv>
- F>ve
- pUXt
- 5.vr
- "-va8.vej/v
- A/v(7.v
- 3.vQ3.vL
- 3.v\\9.v
- G-vA
- m,v3
-]/v6
- kCku
- 9d]g
- T$ 3
- SUVW
- 9D$X
- L$<I
- 9D$@w
- I9I$@vQ
- L$ I
- D$p8
- t$t3
- D$82
- SUVW
- QSUVW
- v:SV3
- r/9\\$
- s59L$
- r;9\\$
- QQUW
- SUV3
- Hu28E
- I$,3
- \\$<3
- SUVW
- |$0f
- D$0W
- t!O;
- QSUV
- (SUV
- QQSUVW3
- /GFJu
- t$4V
- D$ 3
- t$0Q

- IPf;
- D$0r
- 9D$4w
- 9D$,
- <0PE
- 9/t>
- +z4t
- QSUV
- UWWh
- tDUW
- SUVW3
- SUV3
- UUUURPj
- UUUU
- RPUUUUj
- VW9-
- 4_^[
- L$$3
- SUVW
- QSUVW
- tZS3
- tl;u
- t=V3
- QUVW
- t$8P
- t*9}
- SVW3
- t\t9u
- SUVW
- SUVW
- SUVW3
- QSUV
- SVW3
- SUVW3
- SUVW
- :u0j
- QQS3
- SUVW
- T9~$t
- F9~$t
- 9~$t
- L$L3
- D$4(
- PjAV
- SUVW
- PPUS
- Pj2j
- SUVW
- t*f9n
- L$ US
- QSUVW
- s(iE
- UVW3
- f9L8
- SUVW
- SUVW
- SUVW

- IIuR
- t[ItKIt;It
- UVWh
- uA9l$
- ub9l$
- SUWj
- QQSU
- WPW3
- SVW3
- D$$EPU
- D$4PPU
- t$8S
- D$8Pj
- SUV3
- u@9l$
- UUUU
- VWC3
- jD^V2
- D$4Pj
- D$0P
- dSUVW
- u.!=0
- D$(3
- D$p3
- @SVW3
- Pj2j
- @ucj
- SSS3
- SUVW3
- VVPU
- t 9t$
- SUVW3
- PjiU
- Pj 3
- 0SUW
- t?9}
- 9D$
- QQSU
- tFUV
- D$8P
- t!It
- 9l$$t
- jSVU
- Uj h
- D$0PU
- D$0Ph
- jD^V2
- D$(PU
- %SU3
- tKV3
- SPh4
- D$*3
- u\t_^[
- $SVW3
- WSUV
- PWSU
- PWSU

- SUVW
- E;l$
- SUVWj
- .reloc
- @.data
- .rdata
- .text
- Rich
- !This program cannot be run in DOS mode.
- .tmp
- %s\\%s.txt
- --
- #+3;CScs
- <$<(<4<8<D<H<
- 4P:\\:x:
- :,:2:N:Y:b:
- >)>0>D>K>h>q>x>
- <,=C=P=Y=f=
- :7;^;h;n;
- :!:':j:r:x:
- >1>6>F>V>v>{>
- <$<><K<
- :V;k;
- :5:;:A:p:}:
- =$=/===D=M=`=o=
- <-<3<8<C<Q<d<l<
- :!;-;7;=;F;i;q;
- :(:U:q:
- :%:L:
- ?>?H?
- <&<.<
- ;L;R;
- >1>B>N>m>v>
- =(=R=r=
- <,<]<o<
- :";-;O;
- :2:S:n:t:
- ?J?Q?]?
- =">(>J>
- <1=Z=`=
- ;";T;Y;j;p;v;
- 9\t:7:F:L:t:
- ?+?;?E?K?
- >8>=>H>`>j>y>
- =<=A=M=~=
- <2<T<m<}<
- :&:G:k:}:
- >$?3?:?
- <+<@<l<X<k<q<y<
- =->~>
- <(<d<r<w<|<
- :-:3:>:D:S:X:d:n:
- MSVCRT.dll
- SHLWAPI.dll
- StrCmpIW
- StrStrIW
- StrChrA

- CRYPT32.dll
- \\%u.dmp
- dbghelp.dll
- ntdll.dll
- S:(ML;;NW;;;LW)
- bcdfghjklmnpqrstvwxyz
- cdfghlmnrstw
- "%s"
- Jt+c
- Px,fy
- .Z%&
- ;wPp
- :_HT
- ~Q,h
- :bHT
- _""pPn
- .tmp
- Jb.+
- =v"L
- y- w
- @@EMPTY
- @@@@@@@@!!!!
- @@@@
- !!!!!!!!!!!!!!ADAA@@@@@@@@@@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@@@@@@@@@@

- wQJ.v
- ,v+E.v
- -v]7.v
- K/v;
- -v!>-v
- -v1#-v
- `/vd
-)vb
- @.v`
- -v%9-v
- %./f
- CDPMNo}
- @_^][
- T$ I;]
- D$$J;
- tNHt>Ht2Hug
- D$$;
- @_^][
- +L$x
- GT$p
- ;t$l
- +D$H
- |$,?w(
- +D$H
- D$`;
- ;T$h
- T$\\;
- L$T;
- T$@+
- D$`=
- T$hf9<
- D$D;T$
- T$\\;T$4
- !\\$L
- !\\$(
- D$lSUV
- ^][Y
- @_^][YY
-]@[_^
- ^[_]YY
- _^][
- t$ W
- _^][YY
- t$WV
- rCWj
- QQSUVW
- _^][
- _^][
- L$,;L$
- D$tj
- Y^][
- WjHY
- _^][Y
- _^][
- D$<v
- _^][YY
- _[^]

- t!SS
- PSSh
- QSSh
- _^][
- G;|$
- t$$W
- _^][
- G;|$
- t$(Q
- 9D$$t(
- D$$;{
- L$,;
- SVQP
- SVWj@h
- _]^[YY
- Yf;F
- @_^][Y
- @_^][YY
- ^_][
- G(Pj
- tCVVWh3
- PPPP
- PPQP
- @jLY
- @_^][Y
- _^][
- j X_^
-]_^[
- _^][
- _^][
- SVW
- D_^][
- D$,P
- D$,P
- RPVQ
- RPWV
- RPQW
- D$`H
- VWQj
- _^][
- D$$j
- _^][
- FQWS
- _^][
- _^][Y
- t!WWW
- VWPj(
- t,SSSj
- Vj Y
- ^[_Y
- Y_^][Y
- YY_^[
- QSVW
- @_^[
- @_^]Y
- L$@Q
- w&r;

- w'r
- PVRQ
- [_^]
- _^][Y
- t$(h
- t:WPVU
- t$(h
- tnWVVU
- _^][
- _^][Y
- t/WW
- @_^][
- WVPP
- QQQRh
- QPQh
- _^][
- _^][Y
- _^][
- _^][
- SSSS
- PSSj
- _^][
- tK9^$t
- _^][
- tK9^$t
- >9~$_t
- V ;V
- SVSWj
- _^][
- D$ Ph
- PPPV
- L$ Q
- D$<PV
- PPPPV
- t$,h
- QQSV
- _^][
- _^][
- RPRRR
- QQQQP
- D$ P
- _^][Y
- QPQj
- [_^]
- [_]^
- Wj,Y
- ;F(r
- _^][
- _^][
- bSVSj
- t@PPVh
- D$hPh
- D$$P
- D$XPh
- D$(P
- D$XPh
- D$dP

- D$XPh
- YY^[
- _^][
- s!V
- _^][
- _^][
- tThX
- jXh@
- < s}
- FVVj
- D$$P
- ^_][
- t$ P
- T$HYYU
- D$@Ph
- D$LP
- D$$P
- D$@Ph
- D$<P
- D$<Ph
- _^][YY
- WPVV
- GSWh
- D$$PSS
- D$,P
- $SWPj
- D$$P
- D$xP
- D$lPt
- D$,P
- QQQh
- QPQh?
- QQQh
- QPQh?
- QQQh
- QPQh?
- QPQh?
- D$<P
- D$tPhp
- D$,PQ
- RQh\\
- _^][
- D$<P
- t$(P
- D$ VWS
- D$<P
- D$DPP
- Pt(h
- D$DP
- PWWj
- D$,P
- D$$P
- @_^[
- QQSVW
- VVVV
-]@[^
- @_^[

- PWWWWWW
- <_^[
- @_^][
- D$TP
- v'j\tY
- L$<P
- D$$P
- PPPPW
- D$ SSSPh
- PjMV
- _^][
- _^][
- L$$V
- <.t
- YYPV
- r h<
- VWQ
- _^][
- YYPW
- l$hVW
- _][YY
- @[_^
- ^]_[Y
- t$$YY
- T$LY
- t.Jt
- (_^][
- D$@P
- D$ Ph
- $_^][
- >PhX
- G\tPQ
- VWj\t^
- QQPQ
- QQVW
- _^][
- ^[YY
- QQSV
- X_^]
- X_^][YY
- t"Vj
- tNVhm(
- VWh$
- X_^[
- j Y;
- SSSWSS
- D$lPSSj
- t$hP
- D$$Ph
- D$$Ph
- X][_^
- Vj@Y
- [^_]
- Vj,Y
- X_^]
- X_^]
- X_^]

- X_^]
- @_^[
- VVVV
- D$(j
- D$ f
- WPjfj
- _^][
- D$(P
- D$$P
- _^][
- L$$P
- L$$P
- D$(P
- D$(B
- D$(<
- Y_^[
- `bss

• Module 10 (probably unpacked / injected by the sample)

• Module 10 rich signatures

- 44616e530000000000000000000000000fc77b90002000000e81f040002000000831c0e0001000000ddffce0003000000ddffcb001900000000000100ef00000 01e529500010000000d52e400520000000d52de00

• Module 10 yara matches

- Str_Win32_Wininet_Library (Match Windows Inet API library declaration)
- Str_Win32_Internet_API (Match Windows Inet API call)
- Str_Win32_Http_API (Match Windows Http API call)
- IsPE32 ()
- IsDLL ()
- IsWindowsGUI ()
- HasOverlay (Overlay Check)
- HasRichSignature (Rich Signature Check)
- antisb_threatExpert (Anti-Sandbox checks for ThreatExpert)
- inject_thread (Code injection with CreateRemoteThread in a remote process)
- network_http (Communications over HTTP)
- network_dns (Communications use DNS)
- network_dga (Communication using dga)
- escalate_priv (Escalade priviledges)
- win_mutex (Create or check mutex)
- win_registry (Affect system registries)
- win_token (Affect system token)
- win_files_operation (Affect private profile)
- without_attachments (Rule to detect the no presence of any attachment)
- without_images (Rule to detect the no presence of any image)
- without_urls (Rule to detect the no presence of any url)
- contentis_base64 (This rule finds for base64 strings)
- Advapi_Hash_API (Looks for advapi API functions)
- CRC32_poly_Constant (Look for CRC32 [poly])

• Module 10 strings

- **Module 10 most interesting strings**

- url | valid domains | tlds: www.amazon.com
- url | valid domains | tlds: google.com
- url | valid domains | tlds: 5.vl"-vO!.v
- api | frequently used by malware: InternetWriteFile
- api | frequently used by malware: AdjustTokenPrivileges
- api | frequently used by malware: OpenProcessToken
- api | frequently used by malware: DeviceIoControl
- api | frequently used by malware: CreateRemoteThread
- api | frequently used by malware: GetThreadContext
- api | frequently used by malware: VirtualAllocEx
- api | frequently used by malware: OpenProcess
- api | frequently used by malware: WriteProcessMemory
- api | frequently used by malware: CreateToolhelp32Snapshot
- api | frequently used by malware: Process32Next
- api | frequently used by malware: VirtualProtectEx
- api | frequently used by malware: ReadProcessMemory
- api | frequently used by malware: Process32First
- api | frequently used by malware: WriteFile
- api | frequently used by malware: QueryPerformanceCounter
- api | frequently used by malware: MapViewOfFile
- api | frequently used by malware: CreateThread
- api | frequently used by malware: GetAdaptersInfo
- api | frequently used by malware: InternetCloseHandle
- api | frequently used by malware: InternetReadFile
- api | frequently used by malware: InternetQueryDataAvailable
- api | frequently used by malware: PFXImportCertStore
- api | frequently used by malware: CoCreateInstance
- api | frequently used by malware: RegCloseKey
- api | frequently used by malware: WinExec
- api | frequently used by malware: GetTickCount
- api | frequently used by malware: ExitProcess
- api | frequently used by malware: ResumeThread
- api | frequently used by malware: SuspendThread
- api | frequently used by malware: GetProcAddress
- api | frequently used by malware: Sleep
- api | frequently used by malware: CreateRemoteThread
- api | frequently used by malware: LdrLoadDll
- api | frequently used by malware: Accept-Encoding: gzip, deflate
- api | frequently used by malware: Accept-Language: en-US;q=0.5,en;q=0.3
- api | frequently used by malware: Accept: text/html,application/xhtml+xml,application/xml;q=0.9,*/*;q=0.8
- api | frequently used by malware: DllRegisterServer
- url | http tag: https://
- url | http tag: http://
- api | wininet: HttpAddRequestHeadersA
- api | wininet: HttpEndRequestA
- api | wininet: HttpSendRequestExA
- api | wininet: InternetQueryOptionA
- api | wininet: InternetOpenA
- api | wininet: HttpSendRequestA
- api | wininet: HttpOpenRequestA
- api | wininet: InternetSetOptionA
- api | wininet: InternetConnectA
- api | wininet: HttpQueryInfoA
- api | crypt32: CertGetCertificateContextProperty
- api | crypt32: CertFreeCertificateChain

- api | crypt32: CryptDecodeObject
- api | crypt32: CertEnumCertificatesInStore
- api | crypt32: CertCloseStore
- api | crypt32: CertAddCertificateContextToStore
- api | crypt32: CertFreeCertificateContext
- api | crypt32: CertOpenStore
- api | netapi: NetUserGetInfo
- api | advapi32: CryptHashData
- api | advapi32: CryptDestroyHash
- api | advapi32: CryptVerifySignatureA
- api | advapi32: CryptDestroyKey
- api | advapi32: CryptCreateHash
- api | advapi32: CryptImportKey
- api | advapi32: CryptAcquireContextA
- api | advapi32: ConvertStringSecurityDescriptorToSecurityDescriptorA
- api | advapi32: LookupPrivilegeValueA
- api | advapi32: RegCreateKeyA
- api | kernel32: RegSetValueExA
- api | advapi32: GetTokenInformation
- api | advapi32: GetSidSubAuthorityCount
- api | advapi32: GetUserNameW
- api | advapi32: GetSidSubAuthority
- api | user32: wvsprintfA
- api | kernel32: GetOverlappedResult
- api | kernel32: SetUnhandledExceptionFilter
- api | kernel32: VirtualFreeEx
- api | kernel32: GetLocalTime
- api | kernel32: ReleaseMutex
- api | kernel32: CreateMutexA
- api | kernel32: lstrcmpiW
- api | kernel32: GetModuleFileNameW
- api | kernel32: VirtualAlloc
- api | kernel32: GetProcessHeap
- api | kernel32: VirtualFree
- api | kernel32: HeapFree
- api | kernel32: HeapAlloc
- api | kernel32: HeapReAlloc
- api | kernel32: FindClose
- api | kernel32: FindFirstFileA
- api | kernel32: CreateDirectoryA
- api | kernel32: ReadFile
- api | kernel32: GetFileAttributesW
- api | kernel32: GetFileAttributesA
- api | kernel32: GetFileSize
- api | kernel32: SetLastError
- api | kernel32: GetTempPathA
- api | kernel32: GetVersionExA
- api | kernel32: QueryPerformanceFrequency
- api | kernel32: GetSystemInfo
- api | kernel32: GetVolumeInformationA
- api | kernel32: GetSystemTimeAsFileTime
- api | kernel32: GetCurrentProcess
- api | kernel32: SetErrorMode
- api | kernel32: DeleteCriticalSection
- api | kernel32: MultiByteToWideChar
- api | kernel32: lstrcmpA
- api | kernel32: CreateFileMappingA

- api | kernel32: UnmapViewOfFile
- api | kernel32: GetCurrentThreadId
- api | kernel32: TerminateThread
- api | kernel32: TlsSetValue
- api | kernel32: TlsGetValue
- api | dnsapi: DnsFree
- api | dnsapi: DnsQuery_A
- api | netapi: NetWkstaGetInfo
- api | netapi: NetApiBufferFree
- api | kernel32: RegOpenKeyExW
- api | kernel32: RegOpenKeyExA
- api | kernel32: RegQueryValueExA
- api | advapi32: RegEnumKeyW
- api | kernel32: RegCreateKeyExA
- api | kernel32: RegNotifyChangeKeyValue
- api | kernel32: RegEnumValueA
- api | kernel32: RegDeleteValueA
- api | advapi32: InitiateSystemShutdownExA
- api | user32: wsprintfW
- api | user32: wsprintfA
- api | kernel32: DeleteFileA
- api | kernel32: EnterCriticalSection
- api | kernel32: LeaveCriticalSection
- api | kernel32: InitializeCriticalSection
- api | kernel32: DeleteFileW
- api | kernel32: GetWindowsDirectoryW
- api | kernel32: CopyFileW
- api | kernel32: GetWindowsDirectoryA
- api | kernel32: SetFilePointer
- api | kernel32: GetExitCodeThread
- api | kernel32: GetTempPathW
- api | kernel32: CreateFileW
- api | kernel32: GetSystemDirectoryA
- api | kernel32: CreateDirectoryW
- api | kernel32: GetSystemDirectoryW
- api | kernel32: RegisterWaitForSingleObject
- api | kernel32: CreateProcessA
- api | kernel32: GetExitCodeProcess
- api | kernel32: UnregisterWait
- api | kernel32: PulseEvent
- api | kernel32: IsBadCodePtr
- api | kernel32: LocalFree
- api | kernel32: TlsFree
- api | kernel32: TlsAlloc
- api | kernel32: lstrcmpiA
- api | kernel32: lstrcpyW
- api | kernel32: lstrcatW
- api | kernel32: GetModuleHandleA
- api | kernel32: WaitForMultipleObjects
- api | kernel32: lstrlenW
- api | kernel32: lstrcpyA
- api | kernel32: GetCurrentProcessId
- api | kernel32: GetLastError
- api | kernel32: TerminateProcess
- api | kernel32: GetModuleFileNameA
- api | kernel32: LoadLibraryA
- api | kernel32: GetCurrentThread

- api | kernel32: GetModuleHandleExA
- api | kernel32: CloseHandle
- api | kernel32: OpenEventA
- api | kernel32: lstrcatA
- api | kernel32: CreateEventA
- api | kernel32: SetEvent
- api | kernel32: WaitForSingleObject
- api | kernel32: lstrlenA
- api | kernel32: CreateFileA
- api | kernel32: GetCommandLineA
- api | kernel32: IsWow64Process
- api | ntdll: NtWow64WriteVirtualMemory64
- api | ntdll: NtWow64ReadVirtualMemory64
- api | ntdll: NtProtectVirtualMemory
- api | ntdll: NtGetContextThread
- api | kernel32: RegGetValueW
- api | user32: MessageBoxW
- api | kernel32: VirtualProtect

• Module 10 other strings

- \\System32\\kernelbase.dll
- \\System32\\KERNEL32.DLL
- chrome.exe
- explorer.exe
- firefox.exe
- iexplore.exe
- open
- test
- command
- DelegateExecute
- root
- 12345
- !1Aa
- 0$0,040<0D0L0T0\\0d0l0t0|0
- 8 8$8(8,8084888<8@8D8H8L8P8T8X8\\8`8d8
- 3 3&363=3B3g3v3|3
- 5/6R6a6y6
- 2+2T2r2
- 0Q1f1s1
- 0_0h0
- 9"9E9b9l9r9z9
- 8*868J8S8Y8`8
- 3%494G4X4f4q4y4
- 3>3Q3a3m3
- 122c2
- 0+141Y1
- <4=E=f=
- 8'8/8A8
- 6/6U6
- 435U5v5
- 2*2@2M2r2
- 0V1u1
- 0a0k0
- 9D9x9
- 8>8s8

- 6:6C6Z6
- 4'4.4:4A4X4
- 2$2]2
- 1*1\\1
- 0*0:0N0]0l0{0
- 9:9P9U9c9
- 7*888_8
- 667K7Z7a7k7
- 5\t6"656i6
- 2#22282p2
- 0:1@1L1Y1`1f1l1r1
- _0e0r0{0
- =(=A=
- 9&9U9^9v9
- 8:8G8t8
- 606?6O6a6w6}6
- 5E5b5
- 3'464>4y4
- @0z0
- 9S9^9
- 8&8Z8y8
- 797}7
- 5`6z6
- 5W5^5t5
- 4-4;4V4c4i4
- 2.2C2H2U2h2u2
- 1Y1`1l1
- 0P0W0f0
- <U<l<
- 9+9@9F9S9[9a9j9z9
- 8%8C8
- 697T7
- 4t5~5
- 4)4i4
- 3-343:3F3`3m3{3
- 282X2
- "0E0
- 9!9^9s9
- 8%8.8:8F8
- 7*7:7M7R7X7`7
- 6<6j6o6
- 5P5j5
- 444R4W4`4k4q4}4
- 1$131:1?1o1
- 9%9/9
- 515X5_5
- 3!4S4`4
- 102O2}2Q3
- ;0;O;\\;t;
- 526?6P6u6
- 3,373
- 1B2H2M2^2
- 1/1>1`1
- SHDeleteValueA
- SHGetValueA
- StrCmpNIA
- DNSAPI.dll

- _except_handler3
- IPHLPAPI.DLL
- WININET.dll
- SHSetValueA
- PathRemoveFileSpecW
- PathFindFileNameW
- SHGetValueW
- StrToIntA
- StrToIntExA
- StrStrIA
- NETAPI32.dll
- OLEAUT32.dll
- ole32.dll
- CoGetObject
- CoInitialize
- IIDFromString
- SHELL32.dll
- SHGetFolderPathA
- ShellExecuteA
- ADVAPI32.dll
- USER32.dll
- KERNEL32.dll
- Microsoft Base Cryptographic Provider v1.0
- MiniDumpWriteDump
- D:(A;OICI;GA;;;WD)
- PID: %u [%0.2u:%0.2u:%0.2u]
- abcdefghijklmnop
- aeiou
- Cache-Control: max-age=0
- Connection: keep-alive
- Set-Cookie
- POST
- .dat
- 2500
- I)\t/
- 8{:N
- Error
- SDio:
- 6oZj
- C=3\V
- 0 .\t\\
- ~@,i
- SHCreateItemFromParsingName
- ,SHELL32.DLL
- c}FZ4
- Content-Type: application/x-www-form-urlencoded
- !?}&(2}a
- iertutil.dll
- Interface
- JaIa0
- \\notepad.exe
- command
- shell
- }IG*
- s6/Yw
- IShDocVwBroker
- OFc4

- 0 .B\\
- ~L,9
- eFh4
- /index.php
- Content-Type: application/octet-stream
- 0123456789ABCDEF
- /auth?
- kernelbase.dll
- SOFTWARE\\
- user32.dll
- %u(%u)\t%s
- open
- @@AD
- @A@@@@@@@@@@@@A@@@@@@@A@AAA@
- |$@A_A^A]A\\
- t$8H
- l$0H
- 8@:<
- @:;u
- raL;
- ruH;
- X$E;
- x ATAUAVAWE3
- KERNEL32.DLL
- _vEr3
- FL0`
- Tl(`
- 5;<Tp
- >.1c=
- 4P_/
- #.Bce
- E)b]
- Ov5Y
- 7)`K
- Z?i}&
- H{Hi=
- Z1Myuz
- WOW64
- WIN32
- #Eue[
- 4q}$
- .exe
- INv>
- F>ve
- pUXt
- 5.vr
- "-va8.vej/v
- A/v(7.v
- 3.vQ3.vL
- 3.v\\9.v
- G-vA
- m,v3
-]/v6
- kCku
- 9d]g
- T$ 3
- SUVW

- 9D$X
- L$<I
- 9D$@w
- I9I$@vQ
- L$ I
- D$p8
- t$t3
- D$82
- SUVW
- QSUVW
- v:SV3
- r/9\\$
- s59L$
- r;9\\$
- QQUW
- SUV3
- Hu28E
- I$,3
- \\$<3
- SUVW
- |$0f
- D$0W
- t!O;
- QSUV
- (SUV
- QQSUVW3
- /GFJu
- t$4V
- D$ 3
- t$0Q
- IPf;
- D$0r
- 9D$4w
- 9D$,
- <0PE
- 9/t>
- +z4t
- QSUV
- UWWh
- tDUW
- SUVW3
- SUV3
- UUUURPj
- UUUU
- RPUUUUj
- VW9-
- 4_^[
- L$$3
- SUVW
- QSUVW
- tZS3
- tI;u
- t=V3
- QUVW
- t$8P
- t*9}
- SVW3

- t\t9u
- SUVW
- SUVW
- SUVW3
- QSUV
- SVW3
- SUVW3
- SUVW
- :u0j
- QQS3
- SUVW
- T9~$t
- F9~$t
- 9~$t
- L$L3
- D$4(
- PjAV
- SUVW
- PPUS
- Pj2j
- SUVW
- t*f9n
- L$ US
- QSUVW
- s(iE
- UVW3
- f9L8
- SUVW
- SUVW
- SUVW
- IIuR
- t[ItKIt;It
- UVWh
- uA9l$
- ub9l$
- SUWj
- QQSU
- WPW3
- SVW3
- D$$EPU
- D$4PPU
- t$8S
- D$8Pj
- SUV3
- u@9l$
- UUUU
- VWC3
- jD^V2
- D$4Pj
- D$0P
- dSUVW
- u.!=0
- D$(3
- D$p3
- @SVW3
- Pj2j
- @ucj

- SSS3
- SUVW3
- VVPU
- t 9t$
- SUVW3
- PjiU
- Pj 3
- 0SUW
- t?9}
- 9D$
- QQSU
- tFUV
- D$8P
- t!lt
- 9l$$t
- jSVU
- Uj h
- D$0PU
- D$0Ph
- jD^V2
- D$(PU
- %SU3
- tKV3
- SPh4
- D$*3
- u\t_^[
- $SVW3
- WSUV
- PWSU
- PWSU
- SUVW
- E;l$
- SUVWj
- .reloc
- @.data
- .rdata
- .text
- Rich
- !This program cannot be run in DOS mode.
- .tmp
- %s\\%s.txt
- --
- #+3;CScs
- <$<(<4<8<D<H<
- 4P:\\:x:
- :,:2:N:Y:b:
- >)>0>D>K>h>q>x>
- <,=C=P=Y=f=
- :7;^;h;n;
- :!:':j:r:x:
- >1>6>F>V>v>{>
- <$<><K<
- :V;k;
- :5:;:A:p:}:
- =$=/===D=M=`=o=
- <-<3<8<C<Q<d<l<
- ;!;-;7;=;F;i;q;

- :(:U:q:
- :%:L:
- ?>?H?
- <&<.<
- ;L;R;
- >1>B>N>m>v>
- =(=R=r=
- <,<]<o<
- :";-;O;
- :2:S:n:t:
- ?J?Q?]?
- =">(>J>
- <1=Z=`=
- ;";T;Y;j;p;v;
- 9\t:7:F:L:t:
- ?+?;?E?K?
- >8>=>H>`>j>y>
- =<=A=M=~=
- <2<T<m<}<
- :&:G:k:}:
- >$?3?:?
- <+<@<I<X<k<q<y<
- =->~>
- <(<d<r<w<|<
- :-:3:>:D:S:X:d:n:
- MSVCRT.dll
- SHLWAPI.dll
- StrCmpIW
- StrStrIW
- StrChrA
- CRYPT32.dll
- \\%u.dmp
- dbghelp.dll
- ntdll.dll
- S:(ML;;NW;;;LW)
- bcdfghjklmnpqrstvwxyz
- cdfghlmnrstw
- "%s"
- Jt+c
- Px,fy
- .Z%&
- ;wPp
- :_HT
- ~Q,h
- :bHT
- _""pPn
- .tmp
- Jb.+
- =v"L
- y- w
- @@EMPTY
- @@@@@@@@!!!!
- @@@@
- !!!!!!!!!!!!!!ADAA@@@@@@@@@@@@
- @@@@
- @@@@
- @@@@

- @@@@
- @@@@
- @@@@
- @@@@
- @@@@
- @@@@

- L$T;
- T$@+
- D$`=
- T$hf9<
- D$D;T$
- T$\\;T$4
- !\\$L
- !\\$(
- D$lSUV
- ^][Y
- @_^][YY
-]@[_^
- ^[_]YY
- _^][
- t$ W
- _^][YY
- t$WV
- rCWj
- QQSUVW
- _^][
- _^][
- L$,;L$
- D$tj
- Y^][
- WjHY
- _^][Y
- _^][
- D$<v
- _^][YY
- _[^]
- t!SS
- PSSh
- QSSh
- _^][
- G;|$
- t$$W
- _^][
- G;|$
- t$(Q
- 9D$$t(
- D$$;{
- L$,;
- SVQP
- SVWj@h
- _]^[YY
- Yf;F
- @_^][Y
- @_^][YY
- ^_][
- G(Pj
- tCVVWh3
- PPPP
- PPQP
- @jLY
- @_^][Y
- _^][
- j X_^

-]_^[
- _^][
- _^][
- SVW
- D_^][
- D$,P
- D$,P
- RPVQ
- RPWV
- RPQW
- D$`H
- VWQj
- _^][
- D$$j
- _^][
- FQWS
- _^][
- _^][Y
- t!WWW
- VWPj(
- t,SSSj
- Vj Y
- ^[_Y
- Y_^][Y
- YY_^[
- QSVW
- @_^[
- @_^]Y
- L$@Q
- w&r;
- w'r
- PVRQ
- [_^]
- _^][Y
- t$(h
- t:WPVU
- t$(h
- tnWVVU
- _^][
- _^][Y
- t/WW
- @_^][
- WVPP
- QQQRh
- QPQh
- _^][
- _^][Y
- _^][
- _^][
- SSSS
- PSSj
- _^][
- tK9^$t
- _^][
- tK9^$t
- >9~$_t
- V ;V

- SVSWj
- h|\th
- ht\th
- _^][
- D$ Ph
- PPPV
- L$ Q
- D$<PV
- PPPPV
- hX\th
- h@\th
- h \th
- t$,h
- QQSV
- _^][
- _^][
- RPRRR
- QQQQP
- D$ P
- _^][Y
- QPQj
- [_^]
- [_]^
- Wj,Y
- ;F(r
- _^][
- _^][
- bSVSj
- t@PPVh
- D$hPh
- D$$P
- D$XPh
- D$(P
- D$XPh
- D$dP
- D$XPh
- YY^[
- _^][
- s!V
- _^][
- _^][
- tThX
- jXh@
- < s}
- FVVj
- D$$P
- ^_][
- t$ P
- T$HYYU
- D$@Ph
- D$LP
- D$$P
- D$@Ph
- D$<P
- D$<Ph
- _^][YY
- WPVV

- GSWh
- D$$PSS
- D$,P
- $SWPj
- D$$P
- D$xP
- D$lPt
- D$,P
- QQQh
- QPQh?
- QQQh
- QPQh?
- QQQh
- QPQh?
- QPQh?
- D$<P
- D$tPhp
- D$,PQ
- RQh\\
- _^][
- D$<P
- t$(P
- D$ VWS
- D$<P
- D$DPP
- Pt(h
- D$DP
- PWWj
- D$,P
- D$$P
- @_^[
- QQSVW
- VVVV
-]@[^
- @_^[
- PWWWWWW
- <_^[
- @_^][
- D$TP
- v'j\tY
- L$<P
- D$$P
- PPPPW
- D$ SSSPh
- PjMV
- _^][
- _^][
- L$$V
- <.t
- YYPV
- r h<
- hx:g
- VWQ
- _^][
- YYPW
- l$hVW
- _][YY

- @[_^
- ^]_[Y
- t$$YY
- T$LY
- t.Jt
- (_^][
- D$@P
- D$ Ph
- $_^][
- >PhX
- G\tPQ
- VWj\t^
- QQPQ
- QQVW
- _^][
- ^[YY
- QQSV
- X_^]
- X_^][YY
- t"Vj
- tNVhm(g
- VWh$
- X_^[
- j Y;
- SSSWSS
- D$lPSSj
- t$hP
- D$$Ph
- D$$Ph
- X][_^
- Vj@Y
- [^_]
- Vj,Y
- X_^]
- X_^]
- X_^]
- X_^]
- @_^[
- VVVV
- D$(j
- D$ f
- WPjfj
- _^][
- D$(P
- D$$P
- _^][
- L$$P
- L$$P
- D$(P
- D$(B
- D$(<
- Y_^[
- `bss