Analysis report for sample: ee9ec3e175d9c4e460749297a3a2a0dc

This report has been generated by a set of tools for semi-supervised behavioral analysis of executables.

More information about these reports at **http://www.vallejo.cc**.

This work is licensed under a Creative Commons Attribution 4.0 International License. To view a copy of this license visit http://creativecommons.org/licenses/by/4.0/.

Report classification: 66426 (indicates the level of interest of the report, based on the amount of information collected about the sample).

Index

- Sample
- AV detections
- Original source url
- Virustotal url
- Yara matches
- Snapshot
- Threads tree
- Running processes
- Most interesting actions
- Most interesting strings
- Involved hosts
- Dns queries
- Connections and readable network traffic
- Threads behavioural information
- Malware processes' network events
- Sample's unpacked / injected modules

Sample

- md5: ee9ec3e175d9c4e460749297a3a2a0dc

AV detections

- Microsoft:
- Kaspersky:
- Symantec:
- Malwarebytes: Adware.ChinAd

Original source url

- hxxp://down.39adk.com/wnkt/setup_b303.exe

Virustotal url

- https://virustotal.com/es/file/1c3e1a0acbc4edf0493f846683597209e4ec5c01bb995eaaca38e9cba8e90574/analysis

Yara matches

The following yara rules have matched injected or unpacked modules's code or data areas.

Snapshot

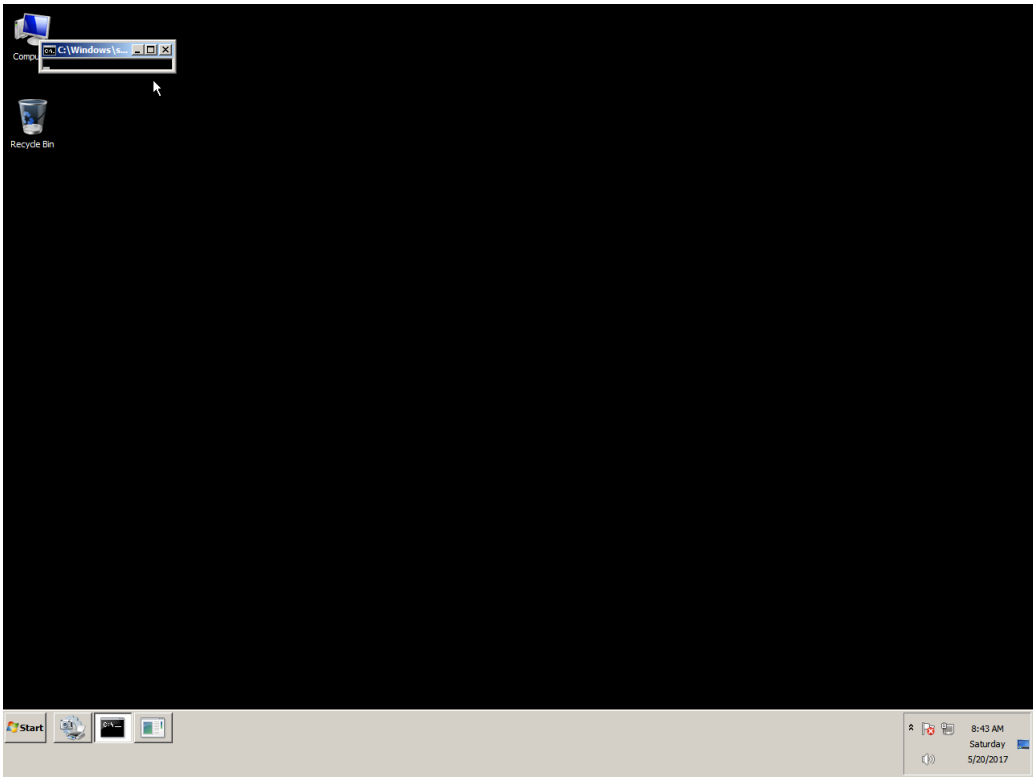

Threads tree

The following tree represents sample's threads. T<index> is an alias for sample's threads (numeration is done in the order of threads creation). P<index> is an alias for processes owning sample's threads.

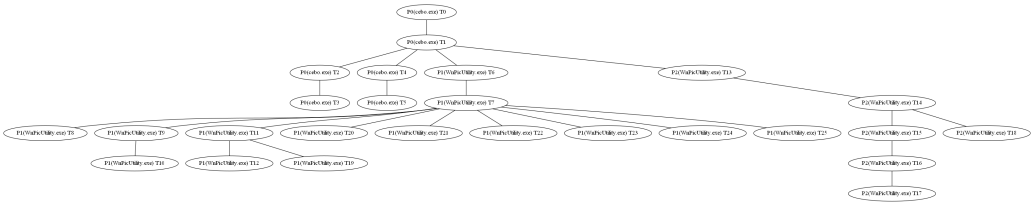

Running processes

Here it is the list of running processes after sample execution.

Processes with sample' threads

- Name cebo.exe Alias P0
- Name WnPicUtility.exe Alias P1
- Name WnPicUtility.exe Alias P2

Other processes

- Name System
- Name smss.exe
- Name csrss.exe
- Name wininit.exe
- Name csrss.exe
- Name winlogon.exe
- Name services.exe
- Name lsass.exe
- Name lsm.exe
- Name svchost.exe
- Name svchost.exe
- Name svchost.exe
- Name svchost.exe
- Name svchost.exe
- Name audiodg.exe
- Name TrustedInstaller.exe
- Name svchost.exe
- Name svchost.exe
- Name spoolsv.exe
- Name svchost.exe
- Name svchost.exe
- Name vmtoolse.exe
- Name svchost.exe
- Name dllhost.exe
- Name msdtc.exe
- Name sppsvc.exe
- Name taskhost.exe
- Name dwm.exe
- Name explorer.exe
- Name vmtoolse.exe
- Name SearchIndexer.exe
- Name svchost.exe
- Name wmpnetwk.exe
- Name WmiPrvSE.exe
- Name chrome.exe
- Name WmiPrvSE.exe
- Name SearchFilterHost.exe
- Name taskhost.exe
- Name SearchProtocolHost.exe
- Name cmd.exe
- Name conhost.exe
- Name UI0Detect.exe
- Name UI0Detect.exe
- Name pxxx.exe

- Name dllhost.exe
- Name cmd.exe
- Name conhost.exe
- Name cmd.exe
- Name conhost.exe
- Name int3.exe
- Name explorer.exe
- Name explorer.exe
- Name svchost.exe
- Name dllhost.exe
- Name WnPicUtility.exe
- Name WnPicUtility.exe
- Name WnPicViewer.exe
- Name cmd.exe
- Name conhost.exe
- Name UI0Detect.exe
- Name cmd.exe
- Name conhost.exe
- Name cmd.exe
- Name conhost.exe
- Name explorer.exe
- Name explorer.exe
- Name cmd.exe
- Name conhost.exe
- Name taskkill.exe
- Name mode.com
- Name conhost.exe
- Name WmiPrvSE.exe
- Name cmd.exe
- Name conhost.exe
- Name cmd.exe
- Name UI0Detect.exe
- Name conhost.exe
- Name int3.exe

Most interesting actions

The following list it's a collection of the most interesting events captured. This list is ordered by the score assigned to the event. In the section "Threads behavioural information" it's possible to find all the actions performed by each sample's thread ordered chronologically.

- RegSetValue (HKLM\\SOFTWARE\\Microsoft\\Windows\\CurrentVersion\\Uninstall\\\\URLInfoAbout Type: REG_SZ, Length: 260, Data: http://www.wn51.com/kantu/)
- RegSetValue (HKLM\\SOFTWARE\\Microsoft\\Windows\\CurrentVersion\\Uninstall\\\\Publisher Type: REG_SZ, Length: 260, Data: www.wn51.com)
- RegCreateKey (HKCU\\Software\\Classes\\.bw Desired Access: Set Value)
- RegCreateKey (HKCU\\Software\\Classes\\.bw Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
- RegSetValue (HKCU\\Software\\Classes\\.bw\\(Default) Type: REG_SZ, Length: 52, Data: WnPicture.bw)
- RegCreateKey (HKCU\\Software\\Classes\\.bw\\OpenWithProgids Desired Access: Set Value)
- RegCreateKey (HKCU\\Software\\Classes\\.bw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
- RegSetValue (HKCU\\Software\\Classes\\.bw\\OpenWithProgids\\WnPicture.bw Type: REG_NONE, Length: 0)
- RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bw\\DefaultIcon Desired Access: Set Value)
- RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
- RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bw\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
- RegSetValue (HKCU\\Software\\Classes\\WnPicture.bw\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
- RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bw\\shell\\open\\command Desired Access: Set Value)
- RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bw Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
- RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bw\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
- RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bw\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
- RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bw\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
- RegSetValue (HKCU\\Software\\Classes\\WnPicture.bw\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
- RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bw\\OpenWithProgids Desired Access: Set Value)
- RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
- RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
- RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bw\\OpenWithProgids\\WnPicture.bw Type: REG_NONE, Length: 0)
- RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bw\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
- RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bw\\UserChoice\\ProgId Type: REG_SZ, Length: 52, Data: WnPicture.bw)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.bw Type: REG_SZ, Length: 52, Data: WnPicture.bw)
- RegCreateKey (HKLM\\SYSTEM\\CurrentControlSet\\Services\\WnPicServiceV1 Desired Access: Set Value)
- RegCreateKey (HKLM\\System\\CurrentControlSet\\Services\\WnPicServiceV1 Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\System\\CurrentControlSet\\services\\WnPicServiceV1\\DisplayName Type: REG_SZ, Length: 74, Data: WnPicView Service)
- RegSetValue (HKLM\\System\\CurrentControlSet\\services\\WnPicServiceV1\\Description Type: REG_SZ, Length: 190, Data:)
- RegCreateKey (HKLM\\SYSTEM\\CurrentControlSet\\Services\\WnPicServiceV1\\Parameters Desired Access: Set Value)
- RegCreateKey (HKLM\\System\\CurrentControlSet\\Services\\WnPicServiceV1\\Parameters Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
- RegSetValue (HKLM\\System\\CurrentControlSet\\services\\WnPicServiceV1\\Parameters\\ServiceDll Type: REG_EXPAND_SZ, Length: 156, Data: C:\\Program Files\\WnPicture\\WnPicSP.dll)
- RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 256, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\,)
- RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 386, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\,)

• RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 472, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\Users\\Public\\Desktop\\.lnk.del,)

• RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 572, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\Users\\Public\\Desktop\\.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-PDF.lnk.del,)

• RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 670, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\Users\\Public\\Desktop\\.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-PDF.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-.lnk.del,)

• RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 814, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\Users\\Public\\Desktop\\.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-PDF.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del,)

• RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: <pid>, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\Users\\Public\\Desktop\\.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-PDF.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del,)

• RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 1.128, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\Users\\Public\\Desktop\\.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-PDF.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-.lnk.del,)

• RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 1.272, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\Users\\Public\\Desktop\\.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-PDF.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del,)

• RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 1.430, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\Users\\Public\\Desktop\\.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-PDF.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del,)

• RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 1.586, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\Users\\Public\\Desktop\\.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-PDF.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-.lnk.del,)

• RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 1.766, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\Users\\Public\\Desktop\\.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-PDF.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-.lnk.del, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Internet Explorer\\Quick Launch\\.lnk.del,)

• RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 1.960, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\Users\\Public\\Desktop\\.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-PDF.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-.lnk.del, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Internet Explorer\\Quick Launch\\.lnk.del, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Internet Explorer\\Quick Launch\\-PDF.lnk.del,)
• RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 2.152, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\Users\\Public\\Desktop\\.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-PDF.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-.lnk.del, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Internet Explorer\\Quick Launch\\.lnk.del, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Internet Explorer\\Quick Launch\\-PDF.lnk.del, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\I@)
• Process Create (C:\\Program Files\\WnPicture\\WnPicUtility.exe PID: P1, Command line: "C:\\Program Files\\WnPicture\\WnPicUtility.exe" InstallSpreadOperate cebo170520)
• Process Create (C:\\Program Files\\WnPicture\\WnPicUtility.exe PID: P2, Command line: "C:\\Program Files\\WnPicture\\WnPicUtility.exe" CreateStartMenu cebo170520,,cebo,2)
• RegSetValue (HKLM\\SOFTWARE\\Microsoft\\Windows\\CurrentVersion\\Uninstall\\\\UninstallString Type: REG_SZ, Length: 260, Data: C:\\Program Files\\WnPicture\\WnPicUninstall.exe)
• RegSetValue (HKLM\\SOFTWARE\\Microsoft\\Windows\\CurrentVersion\\Uninstall\\\\DisplayIcon Type: REG_SZ, Length: 260, Data: C:\\Program Files\\WnPicture\\WnPicViewer.exe)
• RegSetValue (HKLM\\SOFTWARE\\WnPicturemgr\\ServiceDll Type: REG_EXPAND_SZ, Length: 156, Data: C:\\Program Files\\WnPicture\\WnPicSP.dll)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.bmp\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.bmp\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.dib\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.dib\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jpg\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",4)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jpg\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jif\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jif\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jpeg\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jpeg\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jpe\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jpe\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.png\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",5)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.png\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.gif\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",3)

• RegSetValue (HKCU\\Software\\Classes\\WnPicture.gif\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ico\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",2)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ico\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.cur\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.cur\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.tif\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",7)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.tif\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.tiff\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.tiff\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.tga\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.tga\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.targa\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.targa\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pcx\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pcx\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.wap\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.wap\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.wbmp\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.wbmp\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.wbm\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.wbm\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.j2k\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.j2k\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.j2c\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.j2c\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jp2\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jp2\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ras\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)

• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ras\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pbm\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pbm\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pgm\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pgm\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ppm\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ppm\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.mng\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.mng\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jng\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jng\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.koa\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.koa\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.iff\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.iff\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.lbm\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.lbm\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pcd\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pcd\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.psd\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",6)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.psd\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.cut\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.cut\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.xbm\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.xbm\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.xpm\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.xpm\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.dds\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)

• RegSetValue (HKCU\\Software\\Classes\\WnPicture.dds\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.hdr\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.hdr\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.g3\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.g3\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.sgi\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.sgi\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.rgb\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.rgb\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.rgba\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.rgba\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.exr\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.exr\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pfm\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pfm\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pct\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pct\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pict\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pict\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pic\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pic\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.webp\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.webp\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jxr\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jxr\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.wdp\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.wdp\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.hdp\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)

• RegSetValue (HKCU\\Software\\Classes\\WnPicture.hdp\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ska\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ska\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pgx\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pgx\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.wmf\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.wmf\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.emf\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.emf\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.3fr\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.3fr\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.arw\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.arw\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.bay\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.bay\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.bmq\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.bmq\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.cap\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.cap\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.cine\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.cine\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.cr2\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.cr2\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.crw\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.crw\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.cs1\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.cs1\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.dc2\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)

• RegSetValue (HKCU\\Software\\Classes\\WnPicture.dc2\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.dcr\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.dcr\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.drf\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.drf\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.dsc\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.dsc\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.dng\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.dng\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.erf\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.erf\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.fff\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.fff\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ia\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ia\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.iiq\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.iiq\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.k25\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.k25\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.kc2\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.kc2\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.kdc\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.kdc\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.mdc\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.mdc\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.mef\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.mef\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.mos\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)

• RegSetValue (HKCU\\Software\\Classes\\WnPicture.mos\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.mrw\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.mrw\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.nef\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.nef\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.nrw\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.nrw\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.orf\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.orf\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pef\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pef\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ptx\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ptx\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pxn\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pxn\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.qtk\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.qtk\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.raf\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.raf\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.raw\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.raw\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.rdc\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.rdc\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.rw2\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.rw2\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.rwl\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.rwl\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.rwz\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)

• RegSetValue (HKCU\\Software\\Classes\\WnPicture.rwz\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.sr2\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.sr2\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.srf\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.srf\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.srw\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.srw\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.sti\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.sti\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.x3f\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.x3f\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pdf\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPDFViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pdf\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 200, Data: "C:\\Program Files\\WnPicture\\WnPDFViewer.exe" "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.xps\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPDFViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.xps\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 200, Data: "C:\\Program Files\\WnPicture\\WnPDFViewer.exe" "%1")
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.oxps\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPDFViewer.exe",1)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.oxps\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 200, Data: "C:\\Program Files\\WnPicture\\WnPDFViewer.exe" "%1")
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\ApplicationIcon Type: REG_SZ, Length: 192, Data: "C:\\Program Files\\WnPicture\\\\WnPicViewer.exe",0)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\LastInstallTime Type: REG_SZ, Length: 260, Data: 1495294938)
• RegSetValue (HKLM\\SOFTWARE\\V1BEYXRI\\LastInstallTime Type: REG_SZ, Length: 260, Data: 1495294938)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\InstallPath Type: REG_SZ, Length: 260, Data: C:\\Program Files\\WnPicture\\)
• RegSetValue (HKLM\\SOFTWARE\\Microsoft\\Windows\\CurrentVersion\\Uninstall\\\\DisplayName Type: REG_SZ, Length: 260, Data: 1.1)
• RegSetValue (HKLM\\SOFTWARE\\Microsoft\\Windows\\CurrentVersion\\Uninstall\\\\DisplayVersion Type: REG_SZ, Length: 260, Data: 1.1.9.05091)
• RegCreateKey (HKLM\\SoftWare\\WnPicturemgr Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKLM\\SOFTWARE\\WnPicturemgr\\ServiceName Type: REG_SZ, Length: 60, Data: WnPicServiceV1)
• RegCreateKey (HKLM\\SoftWare\\WnPicturemgr Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\SOFTWARE\\WnPicturemgr\\ServiceDisplayName Type: REG_SZ, Length: 72, Data: WnPicView Service)
• RegSetValue (HKLM\\SOFTWARE\\WnPicturemgr\\ServiceDescription Type: REG_SZ, Length: 188, Data:)
• RegSetValue (HKLM\\SOFTWARE\\Microsoft\\Windows NT\\CurrentVersion\\Svchost\\WnPicServiceV1 Type: REG_MULTI_SZ, Length: 30, Data: WnPicServiceV1)
• RegCreateKey (HKCR\\.bmp Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.bmp\\WnPictureBackup Type: REG_SZ, Length: 56, Data: Paint.Picture)
• RegCreateKey (HKCU\\Software\\Classes\\.bmp Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.bmp Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.bmp\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.bmp)
• RegCreateKey (HKCU\\Software\\Classes\\.bmp\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.bmp\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.bmp\\OpenWithProgids\\WnPicture.bmp Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmp\\DefaultIcon Desired Access: Set Value)

• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmp Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmp\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmp\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmp Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmp\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmp\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmp\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bmp\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bmp Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bmp\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bmp\\OpenWithProgids\\WnPicture.bmp Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bmp\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bmp\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.bmp)
• RegCreateKey (HKCR\\.dib Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.dib\\WnPictureBackup Type: REG_SZ, Length: 56, Data: Paint.Picture)
• RegCreateKey (HKCU\\Software\\Classes\\.dib Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.dib Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.dib\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.dib)
• RegCreateKey (HKCU\\Software\\Classes\\.dib\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.dib\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.dib\\OpenWithProgids\\WnPicture.dib Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dib\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dib Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dib\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dib\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dib Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dib\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dib\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dib\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dib\\OpenWithProgids Desired Access: Set Value)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dib Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dib\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dib\\OpenWithProgids\\WnPicture.dib Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dib\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dib\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.dib)
• RegCreateKey (HKCR\\.jpg Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.jpg\\WnPictureBackup Type: REG_SZ, Length: 36, Data: jpegfile)
• RegCreateKey (HKCU\\Software\\Classes\\.jpg Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jpg Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jpg\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.jpg)
• RegCreateKey (HKCU\\Software\\Classes\\.jpg\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jpg\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jpg\\OpenWithProgids\\WnPicture.jpg Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpg\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpg Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpg\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpg\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpg Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpg\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpg\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpg\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpg\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpg Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpg\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpg\\OpenWithProgids\\WnPicture.jpg Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpg\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpg\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.jpg)
• RegCreateKey (HKCU\\Software\\Classes\\.jif Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jif Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jif\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.jif)
• RegCreateKey (HKCU\\Software\\Classes\\.jif\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jif\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jif\\OpenWithProgids\\WnPicture.jif Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jif\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jif Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jif\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jif\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jif Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jif\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jif\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jif\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jif\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jif Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jif\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jif\\OpenWithProgids\\WnPicture.jif Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jif\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jif\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.jif)
• RegCreateKey (HKCR\\.jpeg Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.jpeg\\WnPictureBackup Type: REG_SZ, Length: 36, Data: jpegfile)
• RegCreateKey (HKCU\\Software\\Classes\\.jpeg Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jpeg Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jpeg\\(Default) Type: REG_SZ, Length: 60, Data: WnPicture.jpeg)
• RegCreateKey (HKCU\\Software\\Classes\\.jpeg\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jpeg\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jpeg\\OpenWithProgids\\WnPicture.jpeg Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpeg\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpeg Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpeg\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpeg\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpeg Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpeg\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpeg\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpeg\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpeg\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpeg Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpeg\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpeg\\OpenWithProgids\\WnPicture.jpeg Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpeg\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpeg\\UserChoice\\ProgId Type: REG_SZ, Length: 60, Data: WnPicture.jpeg)
• RegCreateKey (HKCR\\.jpe Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.jpe\\WnPictureBackup Type: REG_SZ, Length: 36, Data: jpegfile)
• RegCreateKey (HKCU\\Software\\Classes\\.jpe Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jpe Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jpe\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.jpe)
• RegCreateKey (HKCU\\Software\\Classes\\.jpe\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jpe\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jpe\\OpenWithProgids\\WnPicture.jpe Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpe\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpe Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpe\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpe\\shell\\open\\command Desired Access: Set Value)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpe Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpe\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpe\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpe\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpe\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpe Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpe\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpe\\OpenWithProgids\\WnPicture.jpe Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpe\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpe\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.jpe)
• RegCreateKey (HKCR\\.png Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.png\\WnPictureBackup Type: REG_SZ, Length: 32, Data: pngfile)
• RegCreateKey (HKCU\\Software\\Classes\\.png Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.png Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.png\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.png)
• RegCreateKey (HKCU\\Software\\Classes\\.png\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.png\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.png\\OpenWithProgids\\WnPicture.png Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.png\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.png Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.png\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.png\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.png Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.png\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.png\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.png\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.png\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.png Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.png\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.png\\OpenWithProgids\\WnPicture.png Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.png\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.png\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.png)
• RegCreateKey (HKCR\\.gif Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.gif\\WnPictureBackup Type: REG_SZ, Length: 32, Data: giffile)
• RegCreateKey (HKCU\\Software\\Classes\\.gif Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.gif Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.gif\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.gif)
• RegCreateKey (HKCU\\Software\\Classes\\.gif\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.gif\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.gif\\OpenWithProgids\\WnPicture.gif Type: REG_NONE, Length: 0)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.gif\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.gif Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.gif\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.gif\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.gif Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.gif\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.gif\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.gif\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.gif\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.gif Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.gif\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.gif\\OpenWithProgids\\WnPicture.gif Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.gif\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.gif\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.gif)
• RegCreateKey (HKCR\\.ico Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.ico\\WnPictureBackup Type: REG_SZ, Length: 32, Data: icofile)
• RegCreateKey (HKCU\\Software\\Classes\\.ico Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.ico Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ico\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.ico)
• RegCreateKey (HKCU\\Software\\Classes\\.ico\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.ico\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ico\\OpenWithProgids\\WnPicture.ico Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ico\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ico Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ico\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ico\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ico Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ico\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ico\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ico\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ico\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ico Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ico\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ico\\OpenWithProgids\\WnPicture.ico Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ico\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ico\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.ico)
• RegCreateKey (HKCR\\.cur Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.cur\\WnPictureBackup Type: REG_SZ, Length: 32, Data: curfile)
• RegCreateKey (HKCU\\Software\\Classes\\.cur Desired Access: Set Value)

• RegCreateKey (HKCU\\Software\\Classes\\.cur Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.cur\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.cur)
• RegCreateKey (HKCU\\Software\\Classes\\.cur\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.cur\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.cur\\OpenWithProgids\\WnPicture.cur Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cur\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cur Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cur\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cur\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cur Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cur\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cur\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cur\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cur\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cur Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cur\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cur\\OpenWithProgids\\WnPicture.cur Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cur\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cur\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.cur)
• RegCreateKey (HKCR\\.tif Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.tif\\WnPictureBackup Type: REG_SZ, Length: 72, Data: TIFImage.Document)
• RegCreateKey (HKCU\\Software\\Classes\\.tif Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.tif Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.tif\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.tif)
• RegCreateKey (HKCU\\Software\\Classes\\.tif\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.tif\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.tif\\OpenWithProgids\\WnPicture.tif Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tif\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tif Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tif\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tif\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tif Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tif\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tif\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tif\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tif\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tif Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tif\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tif\\OpenWithProgids\\WnPicture.tif Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tif\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tif\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.tif)
• RegCreateKey (HKCR\\.tiff Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.tiff\\WnPictureBackup Type: REG_SZ, Length: 72, Data: TIFImage.Document)
• RegCreateKey (HKCU\\Software\\Classes\\.tiff Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.tiff Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.tiff\\(Default) Type: REG_SZ, Length: 60, Data: WnPicture.tiff)
• RegCreateKey (HKCU\\Software\\Classes\\.tiff\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.tiff\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.tiff\\OpenWithProgids\\WnPicture.tiff Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tiff\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tiff Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tiff\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tiff\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tiff Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tiff\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tiff\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tiff\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tiff\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tiff Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tiff\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tiff\\OpenWithProgids\\WnPicture.tiff Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tiff\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tiff\\UserChoice\\ProgId Type: REG_SZ, Length: 60, Data: WnPicture.tiff)
• RegCreateKey (HKCU\\Software\\Classes\\.tga Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.tga Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.tga\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.tga)
• RegCreateKey (HKCU\\Software\\Classes\\.tga\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.tga\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.tga\\OpenWithProgids\\WnPicture.tga Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tga\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tga Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tga\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tga\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tga Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tga\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tga\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tga\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tga\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tga Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tga\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tga\\OpenWithProgids\\WnPicture.tga Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tga\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tga\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.tga)
• RegCreateKey (HKCU\\Software\\Classes\\.targa Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.targa Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.targa\\(Default) Type: REG_SZ, Length: 64, Data: WnPicture.targa)
• RegCreateKey (HKCU\\Software\\Classes\\.targa\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.targa\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.targa\\OpenWithProgids\\WnPicture.targa Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.targa\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.targa Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.targa\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.targa\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.targa Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.targa\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.targa\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.targa\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.targa\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.targa Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.targa\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.targa\\OpenWithProgids\\WnPicture.targa Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.targa\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.targa\\UserChoice\\ProgId Type: REG_SZ, Length: 64, Data: WnPicture.targa)
• RegCreateKey (HKCU\\Software\\Classes\\.pcx Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pcx Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pcx\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.pcx)
• RegCreateKey (HKCU\\Software\\Classes\\.pcx\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pcx\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pcx\\OpenWithProgids\\WnPicture.pcx Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcx\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcx Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcx\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcx\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcx Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcx\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcx\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcx\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pcx\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pcx Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pcx\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pcx\\OpenWithProgids\\WnPicture.pcx Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pcx\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pcx\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.pcx)
• RegCreateKey (HKCU\\Software\\Classes\\.wap Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.wap Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.wap\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.wap)
• RegCreateKey (HKCU\\Software\\Classes\\.wap\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.wap\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.wap\\OpenWithProgids\\WnPicture.wap Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wap\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wap Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wap\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wap\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wap Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wap\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wap\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wap\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wap\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wap Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wap\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wap\\OpenWithProgids\\WnPicture.wap Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wap\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wap\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.wap)
• RegCreateKey (HKCU\\Software\\Classes\\.wbmp Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.wbmp Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.wbmp\\(Default) Type: REG_SZ, Length: 60, Data: WnPicture.wbmp)
• RegCreateKey (HKCU\\Software\\Classes\\.wbmp\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.wbmp\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.wbmp\\OpenWithProgids\\WnPicture.wbmp Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbmp\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbmp Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbmp\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbmp\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbmp Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbmp\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbmp\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbmp\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wbmp\\OpenWithProgids Desired Access: Set Value)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wbmp Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wbmp\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wbmp\\OpenWithProgids\\WnPicture.wbmp Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wbmp\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wbmp\\UserChoice\\ProgId Type: REG_SZ, Length: 60, Data: WnPicture.wbmp)
• RegCreateKey (HKCU\\Software\\Classes\\.wbm Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.wbm Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.wbm\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.wbm)
• RegCreateKey (HKCU\\Software\\Classes\\.wbm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.wbm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.wbm\\OpenWithProgids\\WnPicture.wbm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbm\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbm\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbm\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbm Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbm\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbm\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbm\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wbm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wbm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wbm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wbm\\OpenWithProgids\\WnPicture.wbm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wbm\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wbm\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.wbm)
• RegCreateKey (HKCU\\Software\\Classes\\.j2k Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.j2k Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.j2k\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.j2k)
• RegCreateKey (HKCU\\Software\\Classes\\.j2k\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.j2k\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.j2k\\OpenWithProgids\\WnPicture.j2k Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2k\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2k Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2k\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2k\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2k Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2k\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2k\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2k\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.j2k\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.j2k Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.j2k\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.j2k\\OpenWithProgids\\WnPicture.j2k Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.j2k\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.j2k\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.j2k)
• RegCreateKey (HKCU\\Software\\Classes\\.j2c Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.j2c Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.j2c\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.j2c)
• RegCreateKey (HKCU\\Software\\Classes\\.j2c\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.j2c\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.j2c\\OpenWithProgids\\WnPicture.j2c Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2c\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2c Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2c\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2c\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2c Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2c\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2c\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2c\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.j2c\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.j2c Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.j2c\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.j2c\\OpenWithProgids\\WnPicture.j2c Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.j2c\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.j2c\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.j2c)
• RegCreateKey (HKCU\\Software\\Classes\\.jp2 Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jp2 Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jp2\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.jp2)
• RegCreateKey (HKCU\\Software\\Classes\\.jp2\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jp2\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jp2\\OpenWithProgids\\WnPicture.jp2 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jp2\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jp2 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jp2\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jp2\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jp2 Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jp2\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jp2\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jp2\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jp2\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jp2 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jp2\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jp2\\OpenWithProgids\\WnPicture.jp2 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jp2\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jp2\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.jp2)
• RegCreateKey (HKCU\\Software\\Classes\\.ras Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.ras Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ras\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.ras)
• RegCreateKey (HKCU\\Software\\Classes\\.ras\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.ras\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ras\\OpenWithProgids\\WnPicture.ras Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ras\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ras Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ras\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ras\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ras Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ras\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ras\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ras\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ras\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ras Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ras\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ras\\OpenWithProgids\\WnPicture.ras Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ras\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ras\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.ras)
• RegCreateKey (HKCU\\Software\\Classes\\.pbm Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pbm Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pbm\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.pbm)
• RegCreateKey (HKCU\\Software\\Classes\\.pbm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pbm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pbm\\OpenWithProgids\\WnPicture.pbm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pbm\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pbm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pbm\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pbm\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pbm Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pbm\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pbm\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pbm\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pbm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pbm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pbm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pbm\\OpenWithProgids\\WnPicture.pbm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pbm\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pbm\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.pbm)
• RegCreateKey (HKCU\\Software\\Classes\\.pbm Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\.pbm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pbm\\DefaultIcon Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pbm\\shell\\open\\command Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\.pgm Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pgm Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pgm\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.pgm)
• RegCreateKey (HKCU\\Software\\Classes\\.pgm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pgm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pgm\\OpenWithProgids\\WnPicture.pgm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgm\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgm\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgm\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgm Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgm\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgm\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgm\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgm\\OpenWithProgids\\WnPicture.pgm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgm\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgm\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.pgm)
• RegCreateKey (HKCU\\Software\\Classes\\.pgm Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\.pgm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgm\\DefaultIcon Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgm\\shell\\open\\command Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\.ppm Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.ppm Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ppm\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.ppm)
• RegCreateKey (HKCU\\Software\\Classes\\.ppm\\OpenWithProgids Desired Access: Set Value)

• RegCreateKey (HKCU\\Software\\Classes\\.ppm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ppm\\OpenWithProgids\\WnPicture.ppm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ppm\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ppm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ppm\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ppm\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ppm Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ppm\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ppm\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ppm\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ppm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ppm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ppm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ppm\\OpenWithProgids\\WnPicture.ppm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ppm\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ppm\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.ppm)
• RegCreateKey (HKCU\\Software\\Classes\\.ppm Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\.ppm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ppm\\DefaultIcon Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ppm\\shell\\open\\command Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\.mng Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.mng Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.mng\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.mng)
• RegCreateKey (HKCU\\Software\\Classes\\.mng\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.mng\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.mng\\OpenWithProgids\\WnPicture.mng Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mng\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mng Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mng\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mng\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mng Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mng\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mng\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mng\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mng\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mng Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mng\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mng\\OpenWithProgids\\WnPicture.mng Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mng\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mng\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.mng)
• RegCreateKey (HKCU\\Software\\Classes\\.jng Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jng Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jng\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.jng)
• RegCreateKey (HKCU\\Software\\Classes\\.jng\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jng\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jng\\OpenWithProgids\\WnPicture.jng Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jng\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jng Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jng\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jng\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jng Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jng\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jng\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jng\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jng\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jng Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jng\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jng\\OpenWithProgids\\WnPicture.jng Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jng\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jng\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.jng)
• RegCreateKey (HKCU\\Software\\Classes\\.koa Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.koa Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.koa\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.koa)
• RegCreateKey (HKCU\\Software\\Classes\\.koa\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.koa\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.koa\\OpenWithProgids\\WnPicture.koa Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.koa\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.koa Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.koa\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.koa\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.koa Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.koa\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.koa\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.koa\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.koa\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.koa Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.koa\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.koa\\OpenWithProgids\\WnPicture.koa Type: REG_NONE, Length: 0)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.koa\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.koa\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.koa)
• RegCreateKey (HKCU\\Software\\Classes\\.iff Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.iff Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.iff\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.iff)
• RegCreateKey (HKCU\\Software\\Classes\\.iff\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.iff\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.iff\\OpenWithProgids\\WnPicture.iff Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iff\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iff Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iff\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iff\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iff Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iff\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iff\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iff\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.iff\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.iff Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.iff\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.iff\\OpenWithProgids\\WnPicture.iff Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.iff\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.iff\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.iff)
• RegCreateKey (HKCU\\Software\\Classes\\.lbm Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.lbm Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.lbm\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.lbm)
• RegCreateKey (HKCU\\Software\\Classes\\.lbm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.lbm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.lbm\\OpenWithProgids\\WnPicture.lbm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.lbm\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.lbm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.lbm\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.lbm\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.lbm Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.lbm\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.lbm\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.lbm\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.lbm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.lbm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.lbm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.lbm\\OpenWithProgids\\WnPicture.lbm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.lbm\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.lbm\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.lbm)
• RegCreateKey (HKCU\\Software\\Classes\\.pcd Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pcd Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pcd\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.pcd)
• RegCreateKey (HKCU\\Software\\Classes\\.pcd\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pcd\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pcd\\OpenWithProgids\\WnPicture.pcd Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcd\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcd Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcd\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcd\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcd Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcd\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcd\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcd\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pcd\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pcd Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pcd\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pcd\\OpenWithProgids\\WnPicture.pcd Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pcd\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pcd\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.pcd)
• RegCreateKey (HKCU\\Software\\Classes\\.psd Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.psd Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.psd\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.psd)
• RegCreateKey (HKCU\\Software\\Classes\\.psd\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.psd\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.psd\\OpenWithProgids\\WnPicture.psd Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.psd\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.psd Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.psd\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.psd\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.psd Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.psd\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.psd\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.psd\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.psd\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.psd Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.psd\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.psd\\OpenWithProgids\\WnPicture.psd Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.psd\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.psd\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.psd)
• RegCreateKey (HKCU\\Software\\Classes\\.cut Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.cut Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.cut\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.cut)
• RegCreateKey (HKCU\\Software\\Classes\\.cut\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.cut\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.cut\\OpenWithProgids\\WnPicture.cut Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cut\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cut Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cut\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cut\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cut Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cut\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cut\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cut\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cut\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cut Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cut\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cut\\OpenWithProgids\\WnPicture.cut Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cut\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cut\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.cut)
• RegCreateKey (HKCU\\Software\\Classes\\.xbm Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.xbm Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.xbm\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.xbm)
• RegCreateKey (HKCU\\Software\\Classes\\.xbm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.xbm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.xbm\\OpenWithProgids\\WnPicture.xbm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xbm\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xbm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xbm\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xbm\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xbm Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xbm\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xbm\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xbm\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xbm\\OpenWithProgids Desired Access: Set Value)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xbm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xbm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xbm\\OpenWithProgids\\WnPicture.xbm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xbm\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xbm\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.xbm)
• RegCreateKey (HKCU\\Software\\Classes\\.xpm Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.xpm Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.xpm\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.xpm)
• RegCreateKey (HKCU\\Software\\Classes\\.xpm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.xpm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.xpm\\OpenWithProgids\\WnPicture.xpm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xpm\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xpm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xpm\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xpm\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xpm Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xpm\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xpm\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xpm\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xpm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xpm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xpm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xpm\\OpenWithProgids\\WnPicture.xpm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xpm\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xpm\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.xpm)
• RegCreateKey (HKCU\\Software\\Classes\\.dds Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.dds Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.dds\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.dds)
• RegCreateKey (HKCU\\Software\\Classes\\.dds\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.dds\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.dds\\OpenWithProgids\\WnPicture.dds Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dds\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dds Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dds\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dds\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dds Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dds\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dds\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dds\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dds\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dds Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dds\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dds\\OpenWithProgids\\WnPicture.dds Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dds\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dds\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.dds)
• RegCreateKey (HKCU\\Software\\Classes\\.hdr Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.hdr Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.hdr\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.hdr)
• RegCreateKey (HKCU\\Software\\Classes\\.hdr\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.hdr\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.hdr\\OpenWithProgids\\WnPicture.hdr Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdr\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdr Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdr\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdr\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdr Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdr\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdr\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdr\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.hdr\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.hdr Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.hdr\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.hdr\\OpenWithProgids\\WnPicture.hdr Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.hdr\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.hdr\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.hdr)
• RegCreateKey (HKCU\\Software\\Classes\\.g3 Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.g3 Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.g3\\(Default) Type: REG_SZ, Length: 52, Data: WnPicture.g3)
• RegCreateKey (HKCU\\Software\\Classes\\.g3\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.g3\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.g3\\OpenWithProgids\\WnPicture.g3 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.g3\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.g3 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.g3\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.g3\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.g3 Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.g3\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.g3\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.g3\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.g3\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.g3 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.g3\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.g3\\OpenWithProgids\\WnPicture.g3 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.g3\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.g3\\UserChoice\\ProgId Type: REG_SZ, Length: 52, Data: WnPicture.g3)
• RegCreateKey (HKCU\\Software\\Classes\\.sgi Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.sgi Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.sgi\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.sgi)
• RegCreateKey (HKCU\\Software\\Classes\\.sgi\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.sgi\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.sgi\\OpenWithProgids\\WnPicture.sgi Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sgi\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sgi Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sgi\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sgi\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sgi Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sgi\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sgi\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sgi\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sgi\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sgi Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sgi\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sgi\\OpenWithProgids\\WnPicture.sgi Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sgi\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sgi\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.sgi)
• RegCreateKey (HKCU\\Software\\Classes\\.rgb Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.rgb Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.rgb\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.rgb)
• RegCreateKey (HKCU\\Software\\Classes\\.rgb\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.rgb\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.rgb\\OpenWithProgids\\WnPicture.rgb Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgb\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgb Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgb\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgb\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgb Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgb\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgb\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgb\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rgb\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rgb Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rgb\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rgb\\OpenWithProgids\\WnPicture.rgb Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rgb\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rgb\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.rgb)
• RegCreateKey (HKCU\\Software\\Classes\\.rgba Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.rgba Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.rgba\\(Default) Type: REG_SZ, Length: 60, Data: WnPicture.rgba)
• RegCreateKey (HKCU\\Software\\Classes\\.rgba\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.rgba\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.rgba\\OpenWithProgids\\WnPicture.rgba Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgba\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgba Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgba\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgba\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgba Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgba\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgba\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgba\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rgba\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rgba Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rgba\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rgba\\OpenWithProgids\\WnPicture.rgba Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rgba\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rgba\\UserChoice\\ProgId Type: REG_SZ, Length: 60, Data: WnPicture.rgba)
• RegCreateKey (HKCU\\Software\\Classes\\.exr Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.exr Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.exr\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.exr)
• RegCreateKey (HKCU\\Software\\Classes\\.exr\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.exr\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.exr\\OpenWithProgids\\WnPicture.exr Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.exr\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.exr Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.exr\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.exr\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.exr Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.exr\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.exr\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.exr\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.exr\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.exr Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.exr\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.exr\\OpenWithProgids\\WnPicture.exr Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.exr\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.exr\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.exr)
• RegCreateKey (HKCR\\.pfm Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.pfm\\WnPictureBackup Type: REG_SZ, Length: 32, Data: pfmfile)
• RegCreateKey (HKCU\\Software\\Classes\\.pfm Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pfm Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pfm\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.pfm)
• RegCreateKey (HKCU\\Software\\Classes\\.pfm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pfm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pfm\\OpenWithProgids\\WnPicture.pfm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pfm\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pfm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pfm\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pfm\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pfm Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pfm\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pfm\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pfm\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pfm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pfm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pfm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pfm\\OpenWithProgids\\WnPicture.pfm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pfm\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pfm\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.pfm)
• RegCreateKey (HKCU\\Software\\Classes\\.pct Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pct Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pct\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.pct)
• RegCreateKey (HKCU\\Software\\Classes\\.pct\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pct\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pct\\OpenWithProgids\\WnPicture.pct Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pct\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pct Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pct\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pct\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pct Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pct\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pct\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pct\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pct\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pct Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pct\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pct\\OpenWithProgids\\WnPicture.pct Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pct\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pct\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.pct)
• RegCreateKey (HKCU\\Software\\Classes\\.pict Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pict Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pict\\(Default) Type: REG_SZ, Length: 60, Data: WnPicture.pict)
• RegCreateKey (HKCU\\Software\\Classes\\.pict\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pict\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pict\\OpenWithProgids\\WnPicture.pict Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pict\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pict Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pict\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pict\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pict Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pict\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pict\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pict\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pict\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pict Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pict\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pict\\OpenWithProgids\\WnPicture.pict Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pict\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pict\\UserChoice\\ProgId Type: REG_SZ, Length: 60, Data: WnPicture.pict)
• RegCreateKey (HKCU\\Software\\Classes\\.pic Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pic Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pic\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.pic)
• RegCreateKey (HKCU\\Software\\Classes\\.pic\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pic\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pic\\OpenWithProgids\\WnPicture.pic Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pic\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pic Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pic\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pic\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pic Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pic\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pic\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pic\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pic\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pic Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pic\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pic\\OpenWithProgids\\WnPicture.pic Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pic\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pic\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.pic)
• RegCreateKey (HKCU\\Software\\Classes\\.webp Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.webp Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.webp\\(Default) Type: REG_SZ, Length: 60, Data: WnPicture.webp)
• RegCreateKey (HKCU\\Software\\Classes\\.webp\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.webp\\OpenWithProgids Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.webp\\OpenWithProgids\\WnPicture.webp Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.webp\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.webp Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.webp\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.webp\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.webp Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.webp\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.webp\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.webp\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.webp\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.webp Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.webp\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.webp\\OpenWithProgids\\WnPicture.webp Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.webp\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.webp\\UserChoice\\ProgId Type: REG_SZ, Length: 60, Data: WnPicture.webp)
• RegCreateKey (HKCU\\Software\\Classes\\.jxr Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jxr Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jxr\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.jxr)
• RegCreateKey (HKCU\\Software\\Classes\\.jxr\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jxr\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jxr\\OpenWithProgids\\WnPicture.jxr Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jxr\\DefaultIcon Desired Access: Set Value)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jxr Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jxr\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jxr\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jxr Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jxr\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jxr\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jxr\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jxr\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jxr Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jxr\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jxr\\OpenWithProgids\\WnPicture.jxr Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jxr\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jxr\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.jxr)
• RegCreateKey (HKCR\\.wdp Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.wdp\\WnPictureBackup Type: REG_SZ, Length: 32, Data: wdpfile)
• RegCreateKey (HKCU\\Software\\Classes\\.wdp Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.wdp Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.wdp\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.wdp)
• RegCreateKey (HKCU\\Software\\Classes\\.wdp\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.wdp\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.wdp\\OpenWithProgids\\WnPicture.wdp Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wdp\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wdp Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wdp\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wdp\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wdp Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wdp\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wdp\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wdp\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wdp\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wdp Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wdp\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wdp\\OpenWithProgids\\WnPicture.wdp Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wdp\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wdp\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.wdp)
• RegCreateKey (HKCU\\Software\\Classes\\.hdp Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.hdp Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.hdp\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.hdp)
• RegCreateKey (HKCU\\Software\\Classes\\.hdp\\OpenWithProgids Desired Access: Set Value)

• RegCreateKey (HKCU\\Software\\Classes\\.hdp\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.hdp\\OpenWithProgids\\WnPicture.hdp Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdp\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdp Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdp\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdp\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdp Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdp\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdp\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdp\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.hdp\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.hdp Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.hdp\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.hdp\\OpenWithProgids\\WnPicture.hdp Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.hdp\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.hdp\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.hdp)
• RegCreateKey (HKCU\\Software\\Classes\\.ska Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.ska Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ska\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.ska)
• RegCreateKey (HKCU\\Software\\Classes\\.ska\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.ska\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ska\\OpenWithProgids\\WnPicture.ska Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ska\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ska Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ska\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ska\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ska Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ska\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ska\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ska\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ska\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ska Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ska\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ska\\OpenWithProgids\\WnPicture.ska Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ska\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ska\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.ska)
• RegCreateKey (HKCU\\Software\\Classes\\.pgx Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pgx Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pgx\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.pgx)

• RegCreateKey (HKCU\\Software\\Classes\\.pgx\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pgx\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pgx\\OpenWithProgids\\WnPicture.pgx Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgx\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgx Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgx\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgx\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgx Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgx\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgx\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgx\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgx\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgx Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgx\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgx\\OpenWithProgids\\WnPicture.pgx Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgx\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgx\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.pgx)
• RegCreateKey (HKCR\\.wmf Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.wmf\\WnPictureBackup Type: REG_SZ, Length: 32, Data: wmffile)
• RegCreateKey (HKCU\\Software\\Classes\\.wmf Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.wmf Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.wmf\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.wmf)
• RegCreateKey (HKCU\\Software\\Classes\\.wmf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.wmf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.wmf\\OpenWithProgids\\WnPicture.wmf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wmf\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wmf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wmf\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wmf\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wmf Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wmf\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wmf\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wmf\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wmf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wmf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wmf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wmf\\OpenWithProgids\\WnPicture.wmf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wmf\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wmf\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.wmf)

• RegCreateKey (HKCR\\.emf Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.emf\\WnPictureBackup Type: REG_SZ, Length: 32, Data: emffile)
• RegCreateKey (HKCU\\Software\\Classes\\.emf Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.emf Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.emf\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.emf)
• RegCreateKey (HKCU\\Software\\Classes\\.emf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.emf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.emf\\OpenWithProgids\\WnPicture.emf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.emf\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.emf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.emf\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.emf\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.emf Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.emf\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.emf\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.emf\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.emf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.emf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.emf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.emf\\OpenWithProgids\\WnPicture.emf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.emf\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.emf\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.emf)
• RegCreateKey (HKCU\\Software\\Classes\\.3fr Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.3fr Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.3fr\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.3fr)
• RegCreateKey (HKCU\\Software\\Classes\\.3fr\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.3fr\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.3fr\\OpenWithProgids\\WnPicture.3fr Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.3fr\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.3fr Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.3fr\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.3fr\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.3fr Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.3fr\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.3fr\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.3fr\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.3fr\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.3fr Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.3fr\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.3fr\\OpenWithProgids\\WnPicture.3fr Type: REG_NONE, Length: 0)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.3fr\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.3fr\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.3fr)
• RegCreateKey (HKCU\\Software\\Classes\\.arw Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.arw Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.arw\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.arw)
• RegCreateKey (HKCU\\Software\\Classes\\.arw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.arw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.arw\\OpenWithProgids\\WnPicture.arw Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.arw\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.arw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.arw\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.arw\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.arw Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.arw\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.arw\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.arw\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.arw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.arw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.arw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.arw\\OpenWithProgids\\WnPicture.arw Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.arw\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.arw\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.arw)
• RegCreateKey (HKCU\\Software\\Classes\\.bay Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.bay Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.bay\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.bay)
• RegCreateKey (HKCU\\Software\\Classes\\.bay\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.bay\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.bay\\OpenWithProgids\\WnPicture.bay Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bay\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bay Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bay\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bay\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bay Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bay\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bay\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bay\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bay\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bay Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bay\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bay\\OpenWithProgids\\WnPicture.bay Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bay\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bay\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.bay)
• RegCreateKey (HKCU\\Software\\Classes\\.bmq Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.bmq Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.bmq\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.bmq)
• RegCreateKey (HKCU\\Software\\Classes\\.bmq\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.bmq\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.bmq\\OpenWithProgids\\WnPicture.bmq Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmq\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmq Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmq\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmq\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmq Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmq\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmq\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmq\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bmq\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bmq Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bmq\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bmq\\OpenWithProgids\\WnPicture.bmq Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bmq\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bmq\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.bmq)
• RegCreateKey (HKCU\\Software\\Classes\\.cap Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.cap Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.cap\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.cap)
• RegCreateKey (HKCU\\Software\\Classes\\.cap\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.cap\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.cap\\OpenWithProgids\\WnPicture.cap Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cap\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cap Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cap\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cap\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cap Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cap\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cap\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cap\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cap\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cap Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cap\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cap\\OpenWithProgids\\WnPicture.cap Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cap\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cap\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.cap)
• RegCreateKey (HKCU\\Software\\Classes\\.cine Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.cine Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.cine\\(Default) Type: REG_SZ, Length: 60, Data: WnPicture.cine)
• RegCreateKey (HKCU\\Software\\Classes\\.cine\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.cine\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.cine\\OpenWithProgids\\WnPicture.cine Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cine\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cine Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cine\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cine\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cine Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cine\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cine\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cine\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cine\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cine Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cine\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cine\\OpenWithProgids\\WnPicture.cine Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cine\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cine\\UserChoice\\ProgId Type: REG_SZ, Length: 60, Data: WnPicture.cine)
• RegCreateKey (HKCU\\Software\\Classes\\.cr2 Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.cr2 Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.cr2\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.cr2)
• RegCreateKey (HKCU\\Software\\Classes\\.cr2\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.cr2\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.cr2\\OpenWithProgids\\WnPicture.cr2 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cr2\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cr2 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cr2\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cr2\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cr2 Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cr2\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cr2\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cr2\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cr2\\OpenWithProgids Desired Access: Set Value)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cr2 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cr2\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cr2\\OpenWithProgids\\WnPicture.cr2 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cr2\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cr2\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.cr2)
• RegCreateKey (HKCU\\Software\\Classes\\.crw Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.crw Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.crw\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.crw)
• RegCreateKey (HKCU\\Software\\Classes\\.crw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.crw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.crw\\OpenWithProgids\\WnPicture.crw Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.crw\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.crw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.crw\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.crw\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.crw Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.crw\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.crw\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.crw\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.crw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.crw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.crw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.crw\\OpenWithProgids\\WnPicture.crw Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.crw\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.crw\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.crw)
• RegCreateKey (HKCU\\Software\\Classes\\.cs1 Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.cs1 Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.cs1\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.cs1)
• RegCreateKey (HKCU\\Software\\Classes\\.cs1\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.cs1\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.cs1\\OpenWithProgids\\WnPicture.cs1 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cs1\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cs1 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cs1\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cs1\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cs1 Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cs1\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cs1\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cs1\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cs1\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cs1 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cs1\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cs1\\OpenWithProgids\\WnPicture.cs1 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cs1\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cs1\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.cs1)
• RegCreateKey (HKCU\\Software\\Classes\\.dc2 Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.dc2 Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.dc2\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.dc2)
• RegCreateKey (HKCU\\Software\\Classes\\.dc2\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.dc2\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.dc2\\OpenWithProgids\\WnPicture.dc2 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dc2\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dc2 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dc2\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dc2\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dc2 Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dc2\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dc2\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dc2\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dc2\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dc2 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dc2\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dc2\\OpenWithProgids\\WnPicture.dc2 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dc2\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dc2\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.dc2)
• RegCreateKey (HKCU\\Software\\Classes\\.dcr Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.dcr Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.dcr\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.dcr)
• RegCreateKey (HKCU\\Software\\Classes\\.dcr\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.dcr\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.dcr\\OpenWithProgids\\WnPicture.dcr Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dcr\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dcr Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dcr\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dcr\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dcr Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dcr\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dcr\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dcr\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dcr\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dcr Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dcr\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dcr\\OpenWithProgids\\WnPicture.dcr Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dcr\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dcr\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.dcr)
• RegCreateKey (HKCU\\Software\\Classes\\.drf Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.drf Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.drf\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.drf)
• RegCreateKey (HKCU\\Software\\Classes\\.drf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.drf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.drf\\OpenWithProgids\\WnPicture.drf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.drf\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.drf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.drf\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.drf\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.drf Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.drf\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.drf\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.drf\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.drf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.drf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.drf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.drf\\OpenWithProgids\\WnPicture.drf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.drf\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.drf\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.drf)
• RegCreateKey (HKCU\\Software\\Classes\\.dsc Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.dsc Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.dsc\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.dsc)
• RegCreateKey (HKCU\\Software\\Classes\\.dsc\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.dsc\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.dsc\\OpenWithProgids\\WnPicture.dsc Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dsc\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dsc Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dsc\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dsc\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dsc Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dsc\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dsc\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dsc\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dsc\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dsc Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dsc\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dsc\\OpenWithProgids\\WnPicture.dsc Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dsc\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dsc\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.dsc)
• RegCreateKey (HKCU\\Software\\Classes\\.dng Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.dng Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.dng\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.dng)
• RegCreateKey (HKCU\\Software\\Classes\\.dng\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.dng\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.dng\\OpenWithProgids\\WnPicture.dng Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dng\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dng Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dng\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dng\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dng Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dng\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dng\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dng\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dng\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dng Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dng\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dng\\OpenWithProgids\\WnPicture.dng Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dng\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dng\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.dng)
• RegCreateKey (HKCU\\Software\\Classes\\.erf Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.erf Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.erf\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.erf)
• RegCreateKey (HKCU\\Software\\Classes\\.erf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.erf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.erf\\OpenWithProgids\\WnPicture.erf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.erf\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.erf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.erf\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.erf\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.erf Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.erf\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.erf\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.erf\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.erf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.erf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.erf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.erf\\OpenWithProgids\\WnPicture.erf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.erf\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.erf\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.erf)
• RegCreateKey (HKCU\\Software\\Classes\\.fff Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.fff Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.fff\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.fff)
• RegCreateKey (HKCU\\Software\\Classes\\.fff\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.fff\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.fff\\OpenWithProgids\\WnPicture.fff Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.fff\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.fff Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.fff\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.fff\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.fff Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.fff\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.fff\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.fff\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.fff\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.fff Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.fff\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.fff\\OpenWithProgids\\WnPicture.fff Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.fff\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.fff\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.fff)
• RegCreateKey (HKCU\\Software\\Classes\\.ia Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.ia Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ia\\(Default) Type: REG_SZ, Length: 52, Data: WnPicture.ia)
• RegCreateKey (HKCU\\Software\\Classes\\.ia\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.ia\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ia\\OpenWithProgids\\WnPicture.ia Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ia\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ia Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ia\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ia\\shell\\open\\command Desired Access: Set Value)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ia Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ia\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ia\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ia\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ia\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ia Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ia\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ia\\OpenWithProgids\\WnPicture.ia Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ia\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ia\\UserChoice\\ProgId Type: REG_SZ, Length: 52, Data: WnPicture.ia)
• RegCreateKey (HKCU\\Software\\Classes\\.iiq Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.iiq Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.iiq\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.iiq)
• RegCreateKey (HKCU\\Software\\Classes\\.iiq\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.iiq\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.iiq\\OpenWithProgids\\WnPicture.iiq Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iiq\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iiq Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iiq\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iiq\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iiq Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iiq\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iiq\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iiq\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.iiq\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.iiq Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.iiq\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.iiq\\OpenWithProgids\\WnPicture.iiq Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.iiq\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.iiq\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.iiq)
• RegCreateKey (HKCU\\Software\\Classes\\.k25 Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.k25 Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.k25\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.k25)
• RegCreateKey (HKCU\\Software\\Classes\\.k25\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.k25\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.k25\\OpenWithProgids\\WnPicture.k25 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.k25\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.k25 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.k25\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.k25\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.k25 Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.k25\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.k25\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.k25\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.k25\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.k25 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.k25\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.k25\\OpenWithProgids\\WnPicture.k25 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.k25\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.k25\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.k25)
• RegCreateKey (HKCU\\Software\\Classes\\.kc2 Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.kc2 Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.kc2\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.kc2)
• RegCreateKey (HKCU\\Software\\Classes\\.kc2\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.kc2\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.kc2\\OpenWithProgids\\WnPicture.kc2 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kc2\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kc2 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kc2\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kc2\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kc2 Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kc2\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kc2\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kc2\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.kc2\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.kc2 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.kc2\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.kc2\\OpenWithProgids\\WnPicture.kc2 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.kc2\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.kc2\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.kc2)
• RegCreateKey (HKCU\\Software\\Classes\\.kdc Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.kdc Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.kdc\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.kdc)
• RegCreateKey (HKCU\\Software\\Classes\\.kdc\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.kdc\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.kdc\\OpenWithProgids\\WnPicture.kdc Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kdc\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kdc Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kdc\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kdc\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kdc Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kdc\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kdc\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kdc\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.kdc\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.kdc Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.kdc\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.kdc\\OpenWithProgids\\WnPicture.kdc Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.kdc\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.kdc\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.kdc)
• RegCreateKey (HKCU\\Software\\Classes\\.mdc Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.mdc Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.mdc\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.mdc)
• RegCreateKey (HKCU\\Software\\Classes\\.mdc\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.mdc\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.mdc\\OpenWithProgids\\WnPicture.mdc Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mdc\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mdc Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mdc\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mdc\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mdc Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mdc\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mdc\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mdc\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mdc\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mdc Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mdc\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mdc\\OpenWithProgids\\WnPicture.mdc Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mdc\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mdc\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.mdc)
• RegCreateKey (HKCU\\Software\\Classes\\.mef Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.mef Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.mef\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.mef)
• RegCreateKey (HKCU\\Software\\Classes\\.mef\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.mef\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.mef\\OpenWithProgids\\WnPicture.mef Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mef\\DefaultIcon Desired Access: Set Value)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mef Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mef\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mef\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mef Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mef\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mef\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mef\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mef\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mef Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mef\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mef\\OpenWithProgids\\WnPicture.mef Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mef\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mef\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.mef)
• RegCreateKey (HKCU\\Software\\Classes\\.mos Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.mos Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.mos\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.mos)
• RegCreateKey (HKCU\\Software\\Classes\\.mos\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.mos\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.mos\\OpenWithProgids\\WnPicture.mos Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mos\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mos Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mos\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mos\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mos Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mos\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mos\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mos\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mos\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mos Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mos\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mos\\OpenWithProgids\\WnPicture.mos Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mos\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mos\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.mos)
• RegCreateKey (HKCU\\Software\\Classes\\.mrw Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.mrw Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.mrw\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.mrw)
• RegCreateKey (HKCU\\Software\\Classes\\.mrw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.mrw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.mrw\\OpenWithProgids\\WnPicture.mrw Type: REG_NONE, Length: 0)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mrw\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mrw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mrw\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mrw\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mrw Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mrw\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mrw\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mrw\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mrw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mrw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mrw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mrw\\OpenWithProgids\\WnPicture.mrw Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mrw\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mrw\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.mrw)
• RegCreateKey (HKCU\\Software\\Classes\\.nef Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.nef Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.nef\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.nef)
• RegCreateKey (HKCU\\Software\\Classes\\.nef\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.nef\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.nef\\OpenWithProgids\\WnPicture.nef Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nef\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nef Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nef\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nef\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nef Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nef\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nef\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nef\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.nef\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.nef Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.nef\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.nef\\OpenWithProgids\\WnPicture.nef Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.nef\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.nef\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.nef)
• RegCreateKey (HKCU\\Software\\Classes\\.nrw Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.nrw Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.nrw\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.nrw)
• RegCreateKey (HKCU\\Software\\Classes\\.nrw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.nrw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegSetValue (HKCU\\Software\\Classes\\.nrw\\OpenWithProgids\\WnPicture.nrw Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nrw\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nrw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nrw\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nrw\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nrw Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nrw\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nrw\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nrw\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.nrw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.nrw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.nrw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.nrw\\OpenWithProgids\\WnPicture.nrw Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.nrw\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.nrw\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.nrw)
• RegCreateKey (HKCU\\Software\\Classes\\.orf Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.orf Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.orf\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.orf)
• RegCreateKey (HKCU\\Software\\Classes\\.orf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.orf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.orf\\OpenWithProgids\\WnPicture.orf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.orf\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.orf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.orf\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.orf\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.orf Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.orf\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.orf\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.orf\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.orf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.orf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.orf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.orf\\OpenWithProgids\\WnPicture.orf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.orf\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.orf\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.orf)
• RegCreateKey (HKCU\\Software\\Classes\\.pef Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pef Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pef\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.pef)
• RegCreateKey (HKCU\\Software\\Classes\\.pef\\OpenWithProgids Desired Access: Set Value)

• RegCreateKey (HKCU\\Software\\Classes\\.pef\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pef\\OpenWithProgids\\WnPicture.pef Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pef\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pef Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pef\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pef\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pef Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pef\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pef\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pef\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pef\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pef Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pef\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pef\\OpenWithProgids\\WnPicture.pef Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pef\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pef\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.pef)
• RegCreateKey (HKCU\\Software\\Classes\\.ptx Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.ptx Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ptx\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.ptx)
• RegCreateKey (HKCU\\Software\\Classes\\.ptx\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.ptx\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ptx\\OpenWithProgids\\WnPicture.ptx Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ptx\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ptx Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ptx\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ptx\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ptx Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ptx\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ptx\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ptx\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ptx\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ptx Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ptx\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ptx\\OpenWithProgids\\WnPicture.ptx Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ptx\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ptx\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.ptx)
• RegCreateKey (HKCU\\Software\\Classes\\.pxn Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pxn Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pxn\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.pxn)

• RegCreateKey (HKCU\\Software\\Classes\\.pxn\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pxn\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pxn\\OpenWithProgids\\WnPicture.pxn Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pxn\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pxn Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pxn\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pxn\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pxn Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pxn\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pxn\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pxn\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pxn\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pxn Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pxn\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pxn\\OpenWithProgids\\WnPicture.pxn Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pxn\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pxn\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.pxn)
• RegCreateKey (HKCU\\Software\\Classes\\.qtk Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.qtk Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.qtk\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.qtk)
• RegCreateKey (HKCU\\Software\\Classes\\.qtk\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.qtk\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.qtk\\OpenWithProgids\\WnPicture.qtk Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.qtk\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.qtk Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.qtk\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.qtk\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.qtk Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.qtk\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.qtk\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.qtk\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.qtk\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.qtk Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.qtk\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.qtk\\OpenWithProgids\\WnPicture.qtk Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.qtk\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.qtk\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.qtk)
• RegCreateKey (HKCU\\Software\\Classes\\.raf Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.raf Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegSetValue (HKCU\\Software\\Classes\\.raf\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.raf)
• RegCreateKey (HKCU\\Software\\Classes\\.raf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.raf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.raf\\OpenWithProgids\\WnPicture.raf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raf\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raf\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raf\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raf Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raf\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raf\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raf\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.raf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.raf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.raf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.raf\\OpenWithProgids\\WnPicture.raf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.raf\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.raf\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.raf)
• RegCreateKey (HKCU\\Software\\Classes\\.raw Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.raw Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.raw\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.raw)
• RegCreateKey (HKCU\\Software\\Classes\\.raw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.raw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.raw\\OpenWithProgids\\WnPicture.raw Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raw\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raw\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raw\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raw Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raw\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raw\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raw\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.raw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.raw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.raw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.raw\\OpenWithProgids\\WnPicture.raw Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.raw\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.raw\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.raw)
• RegCreateKey (HKCU\\Software\\Classes\\.rdc Desired Access: Set Value)

• RegCreateKey (HKCU\\Software\\Classes\\.rdc Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.rdc\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.rdc)
• RegCreateKey (HKCU\\Software\\Classes\\.rdc\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.rdc\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.rdc\\OpenWithProgids\\WnPicture.rdc Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rdc\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rdc Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rdc\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rdc\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rdc Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rdc\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rdc\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rdc\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rdc\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rdc Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rdc\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rdc\\OpenWithProgids\\WnPicture.rdc Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rdc\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rdc\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.rdc)
• RegCreateKey (HKCU\\Software\\Classes\\.rw2 Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.rw2 Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.rw2\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.rw2)
• RegCreateKey (HKCU\\Software\\Classes\\.rw2\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.rw2\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.rw2\\OpenWithProgids\\WnPicture.rw2 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rw2\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rw2 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rw2\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rw2\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rw2 Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rw2\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rw2\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rw2\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rw2\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rw2 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rw2\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rw2\\OpenWithProgids\\WnPicture.rw2 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rw2\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rw2\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.rw2)

• RegCreateKey (HKCU\\Software\\Classes\\.rwl Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.rwl Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.rwl\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.rwl)
• RegCreateKey (HKCU\\Software\\Classes\\.rwl\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.rwl\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.rwl\\OpenWithProgids\\WnPicture.rwl Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwl\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwl Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwl\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwl\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwl Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwl\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwl\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwl\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rwl\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rwl Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rwl\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rwl\\OpenWithProgids\\WnPicture.rwl Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rwl\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rwl\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.rwl)
• RegCreateKey (HKCU\\Software\\Classes\\.rwz Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.rwz Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.rwz\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.rwz)
• RegCreateKey (HKCU\\Software\\Classes\\.rwz\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.rwz\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.rwz\\OpenWithProgids\\WnPicture.rwz Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwz\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwz Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwz\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwz\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwz Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwz\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwz\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwz\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rwz\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rwz Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rwz\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rwz\\OpenWithProgids\\WnPicture.rwz Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rwz\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rwz\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.rwz)
• RegCreateKey (HKCU\\Software\\Classes\\.sr2 Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.sr2 Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.sr2\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.sr2)
• RegCreateKey (HKCU\\Software\\Classes\\.sr2\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.sr2\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.sr2\\OpenWithProgids\\WnPicture.sr2 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sr2\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sr2 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sr2\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sr2\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sr2 Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sr2\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sr2\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sr2\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sr2\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sr2 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sr2\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sr2\\OpenWithProgids\\WnPicture.sr2 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sr2\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sr2\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.sr2)
• RegCreateKey (HKCU\\Software\\Classes\\.srf Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.srf Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.srf\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.srf)
• RegCreateKey (HKCU\\Software\\Classes\\.srf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.srf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.srf\\OpenWithProgids\\WnPicture.srf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srf\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srf\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srf\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srf Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srf\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srf\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srf\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.srf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.srf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.srf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.srf\\OpenWithProgids\\WnPicture.srf Type: REG_NONE, Length: 0)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.srf\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.srf\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.srf)
• RegCreateKey (HKCU\\Software\\Classes\\.srw Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.srw Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.srw\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.srw)
• RegCreateKey (HKCU\\Software\\Classes\\.srw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.srw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.srw\\OpenWithProgids\\WnPicture.srw Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srw\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srw\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srw\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srw Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srw\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srw\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srw\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.srw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.srw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.srw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.srw\\OpenWithProgids\\WnPicture.srw Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.srw\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.srw\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.srw)
• RegCreateKey (HKCU\\Software\\Classes\\.sti Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.sti Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.sti\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.sti)
• RegCreateKey (HKCU\\Software\\Classes\\.sti\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.sti\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.sti\\OpenWithProgids\\WnPicture.sti Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sti\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sti Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sti\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sti\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sti Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sti\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sti\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sti\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sti\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sti Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sti\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sti\\OpenWithProgids\\WnPicture.sti Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sti\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sti\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.sti)
• RegCreateKey (HKCU\\Software\\Classes\\.x3f Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.x3f Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.x3f\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.x3f)
• RegCreateKey (HKCU\\Software\\Classes\\.x3f\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.x3f\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.x3f\\OpenWithProgids\\WnPicture.x3f Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.x3f\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.x3f Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.x3f\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.x3f\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.x3f Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.x3f\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.x3f\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.x3f\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.x3f\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.x3f Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.x3f\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.x3f\\OpenWithProgids\\WnPicture.x3f Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.x3f\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.x3f\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.x3f)
• RegCreateKey (HKCU\\Software\\Classes\\.pdf Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pdf Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pdf\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.pdf)
• RegCreateKey (HKCU\\Software\\Classes\\.pdf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pdf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pdf\\OpenWithProgids\\WnPicture.pdf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pdf\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pdf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pdf\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pdf\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pdf Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pdf\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pdf\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pdf\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pdf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pdf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pdf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pdf\\OpenWithProgids\\WnPicture.pdf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pdf\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pdf\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.pdf)
• RegCreateKey (HKCR\\.xps Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.xps\\WnPictureBackup Type: REG_SZ, Length: 92, Data: Windows.XPSReachViewer)
• RegCreateKey (HKCU\\Software\\Classes\\.xps Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.xps Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.xps\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.xps)
• RegCreateKey (HKCU\\Software\\Classes\\.xps\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.xps\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.xps\\OpenWithProgids\\WnPicture.xps Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xps\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xps Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xps\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xps\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xps Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xps\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xps\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xps\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xps\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xps Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xps\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xps\\OpenWithProgids\\WnPicture.xps Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xps\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xps\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.xps)
• RegCreateKey (HKCU\\Software\\Classes\\.oxps Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.oxps Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.oxps\\(Default) Type: REG_SZ, Length: 60, Data: WnPicture.oxps)
• RegCreateKey (HKCU\\Software\\Classes\\.oxps\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.oxps\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.oxps\\OpenWithProgids\\WnPicture.oxps Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.oxps\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.oxps Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.oxps\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.oxps\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.oxps Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.oxps\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.oxps\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.oxps\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.oxps\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.oxps Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.oxps\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.oxps\\OpenWithProgids\\WnPicture.oxps Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.oxps\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.oxps\\UserChoice\\ProgId Type: REG_SZ, Length: 60, Data: WnPicture.oxps)
• RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities Desired Access: Set Value)
• RegCreateKey (HKLM\\SOFTWARE Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKLM\\SOFTWARE\\WnPicture Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\ApplicationDescription Type: REG_SZ, Length: 132, Data:)
• RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\ApplicationName Type: REG_SZ, Length: 24, Data:)
• RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\(Default) Type: REG_NONE, Length: 0)
• RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.bmp Type: REG_SZ, Length: 56, Data: WnPicture.bmp)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.dib Type: REG_SZ, Length: 56, Data: WnPicture.dib)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.jpg Type: REG_SZ, Length: 56, Data: WnPicture.jpg)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.jif Type: REG_SZ, Length: 56, Data: WnPicture.jif)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.jpeg Type: REG_SZ, Length: 60, Data: WnPicture.jpeg)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.jpe Type: REG_SZ, Length: 56, Data: WnPicture.jpe)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.png Type: REG_SZ, Length: 56, Data: WnPicture.png)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.gif Type: REG_SZ, Length: 56, Data: WnPicture.gif)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.ico Type: REG_SZ, Length: 56, Data: WnPicture.ico)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.cur Type: REG_SZ, Length: 56, Data: WnPicture.cur)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.tif Type: REG_SZ, Length: 56, Data: WnPicture.tif)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.tiff Type: REG_SZ, Length: 60, Data: WnPicture.tiff)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.tga Type: REG_SZ, Length: 56, Data: WnPicture.tga)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.targa Type: REG_SZ, Length: 64, Data: WnPicture.targa)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pcx Type: REG_SZ, Length: 56, Data: WnPicture.pcx)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.wap Type: REG_SZ, Length: 56, Data: WnPicture.wap)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.wbmp Type: REG_SZ, Length: 60, Data: WnPicture.wbmp)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.wbm Type: REG_SZ, Length: 56, Data: WnPicture.wbm)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.j2k Type: REG_SZ, Length: 56, Data: WnPicture.j2k)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.j2c Type: REG_SZ, Length: 56, Data: WnPicture.j2c)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.jp2 Type: REG_SZ, Length: 56, Data: WnPicture.jp2)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.ras Type: REG_SZ, Length: 56, Data: WnPicture.ras)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pbm Type: REG_SZ, Length: 56, Data: WnPicture.pbm)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pgm Type: REG_SZ, Length: 56, Data: WnPicture.pgm)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.ppm Type: REG_SZ, Length: 56, Data: WnPicture.ppm)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.mng Type: REG_SZ, Length: 56, Data: WnPicture.mng)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.jng Type: REG_SZ, Length: 56, Data: WnPicture.jng)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.koa Type: REG_SZ, Length: 56, Data: WnPicture.koa)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.iff Type: REG_SZ, Length: 56, Data: WnPicture.iff)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.lbm Type: REG_SZ, Length: 56, Data: WnPicture.lbm)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pcd Type: REG_SZ, Length: 56, Data: WnPicture.pcd)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.psd Type: REG_SZ, Length: 56, Data: WnPicture.psd)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.cut Type: REG_SZ, Length: 56, Data: WnPicture.cut)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.xbm Type: REG_SZ, Length: 56, Data: WnPicture.xbm)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.xpm Type: REG_SZ, Length: 56, Data: WnPicture.xpm)

- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.dds Type: REG_SZ, Length: 56, Data: WnPicture.dds)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.hdr Type: REG_SZ, Length: 56, Data: WnPicture.hdr)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.g3 Type: REG_SZ, Length: 52, Data: WnPicture.g3)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.sgi Type: REG_SZ, Length: 56, Data: WnPicture.sgi)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.rgb Type: REG_SZ, Length: 56, Data: WnPicture.rgb)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.rgba Type: REG_SZ, Length: 60, Data: WnPicture.rgba)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.exr Type: REG_SZ, Length: 56, Data: WnPicture.exr)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pfm Type: REG_SZ, Length: 56, Data: WnPicture.pfm)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pct Type: REG_SZ, Length: 56, Data: WnPicture.pct)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pict Type: REG_SZ, Length: 60, Data: WnPicture.pict)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pic Type: REG_SZ, Length: 56, Data: WnPicture.pic)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.webp Type: REG_SZ, Length: 60, Data: WnPicture.webp)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.jxr Type: REG_SZ, Length: 56, Data: WnPicture.jxr)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.wdp Type: REG_SZ, Length: 56, Data: WnPicture.wdp)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.hdp Type: REG_SZ, Length: 56, Data: WnPicture.hdp)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.ska Type: REG_SZ, Length: 56, Data: WnPicture.ska)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pgx Type: REG_SZ, Length: 56, Data: WnPicture.pgx)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.wmf Type: REG_SZ, Length: 56, Data: WnPicture.wmf)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.emf Type: REG_SZ, Length: 56, Data: WnPicture.emf)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.3fr Type: REG_SZ, Length: 56, Data: WnPicture.3fr)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.arw Type: REG_SZ, Length: 56, Data: WnPicture.arw)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.bay Type: REG_SZ, Length: 56, Data: WnPicture.bay)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.bmq Type: REG_SZ, Length: 56, Data: WnPicture.bmq)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.cap Type: REG_SZ, Length: 56, Data: WnPicture.cap)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.cine Type: REG_SZ, Length: 60, Data: WnPicture.cine)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.cr2 Type: REG_SZ, Length: 56, Data: WnPicture.cr2)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.crw Type: REG_SZ, Length: 56, Data: WnPicture.crw)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.cs1 Type: REG_SZ, Length: 56, Data: WnPicture.cs1)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.dc2 Type: REG_SZ, Length: 56, Data: WnPicture.dc2)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.dcr Type: REG_SZ, Length: 56, Data: WnPicture.dcr)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.drf Type: REG_SZ, Length: 56, Data: WnPicture.drf)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.dsc Type: REG_SZ, Length: 56, Data: WnPicture.dsc)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.dng Type: REG_SZ, Length: 56, Data: WnPicture.dng)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.erf Type: REG_SZ, Length: 56, Data: WnPicture.erf)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.fff Type: REG_SZ, Length: 56, Data: WnPicture.fff)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.ia Type: REG_SZ, Length: 52, Data: WnPicture.ia)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.iiq Type: REG_SZ, Length: 56, Data: WnPicture.iiq)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.k25 Type: REG_SZ, Length: 56, Data: WnPicture.k25)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.kc2 Type: REG_SZ, Length: 56, Data: WnPicture.kc2)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.kdc Type: REG_SZ, Length: 56, Data: WnPicture.kdc)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.mdc Type: REG_SZ, Length: 56, Data: WnPicture.mdc)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.mef Type: REG_SZ, Length: 56, Data: WnPicture.mef)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.mos Type: REG_SZ, Length: 56, Data: WnPicture.mos)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.mrw Type: REG_SZ, Length: 56, Data: WnPicture.mrw)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.nef Type: REG_SZ, Length: 56, Data: WnPicture.nef)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.nrw Type: REG_SZ, Length: 56, Data: WnPicture.nrw)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.orf Type: REG_SZ, Length: 56, Data: WnPicture.orf)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pef Type: REG_SZ, Length: 56, Data: WnPicture.pef)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.ptx Type: REG_SZ, Length: 56, Data: WnPicture.ptx)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pxn Type: REG_SZ, Length: 56, Data: WnPicture.pxn)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.qtk Type: REG_SZ, Length: 56, Data: WnPicture.qtk)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.raf Type: REG_SZ, Length: 56, Data: WnPicture.raf)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.raw Type: REG_SZ, Length: 56, Data: WnPicture.raw)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.rdc Type: REG_SZ, Length: 56, Data: WnPicture.rdc)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.rw2 Type: REG_SZ, Length: 56, Data: WnPicture.rw2)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.rwl Type: REG_SZ, Length: 56, Data: WnPicture.rwl)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.rwz Type: REG_SZ, Length: 56, Data: WnPicture.rwz)

• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.sr2 Type: REG_SZ, Length: 56, Data: WnPicture.sr2)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.srf Type: REG_SZ, Length: 56, Data: WnPicture.srf)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.srw Type: REG_SZ, Length: 56, Data: WnPicture.srw)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.sti Type: REG_SZ, Length: 56, Data: WnPicture.sti)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.x3f Type: REG_SZ, Length: 56, Data: WnPicture.x3f)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pdf Type: REG_SZ, Length: 56, Data: WnPicture.pdf)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.xps Type: REG_SZ, Length: 56, Data: WnPicture.xps)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.oxps Type: REG_SZ, Length: 60, Data: WnPicture.oxps)
• RegDeleteValue (HKLM\\SOFTWARE\\RegisteredApplications\\WnPicture)
• RegCreateKey (HKLM\\SOFTWARE\\RegisteredApplications Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\SOFTWARE\\RegisteredApplications\\WnPicture Type: REG_SZ, Length: 128, Data: Software\\WnPicture\\Capabilities)
• RegCreateKey (HKLM\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\SOFTWARE\\Microsoft\\Windows\\CurrentVersion\\Explorer\\GlobalAssocChangedCounter Type: REG_DWORD, Length: 4, Data: 29)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)

Most interesting strings

The following list it's a collection of the most interesting strings found in the sample's modules code or data. A complete list of strings for each sample's module can be found in the section "Sample's unpacked / injected modules."

- url | http tag | valid domain | tlds: http://www.wn51.com/kantu/protocol.html
- url | http tag | valid domain | tlds: http://www.wn51.com/kantu
- url | http tag | valid domain | tlds: # http://curl.haxx.se/rfc/cookie_spec.html
- url | valid domains | tlds: ftp@example.com
- url | valid domains | tlds: .com
- url | valid domains | tlds: config.wn51.com
- url | valid domains | tlds: config.wn51.com/kantu/install/
- url | valid domains | tlds: tjv1.wn51.com
- url | valid domains | tlds: ,v\\9.vN
- url | valid domains | tlds: _u.Ph
- url | valid domains | tlds: tGHt.Ht&
- url | valid domains | tlds: u.hT
- path | frequently modified by malware: \\AppData\\LocalLow
- api | frequently used by malware: Accept:*/*
- api | frequently used by malware: Sleep
- api | frequently used by malware: InternetCloseHandle
- api | frequently used by malware: InternetReadFile
- api | frequently used by malware: BitBlt
- api | frequently used by malware: GetMessagePos
- api | frequently used by malware: CallNextHookEx
- api | frequently used by malware: GetUpdateRect
- api | frequently used by malware: SetCapture
- api | frequently used by malware: GetKeyState
- api | frequently used by malware: GetMenu
- api | frequently used by malware: TranslateMessage
- api | frequently used by malware: PeekNamedPipe
- api | frequently used by malware: GetTimeZoneInformation
- api | frequently used by malware: ExitThread
- api | frequently used by malware: IsDebuggerPresent
- api | frequently used by malware: SetFileTime
- api | frequently used by malware: ExitProcess
- api | frequently used by malware: GetAdaptersInfo
- api | frequently used by malware: EnumProcessModules
- api | frequently used by malware: CoCreateInstance
- api | frequently used by malware: RegCloseKey
- api | frequently used by malware: GetDC
- api | frequently used by malware: GetForegroundWindow
- api | frequently used by malware: GetWindowThreadProcessId
- api | frequently used by malware: SetTimer
- api | frequently used by malware: GetVersion
- api | frequently used by malware: VirtualAllocEx
- api | frequently used by malware: DeviceIoControl
- api | frequently used by malware: ReadProcessMemory
- api | frequently used by malware: CreateToolhelp32Snapshot
- api | frequently used by malware: GetTickCount
- api | frequently used by malware: WriteFile
- api | frequently used by malware: OpenProcess
- api | frequently used by malware: LoadResource
- api | frequently used by malware: CreateThread
- api | frequently used by malware: WriteProcessMemory
- api | frequently used by malware: QueryPerformanceCounter

• api | frequently used by malware: GetProcAddress
• api | frequently used by malware: WideCharToMultiByte
• api | frequently used by malware: Failed to resolve "%s" for SOCKS5 connect.
• api | frequently used by malware: Failed to receive SOCKS5 connect request ack.
• api | frequently used by malware: Failed to send SOCKS5 connect request.
• api | frequently used by malware: Failed to send SOCKS5 sub-negotiation request.
• api | frequently used by malware: Unable to send initial SOCKS5 request.
• api | frequently used by malware: Failed to resolve "%s" for SOCKS4 connect.
• api | frequently used by malware: Failed to send SOCKS4 connect request.
• api | frequently used by malware: Can't complete SOCKS4 connection to %d.%d.%d.%d:%d. (%d), request rejected because SOCKS server cannot connect to identd on the client.
• api | frequently used by malware: Failed to receive SOCKS4 connect request ack.
• api | frequently used by malware: HTTP error before end of send, stop sending
• api | frequently used by malware: Accept: */*
• api | frequently used by malware: NTLM send, close instead of sending %lld bytes
• api | frequently used by malware: Rewind stream after send
• api | frequently used by malware: got positive EPSV response, but can't connect. Disabling EPSV
• api | frequently used by malware: Connect data stream actively
• api | frequently used by malware: Connect data stream passively
• api | frequently used by malware: socket failure: %s
• api | frequently used by malware: bind(port=%hu) on non-local address failed: %s
• api | frequently used by malware: bind(port=%hu) failed: %s
• api | frequently used by malware: bind() failed, we ran out of ports!
• api | frequently used by malware: Timeout while waiting for server connect
• api | frequently used by malware: Error accept()ing server connect
• api | frequently used by malware: Error while waiting for server connect
• api | frequently used by malware: WSAStartup failed (%d)
• api | frequently used by malware: LDAP local: Cannot connect to %s:%hu
• api | frequently used by malware: LDAP local: ldap_simple_bind_s %s
• api | frequently used by malware: Accept-ranges: bytes
• api | frequently used by malware: tftp_send_first: internal error
• api | frequently used by malware: bind() failed; %s
• api | frequently used by malware: Accept:
• api | frequently used by malware: Accept: application/sdp
• api | frequently used by malware: Accept-Encoding:
• api | frequently used by malware: Accept-Encoding: %s
• api | frequently used by malware: Descriptor is not a socket
• api | frequently used by malware: Couldn't connect to server
• api | frequently used by malware: FTP: The server did not accept the PRET command.
• api | frequently used by malware: SSL connect error
• api | frequently used by malware: LDAP: cannot bind
• api | frequently used by malware: Send failed since rewinding of the data stream failed
• api | frequently used by malware: Socket not ready for send/recv
• api | frequently used by malware: couldn't connect to host
• api | frequently used by malware: connect() timed out!
• api | frequently used by malware: Failed to connect to %s: %s
• api | frequently used by malware: Couldn't bind to '%s'
• api | frequently used by malware: Bind to local port %hu failed, trying next
• api | frequently used by malware: bind failed with errno %d: %s
• api | frequently used by malware: Recv failure: %s
• api | frequently used by malware: Send failure: %s
• api | frequently used by malware: Connection died, retrying a fresh connect
• api | frequently used by malware: we are done reading and this is set to close, stop send
• api | frequently used by malware: About to connect() to %s%s port %ld (#%ld)
• api | frequently used by malware: DllGetClassObject
• api | frequently used by malware: NtQueryInformationProcess
• api | frequently used by malware: GetNativeSystemInfo

- api | frequently used by malware: Wow64DisableWow64FsRedirection
- url | http tag: @http://
- path | path unit: f:\\dd\\vctools\\vc7libs\\ship\\atlmfc\\include\\afxwin1.inl
- path | path unit: f:\\dd\\vctools\\vc7libs\\ship\\atlmfc\\include\\afxwin2.inl
- path | path unit: f:\\dd\\vctools\\vc7libs\\ship\\atlmfc\\src\\mfc\\auxdata.cpp
- registry: software\\Microsoft\\Windows\\CurrentVersion\\Uninstall
- url | http tag: http://%s/statistics/sign?code=%s
- path | path unit: C:\\log\\
- registry: SOFTWARE\\Microsoft\\Windows\\CurrentVersion\\Policies\\System\\
- registry: SOFTWARE\\Wow6432Node\\Microsoft\\Windows\\CurrentVersion\\Uninstall\\
- registry: Software\\Microsoft\\Windows\\CurrentVersion\\Uninstall\\
- path | path unit: e:\\svn\\Common\\Temp\\Release\\InstallSilent.pdb
- url | http tag: ftp://
- url | http tag: ftp://%s:%s@%s
- url | http tag: http://
- api | wininet: HttpQueryInfoW
- api | wininet: InternetOpenUrlW
- api | wininet: InternetSetOptionW
- api | wininet: InternetOpenW
- api | crypt32: CryptQueryObject
- api | crypt32: CryptMsgGetParam
- api | crypt32: CertCloseStore
- api | crypt32: CryptMsgClose
- api | crypt32: CertFindCertificateInStore
- api | crypt32: CertGetNameStringW
- api | crypt32: CertFreeCertificateContext
- api | ws2_32: Proxy CONNECT aborted due to select/poll error
- api | ws2_32: select/poll error
- api | ws2_32: getsockname() failed: %s
- api | ws2_32: FTP response aborted due to select/poll error: %d
- api | ws2_32: WSACreateEvent
- api | ws2_32: failed to find WSACreateEvent function (%d)
- api | ws2_32: WSACloseEvent
- api | ws2_32: failed to find WSACloseEvent function (%d)
- api | ws2_32: WSAEventSelect
- api | ws2_32: failed to find WSAEventSelect function (%d)
- api | ws2_32: WSAEnumNetworkEvents
- api | ws2_32: failed to find WSAEnumNetworkEvents function (%d)
- api | ws2_32: WSACreateEvent failed (%d)
- api | ws2_32: WSAEnumNetworkEvents failed (%d)
- api | ws2_32: WSACloseEvent failed (%d)
- api | ws2_32: getaddrinfo
- api | ws2_32: getnameinfo
- api | ws2_32: freeaddrinfo
- api | ws2_32: sa_addr inet_ntop() failed with errno %d: %s
- api | ws2_32: getpeername() failed with errno %d: %s
- api | ws2_32: ssrem inet_ntop() failed with errno %d: %s
- api | ws2_32: ssloc inet_ntop() failed with errno %d: %s
- api | ws2_32: getsockname() failed with errno %d: %s
- api | ws2_32: select/poll returned error
- api | ws2_32: getaddrinfo() failed for %s:%d; %s
- api | kernel32: HeapAlloc() failed. Error %d
- api | advapi32: InitializeSecurityDescriptor() failed.Error %d
- api | advapi32: GetSecurityDescriptorDacl() failed. Error %d
- api | advapi32: GetAclInformation() failed. Error %d
- api | advapi32: InitializeAcl() failed. Error %d
- api | advapi32: GetAce() failed. Error %d

- api | advapi32: AddAce() failed. Error %d
- api | advapi32: AddAccessAllowedAceEx() failed. Error %d
- api | advapi32: AddAccessAllowedAce() failed. Error %d
- api | advapi32: SetSecurityDescriptorDacl() failed. Error %d
- api | advapi32: GetSecurityDescriptorControl() failed.Error %d
- api | advapi32: SetSecurityDescriptorControl() failed.Error %d
- api | ntdll: %sgswb.log
- api | kernel32: GetFileInformationByHandle
- api | user32: DestroyMenu
- api | user32: GrayStringW
- api | user32: DrawTextExW
- api | user32: TabbedTextOutW
- api | user32: RegisterWindowMessageW
- api | user32: LoadIconW
- api | user32: WinHelpW
- api | user32: GetCapture
- api | user32: GetClassLongW
- api | user32: RemovePropW
- api | user32: GetTopWindow
- api | user32: GetMessageTime
- api | user32: SetMenu
- api | user32: GetClassInfoW
- api | user32: CopyRect
- api | user32: SystemParametersInfoA
- api | user32: GetWindowPlacement
- api | user32: SetMenuItemBitmaps
- api | user32: GetMenuCheckMarkDimensions
- api | user32: LoadBitmapW
- api | user32: ModifyMenuW
- api | user32: EnableMenuItem
- api | user32: CheckMenuItem
- api | user32: GetDlgItem
- api | user32: GetDlgCtrlID
- api | user32: SetWindowsHookExW
- api | user32: PeekMessageW
- api | user32: ValidateRect
- api | user32: GetSysColorBrush
- api | user32: UnhookWindowsHookEx
- api | user32: GetLastActivePopup
- api | user32: IsWindowEnabled
- api | user32: MessageBoxW
- api | user32: GetMenuState
- api | user32: GetMenuItemID
- api | user32: GetMenuItemCount
- api | user32: GetSubMenu
- api | user32: CreateAcceleratorTableW
- api | user32: InvalidateRgn
- api | user32: GetCaretPos
- api | user32: GetSysColor
- api | user32: ClientToScreen
- api | user32: SetCaretPos
- api | user32: ShowCaret
- api | user32: HideCaret
- api | user32: CreateCaret
- api | user32: SetWindowTextW
- api | user32: GetWindowTextLengthW
- api | user32: SetRect

- api | user32: CharPrevW
- api | user32: DrawTextW
- api | user32: FillRect
- api | user32: BeginPaint
- api | user32: EndPaint
- api | user32: MapWindowPoints
- api | user32: GetFocus
- api | user32: ReleaseDC
- api | user32: ReleaseCapture
- api | user32: KillTimer
- api | user32: UnionRect
- api | user32: InflateRect
- api | user32: SetWindowRgn
- api | user32: ScreenToClient
- api | user32: IsZoomed
- api | user32: IsIconic
- api | user32: GetClassInfoExW
- api | user32: RegisterClassW
- api | user32: GetClientRect
- api | user32: AdjustWindowRectEx
- api | user32: SetPropW
- api | user32: GetPropW
- api | user32: CallWindowProcW
- api | user32: LoadImageW
- api | user32: MonitorFromWindow
- api | user32: GetWindow
- api | user32: EnableWindow
- api | user32: GetMessageW
- api | user32: SetFocus
- api | user32: DispatchMessageW
- api | user32: SetCursor
- api | user32: IsRectEmpty
- api | user32: IntersectRect
- api | kernel32: GetTempFileNameW
- api | kernel32: ExpandEnvironmentStringsW
- api | kernel32: WaitForMultipleObjects
- api | kernel32: GetSystemDirectoryA
- api | kernel32: SleepEx
- api | kernel32: SetEnvironmentVariableA
- api | kernel32: GetConsoleOutputCP
- api | kernel32: WriteConsoleA
- api | kernel32: SetStdHandle
- api | kernel32: CreateFileA
- api | kernel32: InitializeCriticalSectionAndSpinCount
- api | kernel32: GetEnvironmentStringsW
- api | kernel32: FreeEnvironmentStringsW
- api | kernel32: GetCurrentDirectoryA
- api | kernel32: GetFullPathNameA
- api | kernel32: GetStringTypeW
- api | kernel32: GetStringTypeA
- api | kernel32: IsValidLocale
- api | kernel32: EnumSystemLocalesA
- api | kernel32: GetLocaleInfoA
- api | kernel32: GetUserDefaultLCID
- api | kernel32: LCMapStringA
- api | kernel32: LCMapStringW
- api | kernel32: IsValidCodePage

- api | kernel32: GetOEMCP
- api | kernel32: GetCPInfo
- api | kernel32: GetStartupInfoA
- api | kernel32: SetHandleCount
- api | kernel32: GetConsoleMode
- api | kernel32: GetConsoleCP
- api | kernel32: GetModuleFileNameA
- api | kernel32: HeapCreate
- api | kernel32: HeapSize
- api | kernel32: GetStartupInfoW
- api | kernel32: HeapReAlloc
- api | kernel32: FindFirstFileA
- api | kernel32: GetDriveTypeA
- api | kernel32: GetStdHandle
- api | kernel32: WriteConsoleW
- api | kernel32: GetSystemTimeAsFileTime
- api | kernel32: RtlUnwind
- api | kernel32: UnhandledExceptionFilter
- api | kernel32: TerminateProcess
- api | kernel32: GetModuleHandleA
- api | kernel32: GetFileAttributesW
- api | kernel32: GetLocaleInfoW
- api | kernel32: CompareStringA
- api | kernel32: InterlockedExchange
- api | kernel32: GlobalFindAtomW
- api | kernel32: GlobalDeleteAtom
- api | kernel32: GetVersionExA
- api | kernel32: GetFullPathNameW
- api | kernel32: SetEndOfFile
- api | kernel32: FlushFileBuffers
- api | kernel32: MoveFileW
- api | kernel32: GlobalAddAtomW
- api | kernel32: GlobalFlags
- api | kernel32: lstrcmpW
- api | kernel32: lstrlenA
- api | kernel32: lstrcmpA
- api | kernel32: CompareStringW
- api | kernel32: TlsFree
- api | kernel32: LocalReAlloc
- api | kernel32: TlsSetValue
- api | kernel32: TlsAlloc
- api | kernel32: GlobalHandle
- api | kernel32: GlobalReAlloc
- api | kernel32: TlsGetValue
- api | kernel32: FileTimeToLocalFileTime
- api | kernel32: FileTimeToSystemTime
- api | kernel32: SetLastError
- api | kernel32: DosDateTimeToFileTime
- api | kernel32: SystemTimeToFileTime
- api | kernel32: DuplicateHandle
- api | kernel32: GetFileType
- api | kernel32: SetFilePointer
- api | kernel32: GetLocalTime
- api | kernel32: MulDiv
- api | kernel32: SetCurrentDirectoryW
- api | kernel32: GetCurrentDirectoryW
- api | kernel32: GetACP

- api | kernel32: FreeResource
- api | psapi: GetModuleFileNameExW
- api | user32: _TrackMouseEvent
- api | advapi32: LookupAccountNameW
- api | advapi32: GetFileSecurityW
- api | advapi32: GetSecurityDescriptorDacl
- api | advapi32: GetAclInformation
- api | advapi32: GetLengthSid
- api | advapi32: InitializeAcl
- api | advapi32: GetAce
- api | advapi32: EqualSid
- api | advapi32: AddAce
- api | advapi32: AddAccessAllowedAce
- api | advapi32: GetSecurityDescriptorControl
- api | advapi32: SetFileSecurityW
- api | advapi32: InitializeSecurityDescriptor
- api | advapi32: SetSecurityDescriptorDacl
- api | kernel32: RegEnumKeyExW
- api | kernel32: RegQueryInfoKeyW
- api | kernel32: RegDeleteValueW
- api | advapi32: RegDeleteKeyW
- api | advapi32: RegEnumKeyW
- api | advapi32: RegOpenKeyW
- api | kernel32: RegEnumValueA
- api | kernel32: RegQueryValueExW
- api | kernel32: RegOpenKeyExW
- api | kernel32: RegCreateKeyExW
- api | kernel32: RegSetValueExW
- api | user32: LoadStringW
- api | user32: OffsetRect
- api | user32: GetCursorPos
- api | user32: GetShellWindow
- api | user32: SendMessageW
- api | user32: CreateWindowExW
- api | user32: DestroyWindow
- api | user32: DefWindowProcW
- api | user32: LoadCursorW
- api | user32: RegisterClassExW
- api | user32: PtInRect
- api | user32: EnumDisplayMonitors
- api | user32: SystemParametersInfoW
- api | user32: GetMonitorInfoW
- api | user32: wsprintfW
- api | user32: FindWindowExW
- api | user32: GetWindowTextW
- api | user32: GetClassNameW
- api | user32: GetDesktopWindow
- api | user32: GetSystemMetrics
- api | user32: GetParent
- api | user32: MoveWindow
- api | user32: CharNextW
- api | user32: FindWindowW
- api | user32: IsWindow
- api | user32: SetForegroundWindow
- api | user32: ShowWindow
- api | user32: PostQuitMessage
- api | user32: GetWindowRect

- api | user32: PostMessageW
- api | user32: GetWindowLongW
- api | user32: SetWindowLongW
- api | user32: SetWindowPos
- api | user32: InvalidateRect
- api | kernel32: HeapAlloc
- api | kernel32: GetProcessHeap
- api | kernel32: HeapFree
- api | kernel32: IsBadReadPtr
- api | kernel32: LoadLibraryA
- api | kernel32: VirtualFreeEx
- api | kernel32: lstrcpynW
- api | kernel32: GetVolumeInformationW
- api | kernel32: ReleaseMutex
- api | kernel32: CreateMutexW
- api | kernel32: SetPriorityClass
- api | kernel32: OutputDebugStringA
- api | kernel32: FormatMessageW
- api | kernel32: VerSetConditionMask
- api | kernel32: VerifyVersionInfoW
- api | kernel32: GetWindowsDirectoryW
- api | kernel32: GlobalLock
- api | kernel32: GlobalUnlock
- api | kernel32: GetCurrentThreadId
- api | kernel32: GetSystemInfo
- api | kernel32: CopyFileW
- api | kernel32: GetCommandLineW
- api | kernel32: GlobalAlloc
- api | kernel32: GlobalFree
- api | kernel32: Process32FirstW
- api | kernel32: Process32NextW
- api | kernel32: GetExitCodeProcess
- api | kernel32: WaitForSingleObject
- api | kernel32: CreateProcessW
- api | kernel32: CreateDirectoryW
- api | kernel32: GetSystemDirectoryW
- api | kernel32: DeleteFileW
- api | kernel32: GetCurrentProcessId
- api | kernel32: VirtualFree
- api | kernel32: GetTempPathW
- api | kernel32: FindClose
- api | kernel32: RemoveDirectoryW
- api | kernel32: MoveFileExW
- api | kernel32: LocalAlloc
- api | kernel32: LocalFree
- api | kernel32: LockResource
- api | kernel32: VirtualAlloc
- api | kernel32: GetModuleHandleW
- api | kernel32: LoadLibraryExW
- api | kernel32: FindResourceW
- api | kernel32: SizeofResource
- api | kernel32: MultiByteToWideChar
- api | kernel32: GetLastError
- api | kernel32: LeaveCriticalSection
- api | kernel32: EnterCriticalSection
- api | kernel32: lstrcmpiW
- api | kernel32: lstrlenW

- api | kernel32: InterlockedDecrement
- api | kernel32: InterlockedIncrement
- api | kernel32: DeleteCriticalSection
- api | kernel32: InitializeCriticalSection
- api | kernel32: RaiseException
- api | kernel32: GetLongPathNameW
- api | kernel32: FindFirstFileW
- api | kernel32: FindNextFileW
- api | kernel32: lstrcpyW
- api | kernel32: GetDiskFreeSpaceExW
- api | kernel32: SetUnhandledExceptionFilter
- api | kernel32: FreeLibrary
- api | kernel32: VirtualProtect
- api | kernel32: GetCurrentProcess
- api | kernel32: GetPrivateProfileStringW
- api | kernel32: GetModuleFileNameW
- api | kernel32: CreateFileW
- api | kernel32: GetFileSize
- api | kernel32: ReadFile
- api | kernel32: CloseHandle
- api | kernel32: GetPrivateProfileIntW
- api | kernel32: WritePrivateProfileStringW
- api | kernel32: QueryPerformanceFrequency
- api | kernel32: LoadLibraryW
- api | kernel32: GetEnvironmentVariableW
- api | kernel32: AreFileApisANSI
- api | kernel32: GetVersionExW
- api | kernel32: FreeLibrary(wsock2) failed (%d)
- api | ntdll: atan
- api | ntdll: sqrt
- api | ntdll: ceil
- api | ntdll: floor
- api | ntdll: fabs
- api | user32: MessageBoxA
- api | user32: GetUserObjectInformationA
- api | user32: GetActiveWindow
- api | user32: GetUserObjectInformationW
- api | user32: GetProcessWindowStation
- api | kernel32: FlsAlloc
- api | kernel32: FlsGetValue
- api | kernel32: FlsSetValue
- api | kernel32: FlsFree
- api | kernel32: DecodePointer
- api | kernel32: EncodePointer
- api | kernel32: HeapQueryInformation
- api | user32: MonitorFromRect
- api | user32: MonitorFromPoint
- api | user32: EnumDisplayDevicesW
- api | user32: GetMonitorInfoA
- api | user32: SetLayeredWindowAttributes
- api | advapi32: AddAccessAllowedAceEx
- api | advapi32: SetSecurityDescriptorControl
- api | kernel32: ERROR: Could not SetPriorityClass, LastError: %d
- api | user32: UpdateLayeredWindow
- api | kernel32: IsWow64Process
- api | kernel32: Wow64RevertWow64FsRedirection
- api | kernel32: GetSystemWow64DirectoryW

Involved hosts

- 106.75.18.205:http
- 120.132.61.186:http
- 180.150.186.132:http
- 106.75.107.219:80 (update.wn51.com)
- 106.75.18.205:80 (csdw.wn51.com)
- 120.132.61.186:80 (tjv1.wn51.com)
- 180.150.186.132:80 (config.wn51.com)
- 192.168.133.1:5355
- 192.168.133.203:49194
- 192.168.133.203:49195
- 192.168.133.203:49196
- 192.168.133.203:49197
- 192.168.133.203:49198
- 192.168.133.203:49200
- 192.168.133.203:49201
- 192.168.133.203:49202
- 192.168.133.203:49203
- 192.168.133.203:49204
- 192.168.133.203:49205
- 192.168.133.203:49206
- 192.168.133.203:49207
- 192.168.133.203:49208
- 192.168.133.203:49209
- 192.168.133.203:49210
- 192.168.133.203:49211
- 192.168.133.203:49212
- 192.168.133.203:49213
- 192.168.133.203:49214
- 192.168.133.203:49215
- 192.168.133.203:49216
- 192.168.133.203:57341
- 192.168.133.203:65399
- 192.168.133.203:68
- 192.168.133.254:67

Dns queries

- 2.133.168.192.in-addr.arpa ---> no answers
- tjv1.wn51.com ---> 120.132.61.186
- config.wn51.com ---> 180.150.186.132
- 186.61.132.120.in-addr.arpa ---> no answers
- 132.186.150.180.in-addr.arpa ---> no answers
- 254.133.168.192.in-addr.arpa ---> no answers
- update.wn51.com ---> 106.75.107.219
- csdw.wn51.com ---> 106.75.18.205
- 219.107.75.106.in-addr.arpa ---> no answers
- 205.18.75.106.in-addr.arpa ---> no answers

Connections and readable network traffic

The analysis environment captures network traffic happened while sample execution. It classifies the traffic and tries to extract the most significant parts from the communications data.

In this section it's possible to find parts of the communication data that are easier to be read.

• tcp 192.168.133.203:49194 ---> 120.132.61.186 (tjv1.wn51.com) :80

GET /statistics/timestamp HTTP/1.1[...]Host: tjv1.wn51.com[...]Accept: */*

• tcp 120.132.61.186 (tjv1.wn51.com) :80 ---> 192.168.133.203:49194

HTTP/1.1 200 OK[...]Server: Apache-Coyote/1.1[...]Transfer-Encoding: chunked[...]Date: Sat, 20 May 2017 15:42:18 GMT[...]{"timestamp":"1495294938"}

• tcp 192.168.133.203:49195 ---> 180.150.186.132 (config.wn51.com) :80

GET /kantu/softdata/wnpicture.dat HTTP/1.1[...]Host: config.wn51.com[...]Accept: */*

• tcp 180.150.186.132 (config.wn51.com) :80 ---> 192.168.133.203:49195

HTTP/1.1 200 OK[...]Content-Type: application/octet-stream[...]Last-Modified: Wed, 15 Feb 2017 06:28:36 GMT[...]Accept-Ranges: bytes[...]ETag: "d357e5bc5487d21:0"[...]Server: Microsoft-IIS/7.5[...]Date: Sat, 20 May 2017 15:42:22 GMT[...]Content-Length: 489[...]{j9#+s#"\'2\'(=hedo~es0)6.*.=2zw4:!~mej[...];"!,[...];\'!y^_gu}[...]) !&9-[...]"!#.6$p(#0)[...](4\'4+9}a[...]=&34-"[...]6\'1<"+y^_gu}[...]038.00y6-!46[...]54/*{|[...]"!#.6$pJYugi[...]+5%<$0[...]`#?9{z[...]+5%<$0[...]CMsu{[...]$<1:6"[...]#"m[...]6\'1<"+{|[...]"\'7\'$6[...]&8$pJYugi[...]+5%<$0[...]\'4#9&,[...](+0s[...]"\'7\'$6ih[...]$<1:6"[...](=7?4>kLDgsi[...]038.00[...]02-5:%3<. y[...]05#(-"[...]0463\'7\'<(;[...]CMoz[...]26\'>[...]/((m

• tcp 192.168.133.203:49196 ---> 120.132.61.186 (tjv1.wn51.com) :80

POST /statistics/timestamp HTTP/1.1[...]Host: tjv1.wn51.com[...]Accept: */*[...]Content-Length: 0

• tcp 192.168.133.203:49197 ---> 120.132.61.186 (tjv1.wn51.com) :80

POST /statistics/sign?code=VUlELDAyMGQ0ZWQ2MTZkM2ZjYzg3OGYxOGMxNWY4YTZiM2EwLFFJRCxjZWJvMTcwNTIwLFNvZnRJRCxXblBpY3R1cmUsSXNPbGQsMCxJc1dCLDA= HTTP/1.1[...]Host: tjv1.wn51.com[...]Accept: */*[...]Content-Length: 0

• tcp 120.132.61.186 (tjv1.wn51.com) :80 ---> 192.168.133.203:49196

HTTP/1.1 200 OK[...]Server: Apache-Coyote/1.1[...]Transfer-Encoding: chunked[...]Date: Sat, 20 May 2017 15:42:28 GMT[...]{"timestamp":"1495294948"}

• tcp 120.132.61.186 (tjv1.wn51.com) :80 ---> 192.168.133.203:49197

HTTP/1.1 200 OK[...]Server: Apache-Coyote/1.1[...]Transfer-Encoding: chunked[...]Date: Sat, 20 May 2017 15:42:32 GMT[...]{"time":"1495294952","sign":"e1166:7A757761677275776167"}

• tcp 192.168.133.203:49198 ---> 120.132.61.186 (tjv1.wn51.com) :80

POST /statistics/online?code=VUlELDAyMGQ0ZWQ2MTZkM2ZjYzg3OGYxOGMxNWY4YTZiM2EwLFFJRCxjZWJvMTcwNTIwLFNvZnROYW1lLEthblR1LFNvZnRJRCxXblBpY3R1cmUsU29mdFZlciwxLjEuMS45LFR5cGUsMA== HTTP/1.1[...]Host: tjv1.wn51.com[...]Accept: */*[...]Content-Length: 0

• tcp 120.132.61.186 (tjv1.wn51.com) :80 ---> 192.168.133.203:49198

HTTP/1.1 200 OK[...]Server: Apache-Coyote/1.1[...]Transfer-Encoding: chunked[...]Date: Sat, 20 May 2017 15:42:29 GMT[...]{"status":1}

• tcp 192.168.133.203:49200 ---> 180.150.186.132 (config.wn51.com) :80

GET /kantu/jpquery/querycfg.dat HTTP/1.1[...]Host: config.wn51.com[...]Accept: */*

• tcp 192.168.133.203:49201 ---> 180.150.186.132 (config.wn51.com) :80

GET /kantu/common/ktconfig.dat HTTP/1.1[...]Accept: */*[...]Accept-Encoding: gzip, deflate[...]User-Agent: Mozilla/4.0 (compatible; MSIE 7.0; Windows NT 6.1; Trident/4.0; SLCC2; .NET CLR 2.0.50727; .NET CLR 3.5.30729; .NET CLR 3.0.30729; Media Center PC 6.0; .NET4.0C; .NET4.0E)[...]Host: config.wn51.com[...]Connection: Keep-Alive

• tcp 180.150.186.132 (config.wn51.com) :80 ---> 192.168.133.203:49200

HTTP/1.1 200 OK[...]Content-Type: application/octet-stream[...]Last-Modified: Tue, 09 May 2017 03:20:06 GMT[...]Accept-Ranges: bytes[...]ETag: "afa3e42773c8d21:0"[...]Server: Microsoft-IIS/7.5[...]Date: Sat, 20 May 2017 15:42:29 GMT[...]Content-Length: 538[...]rx+8+u7+5 <(;|lv}eeu$ $<1.;&se;&!!xylxmXMi[...]"\'8[...])5:yXKngo[...]2037[...]<2:y<%";}a[...]&05,[...]CMsu{[...]4+5*[...])&5/+?[...](35p(#0)in[...]26\'>[...]/=329+[...].(3mXMuar[...]&05,[...](\'6="!k(%$ {|[...]2037[...].<0 05kLDgsi[...]$<>[...]&(!!![...]5p(#0)in[...]26\'>[...]=(\'5[...]2\'kJ_an{[...]"\'8[...]5<7&7(".\',ydq~wczveq~woz[...]$<>[...]\'(7 ,.?<3,[...]CMsu{[...]4+5*[...])&5/+?[...]5<7&7(".\',ydq~wczveq~woz[...]$<>[...];4! "+[...]<(14%<-\'3*kJ_an{[...]"\'8[...]:3946\'[...]\'.,&1<+<57ybeweqavcewe}a[...]&05,[...](\'6="![...]5:#/%:9.!8pJYugi[...];"!,[...];:5![...]\'(7 ,.?<3,[...]wcewzp~wce{z[...];"!,[...];:5![...]\'(7 ,.?<3,[...]CMoz[...]26\'>[...]/((m

• tcp 180.150.186.132 (config.wn51.com) :80 ---> 192.168.133.203:49201

HTTP/1.1 200 OK[...]Content-Type: application/octet-stream[...]Last-Modified: Fri, 11 Nov 2016 15:57:40 GMT[...]Accept-Ranges: bytes[...]ETag: "61bb9c54343cd21:0"[...]Server: Microsoft-IIS/7.5[...]Date: Sat, 20 May 2017 15:42:28 GMT[...]Content-Length: 2927[...]rx+8+u7+5 <(;|lv}eeu$ $<1.;&se;[...]xylglkJ_}[...](;\'\' &\'"u7+5 <(;|lv}eekLDNotjx}[...]#1&!$pJY\\Ni[...]05kp`uoz\t06[...]"!kJ_HG{[...]\'+k):3#ohz%!0=&53o+& !#48`$<8h"/%3|71n[...]<)1.9[...]<%u{&\'!oz[...]\'-pj~kJ_Hrh[...]71 :"mXM\\}[...]5&&/[...]a8"!&.:/sebwyXKG{[...]\'*6&ye;}a[...](#" kJ_HG{[...]\'2&)[...]368g!8>"nw142:es&0<5-/nwvw[...]CMZ\\Ni[...]&($kwin[...]/<"yXKGNZi[...]\'-p{r[...]=3!1th|1"9(8"!,i8 \'/6=#{"!*|1h# =3|fie~>(hvdw[...]3"y^_N\\Hr[...]<:7ksrh[...]CMZ\\Ni[...];52!.:/pvke{z[...];52!.:/pJY\\N\\}[...]mXM\\HGNo%$kLDNZ\\Ni(:">k[...]=3!*6uo[...]1>+6[...]\'3|`tbo[...]/\'.#"feiezn[...]:;#:6=g[...]gco}|s[...]5<%+)\'zs{qug[...]sug}[...]uu{q`rcbubzni[...]sfi`o}wdg~na`[...]g`{w{r~pal|u[...]+#:4g[...]$ 36\'g[...]nq}e|uo[...]|{z(:">kJ_HGNZi.!$#y[...]:=<-"&|aieaf$<8745\'%?0|u[...]u~{qug"1"&*nu}`idsyw}gwdzn[...]:;#:6=g[...]5<%+)\'zp{qug[...]sug}[...]uu{q`rcbubzni[...]sfi`o}wdg~na`[...]g`{w{r~pal|u[...]+#:4g[...]$ 36\'g[...]nq}e|uo[...]|{z(:">kJ_HGNZi.!$#y[...]:=<-"&|aieaf$<8745\'%?0|u[...]up{qug[...]<)1.94s[...]ut`vhu[...]\'(*"=!hao~|s{[...]igfugzni[...]sgieo{wdgpna`[...]g`{w{u{we{udt||s{[...]gfo{i`epgxug[...]gzn[...]:/}g|uo[...]|{z(:">kJ_HGNZi.!$#y[...]=5:,+g{[...]7%-+[...]<5ar`bidzn[...];\'(8${w}e|u[...]\')7:0&a;[...]scifzn[...]!<#0/:hg{wna[...]una`[...]ga{w{t~pab|uo[...]nt}`ifqyujng{[...]a}ic{tev|~zih<5+*mXM\\HGNoz76[...]CMZ\\N\\}\'721yXKGNZ\\Ni(:">k[...];\'+?4h`o~g{<[...]4%ug[...]}g?<,0a[...]|s0)x4=ns[...]7%-+[...]<5ar`fidv`~s}[...]u+<*+g[...]0$>.gg[...]05&(!)|`ieo|g[...]:%<-+hk[...]/!2\'.zw{t`{vmo{{|<30,pJY\\N\\Hrh:%&1[...]CMZ\\N\\}\'7;:)0[...]CMZ\\N\\Hr.\'0*k[...]!=:9+4n{icuo<[...]&(=0|u[...]=."s[...]gg9(%"s[...]>7?0[...].\'zqeq`v}ag}[...]ku-\',6u[...]0"%(zu[...]03=.<;hmo~g[...]:%<-+hbg[...]fwxg[...]4!43\'heew{p`soz.!$#y^_N\\HGNo<30,p[...]</.9-/hf{wui\'[...];:)0zn[...]&(=0g[...]ga".80g[...]#%+0[...]<3zw~w}diaaf[...]mn+:>"u[...]+$8:nu[...]+5 <(;nvicu[...]:#\'+6zvg[...]}qeu[...]4\'/5:zqeq`v}a{z(:">kJ_HGNZ\\{<5+*m[...](//("+2zr{qno:[...]/:/+|s[...];:)0a[...]|g?<,0a[...]7%-+[...]<5aqcdidozqs}[...]u+<*+g[...]0$>.gg[...]05&(!)|liea[...](1<+0n[...]fsea[...]&545<nxwb{vin\'368yXKGNZ\\Ni(:">k[...];\'+?4h`o~g{<[...]=. "hu[...]=(;$n[...]us9.>$n[...]%1""[...](:heev{p`seuo[...]yg9(%"s[...]"6*!ns[...]"\'2\'(=z~{qn[...]<7.9$av`[...]taqn[...]23&\'(aqcdid}a.\'0*kLDNZ\\Nin\'7;:)0[...]CMZ\\N\\}/7;:)0[...]CMZ\\N\\Hr.\'0*k[...]/+%<,zs`v}eg}[...]\')&-|u[...];#\'.\'#scieo[...]d{r{u`w}[...]|{z(:">kJ_HGNZ\\{<5+*m[...]&97\',|gido~g{[...].;46|s[...]#!:.1axic{vna[...]zq{v`pzih<5+*mXM\\HGNZi.!$#y[...]4+#(%ha{v{qno[...]<) 9ug[...]/*5<<#uw`w}d|u[...]bifozic{[...]nin\'368yXKGNZ\\Ni(:">k[...]4-8.8zu{p`ws}[...]</;?hu[...])7\'(<%nr}didzn1:#(u[...]4\'+7z[...]|{z(:">kJ_HGNZ\\{<5+*m[...]&97\',|gido~g{[...].;46|s[...]#!:.1axicng[...]2:9#z[...]wehrh:!"8[...]CMZ\\N\\Hr.\'0*k[...]/+%<,zs`v}eg}[...]\')&-|u[...];#\'.\'#s`ido[...]"1,\'g[...]:30a}g[...]p}ailo~i[...]zih<5+*mXM\\HGNoz&%)!)6kNXKGNZih[...]pJY\\Nin[...]5&&/[...]5+*mXM\\Hr[...]! 4=[...]:">u3,1+zq""72\'36wg&6\'30=zwply^_N\\Hr[...];:0kqrh[...]CMZ\\Ni[...]<+mif[...]=5:7izh8(.}0&&5*&*{$:.,a*:;.z,\'):ewdn\')70?[...];<#0o&3>9[...]\'+kLDNZ\\{[...]4<&\'<(;[...]ucih[...]4<&\'<(;[...]CMZ\\Ni[...]545\'(=ktin[...]2\' :.<;yXKGgsuguango[...];52!.:/proz[...]2!43<. y^_N\\}a[...]! 4=[...]:">kJ_Hrh[...]\'2&)[...]y^_{z[...]:)3()2!0y[...]:30a}g[...]p}ailo~i[...]zih<5+*mXM\\HGNoz&%)!)6kNXKGNZih[...]pJY\\Nin[...]5&&/[...]5+*mXM\\Hr[...]! 4=[...]:">u3,1+zq""72\'36wg&6\'30=zwply^_N\\Hr[...];:0kqrh[...]CMZ\\Ni[...]<+mif[...]=5:7izh8(.}0&&5*&*{$:.,a*:;.z,\'):ewdn\')70?[...];<#0o&3>9[...]\'+kLDNZ\\{[...]4<&\'<(;[...]ucih[...]4<&\'<(;[...]CMZ\\Ni[...]545\'(=ktin[...]2\' :.<;yXKGgsuguango[...];52!.:/proz[...]2!43<. y^_N\\}a[...]! 4=[...]:">kJ_Hrh[...]\'2&)[...]y^_{z[...]:)3()2!0y

• tcp 192.168.133.203:49202 ---> 180.150.186.132 (config.wn51.com) :80

GET /kantu/shortcut/shortcutv1.dat HTTP/1.1[...]Host: config.wn51.com[...]Accept: */*

• tcp 180.150.186.132 (config.wn51.com) :80 ---> 192.168.133.203:49202

HTTP/1.1 200 OK[...]Content-Type: application/octet-stream[...]Last-Modified: Fri, 12 May 2017 02:21:34 GMT[...]Accept-Ranges: bytes[...]ETag: "3de7da79c6cad21:0"[...]Server: Microsoft-IIS/7.5[...]Date: Sat, 20 May 2017 15:42:29 GMT[...]Content-Length: 626[...]rx+8+u7+5 <(;|lv}eeu$
$<1.;&se;[...]xylglkJ_}[...](;\'\' &\'"u7+5 <(;|lv}eekLDgsugi`cjs[...]gxlpJY\\{[...]9-+&1"[...](:>me{z[...]6$? #0[...]\'3*kJ_Hrf~xg[...]ulcy^_Ni[...]ib{v{xrh[...](=3mXM\\}oj
~u[...]CMZi\t:[...]<"2!"[...]$=,\':7kprh[...]\'$/36[...]"&*:(#kJ_Hrf~xg[...]CMZi\t:[...]<"2!"[...]5/5\'kvin[...]\'"45+[...]\'45!{[...]CMoz[...](=3.24<"mXMXK

• tcp 192.168.133.203:49203 ---> 106.75.107.219 (update.wn51.com) :80

GET /kantu/updatev1.dat HTTP/1.1[...]Host: update.wn51.com[...]Accept: */*

• tcp 192.168.133.203:49204 ---> 180.150.186.132 (config.wn51.com) :80

GET /kantu/jpquery/queryinfo.dat HTTP/1.1[...]Host: config.wn51.com[...]Accept: */*

• tcp 106.75.107.219 (update.wn51.com) :80 ---> 192.168.133.203:49203

HTTP/1.1 200 OK[...]Content-Type: application/octet-stream[...]Last-Modified: Fri, 14 Apr 2017 08:50:59 GMT[...]Accept-Ranges: bytes[...]ETag: "294efa3cfcb4d21:0"[...]Server: Microsoft-IIS/7.5[...]Date: Sat, 20 May 2017 15:42:30 GMT[...]Content-Length: 955[...]rx+8+u7+5 <(;|lv}eeu$
$<1.;&se;[...]xylglkJ_}[...](;\'\' &\'"u7+5 <(;|lv}eekLDgsi[...]77430[...]CMsugu}[...]ibih[...]6\'yXKngsu{[...]03pv}m{z[...]$<y^_Ni[...]4\'4+9[...]36\'14-[...]&\'0ymwzwci
h[...]/=329+[...]/:"!#&9[...]/36kJ_Hr[...]#1&!$[...]5<7&7(".\',ydq~wczteq~woz[...]%%/36[...]5:#/%:9.!8pJY\\{[...]1*&\'0[...]:%+y^_guangsi[...]%%/36[...]30,pJY\\Ni[..
.]+!2 +![...]&3\'%}zn;77430o9)fdi6.#h84)!4a16\'v{p`[...]}esev[...]i743in[...]"54295pJYuguangsu{[...]9-+&1"[...]/=329+[...]9\'4\'kJ_HGNo[...]?6-;#6[...]30,pJY\\N\\H
r[...]+6+ %+\t28"k[...]9-+&1"[...]#"mXM\\HGNo[...](04+[...]-/:;"[...]/\') !&9-[...]. %+48[...]&>0y[...]:$4-[...]&0=.;$[...]):;4!
"+[...]<4%-/>[...]CMZ\\N\\}[...]5:"+4[...]/*6k[...]!4>{$6"oz[...]5<6"&2[...]&8$pJY\\N\\}a[...]+6+
%+[...]\'0*kLDNZ\\{tlc{[...]-$94*"[...]CMZ\\N\\}[...]?0921$[...]&>0y[...]-""270\t4,+y^_N\\HG{[...]!$29[...]4"&.=0[...];(
4\'4+9[...]\'4#9&,[...]/*6k[...]<6&9[...]/$;<)0[...].=&34-"[...]:&79 7\t28"kLDNZ\\Ni[...]\'(6$=4[...]#"m>?05<&*{"-$2,+046.<"}0?0}a[...]\'.-"
&[...]&>0yXKGNZih[...]9-+&1"[...]5+*mxjkHGNZXM\\Hrh[...]-$94*"[...];4! "+[...]-.&5pJY\\gu}a[...]#1&!$[...]368yXKG{|[...]71
:"[...]CMsu{z[...]%#45+y^_{z[...]:)3()2!0yXK

• tcp 192.168.133.203:49205 ---> 106.75.18.205 (csdw.wn51.com) :80

GET /position/get03 HTTP/1.1[...]Host: csdw.wn51.com[...]Accept: */*

• tcp 180.150.186.132 (config.wn51.com) :80 ---> 192.168.133.203:49204

HTTP/1.1 200 OK[...]Content-Type: application/octet-stream[...]Last-Modified: Tue, 09 May 2017 03:20:06 GMT[...]Accept-Ranges: bytes[...]ETag: "d5c9e42773c8d21:0"[...]Server: Microsoft-IIS/7.5[...]Date: Sat, 20 May 2017 15:42:30 GMT[...]Content-Length: 2478[...]rx+8+u7+5 <(;|lv}eeu$
$<1.;&se;&!!xylxmXMi[...]"\'8[...])5:yXKG{[...]"\'8[...]5<7&7(".\',g# "26hedq~w|dweqlyoz[...]$<>[...]\'(7
,.?<3,[...]CMZi[...]$<>[...]CMZ\\{[...]4+5*[...]30,pJY\\N\\}[...]26\'>[...]#"mfqe[...]4+5*[...]&8$pJY\\N\\}[...]:"/+[...]4$=(
"[...];.;2:&?9[...]<2>+2,\t4,+y`cw[...]:$4-[...]&0=.;$[...]):;4! "+[...]<4%-/>[...]CMZ\\Ni[...](6 "[...]26/</+[...]6\'1<"+4[...]<4%-/>[...]:"/+[...]4$=(
"[...]05#(-"[...].&1"&*[...]&8$pJY\\N\\}[...]:"/+[...]4$=("[...]05#(-"[...]/<-*[...]6,\t4,+y\t=2[...](04+[...]-/:;"[...]$<1:6"&[...]&.?1[...]&>0yXKGNoz[...]$<>[...]CMZ\\{[...]4+5
*[...]30,pJY\\N\\}[...]26\'>[...]#"m[...]"\'8[...]&>0yXKGNZi[...]<6&9[...]/$;<)0[...].=&34-"[...]:&79 7\t28"k[...](6
"[...]26/</+[...]=<)&5/+?[...].&1"&*[...]&8$pJY\\N\\}[...]:"/+[...]4$=("[...]05#(-"[...].&1"&*[...]&8$p[...]+5%<$0}a[...].-&?[...]&6)\')6[...]"\'7\'$6&[...]<2>+2,\t4,+y^_N\\H
r[...].-&?[...]&6)\')6[...]"\'7\'$6&[...]=("#[...]#"m[...]:$4-[...]&0=.;$[...]"!#.6$=[...];<+1[...]CMZ\\{z[...];"!,[...]!$#y^_N\\}[...]26\'>[...]5+*mXM\\HG{[...]"\'8[...]&>0y[...]$<>[
...]CMZ\\Ni[...](6 "[...]26/</+[...]=<)&5/+?[...].&1"&*[...]&8$p[...].-&?[...]&6)\')6[...])</=329+[...](=7?4>[...]#"mXM\\HG{[...]!$29[...]4"&.=0[...]038.004[...](=7?4>[...]
#"m[...].;&=(5!g[...].<"s[...]"\'7\'$6ih[...]:$4-[...]&0=.;$[...]"!#.6$=[...]:&79 7\t28"kLDNZ\\{[...]:$4-[...]&0=.;$[...]"!#.6$=[...];<+1[...]%?6&$:3+{|[...](04+[...]-/:;"[...]$<1:
6"&[...]&.?1[...]&>0yXKGNoz[...]$<>[...]CMZ\\{[...]4+5*[...]30,pJY\\N\\}[...]26\'>[...]#"m[...]&05,[...]/*6kJ_HGNo[...](04+[...]-/:;"[...]/\') !&9-[...].
%+48[...]&>0y[...]!$29[...]4"&.=0[...];(4\'4+9[...]\'4#9&,[...]/*6kJ_HG{|[...]2037[...]\'0*kLDNZi[...]$<>[...]CMZ\\Ni[...];"!,\t4,+y[...];"!,\t4,+y^_N\\Hr[...].-&?[...]&6)\')6[.
..])</=329+[...](=7?4>[...]#"m[...]<6&9[...]/$;<)0[...].=&34-"[...]:&79
7\t28"kLDNZih[...]4+5*[...]30,pJY\\Ni[...];"!,[...]!$#y^_N\\Hr[...]&05,[...]/*6k[...]$<>[...]CMZ\\Ni[...](6
"[...]26/</+[...]=<)&5/+?[...].&1"&*[...]&8$p[...]<6&9[...]/$;<)0[...].=&34-"[...]:&79

7\t28"kLDNZih[...]4+5*[...]30,pJY\\Ni[...];"!,[...]!$#y^_N\\Hr[...]&05,[...]/*6k[...]4+5*[...]&8$pJY\\N\\}[...]:"/+[...]4$=("[...];.;2:&?9[...]<2>+2,\t4,+y[...].-&?[...]&6)\')6[...])</=329+[...](=7?4>[...]#"mXM\\Hrh[...]"\'8[...]368yXKGNo[...]2037[...]\'0*kLDNZ\\{[...]4+5*[...]&8$p[...]$<>[...]CMZ\\Ni[...](6
"[...]26/</+[...]=<)&5/+?[...].&1"&*[...]&8$p[...](6
"[...]26/</+[...]=<)&5/+?[...].&1"&*[...]&8$pJY\\Nin[...]26\'>[...]5+*mXM\\Hr[...]&05,[...]:">kJ_HGNo[...]2037\t28"k[...]4+5*[...]&8$pJY\\N\\}[...]:"/+[...]4$=(
"[...];.;2:&?9[...]<2>+2,\t4,+y[...]!$29[...]4"&.=0[...];(
4\'4+9[...]\'4#9&,[...]/*6kJ_HG{|[...]2037[...]\'0*kHCMZ\\{[...]4+5*[...]30,pJY\\N\\}[...]26\'>[...]#"m[...]$<>[...]CMZ\\Ni[...](6
"[...]26/</+[...]=<)&5/+?[...].&1"&*[...]&8$p[...]?:103rh[...]!$29[...]4"&.=0[...];(
4\'4+9[...]\'4#9&,[...]/*6kJ_HG{|[...]2037[...]\'0*kLDNZi[...]$<>[...]CMZ\\Ni[...];"!,\t4,+y[...]"\'8[...]&>0yXKGNZi[...]<6&9[...]/$;<)0[...].=&34-"[...]:&79
7\t28"k[...]!$29[...]4"&.=0[...];(4\'4+9[...]\'4#9&,[...]/*6kJ_HG{|[...]2037[...]\'0*kHCMZih[...]4+5*[...].&5pJYih[...]&05,[...]!<k

• tcp 106.75.18.205 (csdw.wn51.com) :80 ---> 192.168.133.203:49205

HTTP/1.1 200 OK[...]Server: Apache-Coyote/1.1[...]Content-Type: application/json;charset=utf-8[...]Transfer-Encoding: chunked[...]Date: Sat, 20 May 2017 15:42:33 GMT[...]{"position":{"cityname":"","pro_id":0,"provname":""}}

• tcp 192.168.133.203:49206 ---> 120.132.61.186 (tjv1.wn51.com) :80

GET /statistics/ktsoftlist?code=dWlkLDAyMGQ0ZWQ2MTZkM2ZjYzg3OGYxOGMxNWY4YTZiM2EwLHFpZCxjZWJvMTcwNTIwLHNvZnR0eXBlLEthblR1LHNvZnRuYW1lLFduUGljdHVyZSx2ZXIsMS4xLjEuOSxzb2Z0bGlzdCwzNjBBUVdTLTAwMHxRUUdKLTAwMHxKU0RCLTAwMHxMRFMtMDAwfEtZLTAwMA== HTTP/1.1[...]Host: tjv1.wn51.com[...]Accept: */*

• tcp 192.168.133.203:49207 ---> 120.132.61.186 (tjv1.wn51.com) :80

POST /statistics/install?code=VUlELDAyMGQ0ZWQ2MTZkM2ZjYzg3OGYxOGMxNWY4YTZiM2EwLFFJRCxjZWJvMTcwNTIwLFNvZnROYW1lLEthblR1LFNvZnRJRCxXblBpY3R1cmUsU29mdFZlciwxLjEuMS45LElzT2xkLDAsSXNXQiwwLFRpbWUsMTQ5NTI5NDk1MixTaWduLGUxMTY2OjdBNzU3NzYxNjc3Mjc1Nzc2MTY3 HTTP/1.1[...]Host: tjv1.wn51.com[...]Accept: */*[...]Content-Length: 0

• tcp 120.132.61.186 (tjv1.wn51.com) :80 ---> 192.168.133.203:49206

HTTP/1.1 200 OK[...]Server: Apache-Coyote/1.1[...]Transfer-Encoding: chunked[...]Date: Sat, 20 May 2017 15:42:33 GMT[...]{"status":1}

• tcp 120.132.61.186 (tjv1.wn51.com) :80 ---> 192.168.133.203:49207

HTTP/1.1 200 OK[...]Server: Apache-Coyote/1.1[...]Transfer-Encoding: chunked[...]Date: Sat, 20 May 2017 15:42:34 GMT[...]{"status":1}

• tcp 192.168.133.203:49208 ---> 120.132.61.186 (tjv1.wn51.com) :80

GET /statistics/ktsoftlist?code=dWlkLDAyMGQ0ZWQ2MTZkM2ZjYzg3OGYxOGMxNWY4YTZiM2EwLHFpZCxjZWJvMTcwNTIwLHNvZnR0eXBlLEthblR1LHNvZnRuYW1lLFduUGljdHVyZSx2ZXIsMS4xLjEuOSxzb2Z0bGlzdCxERlNSRi0wMDB8Wk5ZU1JGLTAwMHxaTllXQlNSRi0wMDB8V05XQi0wMDB8Q0xPVkVSLTAwMA== HTTP/1.1[...]Host: tjv1.wn51.com[...]Accept: */*

• tcp 192.168.133.203:49209 ---> 180.150.186.132 (config.wn51.com) :80

GET /kantu/jpquery/querycfg.dat HTTP/1.1[...]Host: config.wn51.com[...]Accept: */*

• tcp 180.150.186.132 (config.wn51.com) :80 ---> 192.168.133.203:49209

HTTP/1.1 200 OK[...]Content-Type: application/octet-stream[...]Last-Modified: Tue, 09 May 2017 03:20:06 GMT[...]Accept-Ranges: bytes[...]ETag: "afa3e42773c8d21:0"[...]Server: Microsoft-IIS/7.5[...]Date: Sat, 20 May 2017 15:42:32 GMT[...]Content-Length: 538[...]rx+8+u7+5 <(;|lv}eeu$ $<1.;&se;&!!xylxmXMi[...]"\'8[...])5:yXKngo[...]2037[...]<2:y<%";}a[...]&05,[...]CMsu{[...]4+5*[...])&5/+?[...](35p(#0)in[...]26\'>[...]/=329+[...].(3mXMuar[...]&05,[...](\'6="!k(%$
{|[...]2037[...].<0 05kLDgsi[...]$<>[...]&(!![...]5p(#0)in[...]26\'>[...]=(\'5[...]2\'kJ_an{[...]"\'8[...]5<7&7(".\',ydq~wczveq~woz[...]$<>[...]\'(7
,.?<3,[...]CMsu{[...]4+5*[...])&5/+?[...]5<7&7(".\',ydq~wczveq~woz[...]$<>[...];4!
"+[...]<(14%<-\'3*kJ_an{[...]"\'8[...]:3946\'[...]\'.,&1<+<57ybeweqavcewe}a[...]&05,[...](\'6="![...]5:#/%:9.!8pJYugi[...];"!,[...];:5![...]\'(7

,.?<3,[...]wcewzp~wce{z[...];"!,[...];:5![...]\'(7 ,.?<3,[...]CMoz[...]26\'>[...]/((m

• tcp 192.168.133.203:49210 ---> 180.150.186.132 (config.wn51.com) :80

GET /kantu/jpquery/queryinfo.dat HTTP/1.1[...]Host: config.wn51.com[...]Accept: */*

• tcp 180.150.186.132 (config.wn51.com) :80 ---> 192.168.133.203:49210

HTTP/1.1 200 OK[...]Content-Type: application/octet-stream[...]Last-Modified: Tue, 09 May 2017 03:20:06 GMT[...]Accept-Ranges: bytes[...]ETag: "d5c9e42773c8d21:0"[...]Server: Microsoft-IIS/7.5[...]Date: Sat, 20 May 2017 15:42:35 GMT[...]Content-Length: 2478[...]rx+8+u7+5 <(;|lv}eeu$ $<1.;&se;&!!xylxmXMi[...]"\'8[...])5:yXKG{[...]"\'8[...]5<7&7(".\',g# "26hedq~w|dweqlyoz[...]$<>[...]\'(7 ,.?<3,[...]CMZi[...]$<>[...]CMZ\\{[...]4+5*[...]30,pJY\\N\\}[...]26\'>[...]#"mfqe[...]4+5*[...]&8$pJY\\N\\}[...]:"/+[...]4$=("[...];.;2:&?9[...]<2>+2,\t4,+y`cw[...]:$4-[...]&0=.;$[...]):;4! "+[...]<4%-/>[...]CMZ\\Ni[...](6 "[...]26/</+[...]6\'1<"+4[...]<4%-/>[...]:"/+[...]4$=("[...]05#(-"[...].&1"&*[...]&8$pJY\\N\\}[...]:"/+[...]4$=("[...]05#(-"[...]/<-*[...]6,\t4,+y\t=2[...](04+[...]-/:;"[...]$<1:6"&[...]&.?1[...]&>0yXKGNoz[...]$<>[...]CMZ\\{[...]4+5*[...]30,pJY\\N\\}[...]26\'>[...]#"m[...]"\'8[...]&>0yXKGNZi[...]<6&9[...]/$;<)0[...].=&34-"[...]:&79 7\t28"k[...](6 "[...]26/</+[...]=<)&5/+?[...].&1"&*[...]&8$pJY\\N\\}[...]:"/+[...]4$=("[...]05#(-"[...].&1"&*[...]&8$p[...]+5%<$0}a[...].-&?[...]&6)\')6[...]"\'7\'$6&[...]<2>+2,\t4,+y^_N\\Hr[...].-&?[...]&6)\')6[...]"\'7\'$6&[...]=("#[...]#"m[...]:$4-[...]&0=.;$[...]"!#.6$=[...];<+1[...]CMZ\\{z[...];"!,[...]!$#y^_N\\}[...]26\'>[...]5+*mXM\\HG{[...]"\'8[...]&>0y[...]$<>[...]CMZ\\Ni[...](6 "[...]26/</+[...]=<)&5/+?[...].&1"&*[...]&8$p[...].-&?[...]&6)\')6[...])</=329+[...](=7?4>[...]#"mXM\\HG{[...]!$29[...]4"&.=0[...]038.004[...](=7?4>[...]#"m[...].;&=(5!g[...].<"s[...]"\'7\'$6ih[...]:$4-[...]&0=.;$[...]"!#.6$=[...]:&79 7\t28"kLDNZ\\{[...]:$4-[...]&0=.;$[...]"!#.6$=[...];<+1[...]%?6&$:3+{|[...](04+[...]-/:;"[...]$<1:6"&[...]&.?1[...]&>0yXKGNoz[...]$<>[...]CMZ\\{[...]4+5*[...]30,pJY\\N\\}[...]26\'>[...]#"m[...]&05,[...]/*6kJ_HGNo[...](04+[...]-/:;"[...]/\') !&9-[...].%+48[...]&>0y[...]!$29[...]4"&.=0[...];(4\'4+9[...]\'4#9&,[...]/*6kJ_HG{|[...]2037[...]\'0*kLDNZi[...]$<>[...]CMZ\\Ni[...];"!,\t4,+y[...];"!,\t4,+y^_N\\Hr[...].-&?[...]&6)\')6[...])</=329+[...](=7?4>[...]#"m[...]<6&9[...]/$;<)0[...].=&34-"[...]:&79 7\t28"kLDNZih[...]4+5*[...]30,pJY\\Ni[...];"!,[...]!$#y^_N\\Hr[...]&05,[...]/*6k[...]$<>[...]CMZ\\Ni[...](6 "[...]26/</+[...]=<)&5/+?[...].&1"&*[...]&8$p[...]<6&9[...]/$;<)0[...].=&34-"[...]:&79 7\t28"kLDNZih[...]4+5*[...]30,pJY\\Ni[...];"!,[...]!$#y^_N\\Hr[...]&05,[...]/*6k[...]4+5*[...]&8$pJY\\N\\}[...]:"/+[...]4$=("[...];.;2:&?9[...]<2>+2,\t4,+y[...].-&?[...]&6)\')6[...])</=329+[...](=7?4>[...]#"mXM\\Hrh[...]"\'8[...]368yXKGNo[...]2037[...]\'0*kLDNZ\\{[...]4+5*[...]&8$p[...]$<>[...]CMZ\\Ni[...](6 "[...]26/</+[...]=<)&5/+?[...].&1"&*[...]&8$p[...](6 "[...]26/</+[...]=<)&5/+?[...].&1"&*[...]&8$pJY\\Nin[...]26\'>[...]5+*mXM\\Hr[...]&05,[...]:">kJ_HGNo[...]2037\t28"k[...]4+5*[...]&8$pJY\\N\\}[...]:"/+[...]4$=("[...];.;2:&?9[...]<2>+2,\t4,+y[...]!$29[...]4"&.=0[...];(4\'4+9[...]\'4#9&,[...]/*6kJ_HG{|[...]2037[...]\'0*kHCMZ\\{[...]4+5*[...]30,pJY\\N\\}[...]26\'>[...]#"m[...]$<>[...]CMZ\\Ni[...](6 "[...]26/</+[...]=<)&5/+?[...].&1"&*[...]&8$p[...]?:103rh[...]!$29[...]4"&.=0[...];(4\'4+9[...]\'4#9&,[...]/*6kJ_HG{|[...]2037[...]\'0*kLDNZi[...]$<>[...]CMZ\\Ni[...];"!,\t4,+y[...]"\'8[...]&>0yXKGNZi[...]<6&9[...]/$;<)0[...].=&34-"[...]:&79 7\t28"k[...]!$29[...]4"&.=0[...];(4\'4+9[...]\'4#9&,[...]/*6kJ_HG{|[...]2037[...]\'0*kHCMZih[...]4+5*[...].&5pJYih[...]&05,[...]!<k

• tcp 192.168.133.203:49211 ---> 120.132.61.186 (tjv1.wn51.com) :80

GET /statistics/ktsoftlist?code=dWlkLDAyMGQ0ZWQ2MTZkM2ZjYzg3OGYxOGMxNWY4YTZiM2EwLHFpZCxjZWJvMTcwNTIwLHNvZnR0eXBlLEthblR1LHNvZnRuYW1lLFduUGljdHVyZSx2ZXIsMS4xLjEuOSxzb2Z0bGlzdCwzNjBBUVdTLTAwMHxRUUdKLTAwMHxKU0RCLTAwMHxMRFMtMDAwfEtZLTAwMA== HTTP/1.1[...]Host: tjv1.wn51.com[...]Accept: */*

• tcp 120.132.61.186 (tjv1.wn51.com) :80 ---> 192.168.133.203:49208

HTTP/1.1 200 OK[...]Server: Apache-Coyote/1.1[...]Transfer-Encoding: chunked[...]Date: Sat, 20 May 2017 15:42:37 GMT[...]{"status":1}

• tcp 120.132.61.186 (tjv1.wn51.com) :80 ---> 192.168.133.203:49211

HTTP/1.1 200 OK[...]Server: Apache-Coyote/1.1[...]Transfer-Encoding: chunked[...]Date: Sat, 20 May 2017 15:42:39 GMT[...]{"status":1}

• tcp 192.168.133.203:49212 ---> 120.132.61.186 (tjv1.wn51.com) :80

GET /statistics/ktsoftlist?code=dWlkLDAyMGQ0ZWQ2MTZkM2ZjYzg3OGYxOGMxNWY4YTZiM2EwLHFpZCxjZWJvMTcwNTIwLHNvZnR0eXBlLEthblR1LHNvZnRuYW1lLFduUGljdHVyZSx2ZXIsMS4xLjEuOSxzb2Z0bGlzdCxXTkxMUS0wMDA= HTTP/1.1[...]Host: tjv1.wn51.com[...]Accept: */*

• tcp 120.132.61.186 (tjv1.wn51.com) :80 ---> 192.168.133.203:49212

HTTP/1.1 200 OK[...]Server: Apache-Coyote/1.1[...]Transfer-Encoding: chunked[...]Date: Sat, 20 May 2017 15:42:39 GMT[...]{"status":1}

• tcp 192.168.133.203:49213 ---> 120.132.61.186 (tjv1.wn51.com) :80

GET /statistics/mainbrowser?code=dWlkLDAyMGQ0ZWQ2MTZkM2ZjYzg3OGYxOGMxNWY4YTZiM2EwLHFpZCxjZWJvMTcwNTIwLHNvZnR0eXBlLFNodVJ1RmEsc29mdG5hbWUsV25QaWN0dXJlLHZlciwxLjEuMS45LG1haW5icm93c2VyLGlleHBsb3JlLmV4ZSxzdGFydHBhZ2UsaHR0cDovL2dvLm1pY3Jvc29mdC5jb20vZndsaW5rLz9MaW5rSWQ9NjkxNTc= HTTP/1.1[...]Host: tjv1.wn51.com[...]Accept: */*

• tcp 192.168.133.203:49214 ---> 120.132.61.186 (tjv1.wn51.com) :80

GET /statistics/ktsoftlist?code=dWlkLDAyMGQ0ZWQ2MTZkM2ZjYzg3OGYxOGMxNWY4YTZiM2EwLHFpZCxjZWJvMTcwNTIwLHNvZnR0eXBlLEthblR1LHNvZnRuYW1lLFduUGljdHVyZSx2ZXIsMS4xLjEuOSxzb2Z0bGlzdCxERlNSRi0wMDB8Wk5ZU1JGLTAwMHxaTlXQlNSRi0wMDB8V05XQi0wMDB8Q0xPVkVSLTAwMA== HTTP/1.1[...]Host: tjv1.wn51.com[...]Accept: */*

• tcp 120.132.61.186 (tjv1.wn51.com) :80 ---> 192.168.133.203:49213

HTTP/1.1 200 OK[...]Server: Apache-Coyote/1.1[...]Transfer-Encoding: chunked[...]Date: Sat, 20 May 2017 15:42:41 GMT[...]{"status":1}

• tcp 120.132.61.186 (tjv1.wn51.com) :80 ---> 192.168.133.203:49214

HTTP/1.1 200 OK[...]Server: Apache-Coyote/1.1[...]Transfer-Encoding: chunked[...]Date: Sat, 20 May 2017 15:42:40 GMT[...]{"status":1}

• tcp 192.168.133.203:49215 ---> 120.132.61.186 (tjv1.wn51.com) :80

GET /statistics/ktsoftlist?code=dWlkLDAyMGQ0ZWQ2MTZkM2ZjYzg3OGYxOGMxNWY4YTZiM2EwLHFpZCxjZWJvMTcwNTIwLHNvZnR0eXBlLEthblR1LHNvZnRuYW1lLFduUGljdHVyZSx2ZXIsMS4xLjEuOSxzb2Z0bGlzdCxXTkxMUS0wMDA= HTTP/1.1[...]Host: tjv1.wn51.com[...]Accept: */*

• tcp 120.132.61.186 (tjv1.wn51.com) :80 ---> 192.168.133.203:49215

HTTP/1.1 200 OK[...]Server: Apache-Coyote/1.1[...]Transfer-Encoding: chunked[...]Date: Sat, 20 May 2017 15:42:41 GMT[...]{"status":1}

• tcp 192.168.133.203:49216 ---> 120.132.61.186 (tjv1.wn51.com) :80

GET /statistics/mainbrowser?code=dWlkLDAyMGQ0ZWQ2MTZkM2ZjYzg3OGYxOGMxNWY4YTZiM2EwLHFpZCxjZWJvMTcwNTIwLHNvZnR0eXBlLFNodVJ1RmEsc29mdG5hbWUsV25QaWN0dXJlLHZlciwxLjEuMS45LG1haW5icm93c2VyLGlleHBsb3JlLmV4ZSxzdGFydHBhZ2UsaHR0cDovL2dvLm1pY3Jvc29mdC5jb20vZndsaW5rLz9MaW5rSWQ9NjkxNTc= HTTP/1.1[...]Host: tjv1.wn51.com[...]Accept: */*

• tcp 120.132.61.186 (tjv1.wn51.com) :80 ---> 192.168.133.203:49216

HTTP/1.1 200 OK[...]Server: Apache-Coyote/1.1[...]Transfer-Encoding: chunked[...]Date: Sat, 20 May 2017 15:42:42 GMT[...]{"status":1}

• udp 192.168.133.254:67 ---> 192.168.133.203:68

localdomain

• udp 192.168.133.1:5355 ---> 192.168.133.203:65399

in-addr[...]arpa[...]in-addr

• udp 192.168.133.1:5355 ---> 192.168.133.203:57341

arpa

Threads behavioural information

In this section it's possible to find information about sample's threads, such as the actions performed by each sample's thread ordered chronologically.

• Thread T0 (in process P0, cebo.exe) description

• Thread's childs

• Thread T1 (in process P0, cebo.exe)

• Thread' events

• Thread Create (Thread ID: T1)

• Thread T1 (in process P0, cebo.exe) description

• Thread's childs

• Thread T2 (in process P0, cebo.exe)
• Thread T4 (in process P0, cebo.exe)
• Thread T6 (in process P1, WnPicUtility.exe)
• Thread T13 (in process P2, WnPicUtility.exe)

• Thread' events

• Thread Create (Thread ID: T2)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\LastInstallTime Type: REG_SZ, Length: 260, Data: 1495294938)
• RegSetValue (HKLM\\SOFTWARE\\V1BEYXRI\\LastInstallTime Type: REG_SZ, Length: 260, Data: 1495294938)
• Thread Create (Thread ID: TUNKALIAS)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\InstallPath Type: REG_SZ, Length: 260, Data: C:\\Program Files\\WnPicture\\)
• Thread Create (Thread ID: T4)
• Process Create (C:\\Program Files\\WnPicture\\WnPicUtility.exe PID: P1, Command line: "C:\\Program Files\\WnPicture\\WnPicUtility.exe" InstallSpreadOperate cebo170520)
• Thread Create (Thread ID: TUNKALIAS)
• Process Create (C:\\Program Files\\WnPicture\\WnPicUtility.exe PID: P2, Command line: "C:\\Program Files\\WnPicture\\WnPicUtility.exe" CreateStartMenu cebo170520,,cebo,2)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\LastInstallTime Type: REG_SZ, Length: 260, Data: 1495294938)
• RegSetValue (HKLM\\SOFTWARE\\V1BEYXRI\\LastInstallTime Type: REG_SZ, Length: 260, Data: 1495294938)

• Thread T2 (in process P0, cebo.exe) description

• Thread's childs

• Thread T3 (in process P0, cebo.exe)

• Thread' events

• Thread Create (Thread ID: T3)
• Thread Create (Thread ID: TUNKALIAS)

• Thread T3 (in process P0, cebo.exe) description

• Thread's childs

- **Thread' events**

  - Thread Create (Thread ID: TUNKALIAS)

• Thread T4 (in process P0, cebo.exe) description

- **Thread's childs**

  - Thread T5 (in process P0, cebo.exe)

- **Thread' events**

  - Thread Create (Thread ID: T5)

• Thread T5 (in process P0, cebo.exe) description

- **Thread's childs**

- **Thread' events**

  - Thread Create (Thread ID: TUNKALIAS)
  - Thread Create (Thread ID: TUNKALIAS)

• Thread T6 (in process P1, WnPicUtility.exe) description

- **Thread's childs**

  - Thread T7 (in process P1, WnPicUtility.exe)

- **Thread' events**

  - Thread Create (Thread ID: T7)

• Thread T7 (in process P1, WnPicUtility.exe) description

- **Thread's childs**

  - Thread T8 (in process P1, WnPicUtility.exe)
  - Thread T9 (in process P1, WnPicUtility.exe)
  - Thread T11 (in process P1, WnPicUtility.exe)
  - Thread T20 (in process P1, WnPicUtility.exe)
  - Thread T21 (in process P1, WnPicUtility.exe)
  - Thread T22 (in process P1, WnPicUtility.exe)
  - Thread T23 (in process P1, WnPicUtility.exe)
  - Thread T24 (in process P1, WnPicUtility.exe)
  - Thread T25 (in process P1, WnPicUtility.exe)

- **Thread' events**

• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\InstallPath Type: REG_SZ, Length: 260, Data: C:\\Program Files\\WnPicture\\)
• RegSetValue (HKLM\\SOFTWARE\\Microsoft\\Windows\\CurrentVersion\\Uninstall\\\\DisplayName Type: REG_SZ, Length: 260, Data: 1.1)
• RegSetValue (HKLM\\SOFTWARE\\Microsoft\\Windows\\CurrentVersion\\Uninstall\\\\UninstallString Type: REG_SZ, Length: 260, Data: C:\\Program Files\\WnPicture\\WnPicUninstall.exe)
• RegSetValue (HKLM\\SOFTWARE\\Microsoft\\Windows\\CurrentVersion\\Uninstall\\\\DisplayIcon Type: REG_SZ, Length: 260, Data: C:\\Program Files\\WnPicture\\WnPicViewer.exe)
• RegSetValue (HKLM\\SOFTWARE\\Microsoft\\Windows\\CurrentVersion\\Uninstall\\\\DisplayVersion Type: REG_SZ, Length: 260, Data: 1.1.9.05091)
• RegSetValue (HKLM\\SOFTWARE\\Microsoft\\Windows\\CurrentVersion\\Uninstall\\\\Publisher Type: REG_SZ, Length: 260, Data: www.wn51.com)
• RegSetValue (HKLM\\SOFTWARE\\Microsoft\\Windows\\CurrentVersion\\Uninstall\\\\URLInfoAbout Type: REG_SZ, Length: 260, Data: http://www.wn51.com/kantu/)
• Thread Create (Thread ID: T8)
• Thread Create (Thread ID: T9)
• RegCreateKey (HKLM\\SoftWare\\WnPicturemgr Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKLM\\SOFTWARE\\WnPicturemgr\\ServiceName Type: REG_SZ, Length: 60, Data: WnPicServiceV1)
• RegCreateKey (HKLM\\SoftWare\\WnPicturemgr Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\SOFTWARE\\WnPicturemgr\\ServiceDisplayName Type: REG_SZ, Length: 72, Data: WnPicView Service)
• RegCreateKey (HKLM\\SoftWare\\WnPicturemgr Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\SOFTWARE\\WnPicturemgr\\ServiceDescription Type: REG_SZ, Length: 188, Data:)
• RegCreateKey (HKLM\\SoftWare\\WnPicturemgr Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\SOFTWARE\\WnPicturemgr\\ServiceDll Type: REG_EXPAND_SZ, Length: 156, Data: C:\\Program Files\\WnPicture\\WnPicSP.dll)
• RegSetValue (HKLM\\SOFTWARE\\Microsoft\\Windows NT\\CurrentVersion\\Svchost\\WnPicServiceV1 Type: REG_MULTI_SZ, Length: 30, Data: WnPicServiceV1)
• RegCreateKey (HKLM\\SYSTEM\\CurrentControlSet\\Services\\WnPicServiceV1 Desired Access: Set Value)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Services\\WnPicServiceV1 Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\System\\CurrentControlSet\\services\\WnPicServiceV1\\DisplayName Type: REG_SZ, Length: 74, Data: WnPicView Service)
• RegCreateKey (HKLM\\SYSTEM\\CurrentControlSet\\Services\\WnPicServiceV1 Desired Access: Set Value)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Services\\WnPicServiceV1 Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\System\\CurrentControlSet\\services\\WnPicServiceV1\\Description Type: REG_SZ, Length: 190, Data:)
• RegCreateKey (HKLM\\SYSTEM\\CurrentControlSet\\Services\\WnPicServiceV1\\Parameters Desired Access: Set Value)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Services\\WnPicServiceV1\\Parameters Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKLM\\System\\CurrentControlSet\\services\\WnPicServiceV1\\Parameters\\ServiceDll Type: REG_EXPAND_SZ, Length: 156, Data: C:\\Program Files\\WnPicture\\WnPicSP.dll)
• RegCreateKey (HKCR\\.bmp Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.bmp\\WnPictureBackup Type: REG_SZ, Length: 56, Data: Paint.Picture)
• RegCreateKey (HKCU\\Software\\Classes\\.bmp Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.bmp Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.bmp\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.bmp)
• RegCreateKey (HKCU\\Software\\Classes\\.bmp\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.bmp\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.bmp\\OpenWithProgids\\WnPicture.bmp Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmp\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmp Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmp\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.bmp\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmp\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmp Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmp\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmp\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmp\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.bmp\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bmp\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bmp Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bmp\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bmp\\OpenWithProgids\\WnPicture.bmp Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bmp\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bmp\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.bmp)
• RegCreateKey (HKCR\\.dib Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.dib\\WnPictureBackup Type: REG_SZ, Length: 56, Data: Paint.Picture)
• RegCreateKey (HKCU\\Software\\Classes\\.dib Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.dib Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.dib\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.dib)
• RegCreateKey (HKCU\\Software\\Classes\\.dib\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.dib\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.dib\\OpenWithProgids\\WnPicture.dib Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dib\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dib Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dib\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.dib\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dib\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dib Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dib\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dib\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dib\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegSetValue (HKCU\\Software\\Classes\\WnPicture.dib\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dib\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dib Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dib\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dib\\OpenWithProgids\\WnPicture.dib Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dib\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dib\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.dib)
• RegCreateKey (HKCR\\.jpg Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.jpg\\WnPictureBackup Type: REG_SZ, Length: 36, Data: jpegfile)
• RegCreateKey (HKCU\\Software\\Classes\\.jpg Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jpg Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jpg\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.jpg)
• RegCreateKey (HKCU\\Software\\Classes\\.jpg\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jpg\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jpg\\OpenWithProgids\\WnPicture.jpg Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpg\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpg Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpg\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jpg\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",4)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpg\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpg Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpg\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpg\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpg\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jpg\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpg\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpg Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpg\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpg\\OpenWithProgids\\WnPicture.jpg Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpg\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpg\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.jpg)
• RegCreateKey (HKCU\\Software\\Classes\\.jif Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jif Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jif\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.jif)
• RegCreateKey (HKCU\\Software\\Classes\\.jif\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jif\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jif\\OpenWithProgids\\WnPicture.jif Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jif\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jif Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jif\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jif\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jif\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jif Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jif\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jif\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jif\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jif\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jif\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jif Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jif\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jif\\OpenWithProgids\\WnPicture.jif Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jif\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jif\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.jif)
• RegCreateKey (HKCR\\.jpeg Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.jpeg\\WnPictureBackup Type: REG_SZ, Length: 36, Data: jpegfile)
• RegCreateKey (HKCU\\Software\\Classes\\.jpeg Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jpeg Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jpeg\\(Default) Type: REG_SZ, Length: 60, Data: WnPicture.jpeg)
• RegCreateKey (HKCU\\Software\\Classes\\.jpeg\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jpeg\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jpeg\\OpenWithProgids\\WnPicture.jpeg Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpeg\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpeg Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpeg\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jpeg\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpeg\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpeg Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpeg\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpeg\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpeg\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jpeg\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpeg\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpeg Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpeg\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpeg\\OpenWithProgids\\WnPicture.jpeg Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpeg\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpeg\\UserChoice\\ProgId Type: REG_SZ, Length: 60, Data: WnPicture.jpeg)
• RegCreateKey (HKCR\\.jpe Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.jpe\\WnPictureBackup Type: REG_SZ, Length: 36, Data: jpegfile)
• RegCreateKey (HKCU\\Software\\Classes\\.jpe Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jpe Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jpe\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.jpe)
• RegCreateKey (HKCU\\Software\\Classes\\.jpe\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jpe\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jpe\\OpenWithProgids\\WnPicture.jpe Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpe\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpe Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpe\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jpe\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpe\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpe Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpe\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpe\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jpe\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jpe\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpe\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpe Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpe\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpe\\OpenWithProgids\\WnPicture.jpe Type: REG_NONE, Length: 0)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpe\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jpe\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.jpe)
• RegCreateKey (HKCR\\.png Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.png\\WnPictureBackup Type: REG_SZ, Length: 32, Data: pngfile)
• RegCreateKey (HKCU\\Software\\Classes\\.png Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.png Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.png\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.png)
• RegCreateKey (HKCU\\Software\\Classes\\.png\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.png\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.png\\OpenWithProgids\\WnPicture.png Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.png\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.png Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.png\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.png\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",5)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.png\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.png Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.png\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.png\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.png\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.png\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.png\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.png Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.png\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.png\\OpenWithProgids\\WnPicture.png Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.png\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.png\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.png)
• RegCreateKey (HKCR\\.gif Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)

• RegSetValue (HKCR\\.gif\\WnPictureBackup Type: REG_SZ, Length: 32, Data: giffile)
• RegCreateKey (HKCU\\Software\\Classes\\.gif Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.gif Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.gif\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.gif)
• RegCreateKey (HKCU\\Software\\Classes\\.gif\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.gif\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.gif\\OpenWithProgids\\WnPicture.gif Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.gif\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.gif Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.gif\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.gif\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",3)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.gif\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.gif Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.gif\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.gif\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.gif\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.gif\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.gif\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.gif Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.gif\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.gif\\OpenWithProgids\\WnPicture.gif Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.gif\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.gif\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.gif)
• RegCreateKey (HKCR\\.ico Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.ico\\WnPictureBackup Type: REG_SZ, Length: 32, Data: icofile)
• RegCreateKey (HKCU\\Software\\Classes\\.ico Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.ico Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ico\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.ico)
• RegCreateKey (HKCU\\Software\\Classes\\.ico\\OpenWithProgids Desired Access: Set Value)

• RegCreateKey (HKCU\\Software\\Classes\\.ico\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ico\\OpenWithProgids\\WnPicture.ico Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ico\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ico Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ico\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ico\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",2)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ico\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ico Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ico\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ico\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ico\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ico\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ico\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ico Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ico\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ico\\OpenWithProgids\\WnPicture.ico Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ico\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ico\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.ico)
• RegCreateKey (HKCR\\.cur Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.cur\\WnPictureBackup Type: REG_SZ, Length: 32, Data: curfile)
• RegCreateKey (HKCU\\Software\\Classes\\.cur Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.cur Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.cur\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.cur)
• RegCreateKey (HKCU\\Software\\Classes\\.cur\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.cur\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.cur\\OpenWithProgids\\WnPicture.cur Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cur\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cur Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cur\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.cur\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cur\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cur Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cur\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cur\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cur\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.cur\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cur\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cur Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cur\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cur\\OpenWithProgids\\WnPicture.cur Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cur\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cur\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.cur)
• RegCreateKey (HKCR\\.tif Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.tif\\WnPictureBackup Type: REG_SZ, Length: 72, Data: TIFImage.Document)
• RegCreateKey (HKCU\\Software\\Classes\\.tif Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.tif Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.tif\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.tif)
• RegCreateKey (HKCU\\Software\\Classes\\.tif\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.tif\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.tif\\OpenWithProgids\\WnPicture.tif Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tif\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tif Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tif\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegSetValue (HKCU\\Software\\Classes\\WnPicture.tif\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",7)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tif\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tif Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tif\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tif\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tif\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.tif\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tif\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tif Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tif\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tif\\OpenWithProgids\\WnPicture.tif Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tif\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tif\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.tif)
• RegCreateKey (HKCR\\.tiff Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.tiff\\WnPictureBackup Type: REG_SZ, Length: 72, Data: TIFImage.Document)
• RegCreateKey (HKCU\\Software\\Classes\\.tiff Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.tiff Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.tiff\\(Default) Type: REG_SZ, Length: 60, Data: WnPicture.tiff)
• RegCreateKey (HKCU\\Software\\Classes\\.tiff\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.tiff\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.tiff\\OpenWithProgids\\WnPicture.tiff Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tiff\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tiff Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tiff\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.tiff\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tiff\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tiff Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tiff\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tiff\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tiff\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.tiff\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tiff\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tiff Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tiff\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tiff\\OpenWithProgids\\WnPicture.tiff Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tiff\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tiff\\UserChoice\\ProgId Type: REG_SZ, Length: 60, Data: WnPicture.tiff)
• RegCreateKey (HKCU\\Software\\Classes\\.tga Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.tga Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.tga\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.tga)
• RegCreateKey (HKCU\\Software\\Classes\\.tga\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.tga\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.tga\\OpenWithProgids\\WnPicture.tga Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tga\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tga Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tga\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.tga\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tga\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tga Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tga\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tga\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.tga\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.tga\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tga\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tga Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tga\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tga\\OpenWithProgids\\WnPicture.tga Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tga\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.tga\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.tga)
• RegCreateKey (HKCU\\Software\\Classes\\.targa Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.targa Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.targa\\(Default) Type: REG_SZ, Length: 64, Data: WnPicture.targa)
• RegCreateKey (HKCU\\Software\\Classes\\.targa\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.targa\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.targa\\OpenWithProgids\\WnPicture.targa Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.targa\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.targa Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.targa\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.targa\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.targa\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.targa Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.targa\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.targa\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.targa\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.targa\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.targa\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.targa Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.targa\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.targa\\OpenWithProgids\\WnPicture.targa Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.targa\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.targa\\UserChoice\\ProgId Type: REG_SZ, Length: 64, Data: WnPicture.targa)
• RegCreateKey (HKCU\\Software\\Classes\\.pcx Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pcx Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pcx\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.pcx)
• RegCreateKey (HKCU\\Software\\Classes\\.pcx\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pcx\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pcx\\OpenWithProgids\\WnPicture.pcx Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcx\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcx Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcx\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pcx\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcx\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcx Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcx\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcx\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcx\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pcx\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pcx\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pcx Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pcx\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pcx\\OpenWithProgids\\WnPicture.pcx Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pcx\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pcx\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.pcx)
• RegCreateKey (HKCU\\Software\\Classes\\.wap Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.wap Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.wap\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.wap)
• RegCreateKey (HKCU\\Software\\Classes\\.wap\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.wap\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.wap\\OpenWithProgids\\WnPicture.wap Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wap\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wap Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wap\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.wap\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wap\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wap Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wap\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wap\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wap\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.wap\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wap\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wap Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wap\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wap\\OpenWithProgids\\WnPicture.wap Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wap\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wap\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.wap)
• RegCreateKey (HKCU\\Software\\Classes\\.wbmp Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.wbmp Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.wbmp\\(Default) Type: REG_SZ, Length: 60, Data: WnPicture.wbmp)
• RegCreateKey (HKCU\\Software\\Classes\\.wbmp\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.wbmp\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.wbmp\\OpenWithProgids\\WnPicture.wbmp Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbmp\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbmp Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbmp\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.wbmp\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbmp\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbmp Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbmp\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbmp\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbmp\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.wbmp\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wbmp\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wbmp Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wbmp\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wbmp\\OpenWithProgids\\WnPicture.wbmp Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wbmp\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wbmp\\UserChoice\\ProgId Type: REG_SZ, Length: 60, Data: WnPicture.wbmp)
• RegCreateKey (HKCU\\Software\\Classes\\.wbm Desired Access: Set Value)

• RegCreateKey (HKCU\\Software\\Classes\\.wbm Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.wbm\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.wbm)
• RegCreateKey (HKCU\\Software\\Classes\\.wbm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.wbm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.wbm\\OpenWithProgids\\WnPicture.wbm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbm\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbm\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.wbm\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbm\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbm Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbm\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbm\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wbm\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.wbm\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wbm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wbm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wbm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wbm\\OpenWithProgids\\WnPicture.wbm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wbm\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wbm\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.wbm)
• RegCreateKey (HKCU\\Software\\Classes\\.j2k Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.j2k Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.j2k\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.j2k)
• RegCreateKey (HKCU\\Software\\Classes\\.j2k\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.j2k\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.j2k\\OpenWithProgids\\WnPicture.j2k Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2k\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2k Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2k\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.j2k\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2k\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2k Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2k\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2k\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2k\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.j2k\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.j2k\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.j2k Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.j2k\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.j2k\\OpenWithProgids\\WnPicture.j2k Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.j2k\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.j2k\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.j2k)
• RegCreateKey (HKCU\\Software\\Classes\\.j2c Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.j2c Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.j2c\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.j2c)
• RegCreateKey (HKCU\\Software\\Classes\\.j2c\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.j2c\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.j2c\\OpenWithProgids\\WnPicture.j2c Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2c\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2c Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2c\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.j2c\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2c\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2c Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2c\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2c\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.j2c\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.j2c\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.j2c\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.j2c Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.j2c\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.j2c\\OpenWithProgids\\WnPicture.j2c Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.j2c\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.j2c\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.j2c)
• RegCreateKey (HKCU\\Software\\Classes\\.jp2 Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jp2 Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jp2\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.jp2)
• RegCreateKey (HKCU\\Software\\Classes\\.jp2\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jp2\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jp2\\OpenWithProgids\\WnPicture.jp2 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jp2\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jp2 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jp2\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jp2\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jp2\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jp2 Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jp2\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jp2\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jp2\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jp2\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jp2\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jp2 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jp2\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jp2\\OpenWithProgids\\WnPicture.jp2 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jp2\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jp2\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.jp2)
• RegCreateKey (HKCU\\Software\\Classes\\.ras Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.ras Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ras\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.ras)
• RegCreateKey (HKCU\\Software\\Classes\\.ras\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.ras\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ras\\OpenWithProgids\\WnPicture.ras Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ras\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ras Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ras\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ras\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ras\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ras Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ras\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ras\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ras\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ras\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ras\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ras Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ras\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ras\\OpenWithProgids\\WnPicture.ras Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ras\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ras\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.ras)
• RegCreateKey (HKCU\\Software\\Classes\\.pbm Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pbm Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pbm\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.pbm)
• RegCreateKey (HKCU\\Software\\Classes\\.pbm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pbm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pbm\\OpenWithProgids\\WnPicture.pbm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pbm\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pbm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pbm\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pbm\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pbm\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pbm Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pbm\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pbm\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pbm\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pbm\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pbm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pbm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pbm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pbm\\OpenWithProgids\\WnPicture.pbm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pbm\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pbm\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.pbm)
• RegCreateKey (HKCU\\Software\\Classes\\.pbm Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pbm Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pbm\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.pbm)
• RegCreateKey (HKCU\\Software\\Classes\\.pbm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pbm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pbm\\OpenWithProgids\\WnPicture.pbm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pbm\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pbm\\DefaultIcon Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pbm\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pbm\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pbm\\shell\\open\\command Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pbm\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pbm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pbm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pbm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pbm\\OpenWithProgids\\WnPicture.pbm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pbm\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pbm\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.pbm)
• RegCreateKey (HKCU\\Software\\Classes\\.pgm Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pgm Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pgm\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.pgm)
• RegCreateKey (HKCU\\Software\\Classes\\.pgm\\OpenWithProgids Desired Access: Set Value)

• RegCreateKey (HKCU\\Software\\Classes\\.pgm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pgm\\OpenWithProgids\\WnPicture.pgm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgm\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgm\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pgm\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgm\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgm Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgm\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgm\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgm\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pgm\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgm\\OpenWithProgids\\WnPicture.pgm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgm\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgm\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.pgm)
• RegCreateKey (HKCU\\Software\\Classes\\.pgm Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pgm Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pgm\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.pgm)
• RegCreateKey (HKCU\\Software\\Classes\\.pgm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pgm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pgm\\OpenWithProgids\\WnPicture.pgm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgm\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgm\\DefaultIcon Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pgm\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgm\\shell\\open\\command Desired Access: Set Value)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgm\\shell\\open\\command Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pgm\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgm\\OpenWithProgids\\WnPicture.pgm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgm\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgm\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.pgm)
• RegCreateKey (HKCU\\Software\\Classes\\.ppm Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.ppm Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ppm\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.ppm)
• RegCreateKey (HKCU\\Software\\Classes\\.ppm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.ppm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ppm\\OpenWithProgids\\WnPicture.ppm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ppm\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ppm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ppm\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ppm\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ppm\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ppm Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ppm\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ppm\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ppm\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ppm\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ppm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ppm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ppm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ppm\\OpenWithProgids\\WnPicture.ppm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ppm\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ppm\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.ppm)
• RegCreateKey (HKCU\\Software\\Classes\\.ppm Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.ppm Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ppm\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.ppm)
• RegCreateKey (HKCU\\Software\\Classes\\.ppm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.ppm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ppm\\OpenWithProgids\\WnPicture.ppm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ppm\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ppm\\DefaultIcon Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ppm\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ppm\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ppm\\shell\\open\\command Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ppm\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ppm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ppm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ppm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ppm\\OpenWithProgids\\WnPicture.ppm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ppm\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ppm\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.ppm)

• RegCreateKey (HKCU\\Software\\Classes\\.mng Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.mng Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.mng\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.mng)
• RegCreateKey (HKCU\\Software\\Classes\\.mng\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.mng\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.mng\\OpenWithProgids\\WnPicture.mng Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mng\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mng Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mng\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.mng\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mng\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mng Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mng\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mng\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mng\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.mng\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mng\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mng Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mng\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mng\\OpenWithProgids\\WnPicture.mng Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mng\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mng\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.mng)
• RegCreateKey (HKCU\\Software\\Classes\\.jng Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jng Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jng\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.jng)
• RegCreateKey (HKCU\\Software\\Classes\\.jng\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jng\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jng\\OpenWithProgids\\WnPicture.jng Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jng\\DefaultIcon Desired Access: Set Value)

• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jng Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jng\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jng\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jng\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jng Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jng\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jng\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jng\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jng\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jng\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jng Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jng\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jng\\OpenWithProgids\\WnPicture.jng Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jng\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jng\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.jng)
• RegCreateKey (HKCU\\Software\\Classes\\.koa Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.koa Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.koa\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.koa)
• RegCreateKey (HKCU\\Software\\Classes\\.koa\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.koa\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.koa\\OpenWithProgids\\WnPicture.koa Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.koa\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.koa Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.koa\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegSetValue (HKCU\\Software\\Classes\\WnPicture.koa\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.koa\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.koa Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.koa\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.koa\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.koa\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.koa\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.koa\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.koa Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.koa\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.koa\\OpenWithProgids\\WnPicture.koa Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.koa\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.koa\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.koa)
• RegCreateKey (HKCU\\Software\\Classes\\.iff Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.iff Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.iff\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.iff)
• RegCreateKey (HKCU\\Software\\Classes\\.iff\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.iff\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.iff\\OpenWithProgids\\WnPicture.iff Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iff\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iff Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iff\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.iff\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iff\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iff Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iff\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iff\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iff\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.iff\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.iff\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.iff Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.iff\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.iff\\OpenWithProgids\\WnPicture.iff Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.iff\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.iff\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.iff)
• RegCreateKey (HKCU\\Software\\Classes\\.lbm Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.lbm Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.lbm\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.lbm)
• RegCreateKey (HKCU\\Software\\Classes\\.lbm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.lbm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.lbm\\OpenWithProgids\\WnPicture.lbm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.lbm\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.lbm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.lbm\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.lbm\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.lbm\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.lbm Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.lbm\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.lbm\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.lbm\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegSetValue (HKCU\\Software\\Classes\\WnPicture.lbm\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.lbm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.lbm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.lbm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.lbm\\OpenWithProgids\\WnPicture.lbm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.lbm\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.lbm\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.lbm)
• RegCreateKey (HKCU\\Software\\Classes\\.pcd Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pcd Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pcd\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.pcd)
• RegCreateKey (HKCU\\Software\\Classes\\.pcd\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pcd\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pcd\\OpenWithProgids\\WnPicture.pcd Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcd\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcd Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcd\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pcd\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcd\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcd Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcd\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcd\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pcd\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pcd\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pcd\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pcd Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pcd\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pcd\\OpenWithProgids\\WnPicture.pcd Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pcd\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pcd\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.pcd)
• RegCreateKey (HKCU\\Software\\Classes\\.psd Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.psd Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.psd\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.psd)
• RegCreateKey (HKCU\\Software\\Classes\\.psd\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.psd\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.psd\\OpenWithProgids\\WnPicture.psd Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.psd\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.psd Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.psd\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.psd\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",6)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.psd\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.psd Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.psd\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.psd\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.psd\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.psd\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.psd\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.psd Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.psd\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.psd\\OpenWithProgids\\WnPicture.psd Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.psd\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.psd\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.psd)
• RegCreateKey (HKCU\\Software\\Classes\\.cut Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.cut Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.cut\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.cut)
• RegCreateKey (HKCU\\Software\\Classes\\.cut\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.cut\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.cut\\OpenWithProgids\\WnPicture.cut Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cut\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cut Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cut\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.cut\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cut\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cut Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cut\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cut\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cut\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.cut\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cut\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cut Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cut\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cut\\OpenWithProgids\\WnPicture.cut Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cut\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cut\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.cut)
• RegCreateKey (HKCU\\Software\\Classes\\.xbm Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.xbm Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.xbm\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.xbm)
• RegCreateKey (HKCU\\Software\\Classes\\.xbm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.xbm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.xbm\\OpenWithProgids\\WnPicture.xbm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xbm\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xbm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xbm\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.xbm\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xbm\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xbm Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xbm\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xbm\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xbm\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.xbm\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xbm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xbm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xbm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xbm\\OpenWithProgids\\WnPicture.xbm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xbm\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xbm\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.xbm)
• RegCreateKey (HKCU\\Software\\Classes\\.xpm Desired Access: Set Value)

• RegCreateKey (HKCU\\Software\\Classes\\.xpm Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.xpm\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.xpm)
• RegCreateKey (HKCU\\Software\\Classes\\.xpm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.xpm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.xpm\\OpenWithProgids\\WnPicture.xpm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xpm\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xpm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xpm\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.xpm\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xpm\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xpm Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xpm\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xpm\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xpm\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.xpm\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xpm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xpm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xpm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xpm\\OpenWithProgids\\WnPicture.xpm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xpm\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xpm\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.xpm)
• RegCreateKey (HKCU\\Software\\Classes\\.dds Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.dds Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.dds\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.dds)
• RegCreateKey (HKCU\\Software\\Classes\\.dds\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.dds\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.dds\\OpenWithProgids\\WnPicture.dds Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dds\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dds Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dds\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.dds\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dds\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dds Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dds\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dds\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dds\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.dds\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dds\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dds Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dds\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dds\\OpenWithProgids\\WnPicture.dds Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dds\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dds\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.dds)
• RegCreateKey (HKCU\\Software\\Classes\\.hdr Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.hdr Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.hdr\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.hdr)
• RegCreateKey (HKCU\\Software\\Classes\\.hdr\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.hdr\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.hdr\\OpenWithProgids\\WnPicture.hdr Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdr\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdr Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdr\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.hdr\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdr\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdr Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdr\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdr\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdr\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.hdr\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.hdr\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.hdr Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.hdr\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.hdr\\OpenWithProgids\\WnPicture.hdr Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.hdr\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.hdr\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.hdr)
• RegCreateKey (HKCU\\Software\\Classes\\.g3 Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.g3 Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.g3\\(Default) Type: REG_SZ, Length: 52, Data: WnPicture.g3)
• RegCreateKey (HKCU\\Software\\Classes\\.g3\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.g3\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.g3\\OpenWithProgids\\WnPicture.g3 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.g3\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.g3 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.g3\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.g3\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.g3\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.g3 Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.g3\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.g3\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.g3\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.g3\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.g3\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.g3 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.g3\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.g3\\OpenWithProgids\\WnPicture.g3 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.g3\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.g3\\UserChoice\\ProgId Type: REG_SZ, Length: 52, Data: WnPicture.g3)
• RegCreateKey (HKCU\\Software\\Classes\\.sgi Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.sgi Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.sgi\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.sgi)
• RegCreateKey (HKCU\\Software\\Classes\\.sgi\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.sgi\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.sgi\\OpenWithProgids\\WnPicture.sgi Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sgi\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sgi Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sgi\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.sgi\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sgi\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sgi Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sgi\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sgi\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sgi\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.sgi\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sgi\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sgi Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sgi\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sgi\\OpenWithProgids\\WnPicture.sgi Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sgi\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sgi\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.sgi)
• RegCreateKey (HKCU\\Software\\Classes\\.rgb Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.rgb Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.rgb\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.rgb)
• RegCreateKey (HKCU\\Software\\Classes\\.rgb\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.rgb\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.rgb\\OpenWithProgids\\WnPicture.rgb Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgb\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgb Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgb\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.rgb\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgb\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgb Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgb\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgb\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgb\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.rgb\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rgb\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rgb Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rgb\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rgb\\OpenWithProgids\\WnPicture.rgb Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rgb\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rgb\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.rgb)
• RegCreateKey (HKCU\\Software\\Classes\\.rgba Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.rgba Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.rgba\\(Default) Type: REG_SZ, Length: 60, Data: WnPicture.rgba)
• RegCreateKey (HKCU\\Software\\Classes\\.rgba\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.rgba\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.rgba\\OpenWithProgids\\WnPicture.rgba Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgba\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgba Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgba\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.rgba\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgba\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgba Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgba\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgba\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rgba\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.rgba\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rgba\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rgba Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rgba\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rgba\\OpenWithProgids\\WnPicture.rgba Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rgba\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rgba\\UserChoice\\ProgId Type: REG_SZ, Length: 60, Data: WnPicture.rgba)
• RegCreateKey (HKCU\\Software\\Classes\\.bw Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.bw Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.bw\\(Default) Type: REG_SZ, Length: 52, Data: WnPicture.bw)
• RegCreateKey (HKCU\\Software\\Classes\\.bw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.bw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.bw\\OpenWithProgids\\WnPicture.bw Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bw\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bw\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.bw\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bw\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bw Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bw\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bw\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bw\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.bw\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bw\\OpenWithProgids\\WnPicture.bw Type: REG_NONE, Length: 0)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bw\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bw\\UserChoice\\ProgId Type: REG_SZ, Length: 52, Data: WnPicture.bw)
• RegCreateKey (HKCU\\Software\\Classes\\.exr Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.exr Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.exr\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.exr)
• RegCreateKey (HKCU\\Software\\Classes\\.exr\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.exr\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.exr\\OpenWithProgids\\WnPicture.exr Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.exr\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.exr Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.exr\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.exr\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.exr\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.exr Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.exr\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.exr\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.exr\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.exr\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.exr\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.exr Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.exr\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.exr\\OpenWithProgids\\WnPicture.exr Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.exr\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.exr\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.exr)
• RegCreateKey (HKCR\\.pfm Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.pfm\\WnPictureBackup Type: REG_SZ, Length: 32, Data: pfmfile)
• RegCreateKey (HKCU\\Software\\Classes\\.pfm Desired Access: Set Value)

• RegCreateKey (HKCU\\Software\\Classes\\.pfm Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pfm\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.pfm)
• RegCreateKey (HKCU\\Software\\Classes\\.pfm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pfm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pfm\\OpenWithProgids\\WnPicture.pfm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pfm\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pfm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pfm\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pfm\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pfm\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pfm Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pfm\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pfm\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pfm\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pfm\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pfm\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pfm Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pfm\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pfm\\OpenWithProgids\\WnPicture.pfm Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pfm\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pfm\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.pfm)
• RegCreateKey (HKCU\\Software\\Classes\\.pct Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pct Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pct\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.pct)
• RegCreateKey (HKCU\\Software\\Classes\\.pct\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pct\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pct\\OpenWithProgids\\WnPicture.pct Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pct\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pct Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pct\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pct\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pct\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pct Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pct\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pct\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pct\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pct\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pct\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pct Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pct\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pct\\OpenWithProgids\\WnPicture.pct Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pct\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pct\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.pct)
• RegCreateKey (HKCU\\Software\\Classes\\.pict Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pict Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pict\\(Default) Type: REG_SZ, Length: 60, Data: WnPicture.pict)
• RegCreateKey (HKCU\\Software\\Classes\\.pict\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pict\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pict\\OpenWithProgids\\WnPicture.pict Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pict\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pict Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pict\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pict\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pict\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pict Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pict\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pict\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pict\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pict\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pict\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pict Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pict\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pict\\OpenWithProgids\\WnPicture.pict Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pict\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pict\\UserChoice\\ProgId Type: REG_SZ, Length: 60, Data: WnPicture.pict)
• RegCreateKey (HKCU\\Software\\Classes\\.pic Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pic Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pic\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.pic)
• RegCreateKey (HKCU\\Software\\Classes\\.pic\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pic\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pic\\OpenWithProgids\\WnPicture.pic Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pic\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pic Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pic\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pic\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pic\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pic Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pic\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pic\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pic\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pic\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pic\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pic Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pic\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pic\\OpenWithProgids\\WnPicture.pic Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pic\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pic\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.pic)
• RegCreateKey (HKCU\\Software\\Classes\\.webp Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.webp Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.webp\\(Default) Type: REG_SZ, Length: 60, Data: WnPicture.webp)
• RegCreateKey (HKCU\\Software\\Classes\\.webp\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.webp\\OpenWithProgids Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.webp\\OpenWithProgids\\WnPicture.webp Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.webp\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.webp Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.webp\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.webp\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.webp\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.webp Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.webp\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.webp\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.webp\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.webp\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.webp\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.webp Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.webp\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.webp\\OpenWithProgids\\WnPicture.webp Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.webp\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.webp\\UserChoice\\ProgId Type: REG_SZ, Length: 60, Data: WnPicture.webp)
• RegCreateKey (HKCU\\Software\\Classes\\.jxr Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jxr Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jxr\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.jxr)
• RegCreateKey (HKCU\\Software\\Classes\\.jxr\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.jxr\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.jxr\\OpenWithProgids\\WnPicture.jxr Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jxr\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jxr Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jxr\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jxr\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jxr\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jxr Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jxr\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jxr\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.jxr\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.jxr\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jxr\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jxr Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jxr\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jxr\\OpenWithProgids\\WnPicture.jxr Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jxr\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.jxr\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.jxr)
• RegCreateKey (HKCR\\.wdp Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.wdp\\WnPictureBackup Type: REG_SZ, Length: 32, Data: wdpfile)
• RegCreateKey (HKCU\\Software\\Classes\\.wdp Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.wdp Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.wdp\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.wdp)
• RegCreateKey (HKCU\\Software\\Classes\\.wdp\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.wdp\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.wdp\\OpenWithProgids\\WnPicture.wdp Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wdp\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wdp Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wdp\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.wdp\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wdp\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wdp Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wdp\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wdp\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wdp\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.wdp\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wdp\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wdp Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wdp\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wdp\\OpenWithProgids\\WnPicture.wdp Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wdp\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wdp\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.wdp)
• RegCreateKey (HKCU\\Software\\Classes\\.hdp Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.hdp Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.hdp\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.hdp)
• RegCreateKey (HKCU\\Software\\Classes\\.hdp\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.hdp\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.hdp\\OpenWithProgids\\WnPicture.hdp Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdp\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdp Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdp\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.hdp\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdp\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdp Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdp\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdp\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.hdp\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.hdp\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.hdp\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.hdp Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.hdp\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.hdp\\OpenWithProgids\\WnPicture.hdp Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.hdp\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.hdp\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.hdp)
• RegCreateKey (HKCU\\Software\\Classes\\.ska Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.ska Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ska\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.ska)
• RegCreateKey (HKCU\\Software\\Classes\\.ska\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.ska\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ska\\OpenWithProgids\\WnPicture.ska Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ska\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ska Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ska\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ska\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ska\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ska Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ska\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ska\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ska\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ska\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ska\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ska Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ska\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ska\\OpenWithProgids\\WnPicture.ska Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ska\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ska\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.ska)
• RegCreateKey (HKCU\\Software\\Classes\\.pgx Desired Access: Set Value)

• RegCreateKey (HKCU\\Software\\Classes\\.pgx Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pgx\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.pgx)
• RegCreateKey (HKCU\\Software\\Classes\\.pgx\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pgx\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pgx\\OpenWithProgids\\WnPicture.pgx Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgx\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgx Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgx\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pgx\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgx\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgx Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgx\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgx\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pgx\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pgx\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgx\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgx Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgx\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgx\\OpenWithProgids\\WnPicture.pgx Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgx\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pgx\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.pgx)
• RegCreateKey (HKCR\\.wmf Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.wmf\\WnPictureBackup Type: REG_SZ, Length: 32, Data: wmffile)
• RegCreateKey (HKCU\\Software\\Classes\\.wmf Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.wmf Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.wmf\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.wmf)
• RegCreateKey (HKCU\\Software\\Classes\\.wmf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.wmf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.wmf\\OpenWithProgids\\WnPicture.wmf Type: REG_NONE, Length: 0)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wmf\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wmf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wmf\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.wmf\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wmf\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wmf Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wmf\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wmf\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.wmf\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.wmf\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wmf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wmf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wmf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wmf\\OpenWithProgids\\WnPicture.wmf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wmf\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.wmf\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.wmf)
• RegCreateKey (HKCR\\.emf Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.emf\\WnPictureBackup Type: REG_SZ, Length: 32, Data: emffile)
• RegCreateKey (HKCU\\Software\\Classes\\.emf Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.emf Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.emf\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.emf)
• RegCreateKey (HKCU\\Software\\Classes\\.emf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.emf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.emf\\OpenWithProgids\\WnPicture.emf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.emf\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.emf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.emf\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.emf\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.emf\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.emf Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.emf\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.emf\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.emf\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.emf\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.emf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.emf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.emf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.emf\\OpenWithProgids\\WnPicture.emf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.emf\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.emf\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.emf)
• RegCreateKey (HKCU\\Software\\Classes\\.3fr Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.3fr Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.3fr\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.3fr)
• RegCreateKey (HKCU\\Software\\Classes\\.3fr\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.3fr\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.3fr\\OpenWithProgids\\WnPicture.3fr Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.3fr\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.3fr Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.3fr\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.3fr\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.3fr\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.3fr Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.3fr\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.3fr\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.3fr\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.3fr\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.3fr\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.3fr Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.3fr\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.3fr\\OpenWithProgids\\WnPicture.3fr Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.3fr\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.3fr\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.3fr)
• RegCreateKey (HKCU\\Software\\Classes\\.arw Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.arw Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.arw\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.arw)
• RegCreateKey (HKCU\\Software\\Classes\\.arw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.arw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.arw\\OpenWithProgids\\WnPicture.arw Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.arw\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.arw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.arw\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.arw\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.arw\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.arw Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.arw\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.arw\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.arw\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.arw\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.arw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.arw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.arw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.arw\\OpenWithProgids\\WnPicture.arw Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.arw\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.arw\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.arw)
• RegCreateKey (HKCU\\Software\\Classes\\.bay Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.bay Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.bay\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.bay)
• RegCreateKey (HKCU\\Software\\Classes\\.bay\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.bay\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.bay\\OpenWithProgids\\WnPicture.bay Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bay\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bay Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bay\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.bay\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bay\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bay Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bay\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bay\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bay\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.bay\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bay\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bay Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bay\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bay\\OpenWithProgids\\WnPicture.bay Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bay\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bay\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.bay)
• RegCreateKey (HKCU\\Software\\Classes\\.bmq Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.bmq Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.bmq\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.bmq)
• RegCreateKey (HKCU\\Software\\Classes\\.bmq\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.bmq\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.bmq\\OpenWithProgids\\WnPicture.bmq Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmq\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmq Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmq\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.bmq\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmq\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmq Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmq\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmq\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.bmq\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.bmq\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bmq\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bmq Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bmq\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bmq\\OpenWithProgids\\WnPicture.bmq Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bmq\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.bmq\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.bmq)
• RegCreateKey (HKCU\\Software\\Classes\\.cap Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.cap Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.cap\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.cap)
• RegCreateKey (HKCU\\Software\\Classes\\.cap\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.cap\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.cap\\OpenWithProgids\\WnPicture.cap Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cap\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cap Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cap\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.cap\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cap\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cap Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cap\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cap\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cap\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.cap\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cap\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cap Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cap\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cap\\OpenWithProgids\\WnPicture.cap Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cap\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cap\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.cap)
• RegCreateKey (HKCU\\Software\\Classes\\.cine Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.cine Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.cine\\(Default) Type: REG_SZ, Length: 60, Data: WnPicture.cine)
• RegCreateKey (HKCU\\Software\\Classes\\.cine\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.cine\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.cine\\OpenWithProgids\\WnPicture.cine Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cine\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cine Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cine\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.cine\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cine\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cine Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cine\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cine\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cine\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.cine\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cine\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cine Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cine\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cine\\OpenWithProgids\\WnPicture.cine Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cine\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cine\\UserChoice\\ProgId Type: REG_SZ, Length: 60, Data: WnPicture.cine)
• RegCreateKey (HKCU\\Software\\Classes\\.cr2 Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.cr2 Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.cr2\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.cr2)
• RegCreateKey (HKCU\\Software\\Classes\\.cr2\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.cr2\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.cr2\\OpenWithProgids\\WnPicture.cr2 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cr2\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cr2 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cr2\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.cr2\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cr2\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cr2 Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cr2\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cr2\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cr2\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.cr2\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cr2\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cr2 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cr2\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cr2\\OpenWithProgids\\WnPicture.cr2 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cr2\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cr2\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.cr2)
• RegCreateKey (HKCU\\Software\\Classes\\.crw Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.crw Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.crw\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.crw)
• RegCreateKey (HKCU\\Software\\Classes\\.crw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.crw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegSetValue (HKCU\\Software\\Classes\\.crw\\OpenWithProgids\\WnPicture.crw Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.crw\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.crw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.crw\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.crw\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.crw\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.crw Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.crw\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.crw\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.crw\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.crw\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.crw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.crw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.crw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.crw\\OpenWithProgids\\WnPicture.crw Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.crw\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.crw\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.crw)
• RegCreateKey (HKCU\\Software\\Classes\\.cs1 Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.cs1 Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.cs1\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.cs1)
• RegCreateKey (HKCU\\Software\\Classes\\.cs1\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.cs1\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.cs1\\OpenWithProgids\\WnPicture.cs1 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cs1\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cs1 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cs1\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.cs1\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cs1\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cs1 Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cs1\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cs1\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.cs1\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.cs1\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cs1\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cs1 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cs1\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cs1\\OpenWithProgids\\WnPicture.cs1 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cs1\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.cs1\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.cs1)
• RegCreateKey (HKCU\\Software\\Classes\\.dc2 Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.dc2 Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.dc2\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.dc2)
• RegCreateKey (HKCU\\Software\\Classes\\.dc2\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.dc2\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.dc2\\OpenWithProgids\\WnPicture.dc2 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dc2\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dc2 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dc2\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.dc2\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dc2\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dc2 Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dc2\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dc2\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dc2\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.dc2\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dc2\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dc2 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dc2\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dc2\\OpenWithProgids\\WnPicture.dc2 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dc2\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dc2\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.dc2)
• RegCreateKey (HKCU\\Software\\Classes\\.dcr Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.dcr Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.dcr\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.dcr)
• RegCreateKey (HKCU\\Software\\Classes\\.dcr\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.dcr\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.dcr\\OpenWithProgids\\WnPicture.dcr Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dcr\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dcr Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dcr\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.dcr\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dcr\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dcr Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dcr\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dcr\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dcr\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegSetValue (HKCU\\Software\\Classes\\WnPicture.dcr\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dcr\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dcr Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dcr\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dcr\\OpenWithProgids\\WnPicture.dcr Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dcr\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dcr\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.dcr)
• RegCreateKey (HKCU\\Software\\Classes\\.drf Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.drf Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.drf\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.drf)
• RegCreateKey (HKCU\\Software\\Classes\\.drf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.drf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.drf\\OpenWithProgids\\WnPicture.drf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.drf\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.drf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.drf\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.drf\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.drf\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.drf Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.drf\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.drf\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.drf\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.drf\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.drf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.drf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.drf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.drf\\OpenWithProgids\\WnPicture.drf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.drf\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.drf\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.drf)
• RegCreateKey (HKCU\\Software\\Classes\\.dsc Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.dsc Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.dsc\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.dsc)
• RegCreateKey (HKCU\\Software\\Classes\\.dsc\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.dsc\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.dsc\\OpenWithProgids\\WnPicture.dsc Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dsc\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dsc Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dsc\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.dsc\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dsc\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dsc Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dsc\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dsc\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dsc\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.dsc\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dsc\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dsc Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dsc\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dsc\\OpenWithProgids\\WnPicture.dsc Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dsc\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dsc\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.dsc)
• RegCreateKey (HKCU\\Software\\Classes\\.dng Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.dng Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.dng\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.dng)
• RegCreateKey (HKCU\\Software\\Classes\\.dng\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.dng\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.dng\\OpenWithProgids\\WnPicture.dng Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dng\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dng Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dng\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.dng\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dng\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dng Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dng\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dng\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.dng\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.dng\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dng\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dng Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dng\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dng\\OpenWithProgids\\WnPicture.dng Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dng\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.dng\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.dng)
• RegCreateKey (HKCU\\Software\\Classes\\.erf Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.erf Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.erf\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.erf)
• RegCreateKey (HKCU\\Software\\Classes\\.erf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.erf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.erf\\OpenWithProgids\\WnPicture.erf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.erf\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.erf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.erf\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.erf\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.erf\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.erf Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.erf\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.erf\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.erf\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.erf\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.erf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.erf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.erf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.erf\\OpenWithProgids\\WnPicture.erf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.erf\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.erf\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.erf)
• RegCreateKey (HKCU\\Software\\Classes\\.fff Desired Access: Set Value)

• RegCreateKey (HKCU\\Software\\Classes\\.fff Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.fff\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.fff)
• RegCreateKey (HKCU\\Software\\Classes\\.fff\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.fff\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.fff\\OpenWithProgids\\WnPicture.fff Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.fff\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.fff Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.fff\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.fff\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.fff\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.fff Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.fff\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.fff\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.fff\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.fff\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.fff\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.fff Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.fff\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.fff\\OpenWithProgids\\WnPicture.fff Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.fff\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.fff\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.fff)
• RegCreateKey (HKCU\\Software\\Classes\\.ia Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.ia Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ia\\(Default) Type: REG_SZ, Length: 52, Data: WnPicture.ia)
• RegCreateKey (HKCU\\Software\\Classes\\.ia\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.ia\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ia\\OpenWithProgids\\WnPicture.ia Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ia\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ia Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ia\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ia\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ia\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ia Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ia\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ia\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ia\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ia\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ia\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ia Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ia\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ia\\OpenWithProgids\\WnPicture.ia Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ia\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ia\\UserChoice\\ProgId Type: REG_SZ, Length: 52, Data: WnPicture.ia)
• RegCreateKey (HKCU\\Software\\Classes\\.iiq Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.iiq Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.iiq\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.iiq)
• RegCreateKey (HKCU\\Software\\Classes\\.iiq\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.iiq\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.iiq\\OpenWithProgids\\WnPicture.iiq Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iiq\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iiq Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iiq\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.iiq\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iiq\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iiq Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iiq\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iiq\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.iiq\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.iiq\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.iiq\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.iiq Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.iiq\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.iiq\\OpenWithProgids\\WnPicture.iiq Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.iiq\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.iiq\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.iiq)
• RegCreateKey (HKCU\\Software\\Classes\\.k25 Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.k25 Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.k25\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.k25)
• RegCreateKey (HKCU\\Software\\Classes\\.k25\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.k25\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.k25\\OpenWithProgids\\WnPicture.k25 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.k25\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.k25 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.k25\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.k25\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.k25\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.k25 Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.k25\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.k25\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.k25\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.k25\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.k25\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.k25 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.k25\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.k25\\OpenWithProgids\\WnPicture.k25 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.k25\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.k25\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.k25)
• RegCreateKey (HKCU\\Software\\Classes\\.kc2 Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.kc2 Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.kc2\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.kc2)
• RegCreateKey (HKCU\\Software\\Classes\\.kc2\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.kc2\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.kc2\\OpenWithProgids\\WnPicture.kc2 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kc2\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kc2 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kc2\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.kc2\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kc2\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kc2 Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kc2\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kc2\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kc2\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.kc2\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.kc2\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.kc2 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.kc2\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.kc2\\OpenWithProgids\\WnPicture.kc2 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.kc2\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.kc2\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.kc2)
• RegCreateKey (HKCU\\Software\\Classes\\.kdc Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.kdc Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.kdc\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.kdc)
• RegCreateKey (HKCU\\Software\\Classes\\.kdc\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.kdc\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.kdc\\OpenWithProgids\\WnPicture.kdc Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kdc\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kdc Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kdc\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.kdc\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kdc\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kdc Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kdc\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kdc\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.kdc\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.kdc\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.kdc\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.kdc Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.kdc\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.kdc\\OpenWithProgids\\WnPicture.kdc Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.kdc\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.kdc\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.kdc)
• RegCreateKey (HKCU\\Software\\Classes\\.mdc Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.mdc Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.mdc\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.mdc)
• RegCreateKey (HKCU\\Software\\Classes\\.mdc\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.mdc\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.mdc\\OpenWithProgids\\WnPicture.mdc Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mdc\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mdc Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mdc\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.mdc\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mdc\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mdc Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mdc\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mdc\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mdc\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.mdc\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mdc\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mdc Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mdc\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mdc\\OpenWithProgids\\WnPicture.mdc Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mdc\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mdc\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.mdc)
• RegCreateKey (HKCU\\Software\\Classes\\.mef Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.mef Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.mef\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.mef)
• RegCreateKey (HKCU\\Software\\Classes\\.mef\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.mef\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.mef\\OpenWithProgids\\WnPicture.mef Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mef\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mef Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mef\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.mef\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mef\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mef Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mef\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mef\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mef\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.mef\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mef\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mef Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mef\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mef\\OpenWithProgids\\WnPicture.mef Type: REG_NONE, Length: 0)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mef\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mef\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.mef)
• RegCreateKey (HKCU\\Software\\Classes\\.mos Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.mos Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.mos\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.mos)
• RegCreateKey (HKCU\\Software\\Classes\\.mos\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.mos\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.mos\\OpenWithProgids\\WnPicture.mos Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mos\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mos Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mos\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.mos\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mos\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mos Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mos\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mos\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mos\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.mos\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mos\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mos Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mos\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mos\\OpenWithProgids\\WnPicture.mos Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mos\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mos\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.mos)
• RegCreateKey (HKCU\\Software\\Classes\\.mrw Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.mrw Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.mrw\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.mrw)

• RegCreateKey (HKCU\\Software\\Classes\\.mrw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.mrw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.mrw\\OpenWithProgids\\WnPicture.mrw Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mrw\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mrw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mrw\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.mrw\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mrw\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mrw Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mrw\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mrw\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.mrw\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.mrw\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mrw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mrw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mrw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mrw\\OpenWithProgids\\WnPicture.mrw Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mrw\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.mrw\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.mrw)
• RegCreateKey (HKCU\\Software\\Classes\\.nef Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.nef Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.nef\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.nef)
• RegCreateKey (HKCU\\Software\\Classes\\.nef\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.nef\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.nef\\OpenWithProgids\\WnPicture.nef Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nef\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nef Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nef\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.nef\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nef\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nef Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nef\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nef\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nef\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.nef\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.nef\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.nef Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.nef\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.nef\\OpenWithProgids\\WnPicture.nef Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.nef\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.nef\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.nef)
• RegCreateKey (HKCU\\Software\\Classes\\.nrw Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.nrw Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.nrw\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.nrw)
• RegCreateKey (HKCU\\Software\\Classes\\.nrw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.nrw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.nrw\\OpenWithProgids\\WnPicture.nrw Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nrw\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nrw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nrw\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.nrw\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nrw\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nrw Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nrw\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nrw\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.nrw\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.nrw\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.nrw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.nrw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.nrw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.nrw\\OpenWithProgids\\WnPicture.nrw Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.nrw\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.nrw\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.nrw)
• RegCreateKey (HKCU\\Software\\Classes\\.orf Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.orf Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.orf\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.orf)
• RegCreateKey (HKCU\\Software\\Classes\\.orf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.orf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.orf\\OpenWithProgids\\WnPicture.orf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.orf\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.orf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.orf\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.orf\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.orf\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.orf Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.orf\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.orf\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.orf\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.orf\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.orf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.orf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.orf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.orf\\OpenWithProgids\\WnPicture.orf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.orf\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.orf\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.orf)
• RegCreateKey (HKCU\\Software\\Classes\\.pef Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pef Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pef\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.pef)
• RegCreateKey (HKCU\\Software\\Classes\\.pef\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pef\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pef\\OpenWithProgids\\WnPicture.pef Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pef\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pef Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pef\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pef\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pef\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pef Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pef\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pef\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pef\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pef\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pef\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pef Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pef\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pef\\OpenWithProgids\\WnPicture.pef Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pef\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pef\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.pef)
• RegCreateKey (HKCU\\Software\\Classes\\.ptx Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.ptx Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ptx\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.ptx)
• RegCreateKey (HKCU\\Software\\Classes\\.ptx\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.ptx\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.ptx\\OpenWithProgids\\WnPicture.ptx Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ptx\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ptx Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ptx\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ptx\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ptx\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ptx Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ptx\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ptx\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.ptx\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.ptx\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ptx\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ptx Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ptx\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ptx\\OpenWithProgids\\WnPicture.ptx Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ptx\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.ptx\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.ptx)
• RegCreateKey (HKCU\\Software\\Classes\\.pxn Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pxn Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pxn\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.pxn)
• RegCreateKey (HKCU\\Software\\Classes\\.pxn\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pxn\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pxn\\OpenWithProgids\\WnPicture.pxn Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pxn\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pxn Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pxn\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pxn\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pxn\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pxn Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pxn\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pxn\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pxn\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pxn\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pxn\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pxn Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pxn\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pxn\\OpenWithProgids\\WnPicture.pxn Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pxn\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pxn\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.pxn)
• RegCreateKey (HKCU\\Software\\Classes\\.qtk Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.qtk Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.qtk\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.qtk)
• RegCreateKey (HKCU\\Software\\Classes\\.qtk\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.qtk\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.qtk\\OpenWithProgids\\WnPicture.qtk Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.qtk\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.qtk Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.qtk\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.qtk\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.qtk\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.qtk Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.qtk\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.qtk\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.qtk\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.qtk\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.qtk\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.qtk Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.qtk\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.qtk\\OpenWithProgids\\WnPicture.qtk Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.qtk\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.qtk\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.qtk)
• RegCreateKey (HKCU\\Software\\Classes\\.raf Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.raf Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.raf\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.raf)
• RegCreateKey (HKCU\\Software\\Classes\\.raf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.raf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.raf\\OpenWithProgids\\WnPicture.raf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raf\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raf\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.raf\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raf\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raf Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raf\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raf\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raf\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.raf\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.raf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.raf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.raf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.raf\\OpenWithProgids\\WnPicture.raf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.raf\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.raf\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.raf)
• RegCreateKey (HKCU\\Software\\Classes\\.raw Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.raw Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.raw\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.raw)
• RegCreateKey (HKCU\\Software\\Classes\\.raw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.raw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegSetValue (HKCU\\Software\\Classes\\.raw\\OpenWithProgids\\WnPicture.raw Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raw\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raw\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.raw\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raw\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raw Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raw\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raw\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.raw\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.raw\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.raw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.raw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.raw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.raw\\OpenWithProgids\\WnPicture.raw Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.raw\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.raw\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.raw)
• RegCreateKey (HKCU\\Software\\Classes\\.rdc Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.rdc Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.rdc\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.rdc)
• RegCreateKey (HKCU\\Software\\Classes\\.rdc\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.rdc\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.rdc\\OpenWithProgids\\WnPicture.rdc Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rdc\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rdc Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rdc\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.rdc\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rdc\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rdc Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rdc\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rdc\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rdc\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.rdc\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rdc\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rdc Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rdc\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rdc\\OpenWithProgids\\WnPicture.rdc Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rdc\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rdc\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.rdc)
• RegCreateKey (HKCU\\Software\\Classes\\.rw2 Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.rw2 Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.rw2\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.rw2)
• RegCreateKey (HKCU\\Software\\Classes\\.rw2\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.rw2\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.rw2\\OpenWithProgids\\WnPicture.rw2 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rw2\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rw2 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rw2\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.rw2\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rw2\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rw2 Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rw2\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rw2\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rw2\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.rw2\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rw2\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rw2 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rw2\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rw2\\OpenWithProgids\\WnPicture.rw2 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rw2\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rw2\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.rw2)
• RegCreateKey (HKCU\\Software\\Classes\\.rwl Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.rwl Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.rwl\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.rwl)
• RegCreateKey (HKCU\\Software\\Classes\\.rwl\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.rwl\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.rwl\\OpenWithProgids\\WnPicture.rwl Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwl\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwl Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwl\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.rwl\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwl\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwl Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwl\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwl\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwl\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegSetValue (HKCU\\Software\\Classes\\WnPicture.rwl\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rwl\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rwl Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rwl\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rwl\\OpenWithProgids\\WnPicture.rwl Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rwl\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rwl\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.rwl)
• RegCreateKey (HKCU\\Software\\Classes\\.rwz Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.rwz Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.rwz\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.rwz)
• RegCreateKey (HKCU\\Software\\Classes\\.rwz\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.rwz\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.rwz\\OpenWithProgids\\WnPicture.rwz Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwz\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwz Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwz\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.rwz\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwz\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwz Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwz\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwz\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.rwz\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.rwz\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rwz\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rwz Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rwz\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rwz\\OpenWithProgids\\WnPicture.rwz Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rwz\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.rwz\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.rwz)
• RegCreateKey (HKCU\\Software\\Classes\\.sr2 Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.sr2 Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.sr2\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.sr2)
• RegCreateKey (HKCU\\Software\\Classes\\.sr2\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.sr2\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.sr2\\OpenWithProgids\\WnPicture.sr2 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sr2\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sr2 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sr2\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.sr2\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sr2\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sr2 Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sr2\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sr2\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sr2\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.sr2\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sr2\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sr2 Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sr2\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sr2\\OpenWithProgids\\WnPicture.sr2 Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sr2\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sr2\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.sr2)
• RegCreateKey (HKCU\\Software\\Classes\\.srf Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.srf Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.srf\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.srf)
• RegCreateKey (HKCU\\Software\\Classes\\.srf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.srf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.srf\\OpenWithProgids\\WnPicture.srf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srf\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srf\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.srf\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srf\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srf Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srf\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srf\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srf\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.srf\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.srf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.srf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.srf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.srf\\OpenWithProgids\\WnPicture.srf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.srf\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.srf\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.srf)
• RegCreateKey (HKCU\\Software\\Classes\\.srw Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.srw Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.srw\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.srw)
• RegCreateKey (HKCU\\Software\\Classes\\.srw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.srw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.srw\\OpenWithProgids\\WnPicture.srw Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srw\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srw\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.srw\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srw\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srw Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srw\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srw\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.srw\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.srw\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.srw\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.srw Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.srw\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.srw\\OpenWithProgids\\WnPicture.srw Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.srw\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.srw\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.srw)
• RegCreateKey (HKCU\\Software\\Classes\\.sti Desired Access: Set Value)

• RegCreateKey (HKCU\\Software\\Classes\\.sti Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.sti\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.sti)
• RegCreateKey (HKCU\\Software\\Classes\\.sti\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.sti\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.sti\\OpenWithProgids\\WnPicture.sti Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sti\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sti Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sti\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.sti\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sti\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sti Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sti\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sti\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.sti\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.sti\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sti\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sti Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sti\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sti\\OpenWithProgids\\WnPicture.sti Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sti\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.sti\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.sti)
• RegCreateKey (HKCU\\Software\\Classes\\.x3f Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.x3f Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.x3f\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.x3f)
• RegCreateKey (HKCU\\Software\\Classes\\.x3f\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.x3f\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.x3f\\OpenWithProgids\\WnPicture.x3f Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.x3f\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.x3f Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.x3f\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.x3f\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.x3f\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.x3f Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.x3f\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.x3f\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.x3f\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.x3f\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 268, Data: "C:\\Program Files\\WnPicture\\WnPicViewer.exe" OpenImage --file "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.x3f\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.x3f Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.x3f\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.x3f\\OpenWithProgids\\WnPicture.x3f Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.x3f\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.x3f\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.x3f)
• RegCreateKey (HKCU\\Software\\Classes\\.pdf Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pdf Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pdf\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.pdf)
• RegCreateKey (HKCU\\Software\\Classes\\.pdf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.pdf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.pdf\\OpenWithProgids\\WnPicture.pdf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pdf\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pdf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pdf\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pdf\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPDFViewer.exe",1)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pdf\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pdf Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pdf\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pdf\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.pdf\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.pdf\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 200, Data: "C:\\Program Files\\WnPicture\\WnPDFViewer.exe" "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pdf\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pdf Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pdf\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pdf\\OpenWithProgids\\WnPicture.pdf Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pdf\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.pdf\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.pdf)
• RegCreateKey (HKCR\\.xps Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKCR\\.xps\\WnPictureBackup Type: REG_SZ, Length: 92, Data: Windows.XPSReachViewer)
• RegCreateKey (HKCU\\Software\\Classes\\.xps Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.xps Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.xps\\(Default) Type: REG_SZ, Length: 56, Data: WnPicture.xps)
• RegCreateKey (HKCU\\Software\\Classes\\.xps\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.xps\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.xps\\OpenWithProgids\\WnPicture.xps Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xps\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xps Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xps\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.xps\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPDFViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xps\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xps Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xps\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xps\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.xps\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.xps\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 200, Data: "C:\\Program Files\\WnPicture\\WnPDFViewer.exe" "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xps\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xps Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xps\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xps\\OpenWithProgids\\WnPicture.xps Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xps\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.xps\\UserChoice\\ProgId Type: REG_SZ, Length: 56, Data: WnPicture.xps)
• RegCreateKey (HKCU\\Software\\Classes\\.oxps Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.oxps Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.oxps\\(Default) Type: REG_SZ, Length: 60, Data: WnPicture.oxps)
• RegCreateKey (HKCU\\Software\\Classes\\.oxps\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software\\Classes\\.oxps\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\.oxps\\OpenWithProgids\\WnPicture.oxps Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.oxps\\DefaultIcon Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.oxps Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.oxps\\DefaultIcon Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Classes\\WnPicture.oxps\\DefaultIcon\\(Default) Type: REG_SZ, Length: 188, Data: "C:\\Program Files\\WnPicture\\WnPDFViewer.exe",1)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.oxps\\shell\\open\\command Desired Access: Set Value)
• RegCreateKey (HKCU Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.oxps Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.oxps\\shell Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.oxps\\shell\\open Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Classes\\WnPicture.oxps\\shell\\open\\command Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)

• RegSetValue (HKCU\\Software\\Classes\\WnPicture.oxps\\shell\\open\\command\\(Default) Type: REG_SZ, Length: 200, Data: "C:\\Program Files\\WnPicture\\WnPDFViewer.exe" "%1")
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.oxps\\OpenWithProgids Desired Access: Set Value)
• RegCreateKey (HKCU\\Software Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.oxps Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.oxps\\OpenWithProgids Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.oxps\\OpenWithProgids\\WnPicture.oxps Type: REG_NONE, Length: 0)
• RegCreateKey (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.oxps\\UserChoice Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKCU\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer\\FileExts\\.oxps\\UserChoice\\ProgId Type: REG_SZ, Length: 60, Data: WnPicture.oxps)
• RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities Desired Access: Set Value)
• RegCreateKey (HKLM\\SOFTWARE Desired Access: Maximum Allowed, Granted Access: All Access, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKLM\\SOFTWARE\\WnPicture Desired Access: Maximum Allowed, Granted Access: None 0x0, Disposition: REG_CREATED_NEW_KEY)
• RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\ApplicationDescription Type: REG_SZ, Length: 132, Data:)
• RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\ApplicationIcon Type: REG_SZ, Length: 192, Data: "C:\\Program Files\\WnPicture\\\\WnPicViewer.exe",0)
• RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\ApplicationName Type: REG_SZ, Length: 24, Data:)
• RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_CREATED_NEW_KEY)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\(Default) Type: REG_NONE, Length: 0)
• RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.bmp Type: REG_SZ, Length: 56, Data: WnPicture.bmp)
• RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.dib Type: REG_SZ, Length: 56, Data: WnPicture.dib)
• RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.jpg Type: REG_SZ, Length: 56, Data: WnPicture.jpg)
• RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.jif Type: REG_SZ, Length: 56, Data: WnPicture.jif)
• RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.jpeg Type: REG_SZ, Length: 60, Data: WnPicture.jpeg)
• RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.jpe Type: REG_SZ, Length: 56, Data: WnPicture.jpe)
• RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.png Type: REG_SZ, Length: 56, Data: WnPicture.png)
• RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.gif Type: REG_SZ, Length: 56, Data: WnPicture.gif)
• RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.ico Type: REG_SZ, Length: 56, Data: WnPicture.ico)
• RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.cur Type: REG_SZ, Length: 56, Data: WnPicture.cur)

- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.tif Type: REG_SZ, Length: 56, Data: WnPicture.tif)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.tiff Type: REG_SZ, Length: 60, Data: WnPicture.tiff)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.tga Type: REG_SZ, Length: 56, Data: WnPicture.tga)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.targa Type: REG_SZ, Length: 64, Data: WnPicture.targa)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pcx Type: REG_SZ, Length: 56, Data: WnPicture.pcx)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.wap Type: REG_SZ, Length: 56, Data: WnPicture.wap)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.wbmp Type: REG_SZ, Length: 60, Data: WnPicture.wbmp)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.wbm Type: REG_SZ, Length: 56, Data: WnPicture.wbm)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.j2k Type: REG_SZ, Length: 56, Data: WnPicture.j2k)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.j2c Type: REG_SZ, Length: 56, Data: WnPicture.j2c)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.jp2 Type: REG_SZ, Length: 56, Data: WnPicture.jp2)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.ras Type: REG_SZ, Length: 56, Data: WnPicture.ras)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pbm Type: REG_SZ, Length: 56, Data: WnPicture.pbm)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pbm Type: REG_SZ, Length: 56, Data: WnPicture.pbm)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pgm Type: REG_SZ, Length: 56, Data: WnPicture.pgm)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pgm Type: REG_SZ, Length: 56, Data: WnPicture.pgm)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.ppm Type: REG_SZ, Length: 56, Data: WnPicture.ppm)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.ppm Type: REG_SZ, Length: 56, Data: WnPicture.ppm)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.mng Type: REG_SZ, Length: 56, Data: WnPicture.mng)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.jng Type: REG_SZ, Length: 56, Data: WnPicture.jng)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.koa Type: REG_SZ, Length: 56, Data: WnPicture.koa)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.iff Type: REG_SZ, Length: 56, Data: WnPicture.iff)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.lbm Type: REG_SZ, Length: 56, Data: WnPicture.lbm)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pcd Type: REG_SZ, Length: 56, Data: WnPicture.pcd)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.psd Type: REG_SZ, Length: 56, Data: WnPicture.psd)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.cut Type: REG_SZ, Length: 56, Data: WnPicture.cut)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.xbm Type: REG_SZ, Length: 56, Data: WnPicture.xbm)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.xpm Type: REG_SZ, Length: 56, Data: WnPicture.xpm)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)

- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.dds Type: REG_SZ, Length: 56, Data: WnPicture.dds)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.hdr Type: REG_SZ, Length: 56, Data: WnPicture.hdr)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.g3 Type: REG_SZ, Length: 52, Data: WnPicture.g3)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.sgi Type: REG_SZ, Length: 56, Data: WnPicture.sgi)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.rgb Type: REG_SZ, Length: 56, Data: WnPicture.rgb)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.rgba Type: REG_SZ, Length: 60, Data: WnPicture.rgba)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.bw Type: REG_SZ, Length: 52, Data: WnPicture.bw)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.exr Type: REG_SZ, Length: 56, Data: WnPicture.exr)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pfm Type: REG_SZ, Length: 56, Data: WnPicture.pfm)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pct Type: REG_SZ, Length: 56, Data: WnPicture.pct)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pict Type: REG_SZ, Length: 60, Data: WnPicture.pict)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pic Type: REG_SZ, Length: 56, Data: WnPicture.pic)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.webp Type: REG_SZ, Length: 60, Data: WnPicture.webp)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.jxr Type: REG_SZ, Length: 56, Data: WnPicture.jxr)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.wdp Type: REG_SZ, Length: 56, Data: WnPicture.wdp)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.hdp Type: REG_SZ, Length: 56, Data: WnPicture.hdp)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.ska Type: REG_SZ, Length: 56, Data: WnPicture.ska)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pgx Type: REG_SZ, Length: 56, Data: WnPicture.pgx)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.wmf Type: REG_SZ, Length: 56, Data: WnPicture.wmf)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.emf Type: REG_SZ, Length: 56, Data: WnPicture.emf)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.3fr Type: REG_SZ, Length: 56, Data: WnPicture.3fr)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.arw Type: REG_SZ, Length: 56, Data: WnPicture.arw)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.bay Type: REG_SZ, Length: 56, Data: WnPicture.bay)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.bmq Type: REG_SZ, Length: 56, Data: WnPicture.bmq)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.cap Type: REG_SZ, Length: 56, Data: WnPicture.cap)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.cine Type: REG_SZ, Length: 60, Data: WnPicture.cine)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.cr2 Type: REG_SZ, Length: 56, Data: WnPicture.cr2)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.crw Type: REG_SZ, Length: 56, Data: WnPicture.crw)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.cs1 Type: REG_SZ, Length: 56, Data: WnPicture.cs1)

- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.dc2 Type: REG_SZ, Length: 56, Data: WnPicture.dc2)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.dcr Type: REG_SZ, Length: 56, Data: WnPicture.dcr)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.drf Type: REG_SZ, Length: 56, Data: WnPicture.drf)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.dsc Type: REG_SZ, Length: 56, Data: WnPicture.dsc)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.dng Type: REG_SZ, Length: 56, Data: WnPicture.dng)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.erf Type: REG_SZ, Length: 56, Data: WnPicture.erf)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.fff Type: REG_SZ, Length: 56, Data: WnPicture.fff)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.ia Type: REG_SZ, Length: 52, Data: WnPicture.ia)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.iiq Type: REG_SZ, Length: 56, Data: WnPicture.iiq)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.k25 Type: REG_SZ, Length: 56, Data: WnPicture.k25)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.kc2 Type: REG_SZ, Length: 56, Data: WnPicture.kc2)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.kdc Type: REG_SZ, Length: 56, Data: WnPicture.kdc)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.mdc Type: REG_SZ, Length: 56, Data: WnPicture.mdc)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.mef Type: REG_SZ, Length: 56, Data: WnPicture.mef)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.mos Type: REG_SZ, Length: 56, Data: WnPicture.mos)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.mrw Type: REG_SZ, Length: 56, Data: WnPicture.mrw)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.nef Type: REG_SZ, Length: 56, Data: WnPicture.nef)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.nrw Type: REG_SZ, Length: 56, Data: WnPicture.nrw)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.orf Type: REG_SZ, Length: 56, Data: WnPicture.orf)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pef Type: REG_SZ, Length: 56, Data: WnPicture.pef)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.ptx Type: REG_SZ, Length: 56, Data: WnPicture.ptx)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pxn Type: REG_SZ, Length: 56, Data: WnPicture.pxn)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.qtk Type: REG_SZ, Length: 56, Data: WnPicture.qtk)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.raf Type: REG_SZ, Length: 56, Data: WnPicture.raf)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.raw Type: REG_SZ, Length: 56, Data: WnPicture.raw)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.rdc Type: REG_SZ, Length: 56, Data: WnPicture.rdc)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.rw2 Type: REG_SZ, Length: 56, Data: WnPicture.rw2)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.rwl Type: REG_SZ, Length: 56, Data: WnPicture.rwl)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)

- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.rwz Type: REG_SZ, Length: 56, Data: WnPicture.rwz)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.sr2 Type: REG_SZ, Length: 56, Data: WnPicture.sr2)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.srf Type: REG_SZ, Length: 56, Data: WnPicture.srf)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.srw Type: REG_SZ, Length: 56, Data: WnPicture.srw)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.sti Type: REG_SZ, Length: 56, Data: WnPicture.sti)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.x3f Type: REG_SZ, Length: 56, Data: WnPicture.x3f)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.pdf Type: REG_SZ, Length: 56, Data: WnPicture.pdf)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.xps Type: REG_SZ, Length: 56, Data: WnPicture.xps)
- RegCreateKey (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\WnPicture\\Capabilities\\FileAssociations\\.oxps Type: REG_SZ, Length: 60, Data: WnPicture.oxps)
- RegDeleteValue (HKLM\\SOFTWARE\\RegisteredApplications\\WnPicture)
- RegCreateKey (HKLM\\SOFTWARE\\RegisteredApplications Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\RegisteredApplications\\WnPicture Type: REG_SZ, Length: 128, Data: Software\\WnPicture\\Capabilities)
- RegCreateKey (HKLM\\Software\\Microsoft\\Windows\\CurrentVersion\\Explorer Desired Access: Set Value, Disposition: REG_OPENED_EXISTING_KEY)
- RegSetValue (HKLM\\SOFTWARE\\Microsoft\\Windows\\CurrentVersion\\Explorer\\GlobalAssocChangedCounter Type: REG_DWORD, Length: 4, Data: 29)
- Thread Create (Thread ID: T11)
- Thread Create (Thread ID: T20)
- Thread Create (Thread ID: T21)
- Thread Create (Thread ID: T22)
- Thread Create (Thread ID: T23)
- Thread Create (Thread ID: T24)
- Thread Create (Thread ID: T25)

• Thread T8 (in process P1, WnPicUtility.exe) description

• Thread's childs

• Thread' events

- Thread Create (Thread ID: TUNKALIAS)

• Thread T9 (in process P1, WnPicUtility.exe) description

• Thread's childs

- Thread T10 (in process P1, WnPicUtility.exe)

• Thread' events

- Thread Create (Thread ID: T10)
- Thread Create (Thread ID: TUNKALIAS)

• Thread T10 (in process P1, WnPicUtility.exe) description

• Thread's childs

- **Thread' events**

• Thread T11 (in process P1, WnPicUtility.exe) description

- **Thread's childs**

  - Thread T12 (in process P1, WnPicUtility.exe)
  - Thread T19 (in process P1, WnPicUtility.exe)

- **Thread' events**

  - Thread Create (Thread ID: T12)
  - Thread Create (Thread ID: T19)

• Thread T12 (in process P1, WnPicUtility.exe) description

- **Thread's childs**

- **Thread' events**

  - Thread Create (Thread ID: TUNKALIAS)

• Thread T13 (in process P2, WnPicUtility.exe) description

- **Thread's childs**

  - Thread T14 (in process P2, WnPicUtility.exe)

- **Thread' events**

  - Thread Create (Thread ID: T14)

• Thread T14 (in process P2, WnPicUtility.exe) description

- **Thread's childs**

  - Thread T15 (in process P2, WnPicUtility.exe)
  - Thread T18 (in process P2, WnPicUtility.exe)

- **Thread' events**

  - RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
  - RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
  - RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
  - RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
  - RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 256, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\,)
  - RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)

• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 386, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\,)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 472, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\Users\\Public\\Desktop\\.lnk.del,)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 572, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\Users\\Public\\Desktop\\.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-PDF.lnk.del,)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 670, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\Users\\Public\\Desktop\\.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-PDF.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-.lnk.del,)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 814, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\Users\\Public\\Desktop\\.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-PDF.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del,)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: <pid>, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\Users\\Public\\Desktop\\.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-PDF.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del,)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 1.128, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\Users\\Public\\Desktop\\.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-PDF.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-.lnk.del,)

• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 1.272, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\Users\\Public\\Desktop\\.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-PDF.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del,)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 1.430, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\Users\\Public\\Desktop\\.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-PDF.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del,)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 1.586, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\Users\\Public\\Desktop\\.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-PDF.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-.lnk.del,)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 1.766, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\Users\\Public\\Desktop\\.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-PDF.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-.lnk.del, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Internet Explorer\\Quick Launch\\.lnk.del,)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)
• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)
• RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 1.960, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\Users\\Public\\Desktop\\.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-PDF.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-.lnk.del, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Internet Explorer\\Quick Launch\\.lnk.del, ,

\\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Internet Explorer\\Quick Launch\\-PDF.lnk.del,)

• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)

• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)

• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write)

• RegCreateKey (HKLM\\System\\CurrentControlSet\\Control\\Session Manager Desired Access: Read/Write, Disposition: REG_OPENED_EXISTING_KEY)

• RegSetValue (HKLM\\System\\CurrentControlSet\\Control\\Session Manager\\PendingFileRenameOperations Type: REG_MULTI_SZ, Length: 2.152, Data: \\??\\C:\\Users\\javi\\AppData\\Local\\Temp\\E7D8.tmp, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\\\, , \\??\\C:\\Users\\Public\\Desktop\\.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-PDF.lnk.del, , \\??\\C:\\Users\\Public\\Desktop\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-PDF.lnk.del, , \\??\\C:\\ProgramData\\Microsoft\\Windows\\Start Menu\\Programs\\-.lnk.del, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Internet Explorer\\Quick Launch\\.lnk.del, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\Internet Explorer\\Quick Launch\\-PDF.lnk.del, , \\??\\C:\\Users\\javi\\AppData\\Roaming\\Microsoft\\I@)

• Thread Create (Thread ID: T15)

• Thread Create (Thread ID: T18)

• Thread T15 (in process P2, WnPicUtility.exe) description

• Thread's childs

• Thread T16 (in process P2, WnPicUtility.exe)

• Thread' events

• Thread Create (Thread ID: T16)

• Thread Create (Thread ID: TUNKALIAS)

• Thread T16 (in process P2, WnPicUtility.exe) description

• Thread's childs

• Thread T17 (in process P2, WnPicUtility.exe)

• Thread' events

• Thread Create (Thread ID: T17)

• Thread T17 (in process P2, WnPicUtility.exe) description

• Thread's childs

• Thread' events

• Thread Create (Thread ID: TUNKALIAS)

• Thread T18 (in process P2, WnPicUtility.exe) description

• Thread's childs

• Thread' events

- Thread Create (Thread ID: TUNKALIAS)

- **Thread T19 (in process P1, WnPicUtility.exe) description**
  - **Thread's childs**
  - **Thread' events**
    - Thread Create (Thread ID: TUNKALIAS)
- **Thread T20 (in process P1, WnPicUtility.exe) description**
  - **Thread's childs**
  - **Thread' events**
    - Thread Create (Thread ID: TUNKALIAS)
- **Thread T21 (in process P1, WnPicUtility.exe) description**
  - **Thread's childs**
  - **Thread' events**
    - Thread Create (Thread ID: TUNKALIAS)
- **Thread T22 (in process P1, WnPicUtility.exe) description**
  - **Thread's childs**
  - **Thread' events**
    - Thread Create (Thread ID: TUNKALIAS)
- **Thread T23 (in process P1, WnPicUtility.exe) description**
  - **Thread's childs**
  - **Thread' events**
    - Thread Create (Thread ID: TUNKALIAS)
- **Thread T24 (in process P1, WnPicUtility.exe) description**
  - **Thread's childs**

- **Thread' events**

  - Thread Create (Thread ID: TUNKALIAS)

• Thread T25 (in process P1, WnPicUtility.exe) description

- **Thread's childs**

- **Thread' events**

  - Thread Create (Thread ID: TUNKALIAS)

Malware processes' network events

The analysis environment tries to capture and collect network actions performed by sample's threads.

Process P0 (cebo.exe)'s network events

- TCP Connect (javi-PC.localdomain:dynport-> 120.132.61.186:http (0))
- TCP Send (javi-PC.localdomain:dynport-> 120.132.61.186:http (72))
- TCP Receive (javi-PC.localdomain:dynport-> 120.132.61.186:http (148))
- TCP Disconnect (javi-PC.localdomain:dynport-> 120.132.61.186:http (0))

Process P1 (WnPicUtility.exe)'s network events

- TCP Connect (javi-PC.localdomain:dynport-> 180.150.186.132:http (0))
- TCP Send (javi-PC.localdomain:dynport-> 180.150.186.132:http (82))
- TCP Receive (javi-PC.localdomain:dynport-> 180.150.186.132:http (728))
- TCP Disconnect (javi-PC.localdomain:dynport-> 180.150.186.132:http (0))
- TCP Connect (javi-PC.localdomain:dynport-> 120.132.61.186:http (0))
- TCP Send (javi-PC.localdomain:dynport-> 120.132.61.186:http (205))

Process P2 (WnPicUtility.exe)'s network events

- TCP Connect (javi-PC.localdomain:dynport-> 180.150.186.132:http (0))
- TCP Send (javi-PC.localdomain:dynport-> 180.150.186.132:http (83))
- TCP Receive (javi-PC.localdomain:dynport-> 180.150.186.132:http (865))

Process P1 (WnPicUtility.exe)'s network events

- TCP Receive (javi-PC.localdomain:dynport-> 120.132.61.186:http (179))

Process P2 (WnPicUtility.exe)'s network events

- TCP Connect (javi-PC.localdomain:dynport-> 106.75.18.205:http (0))
- TCP Send (javi-PC.localdomain:dynport-> 106.75.18.205:http (66))

Process P1 (WnPicUtility.exe)'s network events

- TCP Disconnect (javi-PC.localdomain:dynport-> 120.132.61.186:http (0))

Process P2 (WnPicUtility.exe)'s network events

- TCP Receive (javi-PC.localdomain:dynport-> 106.75.18.205:http (221))

Process P1 (WnPicUtility.exe)'s network events

- TCP Connect (javi-PC.localdomain:dynport-> 120.132.61.186:http (0))
- TCP Send (javi-PC.localdomain:dynport-> 120.132.61.186:http (312))

Process P2 (WnPicUtility.exe)'s network events

- TCP Disconnect (javi-PC.localdomain:dynport-> 106.75.18.205:http (0))

Process P1 (WnPicUtility.exe)'s network events

- TCP Receive (javi-PC.localdomain:dynport-> 120.132.61.186:http (133))
- TCP Connect (javi-PC.localdomain:dynport-> 180.150.186.132:http (0))
- TCP Send (javi-PC.localdomain:dynport-> 180.150.186.132:http (80))
- TCP Disconnect (javi-PC.localdomain:dynport-> 120.132.61.186:http (0))
- TCP Receive (javi-PC.localdomain:dynport-> 180.150.186.132:http (777))

Process P2 (WnPicUtility.exe)'s network events

- TCP Disconnect (javi-PC.localdomain:dynport-> 180.150.186.132:http (0))

Process P1 (WnPicUtility.exe)'s network events

- TCP Disconnect (javi-PC.localdomain:dynport-> 180.150.186.132:http (0))
- TCP Connect (javi-PC.localdomain:dynport-> 180.150.186.132:http (0))
- TCP Send (javi-PC.localdomain:dynport-> 180.150.186.132:http (81))
- TCP Receive (javi-PC.localdomain:dynport-> 180.150.186.132:http (1460))
- TCP Receive (javi-PC.localdomain:dynport-> 180.150.186.132:http (1258))
- TCP Disconnect (javi-PC.localdomain:dynport-> 180.150.186.132:http (0))
- TCP Connect (javi-PC.localdomain:dynport-> 120.132.61.186:http (0))
- TCP Send (javi-PC.localdomain:dynport-> 120.132.61.186:http (283))
- TCP Receive (javi-PC.localdomain:dynport-> 120.132.61.186:http (133))
- TCP Disconnect (javi-PC.localdomain:dynport-> 120.132.61.186:http (0))
- TCP Connect (javi-PC.localdomain:dynport-> 120.132.61.186:http (0))
- TCP Send (javi-PC.localdomain:dynport-> 120.132.61.186:http (295))
- TCP Receive (javi-PC.localdomain:dynport-> 120.132.61.186:http (133))
- TCP Disconnect (javi-PC.localdomain:dynport-> 120.132.61.186:http (0))
- TCP Connect (javi-PC.localdomain:dynport-> 120.132.61.186:http (0))
- TCP Send (javi-PC.localdomain:dynport-> 120.132.61.186:http (235))
- TCP Receive (javi-PC.localdomain:dynport-> 120.132.61.186:http (133))
- TCP Disconnect (javi-PC.localdomain:dynport-> 120.132.61.186:http (0))
- TCP Connect (javi-PC.localdomain:dynport-> 120.132.61.186:http (0))
- TCP Send (javi-PC.localdomain:dynport-> 120.132.61.186:http (320))
- TCP Receive (javi-PC.localdomain:dynport-> 120.132.61.186:http (133))
- TCP Disconnect (javi-PC.localdomain:dynport-> 120.132.61.186:http (0))

Sample's unpacked / injected modules

In this section it's possible to find information about sample's modules, such as the rich signatures, strings, yara rules matching the module,...

The analysis environment performs an heuristic search trying to find sample's injected or unpacked modules in memory, dumping and analyzing them.

• Module 1 (probably unpacked / injected by the sample)

• Module 1 rich signatures

• 44616e530000000000000000000000001e52840004000000e81f0a000200000009788a0008000000c30f5d000200000027c66e0004000000bd4f960008000000097895002300000009788300dc00000027c66d00520000000978930002000000000000100f202000027c67b00270000000978840 0eb0000000978920001 0000001e52940001000000009789100

• Module 1 yara matches

• Module 1 strings

• Module 1 most interesting strings

- url | http tag | valid domain | tlds: http://www.wn51.com/kantu/protocol.html
- url | http tag | valid domain | tlds: http://www.wn51.com/kantu
- url | http tag | valid domain | tlds: # http://curl.haxx.se/rfc/cookie_spec.html
- url | valid domains | tlds: ftp@example.com
- url | valid domains | tlds: .com
- url | valid domains | tlds: config.wn51.com
- url | valid domains | tlds: config.wn51.com/kantu/install/
- url | valid domains | tlds: tjv1.wn51.com
- url | valid domains | tlds: ,v\\9.vN
- url | valid domains | tlds: _u.Ph
- url | valid domains | tlds: tGHt.Ht&
- url | valid domains | tlds: tGHt.Ht&
- url | valid domains | tlds: u.hT
- path | frequently modified by malware: \\AppData\\LocalLow
- api | frequently used by malware: Accept:*/*
- api | frequently used by malware: Sleep
- api | frequently used by malware: InternetCloseHandle
- api | frequently used by malware: InternetReadFile
- api | frequently used by malware: BitBlt
- api | frequently used by malware: GetMessagePos
- api | frequently used by malware: CallNextHookEx
- api | frequently used by malware: GetUpdateRect
- api | frequently used by malware: SetCapture
- api | frequently used by malware: GetKeyState
- api | frequently used by malware: GetMenu
- api | frequently used by malware: TranslateMessage
- api | frequently used by malware: PeekNamedPipe
- api | frequently used by malware: GetTimeZoneInformation
- api | frequently used by malware: ExitThread
- api | frequently used by malware: IsDebuggerPresent
- api | frequently used by malware: SetFileTime
- api | frequently used by malware: ExitProcess
- api | frequently used by malware: GetAdaptersInfo
- api | frequently used by malware: EnumProcessModules

• api | frequently used by malware: CoCreateInstance
• api | frequently used by malware: RegCloseKey
• api | frequently used by malware: GetDC
• api | frequently used by malware: GetForegroundWindow
• api | frequently used by malware: GetWindowThreadProcessId
• api | frequently used by malware: SetTimer
• api | frequently used by malware: GetVersion
• api | frequently used by malware: VirtualAllocEx
• api | frequently used by malware: DeviceIoControl
• api | frequently used by malware: ReadProcessMemory
• api | frequently used by malware: CreateToolhelp32Snapshot
• api | frequently used by malware: GetTickCount
• api | frequently used by malware: WriteFile
• api | frequently used by malware: OpenProcess
• api | frequently used by malware: LoadResource
• api | frequently used by malware: CreateThread
• api | frequently used by malware: Sleep
• api | frequently used by malware: WriteProcessMemory
• api | frequently used by malware: QueryPerformanceCounter
• api | frequently used by malware: GetProcAddress
• api | frequently used by malware: WideCharToMultiByte
• api | frequently used by malware: Failed to resolve "%s" for SOCKS5 connect.
• api | frequently used by malware: Failed to receive SOCKS5 connect request ack.
• api | frequently used by malware: Failed to send SOCKS5 connect request.
• api | frequently used by malware: Failed to send SOCKS5 sub-negotiation request.
• api | frequently used by malware: Unable to send initial SOCKS5 request.
• api | frequently used by malware: Failed to resolve "%s" for SOCKS4 connect.
• api | frequently used by malware: Failed to send SOCKS4 connect request.
• api | frequently used by malware: Can't complete SOCKS4 connection to %d.%d.%d.%d:%d. (%d), request rejected because SOCKS server cannot connect to identd on the client.
• api | frequently used by malware: Failed to receive SOCKS4 connect request ack.
• api | frequently used by malware: HTTP error before end of send, stop sending
• api | frequently used by malware: Accept: */*
• api | frequently used by malware: NTLM send, close instead of sending %lld bytes
• api | frequently used by malware: Rewind stream after send
• api | frequently used by malware: got positive EPSV response, but can't connect. Disabling EPSV
• api | frequently used by malware: Connect data stream actively
• api | frequently used by malware: Connect data stream passively
• api | frequently used by malware: socket failure: %s
• api | frequently used by malware: bind(port=%hu) on non-local address failed: %s
• api | frequently used by malware: bind(port=%hu) failed: %s
• api | frequently used by malware: bind() failed, we ran out of ports!
• api | frequently used by malware: Timeout while waiting for server connect
• api | frequently used by malware: Error accept()ing server connect
• api | frequently used by malware: Error while waiting for server connect
• api | frequently used by malware: WSAStartup failed (%d)
• api | frequently used by malware: LDAP local: Cannot connect to %s:%hu
• api | frequently used by malware: LDAP local: ldap_simple_bind_s %s
• api | frequently used by malware: Accept-ranges: bytes
• api | frequently used by malware: tftp_send_first: internal error
• api | frequently used by malware: bind() failed; %s
• api | frequently used by malware: Accept:
• api | frequently used by malware: Accept: application/sdp
• api | frequently used by malware: Accept-Encoding:
• api | frequently used by malware: Accept-Encoding: %s
• api | frequently used by malware: Descriptor is not a socket
• api | frequently used by malware: Couldn't connect to server

- api | frequently used by malware: FTP: The server did not accept the PRET command.
- api | frequently used by malware: SSL connect error
- api | frequently used by malware: LDAP: cannot bind
- api | frequently used by malware: Send failed since rewinding of the data stream failed
- api | frequently used by malware: Socket not ready for send/recv
- api | frequently used by malware: couldn't connect to host
- api | frequently used by malware: connect() timed out!
- api | frequently used by malware: Failed to connect to %s: %s
- api | frequently used by malware: Couldn't bind to '%s'
- api | frequently used by malware: Bind to local port %hu failed, trying next
- api | frequently used by malware: bind failed with errno %d: %s
- api | frequently used by malware: Recv failure: %s
- api | frequently used by malware: Send failure: %s
- api | frequently used by malware: Connection died, retrying a fresh connect
- api | frequently used by malware: we are done reading and this is set to close, stop send
- api | frequently used by malware: About to connect() to %s%s port %ld (#%ld)
- api | frequently used by malware: DllGetClassObject
- api | frequently used by malware: NtQueryInformationProcess
- api | frequently used by malware: GetNativeSystemInfo
- api | frequently used by malware: Wow64DisableWow64FsRedirection
- url | http tag: @http://
- path | path unit: f:\\dd\\vctools\\vc7libs\\ship\\atlmfc\\include\\afxwin1.inl
- path | path unit: f:\\dd\\vctools\\vc7libs\\ship\\atlmfc\\include\\afxwin2.inl
- path | path unit: f:\\dd\\vctools\\vc7libs\\ship\\atlmfc\\src\\mfc\\auxdata.cpp
- registry: software\\Microsoft\\Windows\\CurrentVersion\\Uninstall
- url | http tag: http://%s/statistics/sign?code=%s
- path | path unit: C:\\log\\
- registry: SOFTWARE\\Microsoft\\Windows\\CurrentVersion\\Policies\\System\\
- registry: SOFTWARE\\Wow6432Node\\Microsoft\\Windows\\CurrentVersion\\Uninstall\\
- registry: Software\\Microsoft\\Windows\\CurrentVersion\\Uninstall\\
- path | path unit: e:\\svn\\Common\\Temp\\Release\\InstallSilent.pdb
- url | http tag: ftp://
- url | http tag: ftp://%s:%s@%s
- url | http tag: http://
- api | wininet: HttpQueryInfoW
- api | wininet: InternetOpenUrlW
- api | wininet: InternetSetOptionW
- api | wininet: InternetOpenW
- api | crypt32: CryptQueryObject
- api | crypt32: CryptMsgGetParam
- api | crypt32: CertCloseStore
- api | crypt32: CryptMsgClose
- api | crypt32: CertFindCertificateInStore
- api | crypt32: CertGetNameStringW
- api | crypt32: CertFreeCertificateContext
- api | ws2_32: Proxy CONNECT aborted due to select/poll error
- api | ws2_32: select/poll error
- api | ws2_32: getsockname() failed: %s
- api | ws2_32: FTP response aborted due to select/poll error: %d
- api | ws2_32: WSACreateEvent
- api | ws2_32: failed to find WSACreateEvent function (%d)
- api | ws2_32: WSACloseEvent
- api | ws2_32: failed to find WSACloseEvent function (%d)
- api | ws2_32: WSAEventSelect
- api | ws2_32: failed to find WSAEventSelect function (%d)
- api | ws2_32: WSAEnumNetworkEvents
- api | ws2_32: failed to find WSAEnumNetworkEvents function (%d)

- api | ws2_32: WSACreateEvent failed (%d)
- api | ws2_32: WSAEnumNetworkEvents failed (%d)
- api | ws2_32: WSACloseEvent failed (%d)
- api | ws2_32: getaddrinfo
- api | ws2_32: getnameinfo
- api | ws2_32: freeaddrinfo
- api | ws2_32: sa_addr inet_ntop() failed with errno %d: %s
- api | ws2_32: getpeername() failed with errno %d: %s
- api | ws2_32: ssrem inet_ntop() failed with errno %d: %s
- api | ws2_32: ssloc inet_ntop() failed with errno %d: %s
- api | ws2_32: getsockname() failed with errno %d: %s
- api | ws2_32: select/poll returned error
- api | ws2_32: getaddrinfo() failed for %s:%d; %s
- api | kernel32: HeapAlloc() failed. Error %d
- api | advapi32: InitializeSecurityDescriptor() failed.Error %d
- api | advapi32: GetSecurityDescriptorDacl() failed. Error %d
- api | advapi32: GetAclInformation() failed. Error %d
- api | advapi32: InitializeAcl() failed. Error %d
- api | advapi32: GetAce() failed. Error %d
- api | advapi32: AddAce() failed. Error %d
- api | advapi32: AddAccessAllowedAceEx() failed. Error %d
- api | advapi32: AddAccessAllowedAce() failed. Error %d
- api | advapi32: SetSecurityDescriptorDacl() failed. Error %d
- api | advapi32: GetSecurityDescriptorControl() failed.Error %d
- api | advapi32: SetSecurityDescriptorControl() failed.Error %d
- api | ntdll: %sgswb.log
- api | kernel32: GetFileInformationByHandle
- api | user32: DestroyMenu
- api | user32: GrayStringW
- api | user32: DrawTextExW
- api | user32: TabbedTextOutW
- api | user32: RegisterWindowMessageW
- api | user32: LoadIconW
- api | user32: WinHelpW
- api | user32: GetCapture
- api | user32: GetClassLongW
- api | user32: RemovePropW
- api | user32: GetTopWindow
- api | user32: GetMessageTime
- api | user32: SetMenu
- api | user32: GetClassInfoW
- api | user32: CopyRect
- api | user32: SystemParametersInfoA
- api | user32: GetWindowPlacement
- api | user32: SetMenuItemBitmaps
- api | user32: GetMenuCheckMarkDimensions
- api | user32: LoadBitmapW
- api | user32: ModifyMenuW
- api | user32: EnableMenuItem
- api | user32: CheckMenuItem
- api | user32: GetDlgItem
- api | user32: GetDlgCtrlID
- api | user32: SetWindowsHookExW
- api | user32: PeekMessageW
- api | user32: ValidateRect
- api | user32: GetSysColorBrush
- api | user32: UnhookWindowsHookEx

- api | user32: GetLastActivePopup
- api | user32: IsWindowEnabled
- api | user32: MessageBoxW
- api | user32: GetMenuState
- api | user32: GetMenuItemID
- api | user32: GetMenuItemCount
- api | user32: GetSubMenu
- api | user32: CreateAcceleratorTableW
- api | user32: InvalidateRgn
- api | user32: GetCaretPos
- api | user32: GetSysColor
- api | user32: ClientToScreen
- api | user32: SetCaretPos
- api | user32: ShowCaret
- api | user32: HideCaret
- api | user32: CreateCaret
- api | user32: SetWindowTextW
- api | user32: GetWindowTextLengthW
- api | user32: SetRect
- api | user32: CharPrevW
- api | user32: DrawTextW
- api | user32: FillRect
- api | user32: BeginPaint
- api | user32: EndPaint
- api | user32: MapWindowPoints
- api | user32: GetFocus
- api | user32: ReleaseDC
- api | user32: ReleaseCapture
- api | user32: KillTimer
- api | user32: UnionRect
- api | user32: InflateRect
- api | user32: SetWindowRgn
- api | user32: ScreenToClient
- api | user32: IsZoomed
- api | user32: IsIconic
- api | user32: GetClassInfoExW
- api | user32: RegisterClassW
- api | user32: GetClientRect
- api | user32: AdjustWindowRectEx
- api | user32: SetPropW
- api | user32: GetPropW
- api | user32: CallWindowProcW
- api | user32: LoadImageW
- api | user32: MonitorFromWindow
- api | user32: GetWindow
- api | user32: EnableWindow
- api | user32: GetMessageW
- api | user32: SetFocus
- api | user32: DispatchMessageW
- api | user32: SetCursor
- api | user32: IsRectEmpty
- api | user32: IntersectRect
- api | kernel32: GetTempFileNameW
- api | kernel32: ExpandEnvironmentStringsW
- api | kernel32: WaitForMultipleObjects
- api | kernel32: GetSystemDirectoryA
- api | kernel32: SleepEx

- api | kernel32: SetEnvironmentVariableA
- api | kernel32: GetConsoleOutputCP
- api | kernel32: WriteConsoleA
- api | kernel32: SetStdHandle
- api | kernel32: CreateFileA
- api | kernel32: InitializeCriticalSectionAndSpinCount
- api | kernel32: GetEnvironmentStringsW
- api | kernel32: FreeEnvironmentStringsW
- api | kernel32: GetCurrentDirectoryA
- api | kernel32: GetFullPathNameA
- api | kernel32: GetStringTypeW
- api | kernel32: GetStringTypeA
- api | kernel32: IsValidLocale
- api | kernel32: EnumSystemLocalesA
- api | kernel32: GetLocaleInfoA
- api | kernel32: GetUserDefaultLCID
- api | kernel32: LCMapStringA
- api | kernel32: LCMapStringW
- api | kernel32: IsValidCodePage
- api | kernel32: GetOEMCP
- api | kernel32: GetCPInfo
- api | kernel32: GetStartupInfoA
- api | kernel32: SetHandleCount
- api | kernel32: GetConsoleMode
- api | kernel32: GetConsoleCP
- api | kernel32: GetModuleFileNameA
- api | kernel32: HeapCreate
- api | kernel32: HeapSize
- api | kernel32: GetStartupInfoW
- api | kernel32: HeapReAlloc
- api | kernel32: FindFirstFileA
- api | kernel32: GetDriveTypeA
- api | kernel32: GetStdHandle
- api | kernel32: WriteConsoleW
- api | kernel32: GetSystemTimeAsFileTime
- api | kernel32: RtlUnwind
- api | kernel32: UnhandledExceptionFilter
- api | kernel32: TerminateProcess
- api | kernel32: GetModuleHandleA
- api | kernel32: GetFileAttributesW
- api | kernel32: GetLocaleInfoW
- api | kernel32: CompareStringA
- api | kernel32: InterlockedExchange
- api | kernel32: GlobalFindAtomW
- api | kernel32: GlobalDeleteAtom
- api | kernel32: GetVersionExA
- api | kernel32: GetFullPathNameW
- api | kernel32: SetEndOfFile
- api | kernel32: FlushFileBuffers
- api | kernel32: MoveFileW
- api | kernel32: GlobalAddAtomW
- api | kernel32: GlobalFlags
- api | kernel32: lstrcmpW
- api | kernel32: lstrlenA
- api | kernel32: lstrcmpA
- api | kernel32: CompareStringW
- api | kernel32: TlsFree

- api | kernel32: LocalReAlloc
- api | kernel32: TlsSetValue
- api | kernel32: TlsAlloc
- api | kernel32: GlobalHandle
- api | kernel32: GlobalReAlloc
- api | kernel32: TlsGetValue
- api | kernel32: FileTimeToLocalFileTime
- api | kernel32: FileTimeToSystemTime
- api | kernel32: SetLastError
- api | kernel32: DosDateTimeToFileTime
- api | kernel32: SystemTimeToFileTime
- api | kernel32: DuplicateHandle
- api | kernel32: GetFileType
- api | kernel32: SetFilePointer
- api | kernel32: GetLocalTime
- api | kernel32: MulDiv
- api | kernel32: SetCurrentDirectoryW
- api | kernel32: GetCurrentDirectoryW
- api | kernel32: GetACP
- api | kernel32: FreeResource
- api | psapi: GetModuleFileNameExW
- api | user32: _TrackMouseEvent
- api | advapi32: LookupAccountNameW
- api | advapi32: GetFileSecurityW
- api | advapi32: GetSecurityDescriptorDacl
- api | advapi32: GetAclInformation
- api | advapi32: GetLengthSid
- api | advapi32: InitializeAcl
- api | advapi32: GetAce
- api | advapi32: EqualSid
- api | advapi32: AddAce
- api | advapi32: AddAccessAllowedAce
- api | advapi32: GetSecurityDescriptorControl
- api | advapi32: SetFileSecurityW
- api | advapi32: InitializeSecurityDescriptor
- api | advapi32: SetSecurityDescriptorDacl
- api | kernel32: RegEnumKeyExW
- api | kernel32: RegQueryInfoKeyW
- api | kernel32: RegDeleteValueW
- api | advapi32: RegDeleteKeyW
- api | advapi32: RegEnumKeyW
- api | advapi32: RegOpenKeyW
- api | kernel32: RegEnumValueA
- api | kernel32: RegQueryValueExW
- api | kernel32: RegOpenKeyExW
- api | kernel32: RegCreateKeyExW
- api | kernel32: RegSetValueExW
- api | user32: LoadStringW
- api | user32: OffsetRect
- api | user32: GetCursorPos
- api | user32: GetShellWindow
- api | user32: SendMessageW
- api | user32: CreateWindowExW
- api | user32: DestroyWindow
- api | user32: DefWindowProcW
- api | user32: LoadCursorW
- api | user32: RegisterClassExW

- api | user32: PtInRect
- api | user32: EnumDisplayMonitors
- api | user32: SystemParametersInfoW
- api | user32: GetMonitorInfoW
- api | user32: wsprintfW
- api | user32: FindWindowExW
- api | user32: GetWindowTextW
- api | user32: GetClassNameW
- api | user32: GetDesktopWindow
- api | user32: GetSystemMetrics
- api | user32: GetParent
- api | user32: MoveWindow
- api | user32: CharNextW
- api | user32: FindWindowW
- api | user32: IsWindow
- api | user32: SetForegroundWindow
- api | user32: ShowWindow
- api | user32: PostQuitMessage
- api | user32: GetWindowRect
- api | user32: PostMessageW
- api | user32: GetWindowLongW
- api | user32: SetWindowLongW
- api | user32: SetWindowPos
- api | user32: InvalidateRect
- api | kernel32: HeapAlloc
- api | kernel32: GetProcessHeap
- api | kernel32: HeapFree
- api | kernel32: IsBadReadPtr
- api | kernel32: LoadLibraryA
- api | kernel32: VirtualFreeEx
- api | kernel32: lstrcpynW
- api | kernel32: GetVolumeInformationW
- api | kernel32: ReleaseMutex
- api | kernel32: CreateMutexW
- api | kernel32: SetPriorityClass
- api | kernel32: OutputDebugStringA
- api | kernel32: FormatMessageW
- api | kernel32: VerSetConditionMask
- api | kernel32: VerifyVersionInfoW
- api | kernel32: GetWindowsDirectoryW
- api | kernel32: GlobalLock
- api | kernel32: GlobalUnlock
- api | kernel32: GetCurrentThreadId
- api | kernel32: GetSystemInfo
- api | kernel32: CopyFileW
- api | kernel32: GetCommandLineW
- api | kernel32: GlobalAlloc
- api | kernel32: GlobalFree
- api | kernel32: Process32FirstW
- api | kernel32: Process32NextW
- api | kernel32: GetExitCodeProcess
- api | kernel32: WaitForSingleObject
- api | kernel32: CreateProcessW
- api | kernel32: CreateDirectoryW
- api | kernel32: GetSystemDirectoryW
- api | kernel32: DeleteFileW
- api | kernel32: GetCurrentProcessId

- api | kernel32: VirtualFree
- api | kernel32: GetTempPathW
- api | kernel32: FindClose
- api | kernel32: RemoveDirectoryW
- api | kernel32: MoveFileExW
- api | kernel32: LocalAlloc
- api | kernel32: LocalFree
- api | kernel32: LockResource
- api | kernel32: VirtualAlloc
- api | kernel32: GetModuleHandleW
- api | kernel32: LoadLibraryExW
- api | kernel32: FindResourceW
- api | kernel32: SizeofResource
- api | kernel32: MultiByteToWideChar
- api | kernel32: GetLastError
- api | kernel32: LeaveCriticalSection
- api | kernel32: EnterCriticalSection
- api | kernel32: lstrcmpiW
- api | kernel32: lstrlenW
- api | kernel32: InterlockedDecrement
- api | kernel32: InterlockedIncrement
- api | kernel32: DeleteCriticalSection
- api | kernel32: InitializeCriticalSection
- api | kernel32: RaiseException
- api | kernel32: GetLongPathNameW
- api | kernel32: FindFirstFileW
- api | kernel32: FindNextFileW
- api | kernel32: lstrcpyW
- api | kernel32: GetDiskFreeSpaceExW
- api | kernel32: SetUnhandledExceptionFilter
- api | kernel32: FreeLibrary
- api | kernel32: VirtualProtect
- api | kernel32: GetCurrentProcess
- api | kernel32: GetPrivateProfileStringW
- api | kernel32: GetModuleFileNameW
- api | kernel32: CreateFileW
- api | kernel32: GetFileSize
- api | kernel32: ReadFile
- api | kernel32: CloseHandle
- api | kernel32: GetPrivateProfileIntW
- api | kernel32: WritePrivateProfileStringW
- api | kernel32: QueryPerformanceFrequency
- api | kernel32: LoadLibraryW
- api | kernel32: GetEnvironmentVariableW
- api | kernel32: AreFileApisANSI
- api | kernel32: GetVersionExW
- api | kernel32: FreeLibrary(wsock2) failed (%d)
- api | ntdll: atan
- api | ntdll: sqrt
- api | ntdll: ceil
- api | ntdll: floor
- api | ntdll: fabs
- api | user32: MessageBoxA
- api | user32: GetUserObjectInformationA
- api | user32: MessageBoxW
- api | user32: GetActiveWindow
- api | user32: GetLastActivePopup

- api | user32: GetUserObjectInformationW
- api | user32: GetProcessWindowStation
- api | kernel32: FlsAlloc
- api | kernel32: FlsGetValue
- api | kernel32: FlsSetValue
- api | kernel32: FlsFree
- api | kernel32: DecodePointer
- api | kernel32: EncodePointer
- api | kernel32: HeapQueryInformation
- api | user32: GetSystemMetrics
- api | user32: MonitorFromWindow
- api | user32: MonitorFromRect
- api | user32: MonitorFromPoint
- api | user32: EnumDisplayMonitors
- api | user32: EnumDisplayDevicesW
- api | user32: GetMonitorInfoW
- api | user32: GetMonitorInfoA
- api | user32: SetLayeredWindowAttributes
- api | advapi32: AddAccessAllowedAceEx
- api | advapi32: SetSecurityDescriptorControl
- api | kernel32: ERROR: Could not SetPriorityClass, LastError: %d
- api | user32: UpdateLayeredWindow
- api | kernel32: IsWow64Process
- api | kernel32: Wow64RevertWow64FsRedirection
- api | kernel32: GetSystemWow64DirectoryW
- api | kernel32: SetUnhandledExceptionFilter

• Module 1 other strings

- 4O<O
- _Setup.exe
- Setup.exe
- .temp
- AppID
- CLSID
- ForceRemove
- NoRemove
- Delete
- Component Categories
- FileType
- Interface
- Hardware
- Mime
- SECURITY
- Software
- dTypeLib
- UNICODE
- UTF-16LE
- UTF-8
- KERNEL32.DLL
- mscoree.dll
- Assertion failed!
- Program:
- <program name unknown>
- File:
- Line:

- Expression:
- failure, see the Visual C++ documentation on asserts
- For information on how your program can cause an assertion
- (Press Retry to debug the application - JIT must be enabled)
- Microsoft Visual C++ Runtime Library
- #32768
- accDoDefaultAction
- accHitTest
- accNavigate
- accLocation
- accSelect
- accDefaultAction
- accSelection
- accFocus
- accKeyboardShortcut
- accHelpTopic
- accHelp
- accState
- accRole
- accDescription
- accValue
- accName
- accChild
- accChildCount
- YaccParent
- USER32
- AfxOldWndProc423
- AfxOleControl90su
- AfxFrameOrView90su
- AfxMDIFrame90su
- AfxControlBar90su
- AfxWnd90su
- %9, %8
- CLSID\\%1\\DefaultExtension
- CLSID\\%1\\Printable
- %2\\DocObject
- CLSID\\%1\\DocObject
- CLSID\\%1\\InProcServer32
- CLSID\\%1\\MiscStatus
- %3,%7
- CLSID\\%1\\DefaultIcon
- CLSID\\%1\\AuxUserType\\3
- CLSID\\%1\\AuxUserType\\2
- CLSID\\%1\\Insertable
- &Open;,0,2
- CLSID\\%1\\Verb\\1
- &Edit;,0,2
- CLSID\\%1\\Verb\\0
- CLSID\\%1\\LocalServer32
- ole32.dll
- CLSID\\%1\\InprocHandler32
- CLSID\\%1\\ProgID
- CLSID\\%1
- %2\\protocol\\StdFileEditing\\server
- &Edit;
- %2\\protocol\\StdFileEditing\\verb\\0
- %2\\Insertable

- %2\\CLSID
- Exception thrown in destructor
- Gcomdlg32.dll
- Gcomctl32.dll
- arrowimage
- dropdown
- dropbox
- Fdropboxsize
- ComboWnd
- xmlfile
- ChildLayoutUI
- selectedid
- tabselect
- TabLayoutUI
- itemsize
- columns
- TileLayoutUI
- sepheight
- VerticalLayoutUI
- errorLine
- errorCharacter
- errorCode
- errorMessage
- errorUrl
- WebBrowserUI
- homepage
- autonavi
- Fshowactivex
- clsid
- modulename
- Fdelaycreate
- ActiveXUI
- ActiveXWnd
- GUIActiveX
- %4d-%02d-%02d
- DateTimeUI
- SysDateTimePick32
- FDateTimeWnd
- autovscroll
- autohscroll
- wanttab
- wantreturn
- wantctrlreturn
- rich
- Fmultiline
- thumbimage
- thumbsize
- step
- valuechanged
- valuechangedmove
- SliderUI
- isstretchfore
- ProgressUI
- selecteddisableimage
- group
- selectedimage
- selectedhotimage

- selectedbkcolor
- selectedtextcolor
- NormalGifFile
- ButtonGifUI
- foreimage
- hotforeimage
- pushedforeimage
- hotbkcolor
- hottextcolor
- pushedtextcolor
- focusedtextcolor
- return
- readonly
- numberonly
- password
- maxchar
- disabledimage
- nativebkcolor
- EEditWnd
- vcenter
- bottom
- lvcenter
- disabledtextcolor
- enabledeffect
- rhaa
- transshadow
- transtext
- transshadow1
- transtext1
- gradientangle
- enabledstroke
- enabledshadow
- transstroke
- gradientlength
- shadowoffset
- textcolor1
- textshadowcolora
- textshadowcolorb
- Estrokecolor
- horizattr
- dotlineattr
- folderattr
- checkboxattr
- itemattr
- Eitemdbclick
- visiblefolderbtn
- visiblecheckbtn
- itemminwidth
- selitemtextcolor
- selitemhottextcolor
- TreeViewUI
- itemselect
- headerclick
- ListContainerElementUI
- link
- ListTextElementUI
- ListLabelElementUI

- ListElement
- ListElementUI
- dragable
- align
- endellipsis
- font
- textcolor
- textpadding
- normalimage
- hotimage
- pushedimage
- focusedimage
- sepimage
- ListHeaderUI
- header
- hidden
- headerbkimage
- scrollselect
- multiexpanding
- itemfont
- itemalign
- left
- center
- right
- itemendellipsis
- itemtextpadding
- itemtextcolor
- itembkcolor
- itembkimage
- itemaltbk
- itemselectedtextcolor
- itemselectedbkcolor
- itemselectedimage
- itemhottextcolor
- itemhotbkcolor
- itemhotimage
- itemdisabledtextcolor
- itemdisabledbkcolor
- itemdisabledimage
- itemlinecolor
- itemshowhtml
- ListHeaderItemUI
- IList
- IListOwner
- ListUI
- Include
- count
- TreeNode
- TreeNodeUI
- TreeView
- TabLayout
- ButtonGif
- Progress
- RichEdit
- CheckBox
- ComboBox
- DateTime

- ActiveX
- Button
- Option
- Slider
- Combo
- Label
- Edit
- List
- Text
- ListHeader
- TileLayout
- WebBrowser
- ListContainerElement
- ListLabelElement
- ListTextElement
- VerticalLayout
- ListHeaderItem
- ChildLayout
- Image
- Font
- size
- default
- Default
- Window
- sizebox
- roundcorner
- mininfo
- maxinfo
- showdirty
- alpha
- disabledfontcolor
- defaultfontcolor
- linkfontcolor
- linkhoverfontcolor
- selectedcolor
- Error opening file
- File is empty
- File too large
- Could not read file
- Error opening zip file
- Could not find ziped file
- Could not unzip file
- Expected start tag
- Error parsing element name
- Expected start-tag closing
- Expected end-tag start
- Unmatched closing tag
- Error while parsing attributes
- Expected attribute value
- Error while parsing attribute string
- button1normalimage
- button1hotimage
- button1pushedimage
- button1disabledimage
- button2normalimage
- button2hotimage
- button2pushedimage

- button2disabledimage
- thumbnormalimage
- thumbhotimage
- thumbpushedimage
- thumbdisabledimage
- railnormalimage
- railhotimage
- railpushedimage
- raildisabledimage
- bknormalimage
- bkhotimage
- bkpushedimage
- bkdisabledimage
- linesize
- range
- value
- showbutton1
- showbutton2
- ScrollBar
- ScrollBarUI
- file='
- res='
- bold
- underline
- italic
- file
- restype
- dest
- source
- corner
- mask
- fade
- hole
- xtiled
- ytiled
- tooltips_class32
- RichEditUI
- fullpath
- respath
- setfocus
- Dmsimg32.dll
- LabelUI
- User32.dll
- Dmembuffer
- ZIPRES
- closebtn
- restorebtn
- ButtonUI
- OptionUI
- TextUI
- EditUI
- CheckBoxUI
- ComboBoxUI
- QComboUI
- WM_SETCURSOR
- WM_NCPAINT
- WM_PAINT

- WM_ERASEBKGND
- WM_NCMOUSEMOVE
- WM_MOUSEMOVE
- WM_MOUSELEAVE
- WM_MOUSEHOVER
- WM_NOTIFY
- WM_COMMAND
- WM_MEASUREITEM
- WM_DRAWITEM
- WM_LBUTTONDOWN
- WM_LBUTTONUP
- WM_RBUTTONDOWN
- WM_RBUTTONUP
- WM_SETFOCUS
- WM_KILLFOCUS
- WM_MOVE
- WM_SIZE
- WM_SIZING
- WM_MOVING
- WM_GETMINMAXINFO
- WM_CAPTURECHANGED
- WM_WINDOWPOSCHANGED
- WM_WINDOWPOSCHANGING
- WM_NCCALCSIZE
- WM_NCCREATE
- WM_TIMER
- WM_KEYDOWN
- WM_KEYUP
- WM_SHOWWINDOW
- WM_PARENTNOTIFY
- WM_CREATE
- WM_NCACTIVATE
- WM_ACTIVATE
- WM_ACTIVATEAPP
- WM_CLOSE
- WM_DESTROY
- WM_GETICON
- WM_GETTEXT
- Q0x%04X
- inset
- mousechild
- vscrollbar
- vscrollbarstyle
- hscrollbar
- hscrollbarstyle
- childpadding
- ListItem
- VScrollBar
- HScrollBar
- IContainer
- Container
- GContainerUI
- sepwidth
- sepimm
- HorizontalLayout
- DHorizontalLayoutUI
- relativepos

- padding
- bkcolor
- bkcolor1
- bkcolor2
- bkcolor3
- bordercolor
- focusbordercolor
- colorhsl
- bordersize
- leftbordersize
- topbordersize
- rightbordersize
- bottombordersize
- borderstyle
- borderround
- bkimage
- height
- minwidth
- minheight
- maxwidth
- maxheight
- text
- tooltip
- userdata
- enabled
- mouse
- keyboard
- visible
- float
- shortcut
- virtualwnd
- timer
- menu
- ControlUI
- EControl
- Version
- SwapIcon
- WnIESpreader
- empty
- WnIEInstalled
- Bin\\
- 1.1.49
- DisplayIcon
- DisplayVersion
- Publisher
- WnIE
- /statistics/install?code=
- OnClose
- OnConfirm
- OnMore
- update_maintitle
- eMD5Filter
- Full AppBar
- Not Full AppBar
- pPushKeyNameString :%s
- FID end
- InstallCheckBoxName

- lock_ie
- WnPicLog.exe
- 360MainPage
- aGFvc291LmNvbQ==
- c28uY29t
- MzYwMC5jb20=
- 360MainPage bReturn
- Load 360Dll Error
- \\InstallSkin
- WriteShutCutNameToReg
- pDownloadFlagString
- %s Install Successed!!!
- %s Install Faild!!!
- %s pDownloadFlagString Faild!!!
- PushErrCode
- DownRemoveByUnKnow
- updatepush\\UpdateSinglePushInfo.xml
- Null
- GUpdate SoftMD5 %s
- Update FullScreen CheckTimes %d
- update_mainframe.xml
- QUpdatePushMainFrame
- InstallConfig2
- InstallConfig3
- InstallConfig4
- InstallConfig5
- InstallConfig6
- InstallConfig7
- InstallConfig8
- InstallConfig9
- InstallConfig10
- InstallConfig11
- AppDataPathError
- gmicon.ico
- regsvr32.exe /s
- ExePath Diff %s %s
- CreateShortCutFailed
- CreateShortCutSuccess
- ShotCutExist
- strDeskName:%s
- CompressFailed
- Wnie.exe
- Uninst.exe
- taskbarpin
- \\Microsoft\\Internet Explorer\\Quick Launch
- GameIconNull
- .ico
- icon.ico
- shell32.dll
- Do it
- Do it Success
- Parse FALSE
- Parse Success
- do it
- do it Success
- Server Error
- SOFTWARE\\

- SOFTWARE\\Goyoo
- SOFTWARE\\Sicent
- SOFTWARE\\Hintsoft
- ALL APPLICATION PACKAGES
- Everyone
- LookupAccountName() failed. Error %d
- GetFileSecurity() failed. Error %d
- SetFileSecurity() failed. Error %d
- iSource = %d, iTarget = %d ok
- Internet Explorer
- USER32.DLL
- PerryShadowWnd
- type_ == nullValue || type_ == objectValue
- text != 0
- index >= 0
- type_ == nullValue || type_ == arrayValue
- ..\\..\\..\\Common\\Json\\json_value.cpp
- lastDigitThreshold >=0 && lastDigitThreshold <= 9
- collectComments_
- lastValue_ != 0
- software
- ShiQiang
- \\shiqiang\\
- wnsoft.ini
- OnlyIdentifier1
- OnlyIdentifier2
- OnlyIdentifier3
- OnlyIdentifier4
- %08X
- %08X%08X
- \\\\.\\IDE21201.VXD
- \\\\.\\PhysicalDrive%d
- DefineDataVerBegin:
- DefineDateVerBegin:
- aaaaaaaaaaaaaaaaaaaa
- Unknown Operating System
- Microsoft Windows 10 Insider Preview
- Microsoft Windows Server Technical Preview
- Microsoft Windows 8.1
- Microsoft Windows Server 2012 R2
- Microsoft Windows 10
- Microsoft Windows 8
- Microsoft Windows Server 2012
- Microsoft Windows 7
- Microsoft Windows Server 2008 R2
- Microsoft Windows Vista
- Microsoft Windows Server 2008
- Microsoft Windows XP Professional x64 Edition
- Microsoft Windows Server 2003
- Microsoft Windows XP
- Microsoft Windows 2000
- Microsoft Windows Me
- Microsoft Windows 98
- Microsoft Windows NT 4.0
- Microsoft Windows 95
- \\Program Files\\Internet Explorer\\iexplore.exe
- open

- SysListView32
- wEnableLUA
- .del
- setupbar_protocol_link
- welcomebar_browsepath
- WelcomeBar.xml
- welcomebar_onpromptly_setup
- welcomebar_custom_line
- welcomebar_oncustom_setup
- setupbar_protocol_checkbox
- setupbar_install_service
- welcomebar_wnnz_setup
- welcomebar_wnwg_setup
- welcomebar_juzi_setup
- welcomebar_hazg_setup
- welcomebar_huorong_setup
- welcomebar_createstartmenu
- welcomebar_oncustom_setting
- welcomebar_oncustom_cancel
- welcomebar_installpath
- welcomebar_needdiskspace
- welcomebar_canusediskspace
- InstallSelfDefDown
- InstallSelfDefUp
- 49.08MB
- 23.7MB
- shift
- sysbtnbar_onmin
- Asysbtnbar_onclose
- SetupBar.xml
- setupbar_installleft
- setupbar_planprogress
- setupbar_planinstalllabel
- setupbar_planinstalllabel1
- Dsetupbar_intro%d
- WnPicSlation.exe
- anV6aWJyb3dzZQ==
- aGFvMTIza2FudHU=
- PushKeyName
- InstallPushUrl
- InstallPush32Url
- InstallPush64Url
- InstallProgramName
- InstallAppDataName
- InstallGreenBag
- InstallRunParam
- InstallRunExe
- InstallRunDll
- InstallRunDllFnName
- InstallTempName
- InstallRunAdmin
- InstallRunLocalExe
- InstallUACType
- wnie
- alimama
- AlimamaShortcuts
- open_explorer

- direct_open
- no_open
- InstallConfig1
- greenbaggame
- WnPicUtil32.exe
- " UnVuSW50ZXJmYWNl
- %s\\rundll32.exe
- InstallFlag
- DownloadFlag
- 7zData
- WnPicTool.exe
- InstallSpreadOperate
- IsNeedCrSM
- ProcessExchage
- IsNeedCrSM 2
- WnPicMoniter.exe
- " RunByWindowsStart
- RunByWindowsStart
- " InstallServiceDriver
- " CreateStartMenu
- CreateStartMenu %s %s %s %d
- " CreateConfigShortCut
- CreateConfigShortCut cmd = %s
- GetParentProcessInfo
- UnKonw
- InstallParentName
- PreInstall
- InstallParentSign
- GetParentNameAndSign1
- GetParentNameAndSign2
- GetParentNameAndSign3
- GetParentNameAndSign4
- GetParentNameAndSign9
- my7zData.7z
- dongfang
- wanneng
- GetCertificateInfo
- KanTu
- Module
- Module_Raw
- REGISTRY
- Classes
- {\tSoftware
- HKCU
- APPID
- HKEY_CURRENT_CONFIG
- HKEY_DYN_DATA
- HKEY_PERFORMANCE_DATA
- HKEY_USERS
- HKEY_LOCAL_MACHINE
- HKEY_CURRENT_USER
- HKEY_CLASSES_ROOT
- HKCU
- DoRunCreateMainFrame
- NRiched20.dll
- ARunSilent
- SetUp

- HKeyCurrentUserUninstallDisplayName
- HKeyLocalMachineUninstallDisplayName
- RunProcessExeName
- DestopShortName
- LocalDestopShortName
- TaskBarName
- WindowsSystemVersion
- WindowSystem:%s
- UserDataJudge
- \\Microsoft\\Internet Explorer\\Quick Launch\\User Pinned\\TaskBar\\
- UninstallString
- UpdateRecord
- DDisplayName
- optionbar_browsepath
- textchanged
- OptionBar.xml
- optionbar_installpath
- optionbar_needdiskspace
- optionbar_canusediskspace
- 41.90MB
- navstepbar.xml
- navstepbar_choose
- navstepbar_feedback
- navstepbar_uninstall
- navstepbar_finish
- navstepbar_picture1
- Fnavstepbar_picture2
- killfocus
- selectchanged
- itemactivate
- itemclick
- mainframe_title
- backgroundfirst
- welcomebar_background
- finishbar_background
- 1%s/%s.dat
- CheckInstallExist
- CheckSuccessExist
- mExcludeInstallExist
- ExcludeName
- mContainInstallExist
- ContainName
- mWmiInstallMode
- WmiName
- mInstallMode
- InstallRunChildParam
- InstallItem
- CommmonSoft
- SoftInfo
- InstallCheckName
- AInstallIntervarTime
- NavstepBar
- WelcomeBar
- OptionBar
- FinishBar
- SetupBar
- ABottomBar

- ExcludeSpreader
- ContainSpreader
- OnCheckSoftSpreader SpreaderFilter bChooseThisInstallMode = FALSE
- InstallExist
- InstallExcludeSpreader
- InstallContainSpreader
- OnCheckAppIsExist SpreaderFilter bChooseThisInstallMode = FALSE
- InstallWmiMode
- strSpreader%s
- Spreader Error!
- No Spreader Config!
- Spreader ContainSpreader!
- Spreader No ExcludeSpreader!
- Spreader Filter! Contain:%d Exclude:%d
- WnPicViewer.exe
- " SetDefaultIme
- InstallRunRate
- InstallShowMode
- show
- SkinData
- MainFrame.xml
- GMainFrameInstall
- Dadvapi32.dll
- true
- ChooseInstall
- InstallNeedInstall
- false
- InstallPushPos
- SinglePushInfo.xml
- InstallPushRootControlWidth
- PushRootControl
- PushCheckBox
- InstallPushName
- InstallCheckBoxWidth
- width
- InstallCheckBoxStatus
- selected
- PushName
- name
- FinishBar.xml
- finishbar_install
- install_finish_web
- finish_install_name
- finishbar_look_newfun
- finishbar_open_wizard
- finishbar_wg_shortcut
- finishbar_setdefault
- PushHorizontalLayout
- PushVerticalLayout
- RunDefault
- kernel32.dll
- windowinit
- KanTu\\WanNeng
- InstallSkin
- caption
- CConfigure::Init
- UseVestige.ini

- CfgRootPath
- Config
- \\Local
- \\LocalLow
- \\Roaming
- WnPicViewer
- AppUpdate
- MinVer
- WnPicInfo.ini
- Spreader
- AppInfo
- WnPicUtility.exe
- rInstallType
- xzuninstall
- SoftMD5
- LastInstallTime
- V1BEYXRl
- FirstInstallTime
- Setting
- InstallTime
- .ini
- InstallPath
- Globals
- SOFTWARE\\
- Shell32.dll
- {A520A1A4-1780-4FF6-BD18-167343C5AF16}
- USERPROFILE
- WnPicture
- DSoftWare
- BottomBar.xml
- bottombar_onprev
- bottombar_onnext
- bottombar_onsetup
- Gbottombar_onfinish
- WININET.dll
- OleLockRunning
- CLSIDFromProgID
- WINSPOOL.DRV
- OpenPrinterW
- DocumentPropertiesW
- ClosePrinter
- ScaleWindowExtEx
- SetWindowExtEx
- ScaleViewportExtEx
- SetViewportExtEx
- OffsetViewportOrgEx
- SetViewportOrgEx
- Escape
- RectVisible
- PtVisible
- SetMapMode
- CreateBitmap
- GetObjectA
- GdiFlush
- GetCharABCWidthsW
- GetTextExtentPoint32W
- TextOutW

- SetBkMode
- SetTextColor
- RoundRect
- CreatePenIndirect
- MoveToEx
- LineTo
- CreateSolidBrush
- SetBkColor
- ExtTextOutW
- SetStretchBltMode
- CombineRgn
- GetClipBox
- CreateRectRgnIndirect
- ExtSelectClipRgn
- SelectClipRgn
- CreateCompatibleBitmap
- SaveDC
- RestoreDC
- Rectangle
- SetWindowOrgEx
- CreatePen
- GetStockObject
- GetObjectW
- CreateFontIndirectW
- GetTextMetricsW
- CreateRoundRectRgn
- WLDAP32.dll
- WS2_32.dll
- OLEACC.dll
- LresultFromObject
- CreateStdAccessibleObject
- IPHLPAPI.DLL
- PSAPI.DLL
- VERSION.dll
- GetFileVersionInfoSizeW
- GetFileVersionInfoW
- VerQueryValueW
- IMM32.dll
- ImmGetContext
- ImmSetCompositionWindow
- ImmReleaseContext
- GdipCloneBrush
- GdipCreateFontFromLogfontA
- GdipCreateFontFromDC
- GdipDrawString
- GdipSetTextRenderingHint
- GdipSetStringFormatLineAlign
- GdipSetStringFormatAlign
- GdipCreateLineBrushI
- GdiplusStartup
- GdipDeleteFont
- GdipDeleteStringFormat
- GdipCreateStringFormat
- GdipDeleteBrush
- GdiplusShutdown
- GdipCloneImage
- GdipDrawImageRectRectI

- GdipCreateFromHDC
- GdipCreateBitmapFromStreamICM
- GdipCreateBitmapFromStream
- GdipGetImageHeight
- GdipGetImageWidth
- GdipDisposeImage
- GdipDeleteGraphics
- GdipAlloc
- GdipFree
- PathAppendW
- SHDeleteKeyW
- PathFileExistsW
- COMCTL32.dll
- OLEAUT32.dll
- ole32.dll
- CreateStreamOnHGlobal
- CoTaskMemFree
- CoTaskMemRealloc
- CoTaskMemAlloc
- CoInitialize
- CoUninitialize
- CLSIDFromString
- SHELL32.dll
- SHAppBarMessage
- SHGetDesktopFolder
- SHGetDataFromIDListW
- SHGetFolderLocation
- SHGetFileInfoW
- SHGetFolderPathW
- ShellExecuteW
- SHBrowseForFolderW
- SHGetPathFromIDListW
- SHGetSpecialFolderPathW
- ADVAPI32.dll
- GDI32.dll
- CreateDIBSection
- CreateCompatibleDC
- SelectObject
- DeleteObject
- DeleteDC
- GetDeviceCaps
- USER32.dll
- KERNEL32.dll
- N1Y%
- QeQ,g0W
- N1Y%
- N1Y%
- ^,g0W
- bad allocation
- Operation not permitted
- No such file or directory
- No such process
- Interrupted function call
- Input/output error
- No such device or address
- Arg list too long
- Exec format error

- Bad file descriptor
- No child processes
- Resource temporarily unavailable
- Not enough space
- Permission denied
- Bad address
- Resource device
- File exists
- Improper link
- No such device
- Not a directory
- Is a directory
- Invalid argument
- Too many open files in system
- Too many open files
- Inappropriate I/O control operation
- File too large
- No space left on device
- Invalid seek
- Read-only file system
- Too many links
- Broken pipe
- Domain error
- Result too large
- Resource deadlock avoided
- Filename too long
- No locks available
- Function not implemented
- Directory not empty
- Illegal byte sequence
- 6Visual C++ CRT: Not enough memory to complete call to strerror.
- %D,3
- =L9o<
- digit
- alnum
- alpha
- xdigit
- print
- graph
- space
- blank
- upper
- lower
- 0123456789-
- APM0123456789:
- <DIR>
- total
- Establish HTTP proxy tunnel to %s:%hu
- CONNECT
- Failed sending CONNECT to proxy
- Proxy CONNECT aborted
- chunk reading DONE
- Read %zd bytes of chunk, continue
- CONNECT responded chunked
- Ignore %lld bytes of response-body
- Proxy CONNECT aborted due to timeout
- Received HTTP code %d from proxy after CONNECT

• Proxy replied OK to CONNECT request
• response reading failed
• Excessive server response line length received, %zd bytes. Stripping
• server response timeout
• %02d:%02d:%02d
• %02d:%02d
• IDLE
• EADT
• EAST
• WADT
• WAST
• MESZ
• CEST
• MEST
• MEWT
• IDLW
• AHST
• nonce
• stale
• realm
• opaque
• algorithm
• MD5-sess
• %06ld
• auth-int
• %sAuthorization: Digest username="%s", realm="%s", nonce="%s", uri="%s", cnonce="%s", nc=%08x, qop="%s", response="%s"
• auth
• %sAuthorization: Digest username="%s", realm="%s", nonce="%s", uri="%s", response="%s"
• %s, opaque="%s"
• %02x
• Operation too slow. Less than %ld bytes/sec transferred the last %ld seconds
• HOME
• machine
• login
• password
• Callback aborted
• ** Resuming transfer from byte position %lld
• Dload Upload Total Spent Left Speed
• %% Total %% Received %% Xferd Average Speed Time Time Time Current
• %5lld
• %2lld:%02lld:%02lld
• %3lldd %02lldh
• SOCKS5: server resolving disabled for hostnames of length > 255 [actual len=%zu]
• SOCKS5: no connection here
• SOCKS5: connection timeout
• SOCKS5: error occurred during connection
• SOCKS5 nothing to read
• SOCKS5 read timeout
• SOCKS5 read error occurred
• Received invalid version in initial SOCKS5 response.
• User was rejected by the SOCKS5 server (%d %d).
• SOCKS5 reply has wrong version, version should be 5.
• Unable to receive SOCKS5 sub-negotiation response.
• SOCKS5 GSSAPI per-message authentication is not supported.
• No authentication method was acceptable.
• No authentication method was acceptable. (It is quite likely that the SOCKS5 server wanted a username/password, since none was supplied to the server on this connection.)

- Undocumented SOCKS5 mode attempted to be used by server.
- Unable to receive initial SOCKS5 response.
- %hu.%hu.%hu.%hu
- SOCKS4 reply has wrong version, version should be 4.
- SOCKS4%s request granted.
- Can't complete SOCKS4 connection to %d.%d.%d.%d:%d. (%d), request rejected or failed.
- Can't complete SOCKS4 connection to %d.%d.%d.%d:%d. (%d), request rejected because the client program and identd report different user-ids.
- HTTP 1.0, assume close after body
- Negative content-length: %lld, closing after transfer
- keep-alive
- HTTP/1.0 proxy connection set to keep alive!
- close
- HTTP/1.1 proxy connection set close!
- Connection:
- HTTP/1.0 connection set to keep alive!
- deflate
- gzip
- compress
- x-compress
- Content-Encoding:
- Last-Modified:
- WWW-Authenticate:
- Proxy-authenticate:
- Location:
- no chunk, no close, no size. Assume close to signal end
- Keep sending data to get tossed away!
- POST
- Cookie:
- Transfer-Encoding:
- chunked
- Chunky upload is not supported by HTTP 1.0
- Transfer-Encoding: chunked
- File already completely uploaded
- Could only read %lld bytes from the input
- Range: bytes=%s
- Content-Range:
- Proxy-Connection:
- Proxy-Connection: Keep-Alive
- Cookie:
- Failed sending HTTP request
- Failed sending PUT request
- Internal HTTP POST error!
- Could not get Content-Type header line!
- Failed sending POST request
- Content-Length: 0
- Content-Type: application/x-www-form-urlencoded
- Failed sending HTTP POST request
- upload completely sent off: %lld out of %lld bytes
- Invalid TIMEVALUE
- %s, %02d %s %4d %02d:%02d:%02d GMT
- If-Modified-Since: %s
- Last-Modified: %s
- If-Unmodified-Since: %s
- Host:
- Content-Length
- Connection
- Expect:

- 100-continue
- Expect: 100-continue
- The requested URL returned error: %d
- Avoided giant realloc for header (max is %d)!
- Failed to alloc memory for big header!
- Empty reply from server
- Ignoring duplicate digest auth header.
- Authentication problem. Ignoring this.
- Digest
- Proxy-authorization:
- Authorization:
- Basic
- Proxy
- Server
- %s auth using %s with user '%s'
- %sAuthorization: Basic %s
- Remembering we are in dir "%s"
- ABOR
- Failure sending ABOR command: %s
- control connection looks dead
- partial download completed, closing connection
- server did not report OK, got %d
- Uploaded unaligned file size (%lld out of %lld bytes)
- Received only partial file: %lld bytes
- No data was received!
- Got a %03d ftp-server response when 220 was expected
- Failed to clear the command channel (CCC)
- Failed to figure out path
- OS/400
- SITE NAMEFMT 1
- QUOT command failed with %03d
- Server denied you to change to the given directory
- Failed to MKD dir: %03d
- PRET command not accepted: %03d
- Wildcard - Parsing started
- QUOT string not accepted: %s
- unsupported MDTM reply format
- Given file does not exist
- %04d%02d%02d%02d%02d%02d
- %04d%02d%02d %02d:%02d:%02d GMT
- Skipping time comparison
- Weirdly formatted EPSV reply
- Couldn't interpret the 227-response
- Skips %d.%d.%d.%d for data connection, uses %s instead
- Can't resolve proxy host %s:%hu
- Can't resolve new host %s:%hu
- PASV
- unknown proxytype option given
- disabling EPSV usage
- Bad PASV/EPSV response: %03d
- FTPS not supported!
- no memory
- Uploading to a URL without a file name!
- Request has same path as previous transfer
- Failure sending QUIT command: %s
- ACCT rejected by server: %03d
- ACCT requested but none available

- Access denied: %03d
- RETR response: %03d
- bytes
- Maxdownload = %lld
- Getting file with size: %lld
- Failed FTP upload: %0d
- Doing the SSL/TLS handshake on the data stream
- Couldn't use REST
- ftp server doesn't support SIZE
- Offset (%lld) was beyond file size (%lld)
- File already completely downloaded
- Instructs server to resume from offset %lld
- Couldn't set desired mode
- Got a %03d response code instead of the assumed 200
- disabling EPRT usage
- Failed to do PORT
- Could not seek stream
- File already completely uploaded
- Failed to read data
- APPE %s
- SIZE %s
- failed to resolve the address provided to PORT: %s
- Failure sending EPRT command: %s
- Failure sending PORT command: %s
- FTP response timeout
- Connection accepted from server
- PASV
- EPSV
- PORT
- EPRT
- WS2_32.DLL
- failed to load WS2_32.DLL (%d)
- Time-out
- In SUBOPTION processing, RCVD
- %127[^,],%127s
- USER,%s
- %127[^=]%*[=]%255s
- TTYPE
- NEW_ENV
- Unknown telnet option %s
- Syntax error in telnet option: %s
- %s IAC SB
- (terminated by
- , not IAC SE!)
- (Empty suboption?)
- %s (unsupported)
- SEND
- INFO/REPLY
- NAME
- %.2x
- Sending data failed (%d)
- SENT
- %s IAC %s
- %s IAC %d
- EXOPL
- insufficient winsock version to support telnet
- BINARY

- ECHO
- SUPPRESS GO AHEAD
- NAME
- STATUS
- TIMING MARK
- RCTE
- NAOL
- NAOP
- NAOCRD
- NAOHTS
- NAOHTD
- NAOFFD
- NAOVTS
- NAOVTD
- NAOLFD
- EXTEND ASCII
- LOGOUT
- BYTE MACRO
- DE TERMINAL
- SUPDUP
- SUPDUP OUTPUT
- SEND LOCATION
- TERM TYPE
- END OF RECORD
- TACACS UID
- OUTPUT MARKING
- 3270 REGIME
- X3 PAD
- NAWS
- TERM SPEED
- LFLOW
- LINEMODE
- XDISPLOC
- OLD-ENVIRON
- AUTHENTICATION
- NEW-ENVIRON
- SUSP
- ABORT
- DMARK
- WILL
- WONT
- DONT
- TELNET
- /DEFINE:
- /LOOKUP:
- QUIT
- CLIENT libcurl 7.23.1
- lookup word is missing
- default
- QUIT
- DEFINE %s %s
- CLIENT libcurl 7.23.1
- Failed sending DICT request
- QUIT
- CLIENT libcurl 7.23.1
- Microsoft Corporation.
- LDAP local: LDAP Vendor = %s ; LDAP Version = %d

- LDAP local: %s
- LDAP local: %s
- encrypted
- cleartext
- LDAP local: trying to establish %s connection
- LDAP remote: %s
- ;binary
- There are more than %d entries
- onetree
- base
- subtree
- Couldn't open file %s
- Last-Modified: %s, %02d %s %4d %02d:%02d:%02d GMT
- Can't get the size of file.
- failed to resume file:// transfer
- Can't open %s for writing
- Can't get the size of %s
- FILE
- TFTP response timeout
- Received too short packet
- Internal error: Unexpected packet
- TFTP finished
- Internal state machine error
- octet
- netascii
- timeout
- Connected for receive
- Connected for transmit
- ;mode=
- Received ACK for block %d, expecting %d
- tftp_tx: giving up waiting for block %d ack
- tftp_tx: internal error, event: %i
- Received unexpected DATA packet block %d, expecting block %d
- Timeout waiting for block %d ACK. Retries = %d
- tftp_rx: internal error
- got option=(%s) value=(%s)
- blksize
- requested
- blksize parsed from OACK
- tsize
- tsize parsed from OACK
- Malformed ACK packet, rejecting
- invalid blocksize value in OACK packet
- blksize is larger than max supported
- blksize is smaller than min supported
- server requested blksize larger than allocated
- invalid tsize -:%s:- value in OACK packet
- set timeouts for state %d; Total %ld, retry %d maxtry %d
- Got unexpected imap-server response
- IMAPS not supported!
- INBOX
- %s LOGOUT
- Select failed
- Found %llu bytes to download
- Filesize left: %lld
- Got unexpected pop3-server response
- POP3S not supported!

- LIST
- Invalid message. %c
- Access denied. %c
- USER %s
- -ERR
- POP3
- localhost
- Got unexpected smtp-server response: %d
- QUIT
- DATA
- MAIL FROM:%s
- MAIL FROM:%s SIZE=%s
- Authentication failed: %d
- %s %02x%02x%02x%02x%02x%02x%02x%02x%02x%02x%02x%02x%02x%02x%02x%02x%02x
- Access denied: %d
- AUTH %s %s
- No known auth mechanisms supported!
- AUTH %s
- HELO %s
- EHLO %s
- AUTH
- LOGIN
- PLAIN
- CRAM-MD5
- DIGEST-MD5
- GSSAPI
- EXTERNAL
- Got an error writing an RTP packet
- Unable to read the CSeq header: [%s]
- Got a blank Session ID
- Got RTSP Session ID Line [%s], but wanted ID [%s]
- Cannot write a 0 size RTP packet.
- Cannot pause RTP
- Failed writing RTP data
- OPTIONS
- DESCRIBE
- Refusing to issue an RTSP request [%s] without a session ID.
- ANNOUNCE
- SETUP
- PLAY
- PAUSE
- TEARDOWN
- GET_PARAMETER
- SET_PARAMETER
- RECORD
- Transport:
- Refusing to issue an RTSP SETUP without a Transport: header.
- User-Agent:
- Referer:
- Referer: %s
- Range:
- Range: %s
- CSeq:
- CSeq cannot be set as a custom header.
- Session:
- Session ID cannot be set as a custom header.
- Session: %s

- Content-Length:
- Content-Type:
- Content-Type: text/parameters
- Content-Type: application/sdp
- Failed sending RTSP request
- The CSeq of this request %ld did not match the response %ld
- Got an RTP Receive with a CSeq of %ld
- Failed sending Gopher request
- GOPHER
- .A0123456789
- Delayed kill of easy handle %p
- Internal error clearing splay node = %d
- Internal error removing splay node = %d
- Call interrupted
- Bad file
- Bad access
- Bad argument
- Invalid arguments
- Out of file descriptors
- Call would block
- Blocking call in progress
- Need destination address
- Bad message size
- Bad protocol
- Protocol option is unsupported
- Protocol is unsupported
- Socket is unsupported
- Operation not supported
- Address family not supported
- Protocol family not supported
- Address already in use
- Address not available
- Network down
- Network unreachable
- Network has been reset
- Connection was aborted
- Connection was reset
- No buffer space
- Socket is already connected
- Socket is not connected
- Socket has been shut down
- Too many references
- Timed out
- Connection refused
- Loop??
- Name too long
- Host down
- Host unreachable
- Not empty
- Process limit reached
- Too many users
- Bad quota
- Something is stale
- Remote error
- Disconnected
- Winsock library is not ready
- Winsock library not initialised

- Winsock version not supported
- Host not found
- No data record of requested type
- Unrecoverable error in call to nameserver
- Host not found, try again
- Unsupported protocol
- Failed initialization
- URL using bad/illegal format or missing URL
- A requested feature, protocol or option was not found built-in in this libcurl due to a build-time decision.
- Couldn't resolve proxy name
- Couldn't resolve host name
- FTP: weird server reply
- Access denied to remote resource
- FTP: unknown 227 response format
- FTP: can't figure out the host in the PASV response
- FTP: couldn't set file type
- Transferred a partial file
- FTP: couldn't retrieve (RETR failed) the specified file
- Quote command returned error
- HTTP response code said error
- Failed writing received data to disk/application
- Upload failed (at start/before it took off)
- Failed to open/read local data from file/application
- Out of memory
- Timeout was reached
- FTP: command PORT failed
- FTP: command REST failed
- Requested range was not delivered by the server
- Internal problem setting up the POST
- Couldn't resume download
- Couldn't read a file:// file
- LDAP: search failed
- A required function in the library was not found
- Operation was aborted by an application callback
- A libcurl function was given a bad argument
- Failed binding local connection end
- Number of redirects hit maximum amount
- An unknown option was passed in to libcurl
- Malformed telnet option
- SSL peer certificate or SSH remote key was not OK
- Server returned nothing (no headers, no data)
- SSL crypto engine not found
- Can not set SSL crypto engine as default
- Failed to initialise SSL crypto engine
- Failed sending data to the peer
- Failure when receiving data from the peer
- Problem with the local SSL certificate
- Couldn't use specified SSL cipher
- Peer certificate cannot be authenticated with given CA certificates
- Unrecognized or bad HTTP Content or Transfer-Encoding
- Invalid LDAP URL
- Maximum file size exceeded
- Requested SSL level failed
- Failed to shut down the SSL connection
- Failed to load CRL file (path? access rights?, format?)
- Issuer check against peer certificate failed
- Login denied

- TFTP: File Not Found
- TFTP: Access Violation
- Disk full or allocation exceeded
- TFTP: Illegal operation
- TFTP: Unknown transfer ID
- Remote file already exists
- TFTP: No such user
- Conversion failed
- Caller must register CURLOPT_CONV_ callback options
- Remote file not found
- Error in the SSH layer
- RTSP CSeq mismatch or invalid CSeq
- RTSP session error
- Unable to parse FTP file list
- Chunk callback failed
- Unknown error
- \\ws2_32
- \\wship6
- 65535
- (nil)
- (nil)
- 0123456789abcdefghijklmnopqrstuvwxyz
- Connection time-out
- connected
- Timeout
- Could not set TCP_NODELAY: %s
- TCP_NODELAY set
- Local Interface %s is ip %s using address family %i
- Name '%s' family %i resolved to '%s' family %i
- Local port: %hu
- Failed writing body (%zu != %zu)
- Failed writing header
- Data
- Header
- from
- WARNING: failed to save cookies in %s
- # This file was generated by libcurl! Edit at your own risk.
- # Netscape HTTP Cookie File
- # Fatal libcurl error
- unknown
- none
- =]=%4999[^;
- %1023[^;
- secure
- path
- domain
- skipped cookie with illegal dotcount domain: %s
- skipped cookie with bad tailmatch domain: %s
- max-age
- expires
- TRUE
- FALSE
- Replaced
- Added
- %s cookie %s="%s" for domain %s, path %s, expire %lld
- unspecified error %d
- Re-used connection seems dead, get a new one

- Maximum (%ld) redirects followed
- Issue another request to this URL: '%s'
- HEAD
- Disables POST, goes with %s
- Violate RFC 2616/10.3.3 and switch from POST to GET
- Violate RFC 2616/10.3.2 and switch from POST to GET
- No URL set!
- %255[^:]:%d:%255s
- Resolve %s found illegal!
- Done waiting for 100-continue
- Operation timed out after %ld milliseconds with %lld out of %lld bytes received
- Operation timed out after %ld milliseconds with %lld bytes received
- transfer closed with %lld bytes remaining to read
- transfer closed with outstanding read data remaining
- Failed to alloc scratch buffer!
- We are completely uploaded and fine
- Rewinding stream by : %zd bytes on url %s (zero-length body)
- Ignoring the response-body
- Leftovers after chunking: %zu bytes
- Rewinding %zu bytes
- Excess found in a non pipelined read: excess = %zu, size = %lld, maxdownload = %lld, bytecount = %lld
- Excess found in a non pipelined read: excess = %zd url = %s (zero-length body)
- HTTP server doesn't seem to support byte ranges. Cannot resume.
- Failed writing data
- Problem (%d) in the Chunked-Encoded data
- The requested document is not new enough
- The requested document is not old enough
- seek callback returned error %d
- the ioctl callback returned %d
- ioctl callback returned error %d
- necessary data rewind wasn't possible
- operation aborted by callback
- read function returned funny value
- identity
- SESS
- FLUSH
- Set-Cookie:
- Connection #%ld to host %s left intact
- memory shortage
- Re-using existing connection! (#%ld) with host %s
- Connection (#%ld) was killed to make room (holds %ld)
- This connection did not fit in the connection cache
- Connection #%ld seems to be dead!
- Connection #%ld hasn't finished name resolve, can't reuse
- Connection #%ld isn't open enough, can't reuse
- Closing connection #%ld
- User-Agent: %s
- Couldn't resolve proxy '%s'
- Couldn't resolve host '%s'
- anonymous
- Couldn't find host %s in the _netrc file; using defaults
- [%*45[0123456789abcdefABCDEF:.]%c
- Port number too large: %lu
- :%255[^@]
- socks5h
- socks5
- socks4a

- socks4
- %255[^:@]:%255[^@]
- no_proxy
- NO_PROXY
- all_proxy
- ALL_PROXY
- %llu-
- %15[^
- <url> malformed
- DICT.
- DICT
- LDAP.
- LDAP
- IMAP.
- IMAP
- Invalid IPv6 address format
- Protocol %s not supported or disabled in libcurl
- IDN support not present, can't parse Unicode domains
- proxy
- <no protocol>
- init_resolve_thread() failed for %s; %s
- proxy
- host
- Could not resolve %s: %s; %s
- Content-Type: multipart/form-data
- %s; boundary=%s
- Content-Disposition: form-data; name="
- Content-Type: multipart/mixed, boundary=%s
- Content-Disposition: attachment; filename="%s"
- ; filename="%s"
- couldn\'t open file "%s"
- application/octet-stream
- 0123456789abcdef
- .jpeg
- .gif
- image/gif
- image/jpeg
- text/plain
- application/xml
- No error
- Error
- Failed to open file
- Memory allocation failed.
- Error parsing Element.
- Failed to read Element name
- Error reading Element value.
- Error reading Attributes.
- Error: empty tag.
- Error reading end tag.
- Error parsing Unknown.
- Error parsing Comment.
- Error parsing Declaration.
- Error document empty.
- Error null (0) or unexpected EOF found in input stream.
- Error parsing CDATA.
- version
- encoding

- standalone
- UTF8
- &
- "
- '
- version="
- encoding="
- standalone="
- <![CDATA[
- &#
- version="%s"
- encoding="%s"
- standalone="%s"
- invalid string position
- string too long
- log10
- sinh
- cosh
- tanh
- asin
- acos
- atan2
- modf
- ldexp
- _cabs
- fmod
- frexp
- _logb
- _nextafter
- 1#SNAN
- 1#IND
- 1#INF
- 1#QNAN
- CONOUT$
- 700PP
- ('8PW
- __based(
- __pascal
- __thiscall
- __fastcall
- __ptr64
- __restrict
- __unaligned
- new
- delete
- operator
- `vftable'
- `vbtable'
- `typeof'
- `local static guard'
- `vbase destructor'
- `vector deleting destructor'
- `default constructor closure'
- `scalar deleting destructor'
- `vector constructor iterator'
- `vector destructor iterator'
- `vector vbase constructor iterator'

- `virtual displacement map'
- `eh vector constructor iterator'
- `eh vector destructor iterator'
- `eh vector vbase constructor iterator'
- `copy constructor closure'
- `udt returning'
- `RTTI
- `local vftable'
- `local vftable constructor closure'
- new[]
- delete[]
- `omni callsig'
- `placement delete closure'
- `placement delete[] closure'
- `managed vector constructor iterator'
- `managed vector destructor iterator'
- `eh vector copy constructor iterator'
- `eh vector vbase copy constructor iterator'
- `dynamic initializer for '
- `dynamic atexit destructor for '
- `vector copy constructor iterator'
- `vector vbase copy constructor iterator'
- `managed vector copy constructor iterator'
- `local static thread guard'
- Type Descriptor'
- Base Class Descriptor at (
- Base Class Array'
- Class Hierarchy Descriptor'
- Complete Object Locator'
- USER32.DLL
- .exe
- .bat
- Norwegian-Nynorsk
- american
- american english
- american-english
- australian
- belgian
- canadian
- chinese
- chinese-hongkong
- chinese-simplified
- chinese-singapore
- chinese-traditional
- dutch-belgian
- english-american
- english-aus
- english-belize
- english-can
- english-caribbean
- english-ire
- english-jamaica
- english-nz
- english-south africa
- english-trinidad y tobago
- english-uk
- english-us

- english-usa
- french-belgian
- french-canadian
- french-luxembourg
- german-austrian
- german-lichtenstein
- german-luxembourg
- german-swiss
- irish-english
- italian-swiss
- norwegian
- norwegian-bokmal
- norwegian-nynorsk
- portuguese-brazilian
- spanish-argentina
- spanish-bolivia
- spanish-chile
- spanish-colombia
- spanish-costa rica
- spanish-dominican republic
- spanish-ecuador
- spanish-el salvador
- spanish-guatemala
- spanish-honduras
- spanish-mexican
- spanish-modern
- spanish-nicaragua
- spanish-panama
- spanish-paraguay
- spanish-peru
- spanish-puerto rico
- spanish-uruguay
- spanish-venezuela
- swedish-finland
- swiss
- america
- britain
- china
- czech
- england
- great britain
- holland
- hong-kong
- new-zealand
- pr china
- pr-china
- puerto-rico
- slovak
- south africa
- south korea
- south-africa
- south-korea
- trinidad & tobago
- united-kingdom
- united-states
- Sunday
- Monday

- Tuesday
- Wednesday
- Thursday
- Friday
- Saturday
- January
- February
- March
- April
- June
- July
- August
- September
- October
- November
- December
- !"#$%&\'()*+,-./0123456789:;<=>?@abcdefghijklmnopqrstuvwxyz[\\]^_`abcdefghijklmnopqrstuvwxyz{|}~
- JanFebMarAprMayJunJulAugSepOctNovDec
- SunMonTueWedThuFriSat
- bad exception
- KERNEL32
- GAIsProcessorFeaturePresent
- e+000
- 700WP
- (8PX
- UNICODE
- UTF-16LE
- UTF-8
- Program:
- Runtime Error!
- <program name unknown>
- Microsoft Visual C++ Runtime Library
- - floating point support not loaded
- R6002
- - not enough space for arguments
- R6008
- - not enough space for environment
- R6009
- Please contact the application's support team for more information.
- This application has requested the Runtime to terminate it in an unusual way.
- - not enough space for thread data
- R6016
- - unexpected multithread lock error
- R6017
- - unexpected heap error
- R6018
- - unable to open console device
- R6019
- - not enough space for _onexit/atexit table
- R6024
- - pure virtual function call
- R6025
- - not enough space for stdio initialization
- R6026
- - not enough space for lowio initialization
- R6027
- - unable to initialize heap

- R6028
- - CRT not initialized
- R6030
- This indicates a bug in your application.
- - Attempt to initialize the CRT more than once.
- R6031
- - not enough space for locale information
- R6032
- This indicates a bug in your application. It is most likely the result of calling an MSIL-compiled (/clr) function from a native constructor or from DllMain.
- - Attempt to use MSIL code from this assembly during native code initialization
- R6033
- Please contact the application's support team for more information.
- An application has made an attempt to load the C runtime library incorrectly.
- R6034
- DOMAIN error
- SING error
- TLOSS error
- runtime error
- CorExitProcess
- LC_COLLATE
- LC_MONETARY
- LC_NUMERIC
- LC_TIME
- Unknown exception
- CObArray
- CPtrArray
- CMenu
- CResourceException
- CUserException
- CGdiObject
- InitCommonControlsEx
- InitCommonControls
- DISPLAY
- CCmdTarget
- CByteArray
- CArchiveException
- CObject
- file://
- CFileFind
- COleException
- CException
- CSimpleException
- CMemoryException
- CNotSupportedException
- CInvalidArgException
- unknown image type
- unknown code
- missing color table
- bad Image Descriptor
- no clear code
- too many codes
- illegal code in raster
- not GIF
- bad format
- bad file
- PICT
- wrong version

- unsupported bit depth
- wrong color format
- wrong channel count
- bad palette
- monochrome
- invalid
- bad masks
- first not IHDR
- tRNS after IDAT
- tRNS before PLTE
- tRNS with alpha
- invalid PLTE
- multiple IHDR
- bad IHDR len
- 8bit only
- bad ctype
- bad comp method
- bad filter method
- bad interlace method
- 0-pixel image
- no IDAT
- no PLTE
- outofdata
- not enough pixels
- invalid filter
- bad zlib header
- no preset dict
- bad compression
- zlib corrupt
- read past buffer
- bad dist
- output buffer limit
- bad codelengths
- bad req_comp
- no SOI
- no SOF
- bad SOF len
- only 8-bit
- no header height
- 0 width
- bad component count
- too large
- bad component ID
- bad V
- bad H
- bad SOS len
- bad SOS
- bad AC huff
- bad SOS component count
- expected marker
- bad DRI len
- bad DQT table
- bad DHT header
- progressive jpeg
- bad huffman code
- bad code lengths
- outofmem

- unknown compression method
- invalid window size
- incorrect header check
- incorrect data check
- invalid block type
- invalid stored block lengths
- too many length or distance symbols
- invalid bit length repeat
- invalid distance code
- invalid literal/length code
- oversubscribed distance tree
- incomplete distance tree
- empty distance tree with lengths
- oversubscribed literal/length tree
- incomplete literal/length tree
- oversubscribed dynamic bit lengths tree
- -incomplete dynamic bit lengths tree
- +o*7
- MGiI
- 9a&g;
- i]Wb
- need dictionary
- stream end
- file error
- stream error
- data error
- insufficient memory
- buffer error
- incompatible version
- %D,3
- CreateTextServices
- CLabelUI::SetText
- CLabelUI::GetText
- GradientFill
- v@AlphaBlend
- CreateControl
- @Qm6t
- UID,%s,QID,%s,SoftID,%s,IsOld,%d,IsWB,%d
- LiuLanQi
- UID,%s,QID,%s,SoftName,%s,SoftID,%s,SoftVer,%s,IsOld,%d,IsWB,%d,Time,%s,Sign,%s
- sign
- time
- success
- /update/
- .dat
- FilterMD5
- SendInstallDataTime
- LastUpdateVer
- LastUpdateDate
- check
- aHR0cDovL2Rvd25zcmYuZWFzdGRheS5jb20vdi8=
- aHR0cDovL2Rvd25zcmYuZWFzdGRheS5jb20vaC8=
- .gif
- a\tgRFEL
- 1Zs^
- f8nQ
- false

- Type is not convertible to string
- Failed to allocate string value buffer
- A valid JSON document must be either an array or an object value.
- Syntax error: value, object or array expected.
- Missing '}' or object member name
- Missing ',' or '}' in object declaration
- Missing ':' after object member name
- Empty escape sequence in string
- Bad escape sequence in string
- Missing ',' or ']' in array declaration
- additional six characters expected to parse unicode surrogate pair.
- expecting another \\u token to begin the second half of a unicode surrogate pair
- Bad unicode escape sequence in string: four digits expected.
- Bad unicode escape sequence in string: hexadecimal digit expected.
- ' is not a number.
- alse
- deque<T> too long
- GET test1
- file
- 0123456789abcdef`
- DeviceIOControl IOCTL_STORAGE_QUERY_PROPERTY error = %d
- DefineDataVerBegin:aaaaaaaaaaaaaaaaaaaa:DefineDataVerEnd
- DefineDateVerBegin:aaaaaaaaaaaaaaaaaaaa:DefineDateVerEnd
- %.2d%.2d%.2d
- %d%.2d%.2d
- !"#$%&\'()*+,-./0123
- ?456789:;<=
- O(u-N(us
- 1uSbW[
- N!k1\\
- N7h/T
- invalid vector<T> subscript
- Config.xml
- temp.dat
- UTF-8
- DownloaderHelper
- PushItem
- InstallRunExe
- InstallRunParam
- InstallReBootDel
- true
- InstallRunAdmin
- NoApp
- 0\t0
- 0\t0\t0
- 0\t0\t0\t0
- /statistics
- /kunbang?
- code=
- 1.1.9.05091
- GUANGSU
- TheQueryInfo
- PushMaxNum
- PushList
- ExcludeItem
- ContainItem
- WmiItem

- InstallItem
- MiniDumpWriteDump
- clientBegin:aaaaaaaaaaaaaaaaaaa:clientEnd
- identifierBegin:abcdefghijklmnopqrstuvwxyz:identifierEnd
- /statistics/timestamp
- timestamp
- clientbegin:updsp
- clientbegin:wnktupdsp
- :clientEnd
- invalid map/set<T> iterator
- map/set<T> too long
- SHGetKnownFolderPath
- vector<T> too long
- Y@@2O
- can not open output file
- can not close output file
- can not write output file
- ERROR: %s
- hioT\\jo
- 9.v:
- ,va8.vCE.v
- e.vJ
- .v1#-vA
- >-v8
- -.v9
- 8.vQ
- e.v;
- .v<s,v57.v
- -v99.v
- T-v00
- *-v2
- u.vr
- $v99%v
- e$v%
- i$vm
- ha<M
- h9<M
- h1;M
- hInD
- hInD
- V$9}
- V,9}
- j8WV
- 9^$u
- @uvV
- u$9]
- @u_W
- @uwS
- @uwV
- \\$(8X
- T$4P
- D$<3
- %tAM
- _^][3
- <?u
- <*uB8F
- ,0<

- ,0<
- D$0tQ
- < u"
- D$(u=
- <0|\t<9
- \\$ U
- u$VW
- t3Ph
- 9L$8
- D$4Ph
- T$4RPQ3
- D$0Qj
- D$0Sj
- D$,u
- 8SUVW
- $_^[3
- _^3
-][s8
-)]^3
- <0=u
- SUVW3
- _^]3
- F4RV
- QURj
- W$_^3
- SQUj
- RVUPS
- \\$$U
- L$T3
- L$T3
- L$T3
- u)9T$
- u_9T$ uY9T$
- L$0Qh0
- D$ u!
- D$8u:
- D$if
- _^]3
- uBUSj
- u#9O
- u"USj
- _^[3
- D$$h4
- h0xM
- _^][3
- L$4WQ
- T$4WR
- RPUh
- L$4WQ
- F 9N
- 9N u
- QSUV
- _^][3
- L$0Q
- 9\\$(u
- j?VU
- t"VU

- D$8P3
- L$4VQ
- t$0t2h
- _^][3
- jdUV
- RPUV
- 9l$@v
- PQUV
- SUVW
- RPh4
- RPSUh
- j<SU
- _^][3
- L$EP
- L$IQ
- L4DQ
- L$$3
- \\$4u#
- SUVW
- _^][3
- D$2R
- L$4R
- T$2Q
- D$4Q
- L$2P
- T$4PQRh8
- D$2R
- 8D$$t
- PVSWU
- D$,3
- L$0WQ
- T$4R
- L$2Q
- D$0P
- RPSU
- SUVW3
- _][3
- D$0P
- D$ i
- _^]3
- t[;7u
- F u\t_^3
- F$u\t_^3
- F(u\t_^3
- u\t_^3
- u\t_^3
- 8_^]3
- L$(U
- _^]3
- UWhL
- UWhL
- du)3
- L$(u
- NhUh
- D$,)8
- #L$0
- L$\\3

- L$\\3
- L$\\3
- L$\\3
- L$\\3
- M0PQ
- L$03
- L$\\3
- #L$0
- uB9l$
- 9D$
- L$\\3
- l$,U
- l$$U
- l$HU
- l$HU
- l$LU
- l$DU
- l$\\U
- D$Xu
- D$8u
- D$<u
- D$Du
- uEh`
- L$\\3
- L$\\3
- L$\\3
- t0hP
- \\$,u,
- l$a3
- l$`u!
- L$\\3
- UPSW
- D$0t
- D$,9
- L$\\3
- \\$,u
- u7j`j
- _^]3
- ~TUP+
- uH9D$
-][_3
- SUVW
- _^]3
- _^]3
- _^]3
- _^]3
- PQS3
- ;L$ ui
- te_]
- uYQPh
- u3+
- ^uh9D$
- QSUVW
- 9D$,u
- FLu%9D$
- 9D$(
- UQPRh

- n(u0
- 9o(v<h
- u'9nLtH9o,|C
- u#9T$
- 9T$,t
- _^]3
- \\$hU
- Ed;E@
- D$ u
- L$ 3
- t QPU
- 9Kd~
- u1_^
- QSUV
- u\t_]
- w~h4
- T$8PQRh4
- D$4P
- t2=&
- HSUVW
- _^][3
- L$4Q
- T$8Rh
- L$8Q
- D$8P
- T$8R
- _^]3
- u(RVS
- GHu"
- 9_@u
- SUVW
- WUPV
- VQUj
- 8^`u
- 9Fpu
- 9Fpt
- 9Np^
- PQh4
- O(|"
- G,9D$
- _^uI
- u2VW
- uaUSV
- t0USh
- SUVW
-]_^3
- [_^3
- _][3
- L$0QU
- T$0RP
- uHPV
- tO=A'
- L$0QR
- L$4Q
- D$8PQ
- T$0RP
- tij:U

- u j
- _][3
- 9~@~,
- tPW3
- 9\\$p
- \\$p9
- D$(9
- D$4;
- QtO;
- D$4Ph
- to9\\$t
-]^_3
- D$0u1
- D$,u-
- D$$u-
- 9t$ W
- _^][3
- _^][3
- <'t0
- <'w0<
- PVUh4
- PWUh@
- RWUhT
- t4RWUhT
- PUh`
- PUhl
- _^]3
- uFj/W
- T$0R
- L$0Q
- L$4QS
- D$4P
- 9t$$
- 9t$$uH
- t$@3
- D$DSU
- 98t"
- Wt53
- Wt43
- L$8R
- T$0Q
- _^]3
- SUVW
- QRUP
- QRUP
- _^][3
- }0hl
- _^]3
- L$P3
- L$P3
- L$P3
- L$P3
- L$P3
- L$P3
- L$P3
- D$XUV
- ;^0v

- ;~4|
- u\t_^
- f9n@v
- _^]3
- _^]3
- SUVW
- _^]3
-]_^3
- 9F ~
- 9F }
- UtXj
- CD4tN
- UtI9
- C40sK
- C0 {K
- D$8P
- 9F<u
- 9F<t
- 9N<^
- _^]3
- 2;1u
- C4@hK
- C0@pK
- t$ 3
- D$8P
- 9F@u
- 9F@t
- 9N@^
- Ot"P
- 2;1u
- _^][3
- F0pdK
- F0pdK
- SUVW
- ^]_3
- G8_^
- 9FHu
- 9FHt
- 9NH^
- u\'9GLu"h0
- :<Ru
- [_^3
- u\t_^
- 8<Pu
- ^][3
- D$8PU
- D$UQ
- L$OR
- T$IP
- T$7P
- L$4R
- D$1Q
- wxSU
- SUWt
- 8^][3
- L$8RP
- D4)UP

- 2;1u
- 2;1u
- 2;1u
- 2;1u
- 2;1u
- 2;1u
- 2;1u
- 1;0u
- _^]3
- L$(3
- _^]3
- _^]3
- _^]3
- \\$P3
- u(ht
- u,ht
- |$8h
- L$LUQ
- \\$$SU
- L$0;
- D$$u
- 9\\$ t
- _^]3
- L$Pu
- u,jhj
- L$@SUV3
- _^]3
- D$4PSVWU
- SVWU
- _^]3
- _]^3
- G4VS
- tX9.uT
- CdW3
- L$HUR
- B\\QP3
- Cl^3
- RPUQ
- ur9;u\t9{
- _^]3
- KpPUS
- _^]3
- PQUW
- t>9\\$
- T$8h
- L$8h
- SUVW
- L$]3
- ^[_3
- tuj.V
- L$0Q
- D$0P
- WUQV
- SURVW
- |$03
- T$4h
- L$4h

- D$4;
- D$8;
- 9T$4u
- |$03
- D$,S3
- _^]3
- SUVW
- _^][3
- _][3
- SUWuDf
- u-9\\$
- t39\\$
- SPQ3
- u-9\\$
- t39\\$
- _^][3
- D$,u4
- D$8l
- D$8l
- T$,u.
- <%t4
- u@j
- 9*uD
- u:h<
- D$4QS
- _^][3
- E@Ph
- ~{WU
- D$4P
- D$,PU
- D$4P
- D$4v
- D$,u
- _^][3
- u+j.W
- _^]3
- ~QUf
- T$0RV
- _^]3
- _^][3
- _^]3
- _^]3
- l$(3
- QSUV
- _^[3
- t&WU;
- tR9h
- [_^3
- t0Wh
- SUVW
- >u.;
- _^[3
- u)j@
- D$0PR
- 9E$uh
- PRSU
- [_^]3

- u\t9u
- D$@h4
- u\t9s4
- tej?W
- D$8P
- D$0PQ
- T$8Rh
- L$8Qh
- D$8Ph
- D$8Ph
- T$8Rh
- L$8Qh
- <\tu
- u._^]
- u@_^]
- u\t^]
- SUV3
- 2;1u
- ~OSUV
- _^]3
- VWPUQ
- _^]3
- SUQR
- _^]3
- t$ VU
- SUQR
- WSUPV
- SUWtR
- 9OXu)
- uIVS
- twSWU
- u\t_^
- u,9D$
- uH9D$
- _^]3
- _^]3
- u>_^]
-]_^3
- 2j/U
- j?U3
- _][3
- QRSPU
- D$,i
- 9L$$s
- 9D$(
- 9\\$$v
- 9L$(|
- u\t_^3
- P,UV
- T$ 9
- SUVW
- 9AXu8
- G U3
- @4WS
- 9NLu
- N,u(
- F$u0

- PUQRW
- L$$3
- w/h4
- A<$0
- L$0QP
- QSh0
- v-h8
- u-h\\
- L$ 3
- t$ 9V
- l$ 9
- l$ 9
- L$(3
- L$(3
- L$(3
- L$(3
- L$(3
- L$(3
- D$(3
- D$(3
- L$(3
- D$ i
- D$ i
- L$(3
- L$(3
- L$(3
- D$(3
- L$(3
- D$(9
- D$(3
- D$(9
- L$(3
- L$(3
- L$(3
- D$(3
- L$(3
- L$(3
- D$(3
- D$ i
- L$(3
- L$(3
- L$(3
- L$(3
- L$(3
- L$(3
- L$(3
- L$(3
- L$(3
- D$(3
- u!US
- N4PQh
- u593u+
- _]^[3
- W4PR
- Exu*
- G4Ph
- 9_^]

- u\tf9
- O4Qh
- u_9w0uZ
- tAS3
- 9n<tU9l$
- UtTj
- u\t_^
- V8[Y
- V8[Y
- V8[Y
- V8[Y
- QSUj
- @@ t7
- PUSQ
- D$#t49
- 9:St
- j/U
- >]u/
- _^]3
- Sh4tN
- _^][3
- >?u$
- >/u.
- l$0V
- D$ SU
- F<9;t0V
- SUj:W
- USWV
- uJ9D$
- PUSW
- _^[3
- [_^]3
- L$H3
- [_^3
- L$4Q
- L$H3
- \\$h3
- L$H3
- D$HU
- _^]3
- PhpEJ
- t5Uj
- [_^]3
- 9u$t(
- 9{,u
- 9E$t*
- F(Xu
- F ku!
- u-;t$
- l$$3
- l$0V
- L$8_
- |$4j4j
- l$4VW
- t>8Y,u9
- O4hP
- O0hP

- O,hP
- |SUVW
- T$8RW
- L$0Qj
- D$0P
- L$0Qj
- D$0PW
-]_^3
- WUVj
-]_^3
- WUPj
- _^]3
- QSUVW
- D$4=
- L$0SQ
- D$4=
- D$4=
- ?>t9
- SUVW
- G<_3
- D$$UP
- l$(u
- O4hP
- D$,3
- D$,UP
- SUVW
- u#j,
- u:j0
- u*j,
- t*j8
- D$0u'
- 90v*
- _^]3
- UQVj
- SUVW
- _][2
- u'_][
- SUWtZ
- >_uO
- L$ 3
- QUVj,
- VWj8
- {4t&j;
- h4zN
- {0t&j;
- QUVj,
- hI,M
- h4yN
- L$4_^][3
- |2\t#uA
- 9*u/
- SUVWtE
- PUVW
- %hAM
- %dAM
- %lAM
- %0HM

- %4HM
- h85O
- Y|R9
- u`9]
- t1SW
- 5XBM
- SVW3
- @tH9
- 9] t
- X 9}
- SVW3
- QQSV3
- 0K;]
- ;9u
- K<5}
- u\t9E
- u\t9p
- 9]$u
- r"9U
- r"9U
- _^[u
- SVW3
- YY8]
- t\t;E
- QQS3
- u99u
- VW9]
- u09u
- <8=u
- @WuyV
- 5`CM
- ub;F
- Ar\tf
- Ar\tf
- Ar\tf
- Ar\tf
- t(9u
- ;t0;
- t VV9u
- u#9u
- WVU3
- WSj0
- 90tW
- 5lzQ
- 5pzQ
- 5dzQ
- @u^V
- r 8^
- ~%9M
- h4{I
- h,{I
- SVWUj
- t 9]
- t_8]
- tA9]
- t\t9]
- u!f;

- r0f;H
- 6f;H
- tH9]
- r0f;p
- 6f;p
- ti9]
- t(9u
- t+9u
- ;t0;
- $ oN
- h<oN
- 5DCM
- hHoN
- uL9=
- uaVj
- 5tsQ
- 5psQ
- @@f9
- @@f9
- t$9U
- 8"u8
- "u\t3
- S99t
- 8csm
- @A;E
- ^f98t
- h4nN
- 5DCM
- 9] SS
- 5XBM
- @hjII
- hHLI
- hvJI
- u\t9F
- u49^
- ,aB<
- ~S8]
- @@8X
- ~-8]
- 5pBM
- ;5LtQ
- FlPj9
- FhPj8
- FdPjO
- FLPjI
- F<PjE
- F8PjD
- F4Pj/
- F0Pj.
- Pj1Q3
- Af#E
- Pf95
- Pf95
- >:u8FV
- 0Wh\\
- ?%uD
- `<%u

- j0^9
-]t7F:
- >]u
- 5hzQ
- @SuzP
- 5(CM
- 9] u
- t)9]
- 5,CM
- 9]$SS
- 5XBM
- 9] u
- u8SS3
- WSj0
- 90tN
- j0Xf
- 5lzQ
- 5pzQ
- 5dzQ
- 0`vN
- t\tAA
- 8"u/
- 8"ue
- ?%u9
- j8Xf;
- ou'j8Xf;
- YYj0[
- j0Xf;
- 5hzQ
- jeXf
- jEXf;
- jeXf;
- j-X3
- otPf
- itVf
- u,9E
- u,9E
- u>9u
- u+9u
- h0\\N
- FFf9
- FFf9
- u%\tU
- WSj0
- 90tN
- j0Xf
- 5lzQ
- 5pzQ
- 5dzQ
- 0A@@Ju
- r,9Y
- tR99u2
- 9>u&
- >MOC
- Hu4j
- taSV
- 9csm

- 8csm
- =MOC
- ,0GG
- |-;E
- Wj0V
- 80t.
- WSj0
- >If90t
- 90tV
- 5lzQ
- 5pzQ
- 5dzQ
- @u^V
- uNSW
- o~pf
- ov`f
- onPf
- of@f
- o^0f
- oV f
- VVhU
- tC9]
- tl9]
- t/9U
- 98t^
- UVWS
- L$,3
- h0[N
- >=upF
- u'\t}
- uF\t}
- tEHt1
- 5xvQ
- 5<DM
- 5DCM
- 5xvQ
- 5|vQ
- 5xvQ
- 5,DM
- 5|vQ
- 5xvQ
- 5xvQ
- 5|vQ
- 5|vQ
- 5|vQ
- 5|vQ
- 5,DM
- 5|vQ
- 5|vQ
- 5,DM
- 5|vQ
- <v8V
- ueSj
- AAFFf;
- AAKu
- f99t
- SVW3

- YhDIM
- h<IM
- uBhghI
- h,IM
- u1hLRM
- lGG;
- AA@3
- f99u
- f99u
- f99u
- t=f99t8C;]
- SVW3
- 9}(v
- 9} v
- 9u wx3
- 9u(v(VS
- 9E vNPQ
- 9}(u
- >:u8;
- f9>t
- 9} tM9}$uC9}(uC3
- 9} uT
- t^9}
- to9}
- SVW3
- @AA;E
- AABB
- AAFFf;
- SVW3
- wIVSP
- t)@8
- </uT
- </u_
- ^_[3
- YY;E
- YY;E
- t&:a
- 5 tQ
- h0SN
- 5 tQ
- 5 tQ
- j1X+
- 5 tQ
- 1SSj
- t!F9]
- uH9]
- >CuW
- ,uRP
- <.u4
- Wj6Y
- 5pBM
- 5tBM
- BG;U
- tR9]
- @@Iu
- uZ9]
- u+9u

- u)jAXf;
- 7GG9]
- AAf91u
- ja_f;
- f90t3W
- @@f90u
- f93t
- YY;E
- }19u
- 9}(v
- 9} v
- 9u wx3
- 9u(v'VSj
- 9E vLPQj
- 9}(u
- >:u7;
- f9>t
- 9} tL9}$uB9}(uB3
- 9} uS
- t]9}
- tn9}
- SVW3
- 8"u5
- 8"uk
- t&Ku;
- 9csm
- 35psQ
- AAf91u
- jA_f;
- f90t3W
- @@f90u
- f93t
- YY;E
- 0;1t|
- 8csm
- f93u
- WVS3
- AAf9
- ^[_3
- Ar\tf
- Ar\tf
- t8f;
- Ar\tf
- Ar\tf
- tG9}
- AABBf
- t)9u
- t$9}
- SVW3
- t29u
- t79u
- t!9}
- =|AM
- u@Vj
- h4PN
- =8AM
- =<AM

- =@AM
- =DAM
- =HAM
- =LAM
- N8SW
- F89x
- 9~8ucj
- ^49}
- tj9~8u@j
- FtW3
- h0DN
- hTIN
- hTIN
- 97_u
- u=j0^VP
- f95l
- @uZS
- 9p u
- 9p u
- ;G u
- 4h\t*G
- Ht;O u
- t\t9p(u
- 9p u
- 9VLt
- Q8_^]
- Q4_^]
- Q0_^]
- 5DEM
- 9~Pu\tP
- 9~Pt
- 9~Pu
- F W3
- t7j0
- ^<tI
- _ 9w$u
- t39w u&
- 0SVW
- htIN
- 5 EM
- F0lGN
- hdIN
- A(VW
- A(VW
- Q8_^]
- Q4_^]
- Q0_^]
- PhTIN
- F0lGN
- VW9]
- tU9W
- tL9W
- 5\\FM
- PVj0
- VWu)
- tuh@EN
- hPEN

- hdEN
- 5DCM
- hxEN
- tB9~
- ;G u
- t.9^
- u>9E
- E S3
- Ar_f
- Ar5f
- >%uK
- u/9F
- u*hx
- F(;F0u
- uG9~
- 5\\AM
- 5\\FM
- hrAG
- %4BM
- .u\tf9x0u
- x,.u
- SVW3
- 9N t
- 9N t
- 9F t
- 9N t
- 9F t
- 9F t
- 9N t
- #9^ t
- '9^ t
- 9F t
- 9^ t
- 9^ t
- 9^ t
- 9^ t
- 9^ t
- 9^ t
- 9^ t
- 9^ t
- 9^ t
- 9F t
- 9F t
- 9F t
- 9~ t
- 9~ t
- 9~ t
- 9~ t
- 9~ t
- 9~ t
- 9G;}
- 9~ t
- 9F t
- 9F t
- 9^ t
- 9^ t
- 9F t

- 9F t
- 9F t
- 9F t
- 9~ t
- -SPB8
- 9F t
- 9N t
- 9N t
- tP9M
- 9F t
- 9~ t
- 9~ t
- 9~ t
- 9~ t
- 9~ t
- 9~ t
- 9~ t
- 9~ t
- 9~ t
- 9~ t
- 9F t
- tY9]
- t^9]
- 9F t
- 9F t
- 9F t
- 9F t
- 9F t
- 9F t
- 9F t
- 9F t
- u\t9E
- 9^ t
- 9^ t
- 3333#
- UUUU#
- t\t9u
- 9G t
- 9G t
- 9G t
- 9G t
- 9G t
- 9G t
- ETLP
- RDHI
- DNEI
- TADI
- IBgC
- AAHu
- Ep)EtY
- tOj h
- QSUVW
- FG;1r
- 9n t
- 9n t
- QUW3
- 9F t

- 9F t
- 9F t
- 9F t
- 9F t
- 9F t
- 9F t
- 9F t
- 9F t
- 9F t
- Mt_^3
- u>f97u9f9w
- uDf9w
- uJf9w
- uPf9w
- uVf9w
- 9F t
- 9~ t
- @G;9|
- }3WP
- -t3j
- h$4N
- YY_u
- 9^duO
- 9_|t
- Eh;E
- EhPV
- ElPV
- EpPV
- EpPV
- u|W3
- 9N0t'
- V,9U
- F4WV
- v8j
- 9W0t$
- W4VW
- W4VW
- ;O,u
- W4VW
- t0W+
- hD3N
- 9^@t
- ?9^\\u
- F49E
- t;;u
- t69M
- t?8H
- uiSh
- ~(9~$u
- 9~ u
- h0-N
- h0,N
- E@9U8
- +]L3
- E@;L
- u<H#
- ;EXr

- ;EXs
- ;E`s
- E 9EH
- A;MXr
- u49uLv
- ML9T
- G0_^[
- G0SQ
- 9F4u
- F,9E
- P4_^[
- P`)E
- 5hFM
- 5\\EM
- P4_^[
- ;#u\tS
- ;#u\tS
- ;#u\tS
- ;#u\tS
- ;#u\tS
- ;#u\tS
- ;#u\tS
- ;#u\tS
- ;#u\tS
- h0\tN
- u;!E
- SVW3
- F8;E
- Px9E
- Pp9E
- Ph9E
- 8SVW
- E0+Et
- ET!UL
- E0+E`
- 9E`~
- Px9E`}
- Pp9E\\~
- Ph9E\\}
- 9E<~
- Px9E<}
- Pp9E8~
- Ph9E8}
- E@+}
- Ex+Ep
- Ex+Ep
- P`)E|
- PX)Ex
- u;!E
- Pp9E
- Ph9E
- Px9E
- Px9E
- Px9E
- P`)E
- PX)E
- QH9]

- 5hDM
- h0NM
- UUUUP
- t/9l$
- 5 EM
- QQV3
- u"hp
- u3h@
- t`ItL
- Mp_^3
- u|W3
- 9Q$t
- t$8Q1t
- -\\AM
- QQSUj
- 59~$t
- 5pFM
- h0\tN
- u'VW
- u VW
- P`)E
- PX)E
- P`)E
- PX)E
- t 9]
- QSh4
- SVW3
- C8+C0VP
- C4+E
- 5\\AM
- F,+F4
- F,+F4
- F0+F8
- F0+F8
- tL9]
- u9!E
- 7htVM
- f9>u
- h8hM
- tV9^
- SUu13
- hInD
- hInD
- EP+EH
- uP+uH
- ETPVV
- ElPWW
- ElPWW
- u6!E
- u1htVM
- h0\tN
- SUVW
- SUVW
- QSVW3
- QSVW3
- ~0SW
- P`)E

- PX)E
- hInD
- hInD
- 9+t
- ?\tuw
- SUu13
- u(9E
- u1htVM
- h0\tN
- uihL\tN
- P`)E
- Pp9E
- Ph9E
- Px9E
- Px9E
- Ph9E
- Px9E
- P`)E
- PX)E
- u\t9}
- >#u\tV
- >#u\tV
- >#u\tV
- >#u\tV
- >#u\tV
- >#u\tV
- >#u\tV
- >#u\tV
- >#u\tV
- h0\tN
- F\\;E
- P 9}
- u)hh
- u)hh
- u)ht
- u)hX
- Ed;E\\
- E`PV
- >#u\tV
- EXPV
- >#u\tV
- EPPV
- >#u\tV
- ETPV
- >#u\tV
- EhPV
- >#u\tV
- EtPV
- u4!Etj
- EtPV
- u4!Etj
- EtPV
- u4!Etj
- EtPV
- un!E8
- EtPV
- un!E(

- EtPV
- u4!Etj
- uh~`V
- E\\;Ed
- ELPV
- >#u\tV
- u*GG
- 8<u`f
- 8=uwj Yf
- ou f
- pu'f
- au.f
- gu f
- mu#f
- au*f
- P4_^
- P4_^
- P4_^
- P4_^
- uuSh
- tP9U
- u#9
- =tEM
- /u4f
- {u;f
- >t2f
- >t0f
- t8P
- FF;u
- FF;u
- v5V
- u9hX
- }t4f
- ;0}7
- =(AM
- 5DCM
- v6S
- 9E<~
- 9E8~
- 9}<u
- 9}4u
- 9}8u
- 9}0u
- uW9N
- u\\9N
- ua9N
- tESP
- upSh
- j Af
- E$@P
- E(@P
- 5(AM
- 5(AM
- OtwOt
- 9sPu;j<
- NPSW3
- ;~`u

- u*SV
- ~8WS
- u'UW
- ~BVU
- ~8WS
- 9APu
- t/h8
- 5DEM
- t*UV
- VWt7
- 1;t$
- 7hh
- 7hX
- 7ht
- 7hl
- 50EM
- ur9E
- E +E
- E$+E
- =(EM
- 0VWj,
- SVW3
- 0Vh8
- VWu+
- 5\\FM
- _^[u
- P4_^[
- P4_^[
- P`)E
- PX)E
- P`)E
- PX)E
- 3htVM
- 3htVM
- ukOy
- u\t9]
- ~=UV
- Px9E
- Pp9E
- Ph9E
- Pp9E
- Ph9E
- Pp9E
- Ph9E
- P`)E
- PX)E
- u9!E
- >#u\tV
- >#u\tV
- uf!E
- RT+u
- h8wM
- h8wM
- h8wM
- E:SP
- SVW3
- h0NM

- h0NM
- h0NM
- Mp_^3
- j0Xf
- E|SVW3
- j0Xf
- ue9]
- Yh0xM
- ue9]
- h4QM
- E`j8
- h0[M
- h0VM
- h0VM
- hpaM
- hXaM
- hpaM
- tlhT
- tlhT
- 7A;M
- Ehj8
- h0VM
- h0]M
- h0^M
- h0^M
- h0^M
- h0VM
- h0^M
- h0^M
- h0^M
- Ph0NM
- h0wM
- h0xM
- h8xM
- 6hLxM
- tN9}
- t%9p
- h8wM
- h8wM
- h0yM
- h8wM
- h8wM
- h0]M
- h\\OM
- h8zM
- h0{M
- h0VM
- h0VM
- E Ph
- EXPV
- EXPV
- EXPV
- EXPV
- ErSP
- Ph0NM
- h0wM
- h8wM

- h0^M
- h0VM
- h0wM
- h0{M
- h0VM
- E:SP
- Ch0VM
- hHUM
- hhUM
- h0VM
- h4RM
- Ph0NM
- h0NM
- h8PM
- E 9}4s
- E 9}4s
- E8h@
- E8PV
- E:VP
- 5lDM
- 5lDM
- tM9]
- h0NM
- QD9u$t
- Q$9u t
- Q49u
- Q<f9u
- QP9u
- Epj`
- tF9]
- 5DCM
- 5|AM
- 5\\BM
- t+W3
- l(SSP
- tj9^
- u1;E
- t;9u
- VVh3
- PVj0
- VVh3
- PVj0
- PPh6
- 5LFM
- VVh3
- PVj0
- j\tY3
- uPVh
- N<\\u
- A<\\t#<.u
- PhI'
- u6!E
- 5|YQ
- f;F2w
- f;F0w
- u/SW
- ,;1u

- t7;q
- r2h,OM
- h85O
- t2h@OM
- }(;E
- M H9E$t
- M H9E
- }(;E
- H9E$u
- ;E$|
- E$H9E
- E$9}$
- hEkD
- wUj
- 8X)t
- 8Z)t
- 8Y)t
- ,;1u
- t7;q
- r2h,OM
- u/SW
- h85O
- t2h@OM
- YhEkD
- u*h,
- 8X)t
- 8X)t
- 8Y)u
- 8X)t
- 8Y)u
- 8X)t
- 8X)t
- 8Y)u
- 8X)t
- HtaHt7h
- 9]Ht
- t\t9]H
- u\t9}h
- 9]<t
- 9]<u
- t\t9]
- E`j0
- @W9F
- @W9F
- RP9]
- u<9^lu
- E(_^
- E(_^
- w3Wj
- Ad;A`u
- Ad;A`u
- Ad;A`u
- ;A`u
- Ad;A`u
- 8;t$
- Wj4S
- SVW3

- h85O
- SVW3
- FAAOu
- j+j0W
- PUWUUUh
- QQUVW
- 54CM
- SVW3
- t[9}
- PWWh0
- SVW3
- PSh0
- SVW3
- 5XBM
- PVj0
- 0VW3
- PVj0
- 0VW3
- Ex_^3
- @AA;
- Ml_3
- QQW3
- QQW3
- 0@G;}
- @@Ou
- %33333
- %33333
- Zu,h0
- t*Ht Huh8
- E8SP
- E8VP
- DE8P
- 8*Yu
- 8*Yu/3
- viSV
- td9}
- Q$9u$t
- QD9u t
- Q49u
- Q<f9u
- QP9u
- QQV3
- Q$9u t
- Q49u
- Q<f9u
- QP9u
- QQV3
- }f+E
- u'9]
- 5\\FM
- 5,BM
- u-9]
- h0NM
- h0NM
- 5PCM
- 5XBM
- 5PCM

- 5XBM
- <n\\u$3
- SUVW
- u(BFK;u
- t0<@s
- EX9}ls
- EX9}ls
- _9}4s
- EphT
- SUVW3
- Y~7j
- SVW3
- Ph0NM
- h0wM
- h0xM
- h8xM
- u`jP
- 6hLxM
- t!9p
- h8wM
- h8wM
- h0yM
- h8wM
- h8wM
- h0]M
- h\\OM
- h8zM
- h0{M
- Ph0NM
- h0wM
- h8wM
- h0^M
- h0VM
- Ph4tM
- jdX+E
- h,uM
- h|OM
- jdX+E
- h\\uM
- h4vM
- h0NM
- h|OM
- ETPh
- 54CM
- E<YYs
- ETVP
- h0NM
- f9]0t
- }..u
- f9].t
- t 9A
- 5x@M
- t%9E
- t&9E
- ?{u5W
- to9E
- ?{uFW

- uF9]
- 5hBM
- \\u"f
- GGAAHu
- ~o;F
- AABBG;
- q(9>u
- 5VW3
- $9>u
- s,W3
- hPHO
- ,;1u
- t7;q
- r2h,OM
- h85O
- t2h@OM
- 8X-t
- 8X-t
- 8Y-u
- 8X-t
- t7j\tV
- uSVf
- h0^M
- v_9}
- EVWP
- h0^M
- E YYs
- E8SP
- h0^M
- h0^M
- h0^M
- h0^M
- h8mM
- h0^M
- h0^M
- h0^M
- E8PV
- E8PV
- E:VP
- u2Wj
- E:WP
- uSWf
- h0NM
- f9u0
- }..u
- f9u.
- E PW
- ETVP
- EVWP
- uiSf
- uiSf
- u^WPf
- fh8hM
- h0fM
- eh,dM
- h4RM
- h0NM

- Ph0NM
- EXQP
- ErSP
- hpaM
- hXaM
- hpaM
- >A;M
- h0VM
- ,;1u
- t7;q
- r2h,OM
- 8YEu
- 8XEt
- 8XEt
- 8YEu
- 8XEt<^[
- 8XEt
- u[hp
- h4`M
- u^hl
- u3ht
- u[h`
- u/SW
- u/SW
- ,;1u
- t7;q
- r2h,OM
- h85O
- t2h@OM
- h0VM
- h0]M
- h0^M
- h0^M
- h0^M
- h0VM
- h0^M
- h0^M
- h0^M
- h85O
- t2h@OM
- E8PS
- E8PS
- E8Ph
- E8h0NM
- E8Ph
- Ch0VM
- h0[M
- QQW3
- 8Y-u
- 8X-t
- 8X-t
- 8Y-u
- 8X-t
- u@WWhe
- 8XEt
- 8XEt
- 8YEu

- 8XEt
- 9;t-
- hHUM
- hhUM
- h0VM
- E Ph
- E:SP
- h4QM
- EVSP
- h0NM
- h8PM
- ta9}
- tf9}
- SVW3
- u/SW
- h\\OM
- htOM
- hxOM
- h|OM
- SVW3
- h85O
- t2h@OM
- ,;1u
- t7;q
- r2h,OM
- Vh$OM
- EpVPh
- Ph0NM
- h8NM
- SVW3
- SVW3
- u/9u u*
- WAf9
- 8/u\tj\\^f
-] ;u
- E$SP
- E W3
- U$SV
- ul9}
- w\t9u
- w\t9]
- w\t9]
- uWSS
- E$SP
- r\t;u
- E$VP
- M`_^3
- ;M|u
- 9Eps
- 9]tw
- ElSV3
- u09Npu+!Nx
- h0PQ
- f93t
- A;L$
- u19p
- u69x

- 9rTuS9ZHuN9zLuI9Y
- u&9y
- u69E
- M`_^3
- ;M|u
- 9Eps
- 9]tw
- ElSVW
- L0\\@
- u\t9N
- 9N u
- HP9T$
- PX9T$
- rA)E
- 9FHv
- 9FHr
- 9~$s
- 9F,r
- Atj
- u+;U
- NYu
- uQ9]
- u#9]
- 9AANu
- u<9u
- v(!E
- u-8E
- QSW3
- u(9E
- A;N
- t!9^
- 1;t$
- 1;t$
- t 9^
- L$$3
- 9|$4r
- 9|$4s
- D$D9E
- D$0f
- h(1M
- L$<3
- D$0P
- t0Pj
- D$0j
- l$`u
- D$<UV
- |$$9u
- UVW;
- _][3
- _^]3
- |$0f
- L$@3
- T$8j
- h(0M
- SUVW
- 9|$du
- 9|$d

- 9D$h
- 9t$Pt
- D$4L
- D$4@
- D$8tU
- L$h3
- D$4@
- hq1M
- 9}4r
- t89~
- 9ulr
- EX9uls
- EX9uls
- ErPf
- t4PV
- D$8r
- T$8R
- 9l$hr
- D$8P
- 9l$hr
- 9l$0r
- \\$4f
- 9l$Ls
- SUVW
- hL2M
- 9nXr
- 9^Tt
- 9^8u
- T$"3
- 0f;1u
- h0/M
- ,?UR
- WUQP
- ^][3
- QUVh
- h[0M
- l$<3
- @.data
- `.rdata
- .text
- Rich
- !This program cannot be run in DOS mode.
- https
- http
- %s?%d.%d
- SYSTEM
- H
- h((((H
- (((((H
- Q(null)
- G +
- commctrl_DragListMsg
- %s (%s:%d)
- G%s (%s:%d)
- source='%d,%d,%d,%d' dest='%d,%d,%d,%d'
- msftedit.dll
- dest='%d,%d,%d,%d' source='%d,%d,%d,%d'

- showhtml
- bktrans
- dest='%d,%d,%d,%d'
- scroll
- minbtn
- maxbtn
- GWndX
- WM_NCHITTEST
- WM_LBUTTONDBLCLK
- WM_RBUTTONDBLCLK
- WM_NCDESTROY
- WM_CHAR
- WM_SYSKEYDOWN
- WM_SYSKEYUP
- WM_SYSCOMMAND
- WM_SYSCHAR
- WM_VSCROLL
- WM_HSCROLL
- WM_GETTEXTLENGTH
- d%d%.2d%.2d
- Ver::%s
- ******
- lock:%s
- aGFvLjM2MC5jbg==
- %s -
- .lnk
- SHELLDLL_DefView
- BShadow.png
- ..\\..\\..\\Common\\Json\\json_reader.cpp
- ABCDEFGHIJKLMNOPQRSTUVWXYZ0123456789_
- disk id : %s
- @Shell_TrayWnd
- %s%s.txt
- %s%s.del
- %s%s.del%d
- %s.del
- %s.del%d
- %s.bak
- %s.bak%d
- SysBtnBar.xml
- %s...
- zmbd
- (%s)(%s)(%d)
- (%s)(%s)
- FID:%s
- %s,%s
- %s,%s,%s,%d
- dfjswsjm
- ZZZZ
- run cmd = %s
- %s*.*
- %s%s\\
- ntdll
- HKCC
- HKDD
- HKPD
- HKLM

- HKCR
- %s -
- %s%s.lnk
- .lnk
- %.2fGB
- %dMB
- SysBtnBar
- @%s%s
- %s %s
- DBGHELP.DLL
- r%s%s.dmp
- %s%s
- %s%s\\%s
- %s\\%s\\
- %s(%d%d)
- @updsp
- %s(%d)
- @click
- jjjjj
- jjjjj
- jjjjj
- jjjjj
- jjjjj
- jjjjj
- Mjjjj
- StretchBlt
- CRYPT32.dll
- gdiplus.dll
- SHLWAPI.dll
- RSDS
- rwx-tTsS
- ->
- %s:%hu
- Host: %s
- %s%s%s%s
- CONNECT %s:%hu HTTP/%s
- HTTP/1.%d %d
- %zd bytes of chunk left
- %c%c%c=
- %c%c==
- ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz0123456789+/
- %31[ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz]
- NZDT
- NZST
- %s:%s:%s
- %s:%.*s
- %s:%s:%08x:%s:%s:%s
- %s, algorithm="%s"
- _netrc
- %3lld %s %3lld %s %3lld %s %s %s %s %s %s %s
- %4lldk
- %2lld.%0lldM
- %4lldM
- %2lld.%0lldG
- %4lldG
- %4lldT
- %4lldP

- --:--:--
- %7lldd
- Can't complete SOCKS5 connection to %d.%d.%d.%d:%d. (%d)
- Can't complete SOCKS4 connection to %d.%d.%d.%d:%d. (%d), Unknown.
- HTTP/%d.%d %3d
- HTTP %3d
- RTSP/%d.%d %3d
- x-gzip
- Host: %s%s%s
- Host: %s%s%s:%hu
- Content-Range: bytes 0-%lld/%lld
- Content-Range: bytes %s%lld/%lld
- Content-Range: bytes %s/%lld
- %s%s%s%s%s%s%s%s%s%s%s
- %s HTTP/%s
- %s%s=%s
- %s%s
- RTSP/
- HTTP/
- %s:%s
- Proxy-
- HTTP
- unsupported parameter to CURLOPT_FTPSSLAUTH: %d
- PROT %c
- SYST
- Entry path is '%s'
- MKD %s
- CWD %s
- Wildcard - START of "%s"
- Wildcard - "%s" skipped by user
- %c%c%c%u%c
- %d,%d,%d,%d,%d,%d
- MDTM %s
- ;type=
- Connecting to %s (%s) port %d
- TYPE %c
- ACCT %s
- PBSZ %d
- REST %lld
- STOR %s
- %s%s%s
- REST %d
- NLST
- PRET %s
- PRET STOR %s
- PRET RETR %s
- %s |%d|%s|%hu|
- ,%d,%d
- %s %s
- %c%c%c%c
- %c%s%c%s
- %c%c
- %c%c%c%c%s%c%c
- RCVD
- %d (unknown)
- "%s"
- %s %s %s

- %s %s %d
- %s %d %d
- TTYLOC
- ENCRYPT
- /MATCH:
- /FIND:
- MATCH %s %s %s
- DN:
- %s%c%s%c
- %s (%d) %s (%d)
- %s (%ld)
- %s (%d)
- %s (%ld)
- TFTP
- %s STARTTLS
- %s FETCH 1 BODY[TEXT]
- %s SELECT %s
- %s LOGIN %s %s
- STLS
- LIST %s
- RETR %s
- PASS %s
- STARTTLS denied. %c
- SMTPS not supported!
- RCPT TO:%s
- RCPT TO:<%s>
- %lld
- STARTTLS
- NTLM
- SMTP
- CSEQ: %ld
- Got invalid RTSP request: RTSPREQ_NONE
- Got invalid RTSP request: RTSPREQ_LAST
- Transport: %s
- CSeq: %ld
- %s %s RTSP/1.0
- %s%s%s%s%s%s
- Content-Length: %lld
- RTSP
- %d.%d.%d.%d
- Unknown error %d (%#x)
- FTP: unknown PASS reply
- FTP: unknown PASV reply
- Problem with the SSL CA cert (path? access rights?)
- .%ld
- 0123456789ABCDEFGHIJKLMNOPQRSTUVWXYZ
- Trying %s...
- [%s %s %s]
- %s%s%s\t%s\t%s\t%s\t%lld\t%s\t%s
- httponly
- #HttpOnly_
- %15[^?&/:]://%c
- Added %s:%d:%s to DNS cache
- Rewinding stream by : %zu bytes on url %s (size = %lld, maxdownload = %lld, bytecount = %lld, nread = %zd)
- %x%s
- %s://%s
- ;type=%c

- %s://%s%s%s:%hu%s%s%s
- _proxy
- http_proxy
- %15[^:]:%[^
- /?]%[^
- :]://%[^
- /?]%[^
- FTP.
- http
- Connected to %s (%s) port %ld (#%ld)
- %s:%d
- --%s
- --%s
- Content-Type: %s
- --%s--
- --%s--
- ----------
- .xml
- .html
- .txt
- .jpg
- text/html
- <?xml
- <
- >
- <!--
- %s="%s"
- %s='%s'
- </%s>
- <%s>
- <?xml
-
- <!--%s-->
- _hypot
- xppwpp
- `h`hhh
- __cdecl
- __stdcall
- __clrcall
- `vcall'
- `string'
- .cmd
- french-swiss
- MM/dd/yy
- dddd, MMMM dd, yyyy
- HH:mm:ss
- !"#$%&\'()*+,-./0123456789:;<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\\]^_`ABCDEFGHIJKLMNOPQRSTUVWXYZ{|}~
- xpxxxx
- `h``
- (null)
- !"#$%&\'()*+,-./0123456789:;<=>?@ABCDEFGHIJKLMNOPQRSTUVWXYZ[\\]^_`abcdefghijklmnopqrstuvwxyz{|}~
- LC_ALL
- LC_CTYPE
- hhctrl.ocx
- FHtmlHelpW
- CWnd
- CMapPtrToPtr

- not PSD
- unknown BMP
- bad BMP
- bad bpp
- BMP RLE
- not BMP
- bad tRNS len
- bad png sig
- bad TQ
- bad DC huff
- bad DQT type
- #.zf
- wn>Jj
- Qkkbal
- n;^
- %[^,],%[^,],%[^,],%d, %d
- %[^,],%[^,],%[^,],%d,%d
- %s%d
- _ctn
- </html>
- <html
- b/g\tgP
- Comments must start with /
- %s-%s-%s-%s
- ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz0123456789+/
- Hr/f
- Rbc-N
- N@b\tg
- ck(W
- Temp.xml
- /ktkunbang?
- ck(W
- Z2fQ`rb
- Nvu\\Nv
- SvAwMv
- -v(s-v
- .vp
- .vcv.v
- g.vO!.v
- p-v;c/v
- /.vp
- =-v.
- .v_w,v
- =-vJ^/vV
- ,v2},v&<.v
- -vA#-v
- ,v]7.vF
- S.v:
- -v`w
- >-v+E.v
- Y-vM7.vuG-va>-vM
- J-vc3.vd
- .vjX,v
- @.vb
- -v%9-v
- -vM)v`
- -v(7.v

- &vl;:%vN
- vykvW
- _$vP
- h$v
- _$v@f$v
- {$vc
-]vhuv
- r$v{
- s$vK
- qvBrv
- w$vg
- vIkv<j$v
- &vMt;%v!
- hW<M
- hM<M
- hC<M
- h/<M
- h$<M
- hv;M
- h_;M
- hH;M
- h';M
- PWWW
- WWWWW
- j\\h@
- _^[]
- SSSSS
- SSSSS
- SSSSS
- VVVVV
- VVVVV
- VVVVV
- WWWWW
- WWWWW
- t%WV
- WWWWW
- %lGM
- %\\DM
- %`DM
- L$@PQ
- D$`RP
- L$,PQ
- L$,P
- D$,R
- T$XQR
- D$ R
- L$LQ
- t5Ht$Ht
- L$,_^][3
- D$,_^]
- D$,_^][
- D$,_^][
- D$,_^][
- D$(<.
- |$(.
- |$(.
- L$ QR

- D$,_^][
- D$,_^][
- t\t^]
- _^][
- L$$Q
- L$@PQh
- D$@Ph
- QVPW
- WPVj
-)D$@
- RPQW
- L$<+
- T$<+
- L$ Q
- T$PRP
- |$LSW
- D$lPQhT
- D$ WP
- L$TRVP
- T$ Rhx
- D$TVPh
- T$TVRh
- T$dV
- _^][
- QZ^&
- D$(PQ
- T$(_]
- PRh\\
- QPhd
- D$%Q
- L$)P
- D$ PW
- QWRP
- PWRQ
- T$(R
- _^][
- T$ SUV
-]_^[Y
- _.PhH
- _^][
- P QR
- X,VW
- tTPWS
- Qh~f
- L$d_^][3
- }&_^
- T$$+
- R9t$@sL
- D$$+
- T$(RV
- D$(P
- T$4Rh<
- L$,Q
- L$DQhL
- l$hV
- W _^]
- T$ Rh$

- L$ Qh$
- T$$h@
- D$$hD
- L$$hL
- T$$hT
-]_^[
- D$$h\\
- t'PQh
- RQPh
- L$pQ
- T$(PRQhp
- D$(R
- T$pR
- T$LRPUh
- F RPQUh
- L$LQ
- L$ WQh`
- D$(Ph
- t'j?W
- SRPh
- D$PPW
- T$(RP
- L$(Q
- D$Lj
- L$(t$
- t$,V
- D$8Ph|
- D$8Ph|
- D$8Ph|
- D$8Ph|
- T$ j?VR
- D$8Ph|
- D$8Ph|
- D$8Ph|
- T$DR
- L$8Qh|
- D$@h
-)_^]
- T$,R
- T$(Q
- _^][
- D$\\RPhD
- D$XRPSQ
- D$lPQR
- T$tR
- L$XQ
- L$8SQRP
- jdSP
- L$`PQ
- T$pVR
- L$\\Q
- +D$H
- D$<;
- VSRP
- jdRP
- jdVS
- T$<|l

- PQVS
- VSRP
- jdQR
- jdVS
- T$D|W
- PQVS
- RPSQ
- hfff
- qs%j
- RPh$
- WSh<
-][_^
-][_^
- $][_^
- VWQRSUh
- T$ j<RP
- cwrj
- T$,j
- T$NRPW
- D$?<
- D$ QRh
- T$LP
- D$JR
- D$DR
- D$DPVW
- L$DQVW
- L$LQ
- D$JP
- T$HR
- L$FQ
- tzj@
- PSQW
- D$(SP
- PQhP
- T$DRUW
- D$DPUW
- T$FR
- \\$=t
- L$$+
- D$LPUW
- T$ Rj
- D$LPUW
- L$$Q
- T$4PQRh
- L$-P
- T$+P
- T$ PQh
- D$-R
- L$+P
- L$ RPh
- T$-Q
- T$-P
- D$,P
- L$-P
- T$+P
- D$,PWU
- L$,QRU

- t>\tV
- T$.R
- tzj@
- _^][Y
- L$(_
- PVWS
- T$(RP
- L$$V
- -|GM
- =`GM
- T$ RW
- D$ PW
- D$$P
- ~ _^
- ^_^
- _^][
- V`SWRj
- VxRh
- WPQS
- VPt\\
- d|(=
- L$(RPWQ
- NhRPQj
- NhQS
- Vhj\tRh
- Fx=,
- NhQPS
- VhQP
- L$(RPh
- NxQh
- F\\+F`P
- L$l_^][3
- r-RUPQh
- t^QPV
- T$Pj
- t]_^][
- _^][
- T$Hj
- D$HRj
- L$$QPS
- D$$R
- L$LPQj
- t+h(
- l$,j
- L$ QPhD
- T$$j
- RQPhL
- L$LPQ
- l$tURQ
- PQRh
- 9D$@t&
- RPQh
- T$(RUhX
- L$(;
- L$(x
- PQSV
- <At[<DtW<ItS

- L$<R
- L$(+
- L$DRP
- T$H+\\$
- \\$D+
- L$TQPh
- L$PQPh
- T$ h
- t.hx
- D$`P
- L$hSUVW
- T$<ht
- L$<h
- D$<h
- L$(R
- T$(Q
- _^][
- t+h@
- _^][
- t"=,
- t"=,
- VTWQR
- [_^]
- _^][
- D$ WSPj
- D$,;
- T$ RW
- L$,QUR
- +\\$(
- ^T^][
- _^][
- _^][
- PWQh
- PQSV
- QPh<
- RPVW
- VPQh`
- _^][Y
- _^][Y
- D$@P
- _^][
- t'Ph,
- v$hP
- t"Ph
- _^][
- _^][
- G(@w
- l$pV
- _^][
- _^][
- _^][
- _^][
- _^][
- _^][
- _^][
- _^][
- _^][

- _^][
- _^][
- _^][
- _^][
- _^][
- _^][
- _^][
- _^][
- t$ h
- _^][
- _^][
- _^][
- _^][
- ;/tyj
- _^][
- _^][
- _^][
- CQhD
- _^][
- _^][
- _^][
- _^][
- _^][
- _^][
- _^][
- _^][
- _^][
- SHRh
- KxPQV
- ShPh
- ;Kd|
- _^][Y
- G@@t
- _^][Y
- _^][
- _^][
- _^][
- T$PQRPhd
- L$PR
- T$@Q
- L$4QRP
- D$TPS
- T$(R
- D$(Q
- L$<Q
- T$,R
- L$$Q
- T$Pj
- D$ P
- L$@j
- T$$RS
- T$<R
- PQh\\
- RPQV
- L$(RPQh
- D$(Q
- D$,QRPh|

- ~@WP
- L$ Q
- D$ P
- V@Rh
- L$(Q
- D$%P
- T$"R
- L$ Q
- t%Ph
- t6<Dt&]_
- SSVQ
- WtQP
- _^][
- tM_^][
- _^][
- _^][
- t)Ph
- _^][
- _^][
- _^][
- PHRh|
- _^][Y
-]_^[
- t$,PQ
-]_^[
- PQSRhh
- |,;L$
- _^][
- _^][
- >tF;
- wWh,
- JHQh
- [_^]
- RQPh
- tZj/P
- t%Ph
- T$ RV
- T$ RV
- D$.P
- f;l$
- D$(PV
- L$$QV
- f;l$
- f;D$
- D$ PV
- T$ Rj
- L$,h
- T$$R
- ;~@|
- }^_[
- D$@ t
- D$@PQR
- T$tRV
- D$xPh
- T$tR
- D$xPh
- L$xQSSSR

- D$@PQ
- D$$d
- D$(P
- T$$;
- L$dSW
- _^][
- L$ +
- T$$Rj
- PQj<
- WSVh
- _^[Y
- T$PQh,
- D$HP
- T$<R
- T$@R
- L$0RPQ
- D$<P
- t$Dj
- T$<R
- L$,PQj
- D$XQRP
- T$$RPQ
- D$TPS
- D$Xh\\
- T$TPhl
- L$ Qj
- D$ Pj
- L$,Qj
- \\$PPh
- T$TPh
- tVj?W
- t'<?t#
- SVj?P
- QVWj,S
- _^][
- _^][
- T$$QRV
- T$$+
- D$$P
- QRhd
- L$HR
- T$HQ
- D$,PQR
- L$PQP
- _^][
- D$|SUV
- _^][
- _^][
- _^][
- \\$`SWj
- L$$QS
- _^][
- _^][
- D$ j
- FXQRP
- FXQRP
- VXPQR

- C<PQS
- T$(j@R
- ;C ~!_^
- F0_^]+
- }\t_^
-
- W@QRW
- ;F ~
- GDPQW
- N@Qh,
- ;F ~
- QPhX
- ;V ~
- SVh`
- D$ _^
- RPWQ
- gfff
- gfff
-]_^[
-]_^[
- D$xPW
- C(@w
- `SVW
- _^[Y
- _^[Y
- _^[Y
- t Qh`
- _^][
- _^][
- C(@w
- l$pVW
- _^[Y
- _^[Y
- _^]Y
- l$|t
- L$|h
- F(@w
- L$ j
- F(@w
- _^][Y
- _^][Y
- ^][Y
- ^][Y
- _^[Y
- _^[Y
- D$<P
- QSVW
- Wt$Q
- t!Whh
- [_^]
- hDxN
- D$|h!
- PQRh
- L$XR
- T$RP
- D$LQ
- L$FR

- D$CQ
- T$@P
- L$=R
- D$:Q
- :=VtZ
- t+Phh
- QPRV
- hLRN
- Vhh
- u/hLRN
- T$HRP
- Lt:Q
- /< t
-]_^[
- L$ Qh
- (VWj
- _^][
- C Pj
- l$LQP
- D$Dt
- _^][
- T$Lj
- \\$<j
- l$<WRQPh
- T$,;
- |$(;
- D$$P
- D$$;
- D$ Ph
- QRPh
- D$(hL
- tRh`
- t.hx
- D$,h
- vdt#;
- _^][
- jdWj
- D$(+
- T$(RVj
- L$,Q
- t,;D$
- $+L$
- ^_][
- ^8_^][
- T$(R
- D$DQ
- y\\RP
- D$ t
- T$<j
- D$<W
- _t)j
- GX]_^[
- VPQR
-]_^[
- _^][Y
- VWQR
- txVW

- uGVj j
- SSh@
- VPSPh
- !"#$%&\'()..................*+,.......-
- .....
- .....
- ....
- I$;
-]_[Y
- ^]_[Y
- T$$QR
- L$$R
- _^][
- D$(P
- L$,h
- T$(R
- D$,h
- L$@+
- |$@t
- _^][
- D$(PW
- D$$f
- T$$RP
- PQRS
- QRPS
- D$!j
- T$$h
- D$ RPSU
- Vj j
- Wj +
- T$,t*;
- Wj +
- T$HRUQS
- D$$t
- D$(t
- L$$Q
- >%u Wj%
- D$DI
- D$PP
- _^][
- L$$h$
- RPSW
- T$$h
- L$<QV
- T$(RV
- L$(RPQ
- T$(RSQ
- L$@Q
- PVh(
- PVh(
- PVhT
- PWh(
- T$ RP
- T$ RP
- =Wh|
- D$ P
- PQWh

- D$ j
- _^][
- _^][
-]_^[
-]_^[
- D$$PVS
- PWSQV
- L$$QR
- D$ h
- PRQhh
- RWSPV
- T$ WQR
- _^][Y
- T$$;
- D$ W
- D$$+
- PQRV
- tMSV
- tlSh
- SWh(tN
- ,_^][Y
- D$ PSWVRQh\\
- _^[]
- L$(PQ
- t6h(tN
- Pj/W
- T$$Vh
- L$$Vh
- D$8Ph,
- L$<Qh4
- ^][_Y
- _^][
- t>WS
- ^_][
- t:Vj
- ^_][
- L$ j
- D$ j
- L$ VQ
- D$ VP
- L$ Q
- t PW
- L$ j
- _^[Y
- _^[Y
- QSVW
- _][^
- D$ PQ
- VXRV
- QRWPS
- D$(t-
- t\t_^]
- _^][
- QPh\\
- D$ P
- G(RPV
- RPQj

- T$,]
- L$,]
- N\\Qj
- F\\PW
- V QRP
- D$4QRShp
- QRSh
- RQPW
- N\\Qj
- F\\WRP
- \\$$j
- tQWh
- L$$_^
- T$$j
- I$,V
- !"DDD#D$D%DD&D;\'()DDDDDDDDDDDDD*DDDDDDDDDDDD+DD,-DDDDDDDDDDD.D/DDDDDDDDDDDDDDD01DD234DD56789DDDDDDDD:;DD<=>DD?DDDDD@ABDDDDDC
- DDDD
- DDDDD
- DDDD
- DDDD
- DDDDDDDDDDDDDDDDD
- DDDD
- DDDD
- PP P!"PP#$PPPP%&\'PPP(P)*P+PPP,-.PP/0123PPPPPP4PPPPPPP5PPPPPP6789:;PPPPPPPP<PPP=>?@ABCDPPPPEPPPPFPPPPPPGPPHIPPPPPJKPPPLLPPMPPPPPPPPPNPPO
- PPPPPP
- PPPP
- PPPPP
- PPPP
- PPPPPPPPP
- _^][
- L$ _
- L$ _^
- L$ _^
- L$ _^
- L$ _^
- L$ _^]
- L$ _^]
- L$ _^]
- L$ _^]
- L$ _^]
- L$ _^]
- L$ _^]
- L$ _^]
- L$ _^]
- L$ _^]
- L$ _^]
- L$ _^]
- L$ _^]
- L$ _^]
- L$ _^]
- L$ _^]
- _^][
- L$ _^]
- L$ _^]

- L$ _^]
- L$ _^]
- L$ _^]
- L$ _^]
- T$(Q
- L$ _^]
- L$ _^]
- _^][
- _^][
- T$ j
- _^][
- _^][
- L$ _^]
- L$ _^]
- D$ _^]
- _^][
- L$ _^]
- L$ _^3
- L$ _^
- L$ _^
- L$ _^
- L$ _^
- L$ _^
- L$ _^
- L$ _^
- L$ _^
- L$ _^
- L$ _^
- L$ _^
- _^][
- _^][
- _^][
- _^][
- _^][
- _^][
- L$ _
- _^][
- _^]f
- _^][
- L$ _
- L$ _
- _^][
- _^][
- _^][
- _^][
- D$ _^]
- _^][
- D$ _^]
- _^][
- D$ _^]
- _^][
- _^][
- _^][
- _^][
- L$ _
- _^][
- _^][

- _^][
- D$ _^]
- _^][
- _^][
- _^][
- _^][
- _^][
- _^][
- _^][
- _^][
- _^][
- _^][
- L$,Q
- D$(P
- 9\\$ t_
- QVhX
- _^][
- t!Pht
- _^][
- QPRV
- QRPV
- L$$_^][3
- Pv&hl;
- L$ j
- l$$VW
- D$\tSP
- SVWh
- +Qh,
- \\$;
- Cpj#V
- D$ P
- L$(Qh
- >/t<j/V
- T$ h`
- hpDJ
- hpDJ
- hpDJ
- hpDJ
- SVhp
- @PQh
- D$$P
- RQPhd
- _^][
-][_^Y
- |$ W
- _^[]
- h`KJ
- $h`KJ
- T$XRW
- D$(P
- L$@j Q
- L$dQW
- t$XW
- l$`V
- QRhP
- QSUVWjHj
- L$(_^3

- L$ QR
- D$ V
- D$$P
- |$ W
- L$$Q
- D$$P
- T$$R
- L$$Q
- D$$P
- T$$R
- L$$Q
- |$(W
- D$@j
- Rh(tN
- L$(PQ
- [_^]
- Vj/W
- >t\tP
- Rh(tN
- l$HVWj
- _^][
- _^][
- G$_^]
- %dGM
- Y_^][
- L$ PW
- D$lPxN
- D$HPxN
- D$$PxN
- h|~N
- Y_^][
- h zN
- T$0RQWj
- PQSUVW
- L$ Q
- <"u#Wj
- <'u#Wj
- _^][Y
- h(yN
- n hP
- Y_^][
- SQRj
- D$0SPVj
- SPRj
- SPQj
- T$0SRPj
- D$0SPWj
- SQWj
- D$,SP
- hx.M
- []_^
- G<[]_3
- l$(;
- L$;
- T$(R
- D$,PV
- D$+R

- L$(WSQV
- L$ R
- D$,
- L$(Q
- tw8D$$t
- T$(WQRV
- Y_^][
- t$$t
- <<tkj0
- hK.M
- Y_^][
- _t#j,
- h|~N
- D$(WP
- PQSUVW
- h".M
- Y_^][
- Y_^][
- Y_^][
- Y_^][
- L$,PQS
- _j;Q
- Y_^][
- PQSUVW
- L$ Q
- t-<>t.j
- tg<<ucj
- _^][
- h@zN
- h$zN
- h@zN
- h@zN
- {,t&j;\thDzN
- h<xN
- Y_^[
- Y_^[
- PQSVW
- h zN
- j\th<yN
- hLRN
- hLRN
- PQVW
- Y_^][
- D$(=
- D$,=
- t$,V
- \\$(S
- PQSUVW
- h[-M
- h#-M
- Y_^][
- PQSUVW
- Y_^][
- +D$(PQ
- PQSUVW
- Y_^[
- L$$Q

- Y_^[
- h<yN
- t$ h
- PSVW
- h(yN
- h,yN
- T$,R
- PQVW
- t$Vh
- F<ShP
- PQSV
- _^][
- _^][
- PQVW
- hs+M
- Qh`xN
- D$$S
- hC+M
- Y_^][
- +D$(PU
- PQSUVW
- QPPR
- _^][
- PhDxN
- Ph,xN
- h<xN
- SVt?
- SVt?
- Y_^]
- D$ VP
- L$ VQ
- t$$;
- %(HM
- %$HM
- % HM
- %,HM
- SSSSS
- _^[]
- SSSSS
- SSSSS
- @Y@PW
- t\\VV
- @Y@P
- ?sjj
- tSj=V
- SSSSS
- SSSSS
- SSSSS
- t{~Bj
- _^[]
- t/Ht
- tCVV
- VVVVj
- SSSSS
- SSSSS
- WWWWW
- VVVVV

- VVVVV
- +t HHt
- <+t(<-t$:
- SSSSS
- VVVVV
- SSSSS
- VVVVV
- VVVVV
- SSSSS
- SSSSS
- tRHtCHt4Ht%HtFHHt
- ^SSSSS
- ^SSSSS
- VVVVV
- SSSSS
- SSSSS
- VVVVV
- SSSSS
- SSSSS
- VVVVV
- VVVVV
- [_^]
- WWWWW
- t+WWVPV
- t<Vj
- WWWWV
- Y_^[
- GGBB
- VVVVV
- CCGG
- t=f;
- CCGG
- VVVVV
- 8VVVVV
- ^SSSSS
- SSSSS
- u,VVWV
- _VVVVV
- v\tN+D$
- PPPPP
- _^[]
- @PWV
- 0SSSSS
- SSSSW
- SSSSW
- VVVV
- WSj
- RPSW
- HHty+
- HHtYHHt
- t$HHt
- PPPPP
- QSWVj
- j"^SSSSS
- ^SSSSS
- QVj
- VVVVV

- WWWWW
- WWWWW
- SSSSS
- j@j
- VVVVV
- _^[]
- VW|[;
- UQPXY]Y[
- ;t$,v-
-]_^[
- SSSSS
- SSSSS
- SSSSS
- SSSSS
- 8VVVVV
- VVVVV
- ^SSSSS
- SSSSS
- $$nN
- j.Xf
- j:Xf
- SSSSS
- WWWWW
- QQSVWh
- j\\Yf
- @@Bf
- j"@@
- Y[_^
- PPPPP
- tPVWP
- >=Yt1j
- w\tf
- SSSSS
- PPPPP
- PPPPP
- PPPPP
- jd[j
- YY_^[
- SSSSS
- u[SSSP
- VVVVV
- 0WWWWW
- $$nN
- PPPPP
- t+Ht
- SSSSS
- VVVVV
- t&:Q
- t<:Q
- tR:Q
- FVh`\\N
- _^[]
- C@Ph
- t,j@
- j@Sh
- PPPPP
- Vj@h

- |FVW
- 0SSSSS
- _^[]
- _^[]
- 0SSSSS
- W@Ph
- QW@Ph
- C/PjSV
- C.PjRV
- C-PjWV
- C,PjVV
- C+PjUV
- C*PjTV
- C)Pj
- C(Pj
- C$PjQV
- C PjPV
- v$;5htQ
- {>Vj
- _^[]
- F|Pj=
- FxPj<
- FtPj;
- FpPj:
- F`PjN
- F\\PjM
- FXPjL
- FTPjK
- FPPjJ
- FHPjH
- FDPjG
- F@PjF
- F,Pj-
- F(Pj,
- F$Pj+
- F Pj*
- VVVVV
- VVVVV
- VVVVV
- VVVVV
- VVVVVQRSSj
- PVVRV
- VVVVV
- PPPPP
- jd_Fj
- SSSSS
- SSSSS
- PSj?
- =PCM
- PSj?
- SSSSS
- t!PV
- hd\\N
- SSSSS
- SSSSS
- SSSSS
- j,hP

- <xtX<XtT
- ^F<-uB
- jdZ;
- VVVVV
- VVVVV
- t"SS9]
- GWh`\\N
- j Xf
- RPSW
- VVVV
- PPPPP
- Y_^[
- Y_^[
- _^[]
- SSSSS
- WVh{
- @PVh{
- SSSSS
- SSSSS
- SSSSS
- HH_^[
- SSSSS
- SSSSS
- j+Xf;
- j-Xf;
- PPPPP
- t\\jXXf;
- j+Xf;
- j]Yf;
- GGf;
- j]Zf;
- Gj-YGf;
- j]Xf;
- Gj^GXf;
- VVVVV
- j+Xf;
- j+Xf;
- j-Xf;
- jdX;
- xtJf
- dt\\f
- YYGG
- VVVVV
- <Xt
- SSSSS
- <Xt
- WWWWW
- hP\\N
- h<\\N
- Vh(\\N
- tCHt/
- tVHtG
- WWWWW
- PPPPP
- j Xf
- RPSW
- WWWW

- =tBM
- @_^[]
- h|zQ
- s[S;7|G;w
- t)SV
- YYPV
- >csm
- ~@;H
- ~SSV
- =csm
- @_^]
- SSSSS
- QWVP
- _^[]
- 0SSSSS
- VVVVV
- SSSSS
- SSSSS
- PPPPP
- jdRP
- SQRP
- ^WWWWW
- SSSSS
- SSSSS
- _VVVVV
- WSj
- RPSW
- HHty+
- HHtXHHt
- t%HHt
- , <Xw
- PPPPP
- hD[N
- WWWWW
- [j@j
- j@j ^V
- WWWWW
- VVVVV
- VVVVV
- VVVVV
- CC+]
- Ht(f
- CC@@
- Ht$C
- SSSSS
- SSSSS
- WWWWW
- tVPV
- ~,WPV
- VVVVV
- WWWWW
- _^[]
- SVWj
- [_^]
- URPQQh
- SSSSS
- h<[N

- h([N
- Vh$[N
- tVHtG
- SSSSS
- <at9<rt,<wt
- =xvQ
- hXZN
- VVVVV
- VVVVV
- VVVVV
- PPPPP
- VVVVV
- j?^;
- VW}
- @_^[
- _^[]
- 0WWWWW
- WWWWW
- WWWWW
- Vh^mH
- SSSSS
- j-Xf
- ^SSSSS
- ^SSSSS
- YY_^[
- SSSSS
- u^SSSP
- _^[]
- s%j.Zf
- .t C;]
- sfj\\Yf
- YWWWWW
- ^WWWWW
- HFF;
- ^WWWWW
- PQVS
- _^[]
- 0WWWWW
- YQPVh
- VVVVV
- FVSj
- @PSS
- SSSj
- SSSSS
- <\\tM</tI
- PPPPPPPP
- PPPPPPPP
- v\tN+D$
- SSSSS
- WVQR
- ^SSSSS
- SSSSS
- YY_t
- WVQR
- ^SSSSS
- h`RN
- WWWWW

- WWWWW
- WWWWW
- WWWWW
- WWWWW
- WWWWW
- WWWWW
- WWWWW
- WWWWW
- WWWWW
- h,TN
- WWWWW
- WWWWW
- WWWWW
- WWWWW
- WWWWW
- WWWWW
- WWWWW
- WWWWW
- WWWWW
- WWWWW
- slj1X+
- WWWWW
- h<TN
- WWWWW
- WWWWW
- WWWWW
- WWWWW
- u*hLTN
- WWWWW
- h|TN
- WWWWW
- WWWWW
- =XBM
- SSSSS
- SSSSS
- vSSSh
- VVVVV
- ChHRN
- hPRN
- PPPPP
- VVVVV
- VVVVV
- @PVW
- VVVVV
- ^H_[
- =pBM
- hLRN
- PPPPP
- hHRN
- hLRN
- PhDRN
- SSSSS
- _^[]
- h@RN
- PPPPP
- _trP
- PVj@

- h@RN
- SSSSS
- ^_[]
- SSSSS
- Fpt"
- _^[]
- Y_^[]
- to=DtQ
- ^SSSSS
- QSSSj
- SSSSS
- SSSSS
- SSSSS
- SSSSS
- VVVVV
- YY[t
- SWQR
- _VVVVV
- VVVVV
- VVVVV
- Vj<RP
- SSSSS
- j<SW
- j<SW
- j<SW
- SSSSS
- SSSSS
- SSSSS
- ^SSSSS
- Wj$h
- ^SSSSS
- WWWWW
- ^WWWWW
- HFF;
- _^[]
- SSSSS
- WVh=
- @PVh=
- SSSSS
- VVVVV
- VVVVV
- HH_^[
- SSSSS
- SSSSS
- VVVVV
- _^[]
- SSSSS
- @@BBf;
- @@BBf;
- 0WWWWW
- _^[]
- hpsQ
- hpsQ
- Y__^[
- VVVVV
- YY[t
- SWQR

- _VVVVV
- BBFFf
- SSSSS
- Sj Z
- WWWWW
- QSVW
- BBFF
- PhpsQ
- VVVVV
- SSSSS
- GGBB
- VVVVV
- QCPC
- CCGG
- VVVVV
- VVVVV
- Y__^[
- QSVW
- QQSVWd
- PPPPP
- _^[]
- 0WWWWW
- X_^]
- 0WWWWW
- GGBBf
- <$Xf
- BBFFf
- VVVVV
- VVVVV
- VVVVV
- SSSSS
- VVVVV
- WWWWW
- VVVVV
- PPPPP
- VVVV
- WWWW
- VVVVV
- WWWWW
- _^[]
- WWWWW
- PhpsQ
- SSSSS
- t\tVP
- _^[]
- _^[]
- _^[]
- jmh
- Pjmh
- _^[]
- _^[]
- [_^]
- F4_^[]
- _^[]
- _^[]
- ~~;w
- _^[]

- hPDN
- SVWj(3
- =(FM
- wltB
- VWh\t*G
- h\t*G
- btQ-
- @t\tV
- h\t*G
- ;F t
- hHJN
- _^[]
- uLh\t*G
- h\t*G
- Qd_^]
- Q_^]
- QX_^]
- QT_^]
- QP_^]
- QD_^]
- Q@_^]
- Q<_^]
- Q,_^]
- Q(_^]
- Q$_^]
- h\t*G
- h\t*G
- Vh\t*G
- @[_^]
- h\t*G
- Vh\t*G
- P[^]
- _^[]
- t(SP
- S_^[]
- S_^[]
- Qh_^]
- Qd_^]
- Q_^]
- QX_^]
- QT_^]
- QP_^]
- QD_^]
- Q@_^]
- Q<_^]
- Q,_^]
- Q(_^]
- Q$_^]
- >,r/
- tLVW
- M Xf
- |\tj
- =pDM
- ;(r[V
- F(Pj
- =\\FM
- tdh,EN

- ;F r
- ~\tj [
- ~\tj Y
- ;N s
- ;F r
- SSj(
- ;F r
- _^[]
- FFCC
- j?Xf
- ZwYf
- Zw/f
- QSVW
- _^[]
- _^[]
- t&VW;
- _^[]
- ^(_^[]
- F(;^ r
- ;F,v
- F(@@;F,v
- +F(_^[;E
- QQSV
- V,RW
- F(Wt
- j8h@<N
- Pj8h@<N
- =xFM
- _^[]
- h$GG
- h\t*G
- Nxjd
- h|;N
- h\t*G
- YYPS
- ~;;{
- YYPj
- QQSV
- >_^]
- _^[]
- ~';~
- @t\tV
- Rd^]
- WWVPWWWW
- WWWWh
- j\\Xf
- H.f;
- _^[]
- |\tPV
- QQSVWj\\
- QSVW
- WjT_
- Y=SPB8t
- HtXHt5Ht
- (t^V
- SNRttB
- vhSW

- Y@_^[
- @_^[
- MxSVWQ
- @_^[
- HtqH
- _^[]
- @^[_
- jpj\th
- _^][Y
- _^][
- DF =
- xGF;}
- _^[]
- @^[_]Y
- twSV
- @_^[
- ;G;}
- @_^[
- j Y+
- =j Y+
- CGG;]
- j\tY;
- Y[_^
- &Kx;
- teHt,H
- tMHHt+H
- VWt#
- YY_^
-)~\\)~
- ~<)~X
- F<SP
- QQSW
- Y[_^
- X_^][
- Ht<Ht*H
- G,+G(+C
- SSSSh
- ^_][
- FP;FTt
- ;~Ht
- ;FDt
- ;F@t
- ;F<t
- FxWP
- QQQQh
- VHWWWWW
- F(PV
- F$WWWWW
- t\tVP
- G4X_^[
- E(YY_[^
- V$YY
- HN#u<;t
- ;MXs
- MDF;u\\r
- V$YY
- Wj@j

- W$YY
- P$YY
- Y_^[
- WWWW
- WWWhp
- _^][
- u htVM
- u#htVM
- h<\tN
- uZhL\tN
- khX\tN
- hl\tN
- _^[]
- !t3Ht#HtoHtSHHt&HHt;
- QQSV
-][_^
- +}P;EHt
- },+}
- Mx+Mp
- QQSh
- =DFM
- @VWtV
- u"htVM
- PH+}
- `SVW
- tbHHt6
- S,_[^]
- =hDM
- t)SW
- htVM
- @_^]
- VVVV
- SSShP
- u"htVM
- PWSj
- PWSj
- PWSj
- PWSj
- PWSj!
- N,_[^
- ~$Wh
- RRRj
- RRWW
- PPPPPPh
- QQSWWWj
- RSShx
- @_^[
- FDPW
- QSVW
- Pj\\S
- _^[]
- h<\tN
- u`hL\tN
- u!h$VM
- SVWh`
- WWWj
- SSSj

- SSSj
- PPPh
- PPPh
- QQSV
- @^[]
- SSShP
- PPPh
- VPPh
- PPPh
- PPPh
- PPPh
- PPPh
- VPPh
- VPPhT
- RWjt_
- PPPh
- RVhK
- Y_^[
- SWSh>
- VPPh
- Y_^[
- Pj\\j
- RL_^][
- Qj\\P
- @#D$
- ^@[]
- QQSV
- @_^[
- PPPh
- N@SSSh
- PPPh
- SVWtS
- u"htVM
- u%htVM
- N@SSSh
- N@SSSh
- PPPh
- WWWhP
- Y_^[
- u%htVM
- u%htVM
- u%htVM
- SSSh8hM
-][_^
- h$nD
- Y_^[
- Qj<P
- u%htVM
- u%htVM
- u%htVM
- u%htVM
- h<\tN
- hL\tN
- hL\tN
- N\\@P
- _^][
- _^][

- tdSW
- >htVM
- >htVM
- Y_^[
- @_^[]
-]_^[
- h$nD
- WWWh
- PPPh
- PPPh
- Y_^[
-][_^
- P _^
- QPPP
- PPPh
- u%htVM
- h<\tN
- u%htVM
- PH+}
- tSVW
- u htVM
- u#htVM
- u'htVM
- h<\tN
- u\\hL\tN
- hX\tN
- hl\tN
- u#htVM
- u#htVM
- HtVHtJHHt HHt
- $SVW
- [_^]
- j Xj
- j Xj
- Y_^[
- _^[]
- u#htVM
- u#htVM
-]hF;ud|
- EhC;]d|
- Y_^[
- +PhL
- j-[f
- _^[]
- j Yf
- |);F
- GG;>r
- j Xf
- j Yf
- j&Zf;
- j&^f
- Vj;^f
- ^[_]
- _[^]
- _[^]
- u"htVM
- u"htVM

- u%htVM
- PPPh
- QQSVW
- Y_^[
- @SPh
- tKSVW
- SVWW
- j Xf
- Y_^[
- Pj j
- }t,P
- }t*P
- w>P
- }t>f
- >tDf
- =pFM
- 't(V
- =t;f
- w;V
- =pFM
- t.P
- >t:f
- j _f;
- _^[]
- tkSVW
- _^[]
- _^[]
- =DBM
- Y_^[
- htVM
- t&htVM;
- t&htVM;
- 't(S
- =t<f
- ~g+M
- Y_^[
- @j f
- SWj([S
- ~\\9~Pt
- Y_^[
- C Pj
- C PWh6
- K QWh2
- 3PPPPh
- j,_W
- K Qj
- ;sXt(
- K Qj
- PVhN
- PPPh4RM
- tRHH
- WWWh,dM
- WtCj
- PPPh
- WWWh,dM
- ;^Tt
- Pj\\j

- ^\\;~Tu
- ^X;~\\u
- ^`;~Xu
- Pj\\j
- jS_W
- }\tVS
- QSVW
- ~)WS
- }'WS
- _^[]
- QSVW
- QSVW
- Pj\\j
- Pj\\j
- ~RSV
- _^[]
- tYhd
- VRPPPQ
- /t\tj\\
- Y_^[
- |,@P
- hdQM
- VWt<
- Wt:S
- j~Pf
-]xVW
- F;|$
- YY_^][
- }.H;
- }$H;
- t$Wh
- ~=VS
- j YhInD
- t'WhAYD
- C JM
- F JM
- t'WhNKF
- t'WhK5F
- t'Wh.LD
- t'WhT
- t'WheKD
- t'WhyID
- t'Wh
- t'Wh
- t'Wh
- t'Wh
- t'Wh
- t'Whe?D
- t'WhH
- j YhInD
- t'WhW
- t'WhT
- t'Wh<
- t'Wh
- t'Wh
- t'WhC+D
- t'Wh=

- t'Wh
- t'Wh
- t'WhC+D
- t'WhC+D
- t'Wh
- t'WhC+D
- t'WhC+D
- t'Wh
- Y_^[
- V(RS
- P$SW
- F(Ph
- P,HH
- RWSQ
- QWSP
- QWSh
- QWSh
- QWSh
- tRJt;
- QWSP
- QWSP
- QWSh
- QWSh
- QWSh
- zt;JJt
- QWSP
- QWSj
- QWSj$
- QWSh
- QWSh
- QWSj
- QWSR
- QWSj
- QWSj
- QWSj
- HtLHt5
- wztd
- PSVWj
- @_^[
- PPPPP
- @_^[
- (SVW
- _^[]
- _^][
- $SVW
- Y_^[
- t'Wh
- tQ+M
- _^[]
- PhtVM
- QQSVW
- QQSVW
- QQSVW
- QQSVW
- QQSVW
- QQVW
- QQVW

- HHtQHH
- !t5Ht&Ht;
- HHthHH
- !t>Ht,Ht
- ^[_]
- ~<SV
- ^][_
- t[SP
- =DFM
- @VWt:
- u"htVM
- PH+}
- XSVW
- Y_^[
- =pFM
- htVM
- u#htVM
- =pFM
- =pFM
- P\\+}
- _^[]
- t'Wh
- Y_^[
- "t(V
- =t%V
- tcVW
- Y_^[
- Y_^[
- SSPV
- htVM
- uGh$VM
- uGh$VM
- Y_^[
- ShljM
- QSWSSSP
- WShx
- PWh?
- PWVWWWh
- PWVhT
- QVWj$
- Y_^[
- SVWP
- hJ\tM
- Y_^[
- Y_^[
- Y_^[
- hLQM
- h\\QM
- hDSM
- PVhq
- Y_^[
- h\\QM
- h$VM
- h<[M
- tJh$VM
- hDbM
- h\\bM

- hhbM
- hDbM
- h\\bM
- hhbM
- R,Sj
- R,Sj
- Y_^[
- Y_^[
- hXVM
- ?h$VM
- hXVM
- tAhtVM
- Y_^[
- $$VM
- uchP^M
- Y_^[
- hP]M
- htVM
- htVM
- uNh$VM
- htVM
- h$VM
- htVM
- h$VM
- htVM
- FhtVM
- hX\\M
- Y_^[
- Y_^[
- FVWVh
- hTwM
- tGhtVM
- htVM
- hTwM
- tGhtVM
- h xM
- htxM
- jP[S
- h\\xM
- htVM
- htxM
- WWPQ
- htVM
- dh$VM
- htVM
- YYWV
- h$yM
- h$VM
- t!htVM
- hDyM
- hPyM
- hpyM
- hXzM
- hxzM
- htVM
- hXVM
- hH{M

- hl{M
- SVWP
- Y_^[
- Hh$VM
- tAhtVM
- htVM
- YYh0VM
- MpQP
- Y_^[
- YYSW
- hLQM
- h\\QM
- QPh|kM
- QSPh|kM
- 'h wM
- htVM
- htVM
- htVM
- htVM
- h(wM
- hTwM
- hXVM
- hTwM
- uWhtVM
- htVM
- hTwM
- Gh$VM
- hTwM
- h$VM
- SVWP
- Y_^[
- }Gh$VM
- Y_^[
- PSVh,aM
- PSVh@aM
- YY~Mh$VM
- h\\[M
- Y_^[
- C,PWWQ
- h$VM
- hPNM
- Y_^[
- PWVh_3C
- PSVSSSh,aM
- PVSh,aM
- PSVSSSh@aM
- PVSh@aM
- Vj
- Y_^[
- RSQP
- YYSj
- YYSj
- htVM
- Y_^[
- VVVj
- QVSP
- RVVj

- Y_^[
- VVVj
- VVVPh
- Y_^[
- QVSP
- QVPW
- txSW
- Y_^[
- Y_^[
- ZtPh
- >MtV
- Y_^[
- ZtPh
- >MtV
- Y_^[
- t Sh
- YYSj
- Y_^[
- RPVQ
- _^[]
- hlXM
- =DBM
- hlXM
- =`@M
- PSSj
- =d@M
- +F4t\tP
- =<BM
- CC;F
- vWSW
- =<BM
- s~SW
- YFWj
- Y_^[
- Qj@VW
- Vhqp
- tNSj
- QSVj
- t:WSV
- vKWSj@
- t]SV
- |phLRM
- PVVj%V
- t(Vh
- WhLRM
- R<\\uMV
- Y_^[
- PPQh
- WSWWWh
- V(_^[
- ^,t:
- jt+-
- RWQP
- PVVWj
- PWVj
- WWWj
- WWWj

- WWWj
- SSSj
- M(SSSj
- SSSj
- SSSj
- VVVj
- PPPj
- VVVj
- PPPj
- t<^[
- h$VM
- h$VM
- h$VM
- h$VM
- t/</t+hT
- j|hx
- 8X)t<^[
- t$WhEkD
- NphP
- Y_^[
- tWHHtOH
- Y_^[
- YY_^
-]t\\j\tY+
- NlWP
- w\\Wj
- wFWj
- Qd;Q`u
- @;D$
- QSVW
- Sh+N
- QQVW
- QQVW
- YYF;
- SVWjY^
- v$jNW
- Y_^[
- YYSV
- SVWP
- _^[]
- _^[]
- jN^j
- [_^]YY
- PWWh
- PWWh
- PWWhP
- HWj+
- YSSj
- FXPV
- jxY+
- _^[]
- QZ^&
- HSVWj@
- QSSj
- MtQj
- SSSSh
- Pj.j

- PSSh
- QQSV
- Y_^[
- QQVW
- YY;}
- |!;]
- F(SP
- j?X#
- _^][Y
- tDWh
- YYWV
- tDWh
- YYWV
- Y_^[
- tyHtXHt
- Y_^[
- Y_^[
- VVPWV
- YYht
- SVWP
- t]SV
- VWht
- YYSj
- Y_^[
- SSSSj
- QQVW
- ttSj<3
- tCj<
- hhrM
- st\tF;
- QQSW
- ^|!+M
- =hFM
- =,BM
- PSSSj
- PVVVj
- t$ Wh
- t$ Wj
- WWWWj
- t$ Wj
- t$ Wj
- WWWWj
- Y_^]
- j\\Xf
- _^[]
- Y_^[
- |En\\Yt
- MpQP
- tch8hM
- _^][
- h<gM
- $hHgM
- Y_^[
- h,~M
- hd~M
- VWjd
- Y_^[

- FVWVh
- h xM
- htxM
- h\\xM
- htVM
- htxM
- WWPQ
- htVM
- dh$VM
- htVM
- h$yM
- h$VM
- t!htVM
- hDyM
- hPyM
- hpyM
- hXzM
- hxzM
- htVM
- hXVM
- hH{M
- hl{M
- SVWP
- Y_^[
- hlwM
- Y_^[
- YYSW
- hLQM
- h\\QM
- h wM
- h(wM
- hTwM
- hXVM
- hTwM
- uNhtVM
- htVM
- hTwM
- h$VM
- SVWP
- PSVSSSh,aM
- PVSh,aM
- PSVSSSh@aM
- PVSh@aM
- Y_^[
- FjdX+E
- WFVP
- hptM
- PhtrM
- PhtrM
- h,vM
- $@vM
- hlvM
- SVWP
- Y_^[
- MTQP
- Y_^[
- h@sM

- hlsM
- Y_^[
- h\\rM
- },.t
- hhrM
- Y_^[
- @_^[
- PWWj
- QQSV
- PVVj
- VVVVj
- hhqM
- Ph|qM
- j"Yf
- bj"Xf
- hhqM
- Ph|qM
- j"Yf
- bj"Xf
- Y_^[
- |Gj{Xf;E
- Y_^[
- SSVSSW
- SVWP
- Y_^[
- FFGGf
- SVWP
- j'Yf;
- h(qM
- =pFM
- PWWW
- QPPP
- PPPPPPP
- GGCCHu
- j'Yf;
- f;L$
- j'Yf;
- j'Yf;
- j'Xf
- VVVVVh
- hhnM
- Y_^[
- Y_^[
- tZhtVM
- hhlM
- tHhtVM
- tLhtVM
- tLhtVM
- tLhtVM
- tOhtVM
- tOhtVM
- h`mM
- tOhtVM
- h$VM
- Y_^[
- QQSV
- Y_^[

- Y_^[
- Y_^[
- Y_^[
- Y_^[
- Ph|kM
- PWhljM
- Pj\tWh
- PWhljM
- hljM
- j\tSh
- hPhM
- h|gM
- Y_^[
- h<gM
- $hHgM
- hXfM
- _^][
- PSVh
- hHcM
- htcM
- Y_^[
- YYSj
- MXPQ
- h(cM
- h\\QM
- hDbM
- h\\bM
- hhbM
- hDbM
- h\\bM
- hhbM
- Y_^[
- t~SWP
- Y_^[
- }Yh$VM
- PWSh,aM
- PWSh@aM
- nh `M
- hH`M
- h\\`M
- hp`M
- YY_^
- ;t$
- t>SVW
- Y_^[
- $$VM
- uchP^M
- Y_^[
- hP]M
- htVM
- htVM
- uNh$VM
- htVM
- h$VM
- htVM
- h$VM
- htVM

- FhtVM
- hX\\M
- Y_^[
- v'h`
- YY~Mh$VM
- h\\[M
- h$VM
- h<[M
- tIh$VM
- ;t$
- h$[M
- F(hZM
- F$pZM
- F xZM
- F(hZM
- F$pZM
- F xZM
- _^[]
- 8X-t<^[
- @_[^]
- hIXM
- =DCM
- tgSW
- VhLRM
- -@CM
- hXVM
- ?h$VM
- hXVM
- tAhtVM
- Y_^[
- h$VM
- jbPf
- Y_^[
- P,Sj
- hDSM
- hpSM
- h TM
- hHTM
- hpTM
- _^[]
- hLRM
- WhhRM
- hdQM
- Y_^[
- hLQM
- h\\QM
- Y_^[
- h$QM
- SVWP
- Y_^[
- hHPM
- h\\PM
- hpPM
- PWh$PM
- Y_^[
- Y_^[
- PVVh

- h$NM
- Y_^[
- [_^]
- RPWh
- Y_^[
- hPNM
- YYWj
- Ph`NM
- h`NM
- PSh?
- h$NM
- t<^[
- PhhMM
- t!h,MM
- hPMM
- PSVh
- PVWVVVh
- PVWVVVh
- PVWVVV
- PVWVVV
- h$JM
- hLJM
- h$JM
- hLJM
- hpJM
- ;G t
- ;F t
- }(YY
- SWVP
- SWVP
-)Nt)Vp
- N$+M
- ;)~t
- +N,;
- ;wTt SW
- @9NPtK
- 9NLtc;
- J#P,
- x4J#P,
- N$+F,
- +X,;
- @SVW
- A|$`<@r
- Jt}JtmJtDJ
- X_^[
- (SVW
- tBHt%Hus
- QQVW
- (BY;
- QQSV
- ^_[]
- u\tF;t$
- (;\\:$r
- GDVP
- ._^[]
- (CYY;^
- $_^[]

- CYY;^
- Yt*Ht
- j Y+
- [_^]
- Y[_^
- Y[_^
- L$,d
- L$<j
- D$,d
- Y_^][
- L$<d
- T$ R
- VRQPS
- L$ Q
- D$<d
- D$$SUVW
- L$(d
- D$(d
- L$Ld
- D$Ld
- Y_^[
- Y_^[
- +D$
- T$,Q+
- L$$+L$
- D$;
- |$(+
- T$ +
- L$$;
- T$(+
- T$ +
- T$$+
- |$(+
- T$ +
- ;|$
- |$(;
- +L$
- _^+
- L$$r
-)f;*u&
- D$ P
- T$$R
- _^][
- L$,d
- t$<j
- D$,d
- L$(d
- |$,f
- D$(d
- [_]Y
- (f;)u&
- D$$+
- RWSW
- Y_^[
- $WWP
- d$Hh
- d$Hh

- d$Hh
- 9D$htW
- $VWP
- T$TRV
- L$,j
- L$|Q
- d$Hh
- d$Hh
- T$HRh
- L$,Q
- D$L;
- L$<;
- T$XR
- D$,Pj
- T$,R
- t$Lj
- Y_^[
- t"9wXr
- t/Pj
- MpQj
- SVWP
- Y_^][
- T$pR
- L$pQ
- \\$Hf
- L$T9l$Lr
- \\$df
- D$TP
- \\$Hf
- T$T9l$Lr
- \\$df
- L$TQ
- PWh`
- \\$df
- D$ph
- N(9n r
- VD9n<r
- ^`9nXr
- Y_][
- <h\\t
- Y_^[
- ?QSj
- Y_^[
- ?QSj
- T$ Rj
- =PCM
- Y^][
- L$,d
- D$,d
- Y_^[
- PQVW
- PQRV
- .rsrc