

Database Systems

05

Database VIEW



Kak Soky, PhD




soky.kak@cadt.edu.kh



085683680

- Introduction
- Create View
- Update View
- Delete View

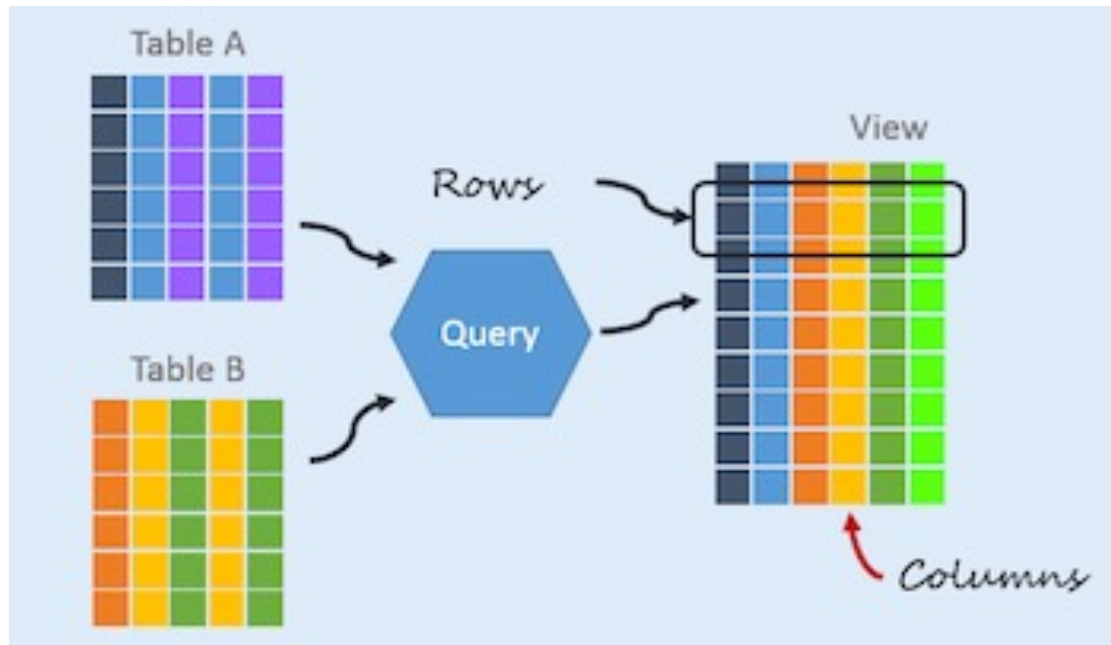

- View is a virtual table or logical table based on the result-set of an SQL statement.
- A view contains rows and columns, just like a real table.
- The fields in a view are fields from one or more real tables in the database.
- You can add SQL functions, WHERE, and JOIN statements to a view and present the data as if the data were coming from one single table.

```
CREATE VIEW view_name AS
SELECT column1, column2, ...
FROM table_name
WHERE condition;
```

```
--example 1|
CREATE VIEW v_customers AS
SELECT CustomerName, ContactName
FROM Customers
WHERE Country = "Brazil";
```

```
CREATE VIEW [Current Product List] AS
SELECT ProductID, ProductName
FROM Products
WHERE Discontinued=No
```

```
create view V2(prod, sum_amount) as
select prod, sum(amount)
from sales
where year=2016
group by prod
```

```
CREATE VIEW [Category Sales For 1997] AS
SELECT DISTINCT CategoryName, Sum(ProductSales) AS CategorySales
FROM [Product Sales for 1997]
GROUP BY CategoryName
```

```
CREATE VIEW view_name AS
SELECT column1, column2, ...
FROM table_name
WHERE condition;
```

```
--example 1|
CREATE VIEW v_customers AS
SELECT CustomerName, ContactName
FROM Customers
WHERE Country = "Brazil";
```

```
CREATE VIEW [Current Product List] AS
SELECT ProductID, ProductName
FROM Products
WHERE Discontinued=No
```

```
create view V2(prod, sum_amount) as
select prod, sum(amount)
from sales
where year=2016
group by prod
```

```
CREATE VIEW [Category Sales For 1997] AS
SELECT DISTINCT CategoryName, Sum(ProductSales) AS CategorySales
FROM [Product Sales for 1997]
GROUP BY CategoryName
```



```
CREATE OR REPLACE VIEW view_name AS  
SELECT column1, column2, ...  
FROM table_name  
WHERE condition;
```

```
CREATE OR REPLACE VIEW v_customers AS  
SELECT CustomerName, ContactName, City  
FROM Customers  
WHERE Country = "Brazil";
```

```
DROP VIEW view_name;
```

```
DROP VIEW v_customers;
```