

Installation d'OCS Inventory NG

Installation et configuration d'OCS Inventory NG sur une VM Debian 12, administrée à distance en SSH.



Paul-Yann Bouvier

BTS SIO — option SISR

TYPE

Mission / TP système

ENVIRONNEMENT

VM Debian 12 · MobaXterm

VERSION

OCS Inventory NG 2.10.0

OBJECTIFS

- Administrer la VM à distance en SSH (MobaXterm)
- Installer la pile Web et les dépendances Perl / PHP
- Installer le serveur OCS et configurer MariaDB
- Finaliser l'installation via le navigateur

COMPÉTENCES MOBILISÉES

OCS Inventory NG

SSH

Perl / CPAN

Apache2

MariaDB

Inventaire de parc

SOMMAIRE

01 Objectif et prérequis

02 Accès SSH à la VM

03 Pile Web et dépendances

04 Installation du serveur OCS Inventory NG

05 Base de données MariaDB

06 Configuration d'Apache

07 Finalisation via le navigateur

1 Objectif et prérequis

Installer et configurer **OCS Inventory NG** sur une VM Debian 12, en l'administrant à distance via SSH, puis finaliser l'installation depuis le navigateur de la machine physique.

Prérequis

VM Debian 12 avec accès réseau et accès SSH fonctionnel.

Poste d'administration

Client SSH (MobaXterm) et navigateur Web sur la machine physique.

2 Accès SSH à la VM

2.1 Installer et vérifier le serveur SSH

VM DEBIAN

```
$ sudo apt install openssh-server  
$ systemctl status ssh
```

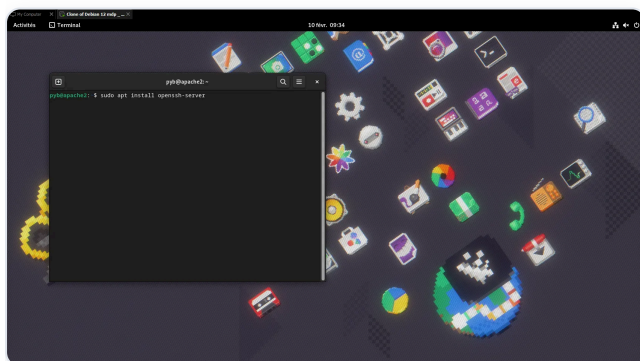


Figure 1 — Installation d'openssh-server sur la VM

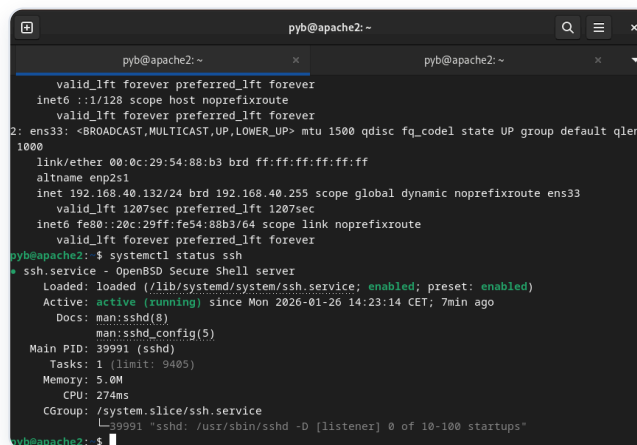


Figure 2 — Service ssh actif (running), IP 192.168.40.132

2.2 Se connecter avec MobaXterm

- 1 Ouvrir MobaXterm et créer une session **SSH**.
- 2 Renseigner l'IP de la VM (**192.168.40.132**), l'utilisateur et le port 22.
- 3 S'authentifier avec le compte de la VM.

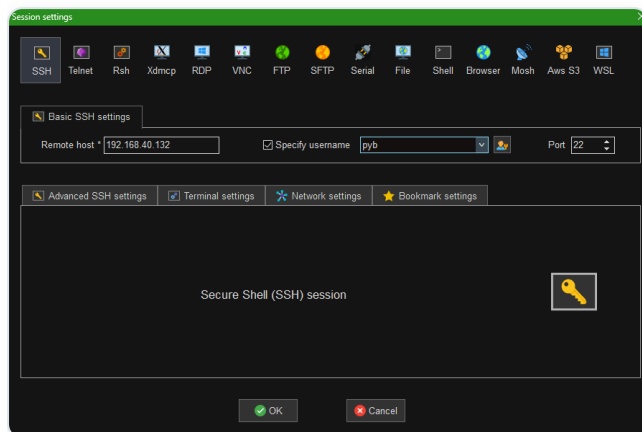


Figure 3 — Paramètres de la session SSH

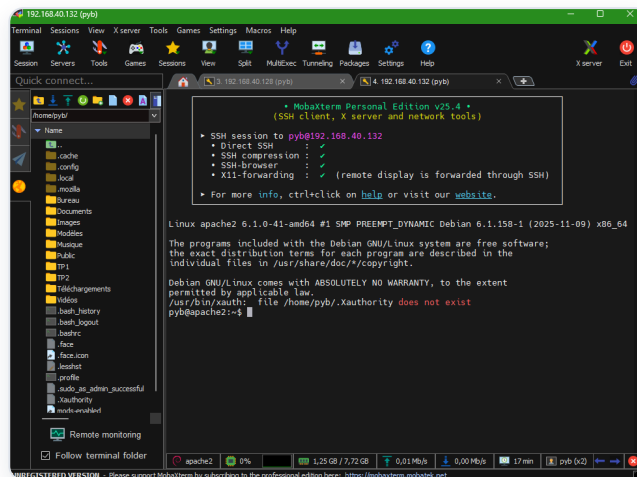


Figure 4 — Session SSH ouverte sur la VM

3 Pile Web et dépendances

3.1 Apache, MariaDB et PHP

TERMINAL

```
$ sudo apt install apache2 mariadb-server php -y
```

```
pyb@apache2:~$ sudo apt install apache2 mariadb-server php -y
[sudo] Mot de passe de pyb :
Lecture des listes de paquets... Fait
Construction de l'arbre des dépendances... Fait
Lecture des informations d'état... Fait
apache2 est déjà la version la plus récente (2.4.66-1~deb12u1).
Le paquet suivant a été installé automatiquement et n'est plus nécessaire :
  linux-image-6.1.0-40-amd64
Veuillez utiliser « sudo apt autoremove » pour le supprimer.
Les paquets supplémentaires suivants seront installés :
  galera-4 gawk libapache2-mod-php8.2 libcgi-fast-perl libcgi-pm-perl
  libconfig-inifiles-perl libdbd-mariadb-perl libdbi-perl libfcgi-bin libfcgi-perl
  libfcgi0ldbl libhtml-template-perl libmariadb3 libsigsegv2 libterm-readkey-perl
  liburing2 mariadb-client mariadb-client-core mariadb-common
  mariadb-plugin-provider-bzip2 mariadb-plugin-provider-lz4
  mariadb-plugin-provider-lzma mariadb-plugin-provider-lzo
  mariadb-plugin-provider-snappy mariadb-server-core mysql-common php-common php8.2
  php8.2-cli php8.2-common php8.2-opcache php8.2-readline pv rsync socat
```

Figure 5 — Installation de la pile Web

3.2 Bibliothèques Perl et modules PHP

```

TERMINAL (ROOT)

apt install -y libapache2-mod-perl2
apt install -y libxml-simple-perl
apt install -y libnet-ip-perl
apt install -y libsoap-lite-perl
apt install -y libapache2-mod-perl2-dev
apt install -y make
apt install -y php-mysql
apt install -y php-gd
apt install -y php-mbstring
apt install -y php-soap
apt install -y php-xml
apt install -y php-curl

```

3.3 Modules Perl complémentaires (CPAN)

```

TERMINAL

$ sudo perl -MCPAN -e "install XML::Entities"
$ sudo cpan Apache2::SOAP
$ sudo cpan SOAP::Lite
$ sudo cpan Mojolicious::Lite
$ sudo cpan Switch

```

Point d'attention

Lors de l'installation d' **Apache2::SOAP**, à la question « *Please tell me where I can find your apache src* », interrompre avec **Ctrl + C**.

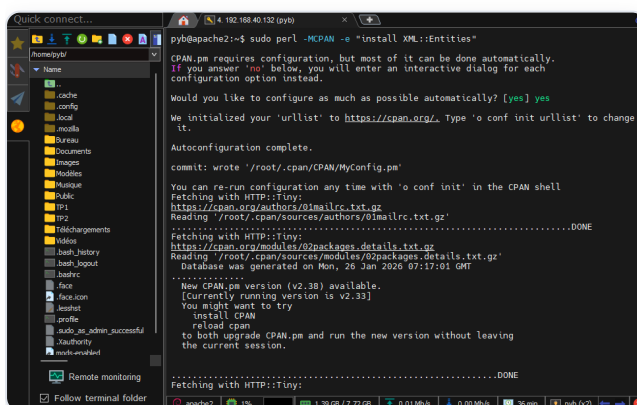


Figure 6 — Configuration de CPAN et installation de XML::Entities

```

pyb@apache2:~$ sudo cpan Apache2::SOAP
Loading internal logger. Log::Log4perl recommended for better logging
Reading '/root/.cpan/Metadata'
Database was generated on Mon, 26 Jan 2026 07:17:01 GMT
Running 'install' for module 'Apache2::SOAP'
Fetching with HTTP::Tiny:
https://cpan.org/authors/id/R/RK/RKOBES/Apache2-SOAP-0.73.tar.gz
Fetching with HTTP::Tiny:
https://cpan.org/authors/id/R/RK/RKOBES/CHECKSUMS
Checksum for /root/.cpan/sources/authors/id/R/RK/RKOBES/Apache2-SOAP-0.73.tar.gz ok
'YAML' not installed, will not store persistent state
Configuring R/RK/RKOBES/Apache2-SOAP-0.73.tar.gz with Makefile.PL
[ info] generating script t/TEST
Checking if your kit is complete...
Looks good
Generating a Unix-style Makefile
Writing Makefile for Apache2::SOAP
Writing MYMETA.yml and MYMETA.json
RKOBE/Apache2-SOAP-0.73.tar.gz
/usr/bin/perl Makefile.PL INSTALLDIRS=site -- OK
Running make for R/RK/RKOBES/Apache2-SOAP-0.73.tar.gz
cp lib/Soap/Transport/HTTP2.pm blib/lib/Soap/Transport/HTTP2.pm
cp lib/Apache2/SOAP.pm blib/lib/Apache2/SOAP.pm
Manifesting 1 pod document
RKOBE/Apache2-SOAP-0.73.tar.gz

```

Figure 7 — Installation d'Apache2::SOAP

```

pyb@apache2:~$ sudo cpan Mojolicious::Lite
Loading internal logger. Log::Log4perl recommended for better logging
Reading '/root/.cpan/Metadata'
Database was generated on Mon, 26 Jan 2026 07:17:01 GMT
Running install for module 'Mojolicious::Lite'
Fetching with HTTP::Tiny:
https://cpan.org/authors/id/S/SR/SRI/Mojolicious-9.42.tar.gz
Fetching with HTTP::Tiny:
https://cpan.org/authors/id/S/SR/SRI/CHECKSUMS
Checksum for /root/.cpan/sources/authors/id/S/SR/SRI/Mojolicious-9.42.tar.gz ok
'YAML' not installed, will not store persistent state
Configuring S/SR/SRI/Mojolicious-9.42.tar.gz with Makefile.PL
Checking if your kit is complete...
Looks good
Generating a Unix-style Makefile
Writing Makefile for Mojolicious
Writing MYMETA.yml and MYMETA.json
SRI/Mojolicious-9.42.tar.gz
./usr/bin/perl Makefile.PL INSTALLDIRS=site -- OK
Running make for S/SR/SRI/Mojolicious-9.42.tar.gz
cp lib/Mojo/HelloWorld.pm blib/lib/Mojo/HelloWorld.pm
cp lib/Mojo/File.pm blib/lib/Mojo/File.pm
cp lib/Mojo/Content/Single.pm blib/lib/Mojo/Content/Single.pm
cp lib/Mojo/Content.pm blib/lib/Mojo/Content.pm
cp lib/Mojo/IO/Loop/Stream.pm blib/lib/Mojo/IO/Loop/Stream.pm
cp lib/Mojo/Promise.pm blib/lib/Mojo/Promise.pm
cp lib/Mojo/Asset/File.pm blib/lib/Mojo/Asset/File.pm
cp lib/Mojo/Cookie/Request.pm blib/lib/Mojo/Cookie/Request.pm
cp lib/Mojo/EventEmitter.pm blib/lib/Mojo/EventEmitter.pm
cp lib/Mojo/Log.pm blib/lib/Mojo/Log.pm
cp lib/Mojo/Asset/Memory.pm blib/lib/Mojo/Asset/Memory.pm
cp lib/Mojo/Cookie/Response.pm blib/lib/Mojo/Cookie/Response.pm

```

Figure 8 — Installation de Mojolicious::Lite

```

pyb@apache2:~$ sudo cpan Switch
Loading internal logger. Log::Log4perl recommended for better logging
Reading '/root/.cpan/Metadata'
Database was generated on Mon, 26 Jan 2026 07:17:01 GMT
Running install for module 'Switch'
Fetching with HTTP::Tiny:
https://cpan.org/authors/id/C/CH/CHORNY/Switch-2.17.tar.gz

```

Figure 9 — Installation de Switch

4 Installation du serveur OCS Inventory NG

4.1 Télécharger et décompresser

TERMINAL

```

$ sudo apt install wget
$ wget https://github.com/OCSInventory-NG/OCSInventory-ocsreports/releases/download/2.10.0/OCSNG_UNIX_SERVER-2.10.0.tar.gz
$ sudo tar xvfz OCSNG_UNIX_SERVER-2.10.0.tar.gz
$ ls

```

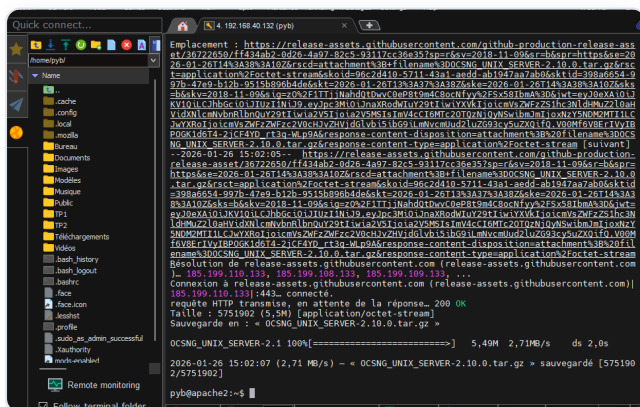


Figure 10 — Téléchargement de l'archive OCSNG_UNIX_SERVER-2.10.0

```

pyb@apache2:~$ sudo tar xvfz OCSNG_UNIX_SERVER-2.10.0.tar.gz
OCSNG_UNIX_SERVER-2.10.0/
OCSNG_UNIX_SERVER-2.10.0/Apache/
OCSNG_UNIX_SERVER-2.10.0/Apache/Makefile.PL
OCSNG_UNIX_SERVER-2.10.0/Apache/OcsInventory.pm
OCSNG_UNIX_SERVER-2.10.0/Apache/INSTALL
OCSNG_UNIX_SERVER-2.10.0/Apache/MANIFEST
OCSNG_UNIX_SERVER-2.10.0/Apache/LICENSE
OCSNG_UNIX_SERVER-2.10.0/Apache/Changes
OCSNG_UNIX_SERVER-2.10.0/Apache/OcsInventory/
OCSNG_UNIX_SERVER-2.10.0/Apache/OcsInventory/Plugins/
OCSNG_UNIX_SERVER-2.10.0/Apache/OcsInventory/Plugins/Modules.pm
OCSNG_UNIX_SERVER-2.10.0/Apache/OcsInventory/Interface.pm
OCSNG_UNIX_SERVER-2.10.0/Apache/OcsInventory/SOAP.pm
OCSNG_UNIX_SERVER-2.10.0/Apache/OcsInventory/Plugins.pm
OCSNG_UNIX_SERVER-2.10.0/Apache/OcsInventory/Server/
OCSNG_UNIX_SERVER-2.10.0/Apache/OcsInventory/Server/Constants.pm
OCSNG_UNIX_SERVER-2.10.0/Apache/OcsInventory/Server/Communication.pm
OCSNG_UNIX_SERVER-2.10.0/Apache/OcsInventory/Server/Groups.pm

```

Figure 11 — Décompression de l'archive

4.2 Lancer le script d'installation

TERMINAL

```
$ cd OCSNG_UNIX_SERVER-2.10.0
$ ls                # vérifier la présence de setup.sh
$ sudo ./setup.sh
```

```
pyb@apache2:~/OCSNG_UNIX_SERVER-2.10.0$ ls
Apache binutils dtd INSTALL ocsreports setup.sh
Api cpanfile etc LICENSE README.md
pyb@apache2:~/OCSNG_UNIX_SERVER-2.10.0$ sudo ./setup.sh

-----
Welcome to OCS Inventory NG Management server setup !
-----

Trying to determine which OS or Linux distribution you use
| Checking for Apache web server binaries !
|

CAUTION: If upgrading Communication server from OCS Inventory NG 1.0 RC2 and
previous, please remove any Apache configuration for Communication Server!
Do you wish to continue ([y]/n)?
```

Figure 12 — Démarrage de l'assistant setup.sh

```
Found that PERL module DBD:mysql is available.
Checking for XML::Simple PERL module...
Found that PERL module XML::Simple is available.
Checking for Net::IP PERL module...
Found that PERL module Net::IP is available.

-----
Installing files for Administration server...
-----

Creating PHP directory /usr/share/ocsinventory-reports/ocsreports.
Copying PHP files to /usr/share/ocsinventory-reports/ocsreports.
Fixing permissions on directory /usr/share/ocsinventory-reports/ocsreports.
Creating database configuration file /usr/share/ocsinventory-reports/ocsreports/dbconf
ig.tnc.php.
Creating IPDISCOVER directory /var/lib/ocsinventory-reports/ipd.
Fixing permissions on directory /var/lib/ocsinventory-reports/ipd.
Creating packages directory /var/lib/ocsinventory-reports/download.
Fixing permissions on directory /var/lib/ocsinventory-reports/download.
Creating snmp mibs directory /var/lib/ocsinventory-reports/snmp.
Fixing permissions on directory /var/lib/ocsinventory-reports/snmp.
Creating Administration server log files directory /var/lib/ocsinventory-reports/logs.
Fixing permissions on directory /var/lib/ocsinventory-reports/logs.
Creating Administration server temporary files directory /var/lib/ocsinventory-reports
/tmp_dir.
Fixing permissions on directory /var/lib/ocsinventory-reports/tmp_dir.
Creating Administration server scripts log files directory /var/lib/ocsinventory-repor
ts/scripts.
Fixing permissions on directory /var/lib/ocsinventory-reports/scripts.
Configuring IPDISCOVER-UTIL Perl script.
Installing IPDISCOVER-UTIL Perl script.
Fixing permissions on IPDISCOVER-UTIL Perl script.
Writing Administration server configuration to file /etc/apache2/conf-available/ocsinv
entory-reports.conf

-----
OK, Administration server installation finished ;-)
-----

Please, review /etc/apache2/conf-available/ocsinventory-reports.conf
to ensure all is good and restart Apache daemon.

Then, point your browser to http://server/ocsreports
to configure database server and create/update schema.

-----

Setup has created a log file /home/pyb/OCSNG_UNIX_SERVER-2.10.0/ocs_server_setup.log.
Please, save this file.
If you encounter error while running OCS Inventory NG Management server,
we can ask you to show us its content !

DON'T FORGET TO RESTART APACHE DAEMON !

Enjoy OCS Inventory NG ;-)

pyb@apache2:~/OCSNG_UNIX_SERVER-2.10.0$
```

Figure 13 — Fin de l'installation du serveur

Validation

Si tout s'est bien passé, l'assistant se termine par le message « *Enjoy OCS Inventory ;-)* ».

5 Base de données MariaDB

```
MARIADB
$ sudo mysql -u root
MariaDB> CREATE DATABASE ocsweb;
MariaDB> SHOW DATABASES;
MariaDB> GRANT ALL PRIVILEGES ON *.* TO ocs@'localhost' IDENTIFIED BY 'ocs';
MariaDB> FLUSH PRIVILEGES;
MariaDB> exit;
```

```
MariaDB [(none)]> SHOW DATABASES;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| ocsweb |
| performance_schema |
| sys |
+-----+
5 rows in set (0,001 sec)
```

Figure 14 — La base ocsweb est créée

```
MariaDB [(none)]> FLUSH PRIVILEGES;
Query OK, 0 rows affected (0,001 sec)

MariaDB [(none)]> exit;
Bye
pyb@apache2:~/OCSNG_UNIX_SERVER-2.10.0$
```

Figure 15 — Application des privilèges

Amélioration possible

Pour respecter le principe du moindre privilège, limiter les droits à la seule base : `GRANT ALL PRIVILEGES ON ocsweb.* TO ocs@'localhost' ...`, et utiliser un mot de passe robuste.

6 Configuration d'Apache

6.1 Redémarrer les services

```
TERMINAL
$ sudo service mariadb restart
$ sudo service apache2 restart
```

6.2 Activer la configuration ocsinventory-reports

Vérifier si `ocsinventory-reports.conf` est présent dans `/etc/apache2/conf-enabled/` ; sinon l'activer :

TERMINAL

```
$ ls -l /etc/apache2/conf-enabled/
$ sudo a2enconf ocsinventory-reports
$ sudo service apache2 restart
```

```
pyb@apache2:~$ ls -l /etc/apache2/conf-enabled/
total 0
lrwxrwxrwx 1 root root 30 1 déc. 09:48 charset.conf -> ../conf-available/charset.conf
lrwxrwxrwx 1 root root 44 1 déc. 09:48 localized-error-pages.conf -> ../conf-available/localized-error-pages.conf
lrwxrwxrwx 1 root root 46 1 déc. 09:48 other-vhosts-access-log.conf -> ../conf-available/other-vhosts-access-log.conf
lrwxrwxrwx 1 root root 31 1 déc. 09:48 security.conf -> ../conf-available/security.conf
lrwxrwxrwx 1 root root 36 1 déc. 09:48 serve-cgi-bin.conf -> ../conf-available/serve-cgi-bin.conf
```

Figure 16 — Avant : la configuration OCS n'est pas activée

```
pyb@apache2:~$ sudo a2enconf ocsinventory-reports
service apache2 restart
Enabling conf ocsinventory-reports.
To activate the new configuration, you need to run:
systemctl reload apache2
-bash: service : commande introuvable
pyb@apache2:~$ sudo service apache2 restart
pyb@apache2:~$ ls -l /etc/apache2/conf-enabled/
total 0
lrwxrwxrwx 1 root root 30 1 déc. 09:48 charset.conf -> ../conf-available/charset.conf
lrwxrwxrwx 1 root root 44 1 déc. 09:48 localized-error-pages.conf -> ../conf-available/localized-error-pages.conf
lrwxrwxrwx 1 root root 43 26 janv. 16:09 ocsinventory-reports.conf -> ../conf-available/ocsinventory-reports.conf
lrwxrwxrwx 1 root root 46 1 déc. 09:48 other-vhosts-access-log.conf -> ../conf-available/other-vhosts-access-log.conf
lrwxrwxrwx 1 root root 31 1 déc. 09:48 security.conf -> ../conf-available/security.conf
lrwxrwxrwx 1 root root 36 1 déc. 09:48 serve-cgi-bin.conf -> ../conf-available/serve-cgi-bin.conf
```

Figure 17 — Après a2enconf : ocsinventory-reports.conf est lié

7 Finalisation via le navigateur

Depuis la machine physique, ouvrir <http://192.168.40.132/ocsreports> et compléter l'assistant :

MySQL login	ocs
MySQL password	ocs
Base	ocsweb
Hôte / port	localhost · 3306

OCS-NG Inventory Installation

WARNING: You will not be able to build any deployment package with size greater than 2MB
You must raise both `post_max_size` and `upload_max_filesize` in your vhost configuration to increase this limit.

WARNING: If you change default database name (ocsweb) or user (ocs), don't forget to update the file 'z-ocsinventory-server.conf' in your Apache configuration directory

Var lib dir should be writable : /var/lib/ocsinventory-reports

MySQL login:	ocs
MySQL password:	...
Name of Database:	ocsweb
MySQL HostName:	localhost
MySQL Port :	3306

Figure 18 — Assistant d'installation : paramètres de connexion à la base

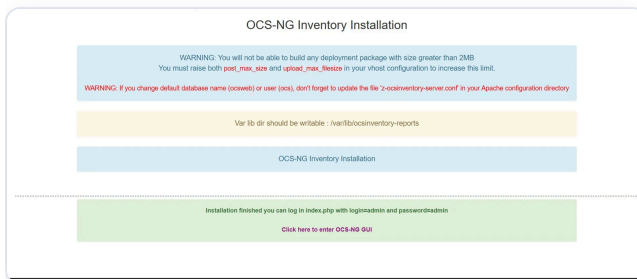


Figure 19 — Installation terminée

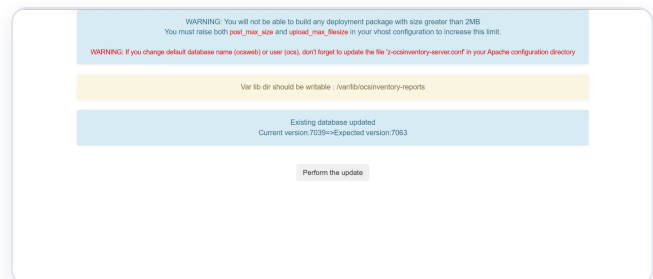


Figure 20 — Mise à jour du schéma de la base

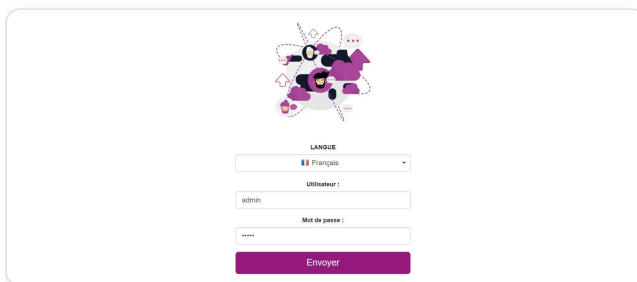


Figure 21 — Page de connexion (compte admin)

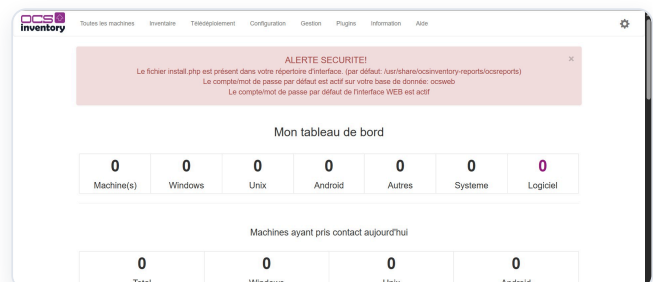


Figure 22 — Tableau de bord OCS Inventory NG

Sécurisation post-installation

L'alerte de sécurité du tableau de bord rappelle de supprimer le fichier `install.php` (`/usr/share/ocsinventory-reports/ocsreports/`) et de changer les mots de passe par défaut (interface Web et utilisateur de base de données).