

EMEM: A Content-Addressed, Verifiable Earth-Memory Protocol for AI Agents over Foundation-Model Embeddings

An Earth observation that survives an agent handoff.

emem gives a sampled or derived observation a reusable reference. The next agent recovers its value, location, acquisition time and processing recipe, then checks the evidence.

A compact citation keeps the observation traceable across agents and time. Encode in orbit, decode in AI's reasoning with emem.

Jaya Kumari · Avijeet Singh · Vortex AI · avijeet@vortex.ai · whitepaper doi.org/10.5281/zenodo.20706317 · study doi.org/10.5281/zenodo.20706893
Agentic AI for Earth Observation · BIFOLD and ESA Φ-lab · Berlin · Poster Session 1 · 19 Oct 2026 · emem.dev · github.com/Vortex-AI/emem (Apache-2.0)


From observation to the next agent

Observe	Locate	Record	Hand off	Resolve	Check	Continue
Satellite or sensor Keep the source scene.	Location · product · time Lookup identity	Canonical record + CID Batch attestation	Pass the reference MCP · REST · A2A	Retrieve the same record Recover its provenance.	Hash · binding · signature Re-read source if needed.	Reason with cited evidence Carry the reference onward.

1 What survives an agent handoff?

The same observation, carried through receiver checks.

Agent A cites a source read. A relay changes the evidence. Agent B acts on it or checks the reference.

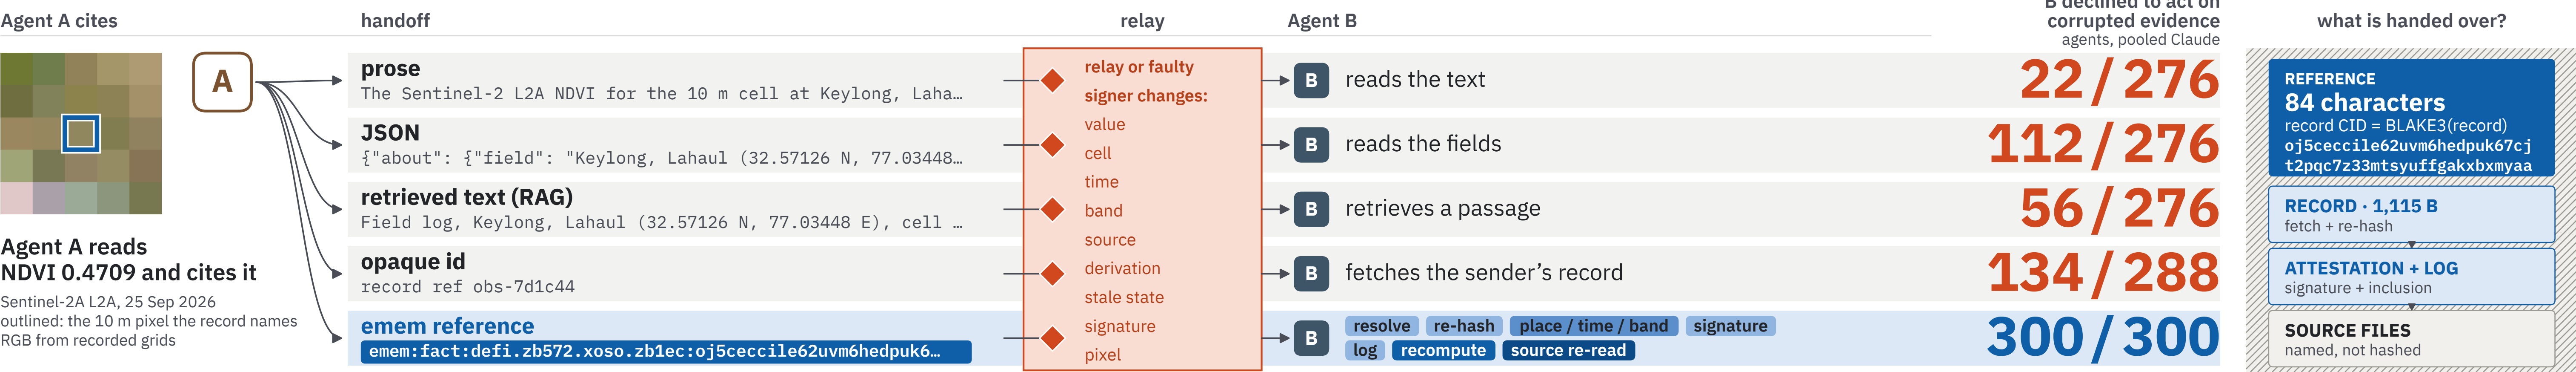


In the controlled handoff test, agents declined 300 of 300 corruptions carried by a checked reference with explicit instructions; with prose, 22 of 276 (they acted on 254).

Earth data stays on the encoding device in orbit; its reference is downlinked and enters the AI's reasoning (design; SAT-042 reference harness).

2 How does a value change between agents?

One NDVI, eight values

At Keylong on 25 Sep 2026, scene, date, pixel and arithmetic choices change the reported NDVI.

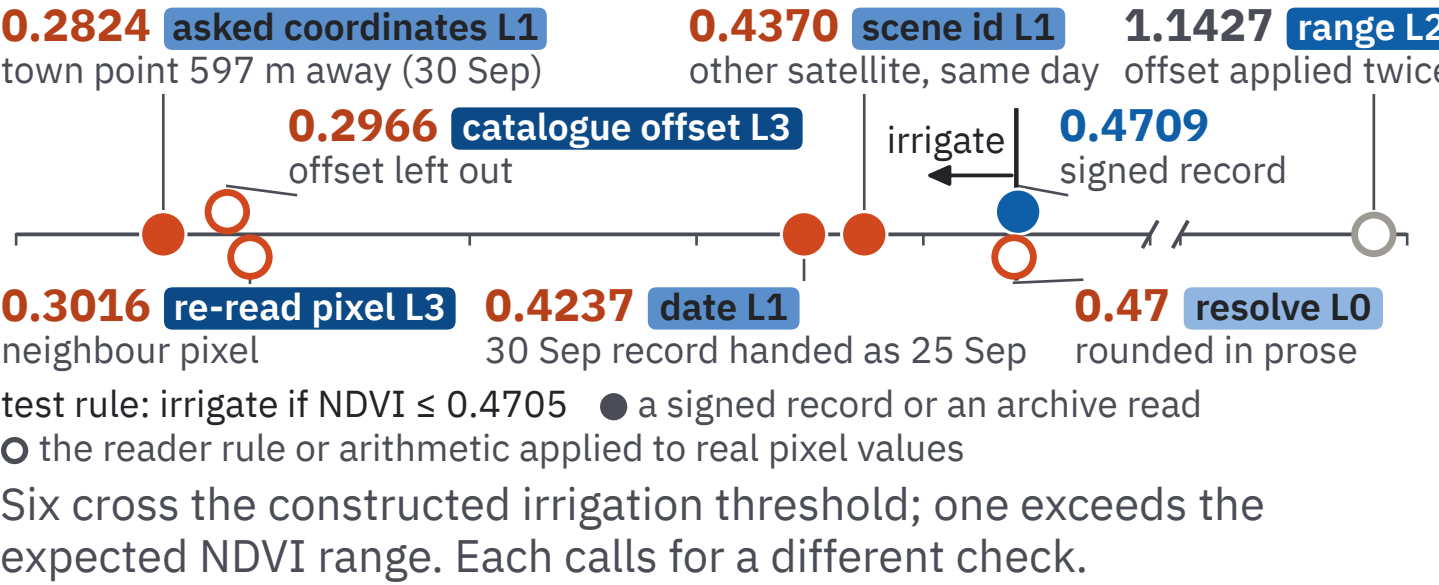

3 Where did the evidence change?

A changed value needs a cause

Between acquisitions, the surface, sensor, location or processing can change.

CONCEPTUAL CHANGE MODEL

$$\Delta Z = \Delta_{env} + \Delta_{sensor} + \Delta_{geo} + \Delta_{encoder} + \epsilon$$

Δz : change in readout. Environment · sensor · geolocation · encoder · residual. emem's change attribution links evidence to each term.


IMPLEMENTED · DRIFT-ANCHOR SCORE

$$d = |x - a| \quad \text{for finite } x, a \text{ and } 0 < \sigma < \infty$$

$$r = d / (3\sigma); s = r / (1 + r)$$

Invalid op: $s = 0$ if $d = 0$; otherwise $s = 1$.

x : output · a : anchor · σ : anchor uncertainty

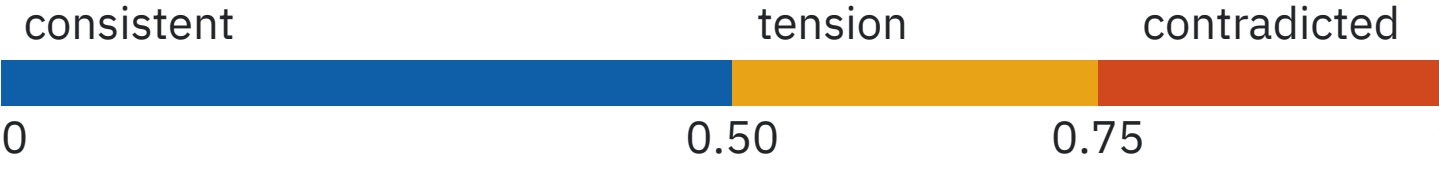

Tests pin 3σ at 0.50 and 9σ at 0.75.

Score boundaries: consistent < 0.50; tension < 0.75.

The implemented score measures disagreement with an anchor. SAT-042 applies it to a fixed reference in the execution harness.

7 What does a checked reference establish?

Know what was checked

CHECKABLE	NOT ESTABLISHED
Record bytes + content identity	Sensor accuracy
Declared cell, band, time	Entity identity
Attestation signature	Physical truth
Derived derivation	Decision correctness
Recorded history / as-of	Source quality: inherited

Run the corresponding checks; a content address alone is insufficient.

Record checks establish properties of the cited record. A source re-read adds evidence about the sampled pixel; sensor accuracy remains inherited.

FULL TRACE · 30 SEP 2026

Token · record · source pixel

accept if BLAKE3(b) = cid & cell(b) = cell(token) & NDVI(DN(b)) = value & COG(row, col) = DN(b) & Ed25519(o) & leaf in STH & STHgeo.qa prefix of STH

Without emem software, a 698-line script (Python stlib, blake3, cbor2, pynacl) checked 15 links (17 checks) in 17.9 s, all verified. Grey: what must still be trusted after each check.

1-3 content address 1,115 B hash to the fact_cid; one flipped mantissa bit gives mu5x2cks... · still trusted: nothing

4-5 cell binding hashed cell = token cell = the lat/long the derivation used · nothing

6-7 derivation scene id, DNs, catalogue and offset are inside the bytes; NDVI recomputed bit-for-bit · argument order read from emem's code

8-9 upstream the STAC item matches the scene; the COG pixel at col 909, row 9443 reads B08 3502, B04 1900 · STAC carries no checksum

10-11 server signature emem.dev's Ed25519 receipt over the request id, time, cells and returned fact_cids · shows what emem.dev served, not that the value is right

12-14 public log entry 2,457,078 is in the 2,556-entry log, consistent with the root geo.qa co-signed · geo.qa is also run by Vortex AI

15 signing key the signing key is published in did:web, JWKS and DNS TXT for emem.dev · Web PKI; DNS without DNSSEC

Links 1-5 and 12-14 fit in a 4,906-byte file that repeats 9 checks with networking disabled (unshare -rn); a 1-bit tamper, a wrong cell or a wrong key fails it.

THE CONTRIBUTION

Checkable observation handoff

An agent passes a reference to a specific physical observation; the receiver resolves it and checks the evidence.

Built with standard BLAKE3, Ed25519, CBOR and Merkle logs. STAC, openEO, PROV, C2PA, RAG and temporal storage provide complementary layers.

12 Use emem. Carry the evidence forward.

Measured separately: same record and value through 11 client paths; receipt signatures checked on 9 (30 Sep 2026).

ChatGPT · @emem plugin "Signed facts about real places"	Claude · Directory plugin / MCP "hand another agent a token it can check offline"	Dify · Marketplace plugin "Shared memory for AI agents. One address per fact, one signature you check."	GitHub MCP Registry · Server listing "Satellites for AI."	ClawHub · OpenClaw plugin listing "Shared, signed and content-addressed memory of the physical world..."
Enable emem; paste a token.	Resolve from chat or terminal.	Referent Lock / EUDR workflows	Install MCP server	Install the OpenClaw plugin.


MORE CLIENTS	PROTOCOLS	DEVELOPER	FRAMEWORK EXAMPLES	DISCOVERY / MIRRORS
Cursor · VS Code · Gemini CLI	MCP · A2A REST / OpenAPI	Python · TypeScript · Docker LangGraph memory · AutoGen	LangChain · LlamaIndex · AutoGen CrewAI · Mastra · Agno (see setup notes)	MCP Registry · MuleSoft Exchange · Glama · Smithery Context7 · Hugging Face (older mirror)

Implementation: emem 8e9b401. Measurements: 29 Sep to 1 Oct 2026. · The linked methods connect this poster's figures to their records, source data and reproducible checks. · Related work: Sigstore, RFC 9162, SCITT (RFC 9943), ARC (arXiv 2607.25066). · Sentinel-2 Products Specification (ESA) · Copernicus DEM GLO-30/90 · Hansen et al. 2013, GFC v1.13 · JRC GFC2020 V3/4, TMF · ESA CCI Biomass v7 · BLAKE3 · RFC 8032 · RFC 6962/9162 · STAC 1.1 · openEO 1.3 · W3C PROV-DM · C2PA 2.4 · MCP 2025-11-25 · A2A 1.0 · Perez et al., ICLR 2025 · Munir et al. 2026 (2604.24919) · Cemri et al. 2025, MAST (2503.13657) · Townshend et al. 1992 · GeoGuard (NASA-IMPACT) · Prithvi-EO-2.0 · TESSERA (2506.20380)

Agent A cites a satellite observation. What can agent B check without trusting A, A's model, or us?

emem makes raw satellite observations **addressable by place, band and time**, each a signed record named by the BLAKE3 hash of its bytes. The exact evidence A cites survives compaction, a change of model and a **handoff**; B re-hashes it, verifies the log entry and receipt offline, and traces it to the source pixel. Agents cannot write observations, and a changed, rounded or forged value no longer matches its name.

Trace (token) · record bytes · cell · pixel · receipt · log · key

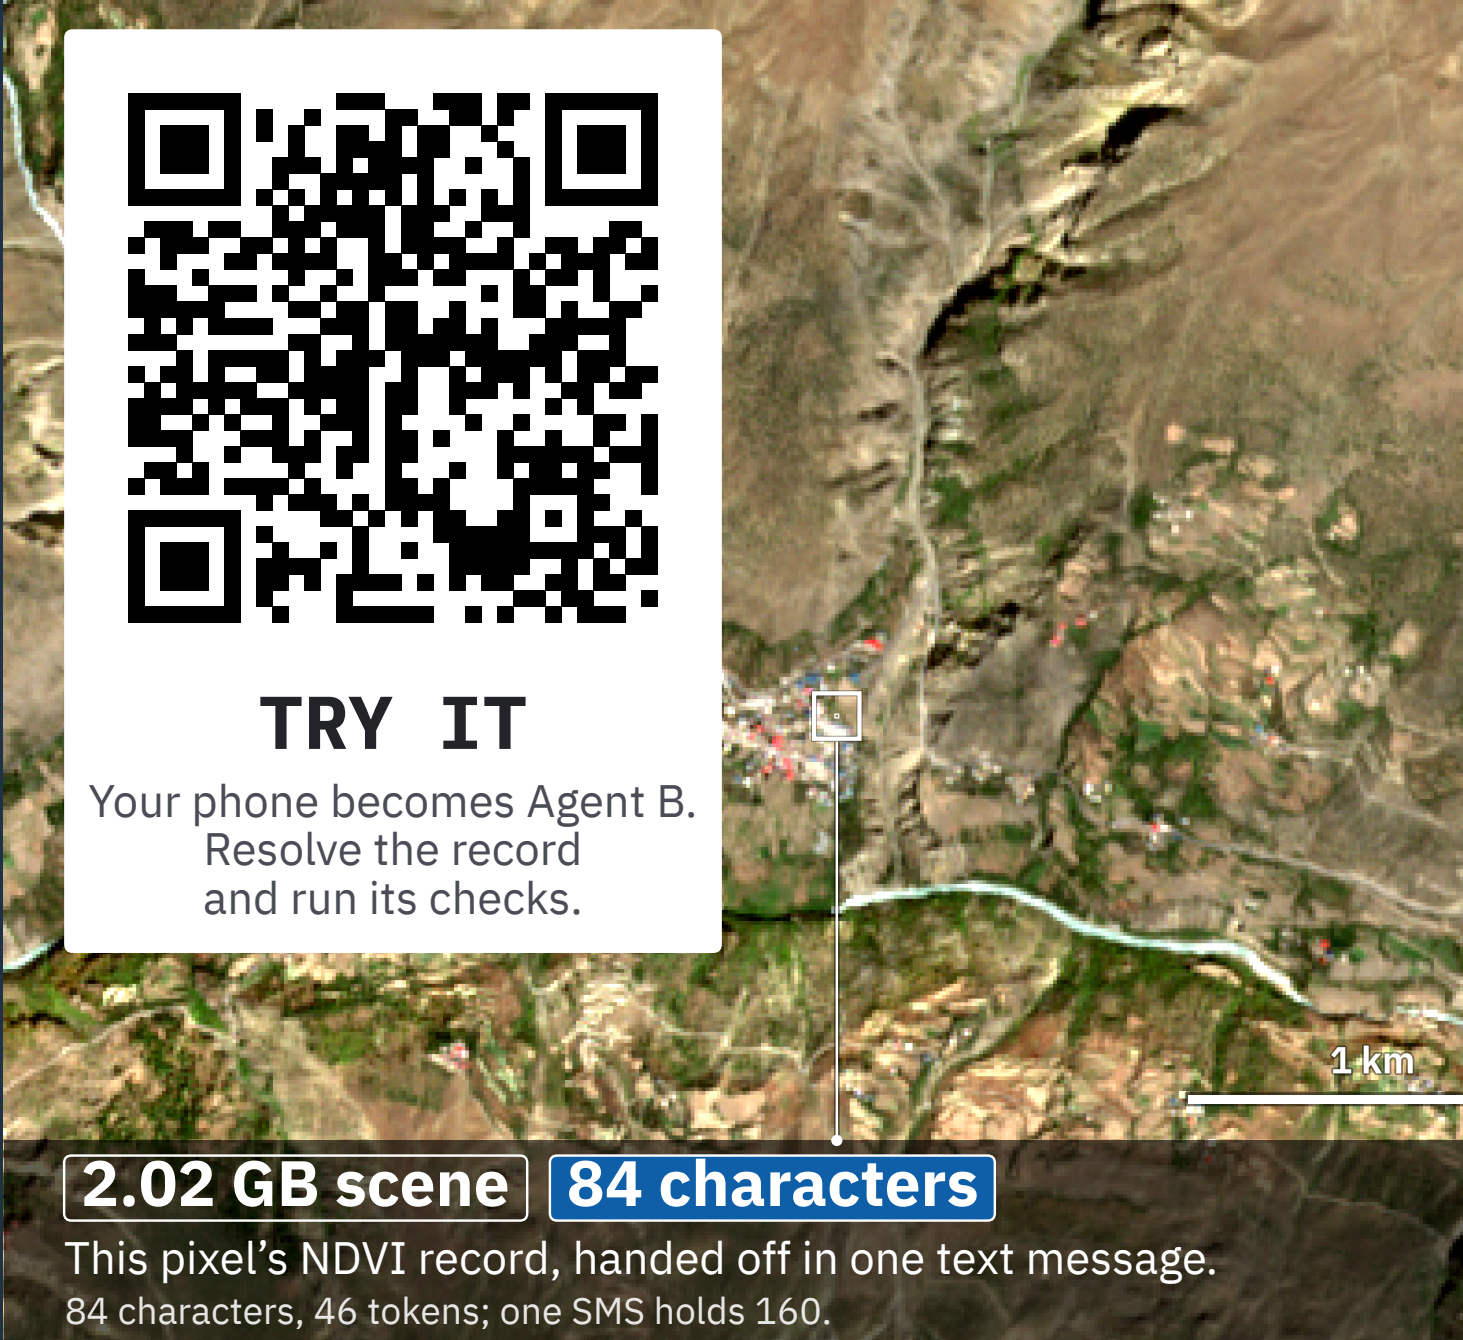

8 Can a later agent recover the earlier state?


Revisit the earlier evidence

$$C_t = TxAsOf(O^*, a, b, t)$$

$$\text{recall} = \max_{(t, \text{cid})} \{O \text{ in } C_t : t \leq t^*\}$$

Latest-as-of mode: take the versions known by signing time t , then the latest valid time $t \leq t^*$. No candidate gives an empty result; CID order breaks ties.

BENGALURU · SAME CELL AND BAND · 2026

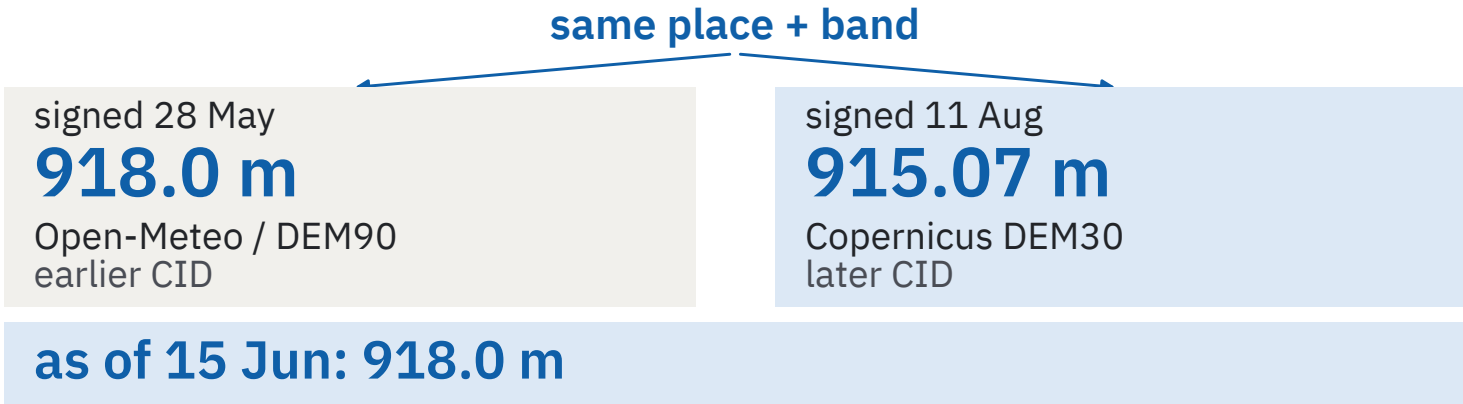

The next agent can recover the earlier citation.

The later 915.07 m reflects a provider change. The earlier citation still resolves to the earlier estimate.

9 What does the memory contain?

Observations + temporal edges

$$M = (O^*, E^*) \quad O = (a, b, t, v, u, p, s)$$

a : location cell · b : variable · t : valid time · v : value
 u : uncertainty · p : provenance, recipe, signing time
 s : attestation associated with the observation
Conceptual tuple: a batch attestation covers the fact address; a signed read receipt binds the response.

$$E = (\text{subject, predicate, object, } t_{\text{from}}, t_{\text{to}})$$

Append observations and supersedes / disagrees_with edges; keep earlier records.

Lookup = (a, b, t)
cid(record) = BLAKE3(CBOR _{canonical} (record))

Use it in an EO workflow

Compare dates · recall, diff

Assemble evidence · merge, trace

Retain conflicts · competing, evolve

Refresh inputs · ensure, valid

Compare vegetation observations, retain conflicting estimates and pass their references onward. Single-hop retrieval materialises the requested observation.

10 What else can an agent carry?

Beyond a single observation

The emem token family is how agents read Earth observation: one grammar for a place, a value, a raster, a time series or a device run.

data need	grammar, after emem:	what its id hashes
a place	cell: <cell164>	the quantised lat/long; no hash
one value	fact: <cell>: <cid>	BLAKE3(CBOR(fact)), 52 chars
nothing there	fact: · · kind absence	same; + BLAKE3(reason):[16]
an embedding	fact: · 128 / 1024 floats	same; attester_only
a derived value	fact: · · op, parents	same; pure ops re-runnable
a raster	raster: <a>: : <t>: <d>	fact d names BLAKE3(grid)
a raster in time	cube: <a>: : <t0> · <t1>: <d>	BLAKE3(CBOR([member d...]))
a raster set	rasteriset: <set>: <d>	BLAKE3(CBOR([d..., purpose]))
many facts, one id	bundle: <cid>	BLAKE3(p, cell band t cid):[16]
a file, one chunk	tree: <file>#row=i	BLAKE3(note):[16]; root inside
a reasoning stage	state: <cid>	BLAKE3(CBOR(state record))
a named object	entity: <cid>	BLAKE3(anchor):[16]; a label
a device run	trace: <cid>	BLAKE3(CBOR(signed trace))
an evidence chain	track. v1 note	link = BLAKE3(prev, ref):[16]

14 data needs; embedding and absence share the fact grammar. At emem 18adb67, names, sets and records hash differently. track.v1 is a note. Trace evidence here is a reference harness.

Eight facts resolve through one bundle; four state addresses re-hash. These object checks do not validate an agent's reasoning.

11 Satellite execution evidence

A signed trace binds the reported run

SAT-042 scripted pass · reference harness · 30 Sep 2026.

Enrol	Write, no trace	Capture the pass	Unbound fact	Bound batch	Score vs anchor	Rewrite one log
ENROLLED	REFUSED	SIGNED	REFUSED	ADMITTED	SCORED	REFUSED

8 trace layers, each log digest chained; seq 2 rewritten after signing; broken at seq 3

yscall · scheduler · memory · sensor bus · signal · energy · thermal · storage

seq 0 · seq 1 · seq 2 · seq 3 · seq 4 · seq 5 · seq 6 · seq 7

drift anchor 0.6402 ± 0.02 (1σ) 0.6431 (s 0.05) 0.5 0.75

scored after admission, not a gate 0.6512 (s 0.15) 0.2103 (s 0.88)

Reference harness, no spacecraft enrolled. The admission gate binds output value digests; band, cell and time are outside this check.

CONNECT



Setup · EO tasks
Reproduce