

EMEM: A Content-Addressed, Verifiable Earth-Memory Protocol

An Earth observation that survives an agent handoff.

emem gives a sampled or derived observation a reusable reference. The next agent recovers its value, location, acquisition time and processing recipe, then checks the evidence. Where no observation exists, emem signs an absence and its reason, not a zero.

A compact citation keeps the observation traceable across agents and time. Design goal: encode in orbit, decode in AI's reasoning with emem.

Jaya Kumari · Avijeet Singh · Vortex AI · avijeet@vortex.ai · emem.dev · github.com/Vortex-AI/emem (Apache-2.0)
Agentic AI for Earth Observation · BIFOLD and ESA Φ-lab · Berlin · Poster Session 1 · 19 Oct 2026



From observation to the next agent

Observe	Locate	Record	Hand off	Resolve	Check	Continue
Satellite or sensor Keep the source scene.	Location · product · time Lookup identity	Canonical record + CID Batch attestation	Pass the reference MCP · REST · A2A	Retrieve the same record Recover its provenance.	Hash · bind · sign · source Policy: refuse if one fails.	Reason with cited evidence Carry the reference onward.

1 Does agent B act on a corrupted handoff?

The same corruptions, five handoff conditions.

Agent A cites a satellite reading. A relay or a faulty signer changes the evidence. Agent B acts on it, declines it or uses the genuine record.

Agent A cites	handoff	relay	Agent B	B did not act on corrupted evidence agents, pooled Claude	declined	used the genuine record
 Agent A reads NDVI 0.4709 and cites it Sentinel-2A L2A, 25 Sep 2026 outlined: the 10 m pixel the record names RGB from recorded grids	prose The Sentinel-2 L2A NDVI for the 10 m cell at Keylong, Laha...	relay or faulty signer changes: - value - cell - time - band - source - derivation - stale state - signature - pixel	B reads the text	22 / 276	22	0
	JSON { "about": { "field": "Keylong, Lahaul (32.57126 N, 77.03448...		B reads the fields	112 / 276	106	6
	retrieved text (RAG) Field log, Keylong, Lahaul (32.57126 N, 77.03448 E), cell ...		B retrieves a passage	56 / 276	56	0
	opaque id record ref obs-7d1c44		B fetches the sender's record	134 / 288	88	46
	emem reference + verifier emem:fact:defi.zb572.xoso.zb1ec:oj5ceccile62uvm6hedpuk6...		resolve re-hash place / time / band signature log recompute source re-read	300 / 300	264	36


Across the 23 shared items, agents with an emem reference did not act on 276 of 276 corrupted handoffs (240 declined, 36 used the genuine record); with an opaque id, 122 of 276; in prose, 22 of 276.

By design, Earth data stays on the encoding device in orbit; its signed record and reference are downlinked, so no source re-read (SAT-042 harness, not flown).

2 How does a value change between agents?

One NDVI, eight values

We varied one Keylong NDVI by scene, date, place, pixel and arithmetic.

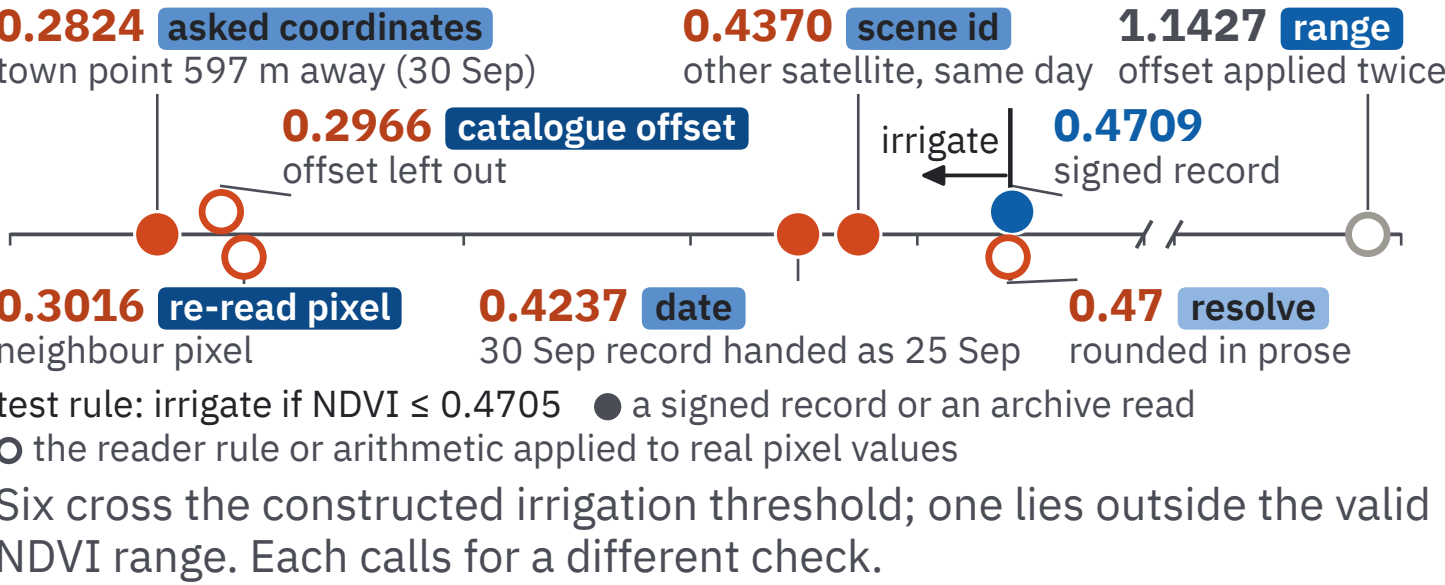

3 Why can a value change?

A changed value needs a cause

Between acquisitions, the surface, sensor, location or processing can change.

CONCEPTUAL CHANGE MODEL

$$\Delta Z = \Delta_{env} + \Delta_{sensor} + \Delta_{geo} + \Delta_{encoder} + \epsilon$$

Δz : change in readout. The terms list possible causes (environment, sensor, geolocation, encoder, residual), not measured shares.


IMPLEMENTED HEURISTIC · DRIFT-ANCHOR SCORE

$$d = |x - a| \quad \text{for finite } x, a \text{ and } 0 < \sigma < \infty$$

$$r = d / (3\sigma); s = r / (1 + r)$$

Invald σ : $s = 0$ if $d = 0$; otherwise $s = 1$ (fail-closed).

x : output · a : anchor · σ : anchor uncertainty

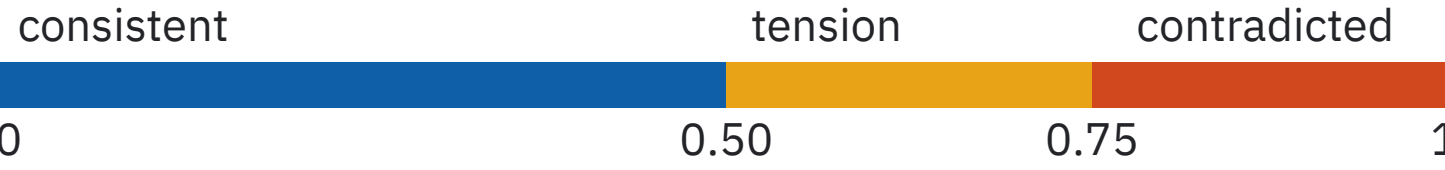

Tests pin 3σ at 0.50 and 9σ at 0.75.

Score boundaries: consistent < 0.50; tension < 0.75.

This score is an uncalibrated heuristic: it measures disagreement with one anchor, not a cause. SAT-042 uses it in the execution harness.

7 What does a checked reference establish?

The record, not physical truth

CHECKABLE	NOT ESTABLISHED
Record bytes + content identity	Sensor accuracy
Declared cell, band, time	Entity identity
Attestation signature	Physical truth
Declared derivation	Decision correctness
Recorded history / as-of	Source quality: inherited

Run the corresponding checks; a content address alone is insufficient.

Record checks establish properties of the cited record. A source re-read adds evidence about the sampled pixel; sensor accuracy remains inherited.

FULL TRACE · 30 SEP 2026

Token **record** **source pixel**

accept if $\text{BLAKE3}(b) = \text{cid} \ \& \ \text{cell}(b) = \text{cell}(\text{token}) \ \& \ \text{NDVI}(\text{DN}(b)) = \text{value} \ \& \ \text{COG}(\text{row}, \text{col}) = \text{DN}(b) \ \& \ \text{Ed25519}(a) \ \& \ \text{leaf} \ \text{in} \ \text{STH} \ \& \ \text{STH}_{\text{geo}, \text{qa}} \ \text{prefix} \ \text{of} \ \text{STH}$

Without emem software, a 698-line script (Python stdlib, blake3, cbor2, pynacl) checked 15 links (17 checks) in 17.9 s, all verified. Grey: what must still be trusted after each check.

1-3 content address 1,115 B hash to the fact_cid; one flipped mantissa bit gives mu5x2c3ks... · still trusted: BLAKE3 and the verifier's code

4-5 cell binding hashed cell = token cell = the lat/ing the derivation used · the cell rule

6-7 derivation scene id, DNs, catalogue and offset are inside the bytes; NDVI recomputed bit-for-bit · argument order read from emem's code

8-9 upstream the STAC item matches the scene; the COG pixel at col 909r, row 9443 reads B08 3502, B04 1900 · this STAC item carries no checksum

10-11 server signature emem.dev's Ed25519 receipt over the request id, time, cells and returned fact_cids · shows what emem.dev served, not that the value is right

12-14 public log entry 2,457,078 is in the 2,556,451-entry log, consistent with the signed tree head (STH) geo.qa co-signed · geo.qa is also run by Vortex AI

15 signing key the signing key is published in did:web, JWKS and DNS TXT for emem.dev · Web PKI, DNS without DNSSEC

Links 1-5 and 12-14 fit in a 4,906-byte file that repeats 9 checks with networking disabled (unshare -rn); a 1-bit tamper, a wrong cell or a wrong key fails it.


THE CONTRIBUTION
Checkable observation handoff
EO evidence that travels between agents, checked by the receiver down to the source pixel.
Content hashes (IPFS), signed logs (SCITT) and provenance (PROV) already exist. emem adds typed EO references and a source re-read, which caught a wrong pixel that hashing, signatures, logs and recomputation had passed (panel 5).

4 What exactly is handed over?

A compact reference to an exact record

The receiver uses an 84-character reference to fetch the record and its evidence.

INSPECT THE RECORD The 1,115 bytes behind the main example, decoded.

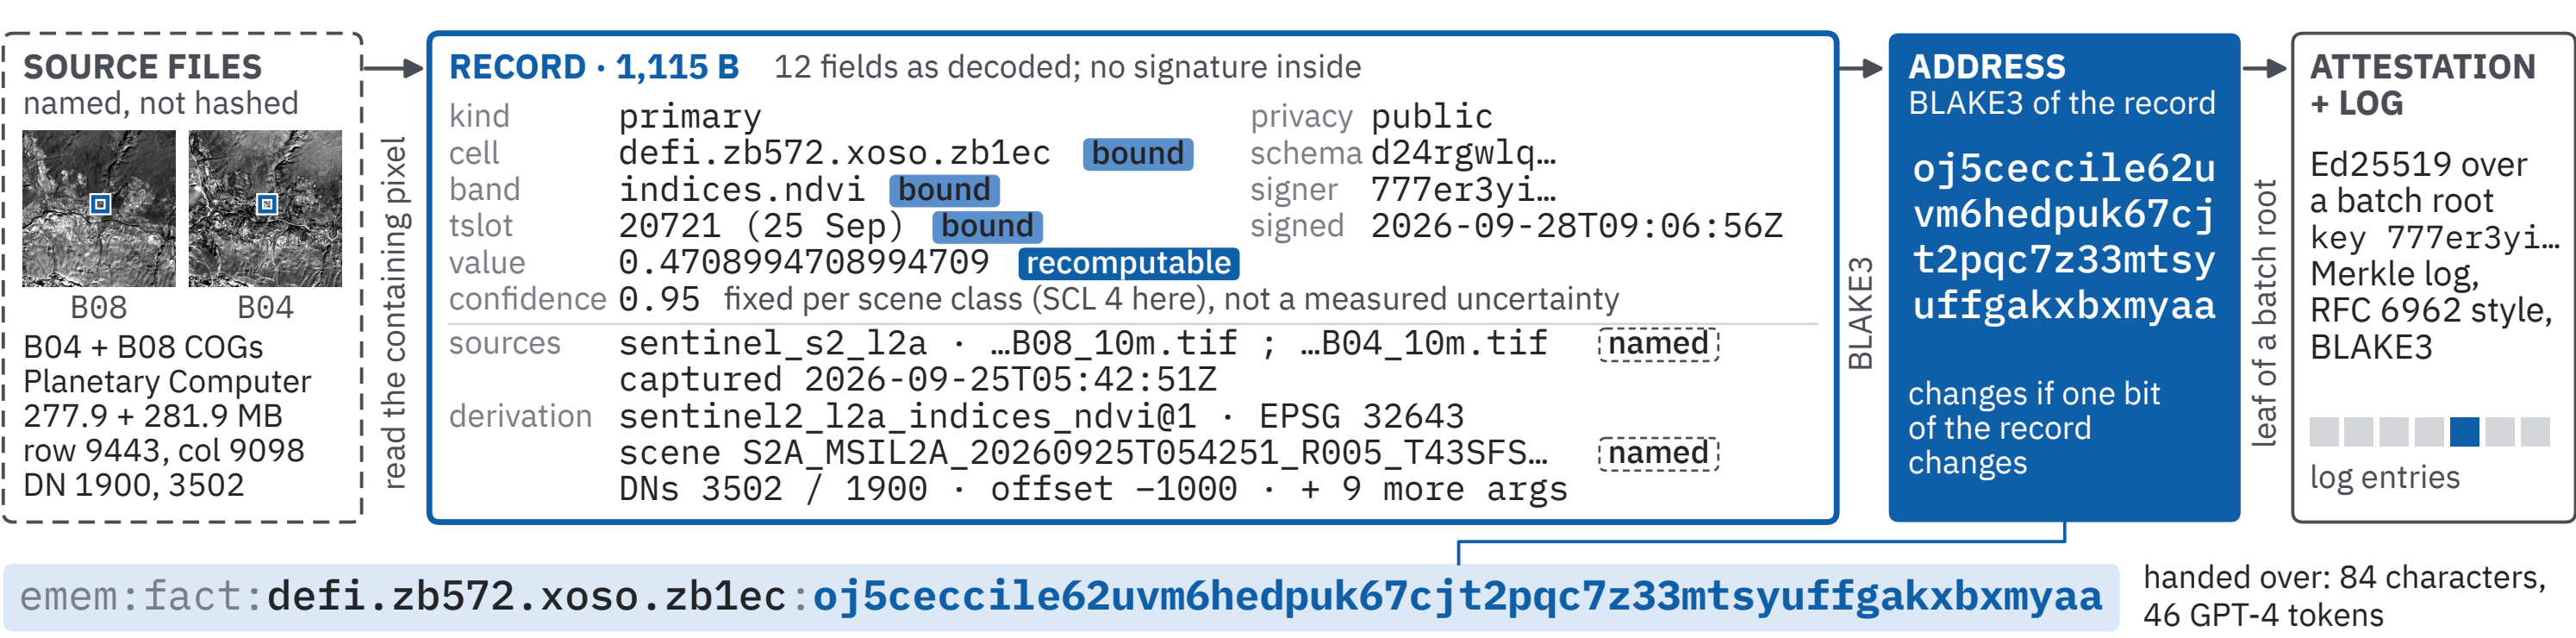


BLAKE3 identifies the 1,115-byte record. Its fields name the source files, sampled point and derivation; a batch signature covers the record address. Source-file hashes are absent from this record.

THE MEMORY, AS CODED · fact.rs, cbor.rs, geo.rs, recall.rs, attest.rs, translog.rs, emem-attest

```
fact {
  name f = (kind, cell, band, tslot, value, unit, confidence, sources, derivation){fn key, args};
  privacy, schema_cid, signer, signed_at
}
b = CBOR(f), declaration order, NaN as f9 7e00, -0 as +0; fact_cid = base32(BLAKE3-256(b)); token emem:fact:<cell>:<fact_cid>
cell lat_q = round((lat+90)/180*(2^1-1)), lng_q = round((lng+180)/360*(2^2-1)); pitch 8.583e-5° = 9.52 × 8.06 m here
recall tslot = floor(unix / 86 400) (2072; = 25 Sep 2026); key (cell, band, tslot); as of t: argmax (signed_at, cid) over signed_at ≤ t
sign R = Merkle(sorted fact_cids); attestation = Ed25519(PreimageV1("attestation"))(R, registry, schema); a fact carries no signature
log leaf = BLAKE3(0x00 || BLAKE3(CBOR(attestation))), node = BLAKE3(0x01 || 1 || ); RFC 6962 shape
receipt sig = Ed25519(BLAKE3("emem.preimage.v10")) || request_id || served_at || primitive || cells || fact_cids || merkle))
```

5 A valid record can preserve a wrong source read

$$\text{NDVI} = (\text{DN}_8 - \text{DN}_4) / (\text{DN}_8 + \text{DN}_4 + 2\sigma), \sigma = -1000 \text{ (product offset)}$$

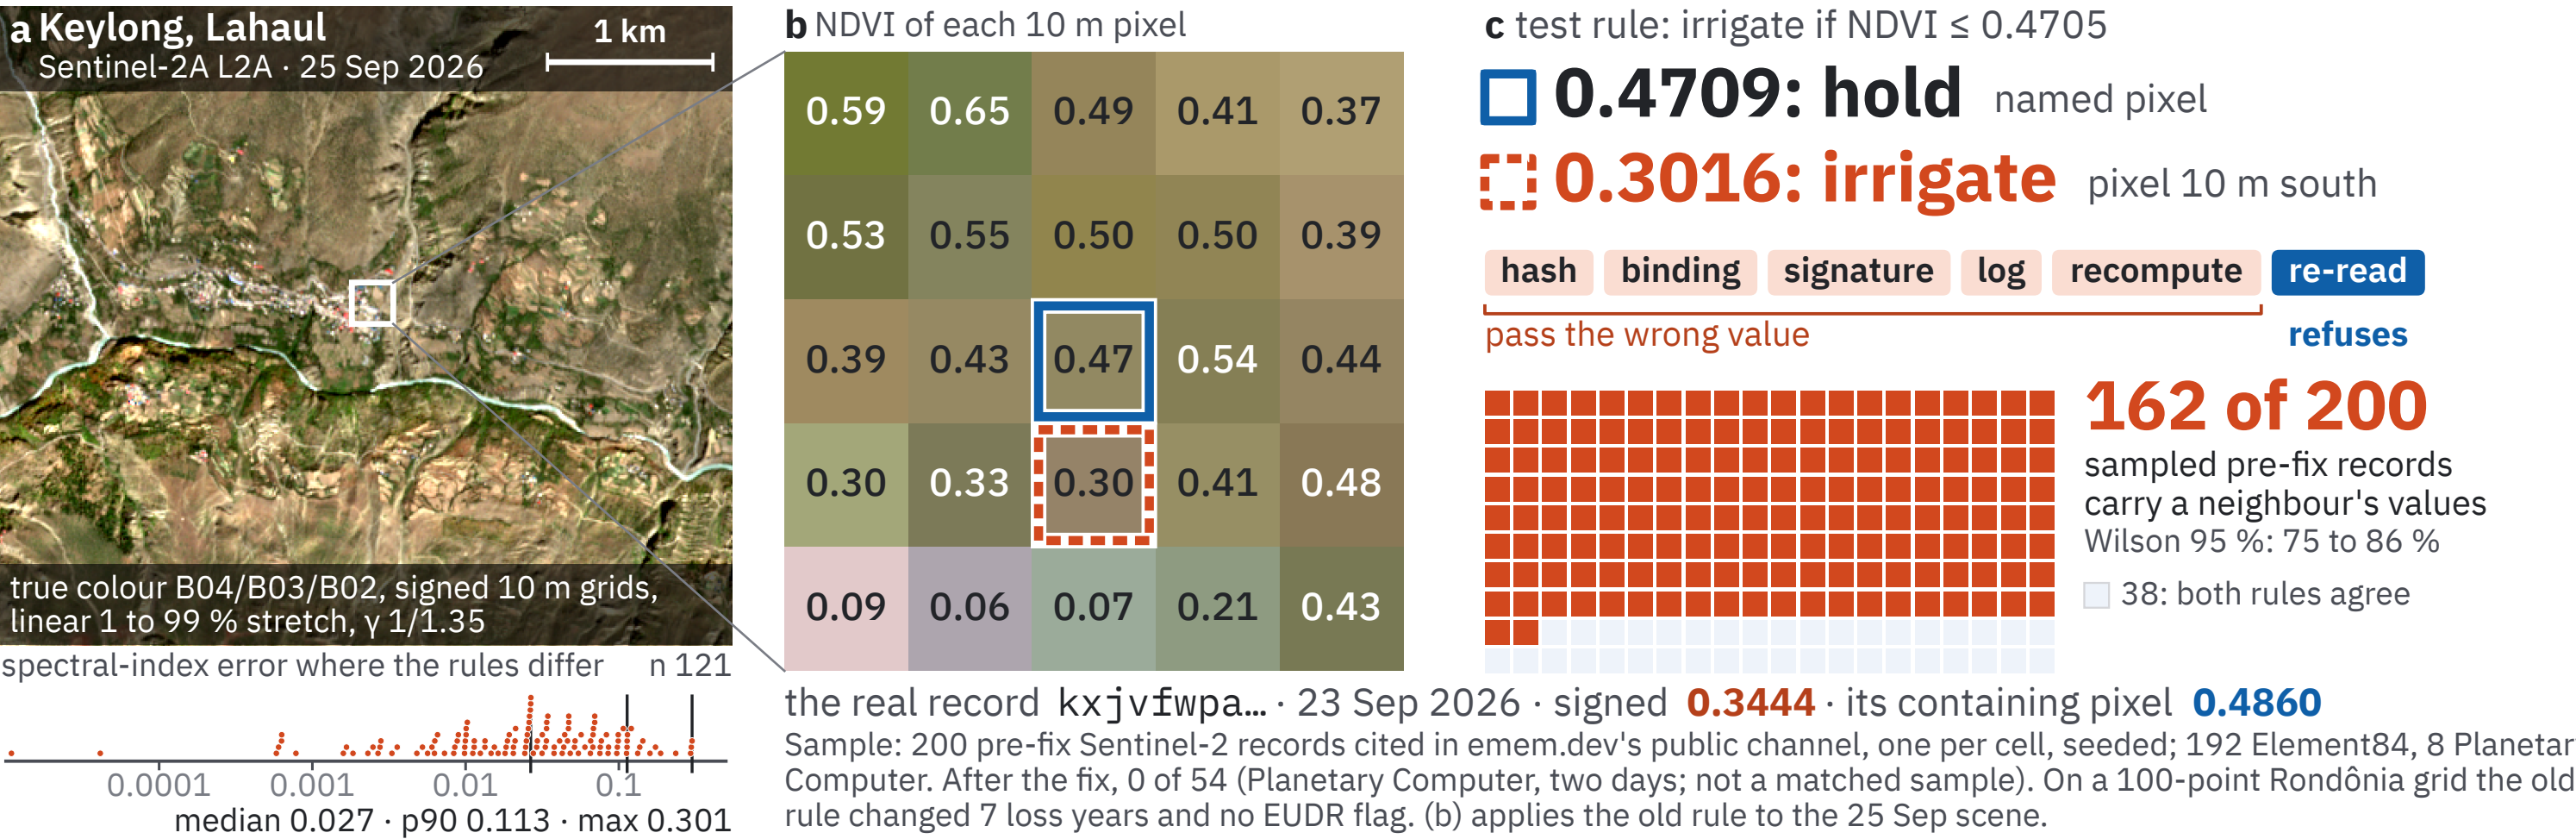

6 Which changes can the receiver detect?

Checks can continue back to the source

agent bars: three Claude models pooled, 1 Oct 2026	prose	JSON	RAG	opaque id	emem checks	first check that refuses
B acted on corrupted evidence	unaffected	refused	not applicable			
M2 seen in production	the only check that stops it	flips the decision				
G0	nothing altered: no check refuses it					
value M1	stated value changed in its last bit	0/12	0/12	0/12	3/12	
M2	stated value rounded to "0.47"	6/12	6/12	1/12	12/12	
M8	value 0.45, re-encoded and re-hashed	0/12	6/12	0/12	6/12	
cell M4	record cited for another cell	5/12	12/12	6/12	6/12	
M9	cell changed inside the record, re-hashed	5/12	1/12	6/12	6/12	
time M10	tslot changed to look current, re-hashed	0/12	6/12	6/12	6/12	
band M6	a record for another band handed over	0/12	12/12	6/12	10/12	
source M11	source scene id changed, re-hashed	0/12	0/12	0/12	0/12	
derivation M12	offset changed, value recomputed, re-hashed	0/12	1/12	0/12	4/12	
M14	value (0.46) disagrees with the signed DNs	0/12	6/12	0/12	6/12	
stale / current M5	an older record handed over as current	0/12	11/12	6/12	11/12	
M6	a second signed version shown only to B	0/12	6/12	6/12	6/12	
signature / id M3	last bit changed inside the served bytes	0/12	0/12	0/12	0/12	
M7	token miscopied by one character	n/a	n/a	n/a	12/12	
M13	value 0.45 under the forger's own key	0/12	6/12	0/12	6/12	
source pixel M15	DNs read from the pixel 10 m south	0/12	0/12	0/12	0/12	
entity M17	same record; A meant another entity (out of scope)					none

B did not act on corrupted evidence
deterministic receiver, same corruptions
resolve **hash** **binding** **signature** **log** **recompute** **re-read** · D to I are cumulative: each adds one check
Bars: B did not act on it (declined, or used the genuine record), n 12 (6 Haiku 4.5, 5 Sonnet 5.5, 1 Opus 5.5 runs); squares: deterministic ceiling. Totals pool 23 to 25 items, 1 Oct 20
Three further signer errors (offset, same-day scene, unit) pass checks D to I; metadata checks catch them.

Deeper checks expose different corruptions. Agents with an emem reference decided correctly on 71 of 72 genuine controls and declined one.

Each agent bar is 12 runs of one item; totals pool 23 items per condition (24 for the opaque id, 25 for emem). JSON and an opaque id caught some changes from their fields. On the live pre-fix record, agents acted 4 of 4 times uninstructed, 2 of 4 with resolve-and-bind instructions and 0 of 4 with a source re-read.

8 Can a later agent recover the earlier state?


Revisit the earlier evidence

$$C_t = \text{TxAsOf}(O^*, a, b, t)$$

$$\text{recall} = \max_{(t, \text{cid})} \{O \text{ in } C_t : t \leq t^*\}$$

Latest-as-of mode: take the versions signed by τ (signed_at, the signer's clock), then the latest valid time $\leq t^*$. If no candidate exists, recall returns an empty result; CID order breaks ties.

BENGALURU · SAME CELL AND BAND · 2026

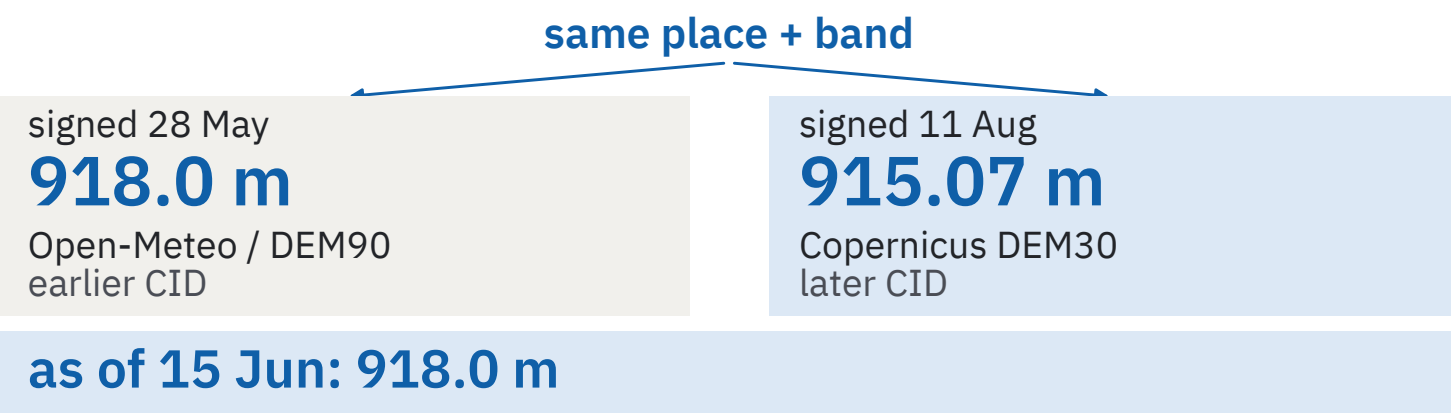

The next agent can recover the earlier citation.

The later 915.07 m reflects a provider change.

9 What does the memory contain?

Observations + temporal edges

$$M = (O^*, E^*) \quad O = (a, b, t, v, u, p, s)$$

a : location cell · b : variable · t : valid time · v : value
 u : uncertainty, if recorded · p : provenance, recipe, signed_at
 s : attestation associated with the observation

Conceptual tuple: a batch attestation covers the fact address; a signed read receipt binds the response.

$$E = (\text{subject}, \text{predicate}, \text{object}, t_{\text{from}}, t_{\text{to}})$$

Append observations and supersedes / disagrees_with edges; keep earlier records.

Lookup = (a, b, t); a cid names a record, not an object
 $\text{cid}(\text{record}) = \text{BLAKE3}(\text{CBOR}(\text{record}))$

Use it in an EO workflow

Compare dates · recall, diff

Assemble evidence · merge, trace

Retain conflicts · competing, evolve

Refresh inputs · ensure, valid

Compare vegetation observations, keep conflicting estimates and pass their references on. A request reuses stored records and fetches and signs missing ones from the archive.

10 What else can an agent carry?

Beyond a single observation

In emem, the token family is how agents read Earth observation: one grammar for a place, a value, a raster, a time series or a device run.

data need	grammar, after emem:	what its id hashes
a place	cell: <cell164>	the quantised lat/ing; no hash
one value	fact: <cell>: <cid>	BLAKE3(CBOR(fact)), 52 chars
nothing there	fact: · kind absence	same; BLAKE3(reason)[:16]
an embedding	fact: · 128 / 1024 floats	same; not re-runnable
a derived value	fact: · op, parents	same; pure ops re-runnable
a raster	raster: <a>: : <t>: <d>	fact d names BLAKE3(grid)
a raster in time	cube: <a>: : <t0..t1>: <d>	BLAKE3(CBOR(fact)), 52 chars
a raster set	raster: <set>: <d>	BLAKE3(CBOR([d..., purpose]))
many facts, one id	bundle: <cid>	BLAKE3(p, cell band t cid)[:16]
a file, one chunk	tree: <file>: <row>: i	BLAKE3(note)[:16]; root inside
a reasoning stage	state: <cid>	BLAKE3(CBOR(state record))
a named object	entity: <cid>	BLAKE3(anchor)[:16]; a label
a device run	trace: <cid>	BLAKE3(CBOR(signed trace))
an evidence chain	track: v1 note	link = BLAKE3(prev, ref)[:16]

14 data needs; embedding and absence share the fact grammar.

Names, sets and records hash differently.

Grey: encoders retired; device runs in a reference harness.

One bundle resolves to eight facts; four reasoning-state addresses re-hash. Neither check validates an agent's reasoning.

11 Satellite execution evidence

A signed trace binds the reported run

SAT-042 scripted pass · reference harness · 30 Sep 2026.

Enrol	Write, no trace	Capture the pass	Unbound fact	Bound batch	Score vs anchor	Rewrite one log
ENROLLED	REFUSED	SIGNED	REFUSED	ADMITTED	SCORED	REFUSED

8 trace layers, each log digest chained; seq 2 rewritten after signing; broken at seq 3
syscall · scheduler · memory sensor bus · signal · energy · thermal · storage
seq 0 · seq 1 · seq 2 · seq 3 · seq 4 · seq 5 · seq 6 · seq 7

drift anchor
0.6402 ± 0.02 (1 σ)
scored after admission, not a gate
0.6431 (s 0.05)
0.5
0.75

Reference harness, no spacecraft enrolled. The trace shows which key signed the run and that no logged segment changed; it does not show which code ran on which inputs. The gate binds output digests, not band, cell or time.

12 Use emem. Carry the evidence forward.

ChatGPT · @emem plugin "Signed facts about real places" Enable emem; paste a token.	Claude · Directory plugin / MCP "hand another agent a token it can check offline" Resolve from chat or terminal.	Dify · Marketplace plugin "Shared memory for AI agents. One address per fact, one signature you check." Workflow templates, including EUDR	GitHub MCP Registry · Server listing "Satellites for AI." Install MCP server	ClawHub · OpenClaw plugin listing "Shared, signed and content-addressed memory of the physical world..." Install the OpenClaw plugin.	CONNECT
MORE CLIENTS Cursor · VS Code · Gemini CLI	PROTOCOLS MCP · A2A REST / OpenAPI	DEVELOPER Python · TypeScript · Docker LangGraph memory · GitHub source	FRAMEWORK EXAMPLES LangChain · LlamaIndex · AutoGen CrewAI · Mastra · Agno (see setup notes)	DISCOVERY / MIRRORS MCP Registry · MuleSoft Exchange · Glama · Smithery Context7 · Hugging Face (older mirror)	Setup · EO tasks Reproduce