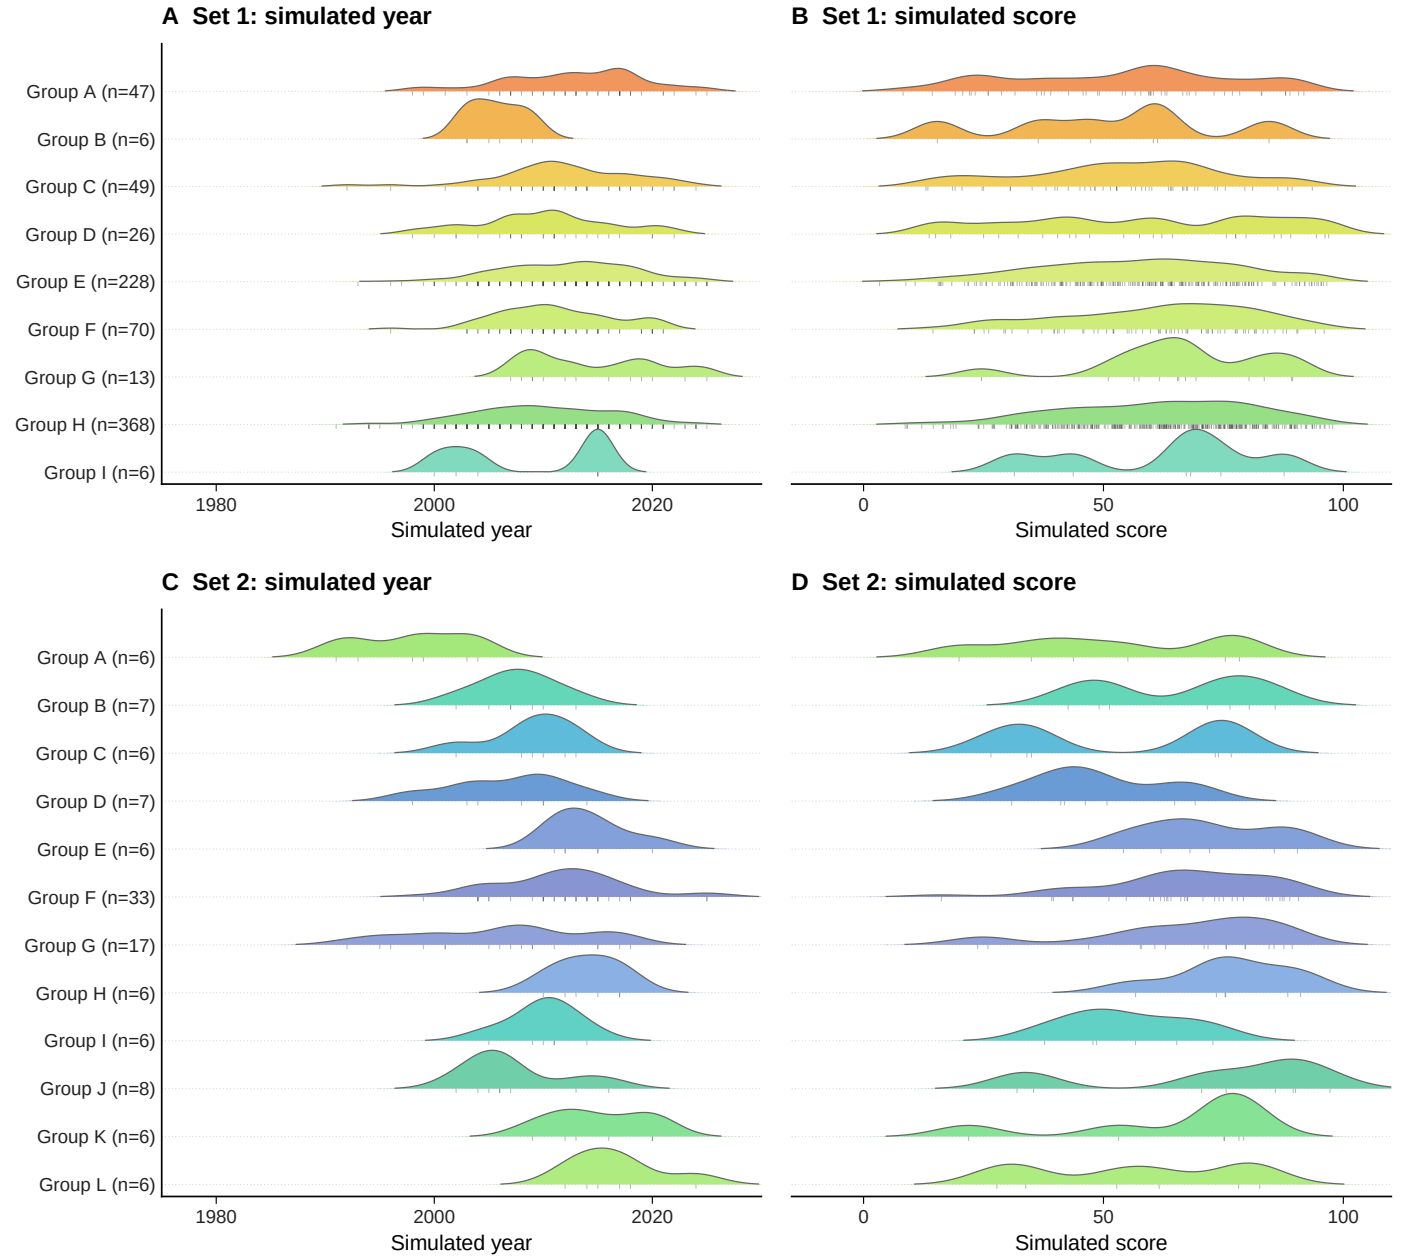



Four independent simulated datasets. Counts are actual generated observations; the source generator enforces n>=6.
Gaussian KDE uses one pooled−data bandwidth per panel and one common peak scaling. Rugs belong to each group; scores are not JIF percentiles.