


EXPERIMENT NO.: 18

TITLE: Setting Up a Basic CI/CD Pipeline Using Jenkins and Docker

AIM: To set up a basic CI/CD pipeline using Jenkins and Docker to automatically build, test, and deploy a containerized application whenever code changes are committed.

OUTPUT:

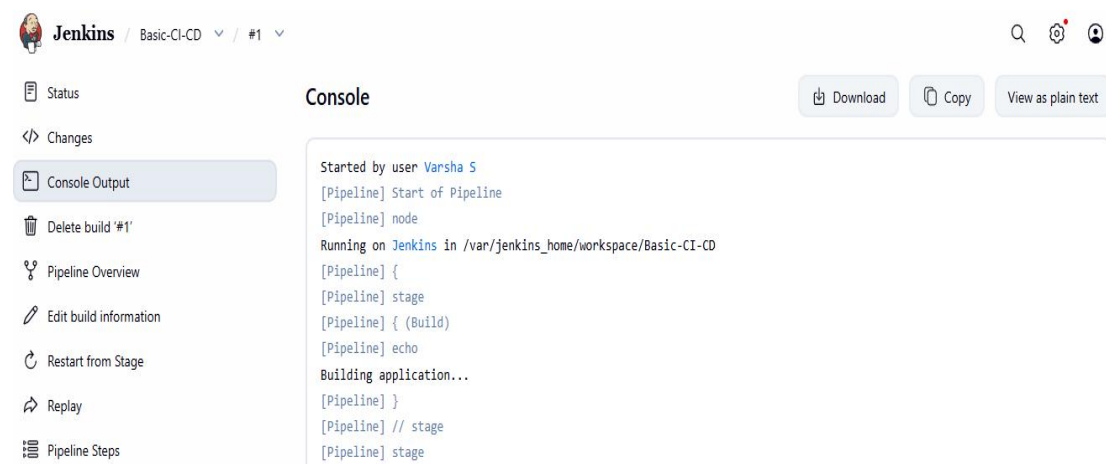

The screenshot shows the Jenkins web interface for a pipeline named 'Basic-CI-CD' at build #1. The left sidebar contains navigation links: Status, Changes, Console Output (selected), Delete build '#1', Pipeline Overview, Edit build information, Restart from Stage, Replay, and Pipeline Steps. The main console area displays the following output:

```
Started by user Varsha S
[Pipeline] Start of Pipeline
[Pipeline] node
Running on Jenkins in /var/jenkins_home/workspace/Basic-CI-CD
[Pipeline] {
[Pipeline] stage
[Pipeline] { (Build)
[Pipeline] echo
Building application...
[Pipeline] }
[Pipeline] // stage
[Pipeline] stage
```

At the top right of the console area, there are buttons for 'Download', 'Copy', and 'View as plain text'.

RESULT: A basic CI/CD pipeline was successfully configured using Jenkins and Docker. The pipeline automated the application build, testing, Docker image creation, and deployment process.