


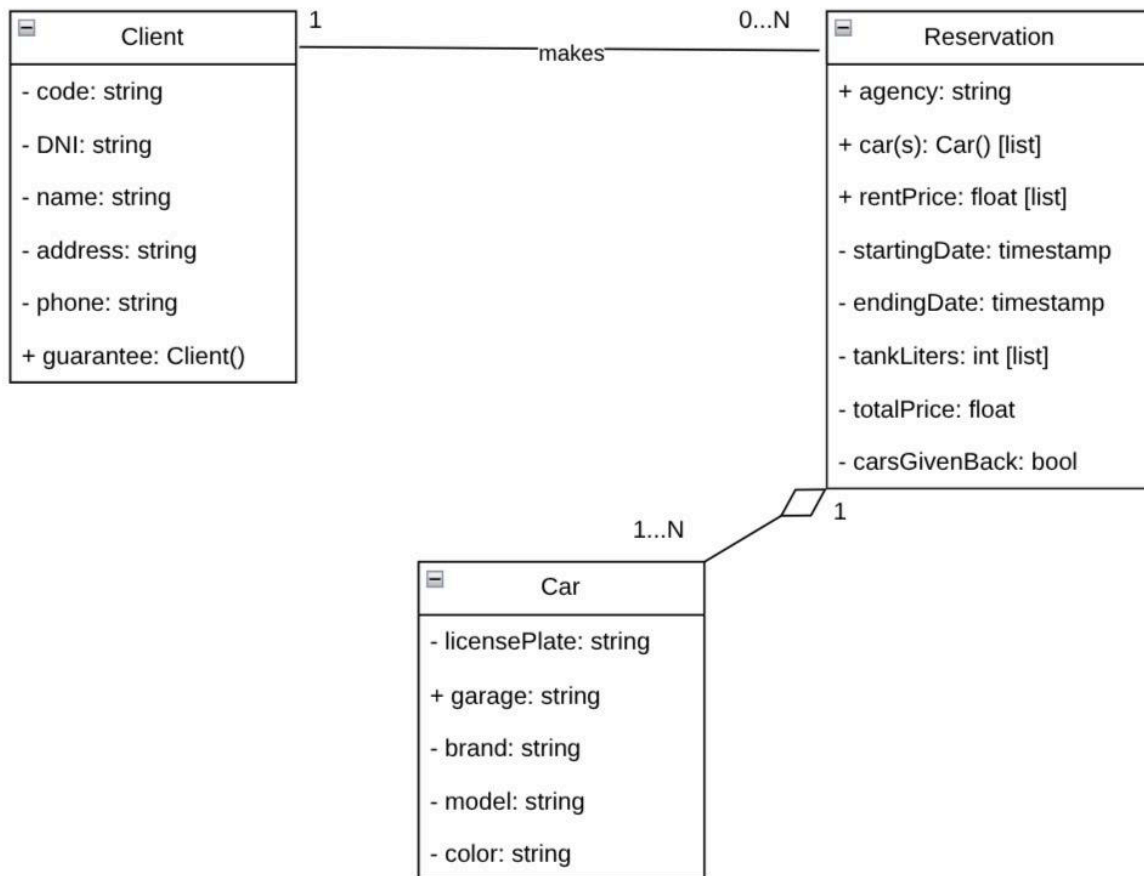

This is our diagram for the car reservation problem, we made only 3 classes because other objects that could be classes like garage and the agency would only have one attribute, like the identifier, so instead we passed these as attributes for the Car and Reservation classes respectively, also, we had attributes in the Client and Reservation classes that were instances of other classes, this is not commonly done this way, and instead, we should have added a relationship between the classes, with a reflective relationship for the Client class for the guarantee attribute. We made the multiplicity between Client and Reservation 1 to 0...N because a client can have many reservations but they would not stop being a client when all are done, and 1 to 1...N between the Reservation and Car classes because a Reservation would need at least one car to make sense, and a reservation can include many cars, to account for this, the Reservation car(s), rentPrice and tankLiters are lists