

Tutorial 1: Student Feedback Application


1. Scenario

The objective of this project is to develop a simple web application that enables students to submit their feedback and view all submitted responses dynamically.

The application implements the following requirements:

- Built using React.js functional components.
- Contains a FeedbackForm to collect user feedback (Student Name, Email ID, Contact No., and Feedback Message).
- Uses a controlled form to capture user input.
- Contains a FeedbackList to display the submitted feedback.
- Utilizes React state to store and manage the feedback entries.
- After submission, the form fields are cleared, and the feedback list updates dynamically to show the latest entry without requiring a page reload.

2. VS Code Project Structure

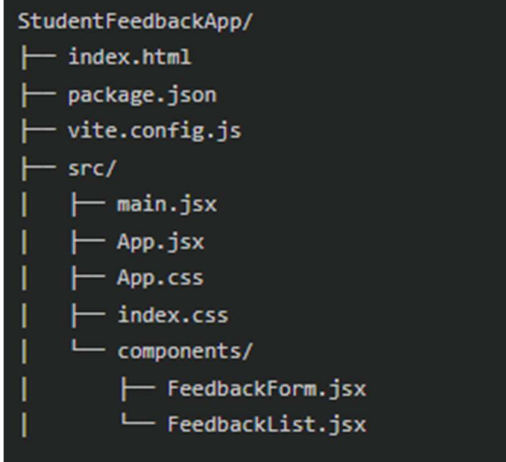

3. Component Code

src/components/FeedbackForm.jsx

```
import React, { useState } from 'react';

const FeedbackForm = ({ onAddFeedback }) => {

  const [formData, setFormData] = useState({

    name: "",

    email: "",

    contactNo: "",

    message: ""

  });

  const handleChange = (e) => {
```

```
const { name, value } = e.target;

setFormData(prev => ({ ...prev, [name]: value }));

};

const handleSubmit = (e) => {

  e.preventDefault();

  onAddFeedback({ ...formData, id: Date.now() });

  setFormData({ name: "", email: "", contactNo: "", message: "" });

};

return (

  <div className="form-card">

    <h2>We value your feedback</h2>

    <form onSubmit={handleSubmit} className="feedback-form">

      <div className="form-group">

        <label htmlFor="name">Student Name</label>

        <input

          type="text"

          id="name"

          name="name"

          value={formData.name}

          onChange={handleChange}

          required

          placeholder="John Doe"

        />

      </div>

      <div className="form-group">

        <label htmlFor="email">Email ID</label>

        <input

          type="email"

          id="email"

          name="email"

          value={formData.email}

          onChange={handleChange}

        />

      </div>

    </form>

  </div>

);
```

```
        required
        placeholder="john@example.com"
    />
</div>
<div className="form-group">
    <label htmlFor="contactNo">Contact No.</label>
    <input
        type="tel"
        id="contactNo"
        name="contactNo"
        value={formData.contactNo}
        onChange={handleChange}
        required
        placeholder="+1 234 567 890"
    />
</div>
<div className="form-group">
    <label htmlFor="message">Feedback Message</label>
    <textarea
        id="message"
        name="message"
        value={formData.message}
        onChange={handleChange}
        required
        placeholder="Tell us what you think..."
        rows="4"
    />
</div>
<button type="submit" className="submit-btn">Submit Feedback</button>
</form>
</div>
);
```

```

};

export default FeedbackForm;

src/components/FeedbackList.jsx

import React from 'react';

const FeedbackList = ({ feedbacks }) => {
  return (
    <div className="feedback-list-container">
      <h2>Recent Feedback</h2>
      {feedbacks.length === 0 ? (
        <div className="empty-state">
          <p>No feedback submitted yet. Be the first!</p>
        </div>
      ) : (
        <div className="feedback-grid">
          {feedbacks.map(feedback => (
            <div key={feedback.id} className="feedback-card">
              <div className="card-header">
                <div className="avatar">
                  {feedback.name.charAt(0).toUpperCase()}
                </div>
                <div className="user-info">
                  <h3>{feedback.name}</h3>
                  <p className="email">{feedback.email}</p>
                  <p className="contact">{feedback.contactNo}</p>
                </div>
              </div>
              <div className="card-body">
                <p>{feedback.message}</p>
              </div>
            </div>
          ))}
        </div>
      )}
    </div>
  );
};

```

```

    })
  </div>

  );
};

export default FeedbackList;

```

src/App.jsx

```

jsx

import React, { useState } from 'react';
import FeedbackForm from './components/FeedbackForm';
import FeedbackList from './components/FeedbackList';
import './App.css';

function App() {
  const [feedbacks, setFeedbacks] = useState([]);
  const handleAddFeedback = (newFeedback) => {
    setFeedbacks([newFeedback, ...feedbacks]);
  };

  return (
    <div className="app-container">
      <header className="app-header">
        <h1>Student Feedback Portal</h1>
        <p>Help us improve your educational experience</p>
      </header>

      <main className="main-content">
        <section className="form-section">
          <FeedbackForm onAddFeedback={handleAddFeedback} />
        </section>

        <section className="list-section">
          <FeedbackList feedbacks={feedbacks} />
        </section>
      </main>
    </div>
  );
}

```

```

    <footer className="app-footer">
      <p>&copy; 2026 Educational Institute. All rights reserved.</p>
    </footer>
  </div>
);
}
export default App;
src/index.css
@import
url('https://fonts.googleapis.com/css2?family=Inter:wght@300;400;500;600;700&display=swap');
:root {
  --primary-color: #4f46e5;
  --primary-hover: #4338ca;
  --bg-color: #f8fafc;
  --bg-card: #ffffff;
  --text-main: #0f172a;
  --text-muted: #64748b;
  --border-color: #e2e8f0;
  --input-bg: #f1f5f9;
  --accent-color: #8b5cf6;
  --danger-color: #ef4444;
}
* {
  box-sizing: border-box;
  margin: 0;
  padding: 0;
}
body {
  font-family: 'Inter', sans-serif;
  background-color: var(--bg-color);
  color: var(--text-main);
  line-height: 1.5;

```

```

-webkit-font-smoothing: antialiased;
}

h1, h2, h3 {
  font-weight: 600;
  line-height: 1.2;
}

input, textarea, button {
  font-family: inherit;
}

```

4. Output Screenshots

