




Tooling & Automatisations

Comment automatiser certains process, des fois lourds, souvent non


Automatisation d'un repository : Make

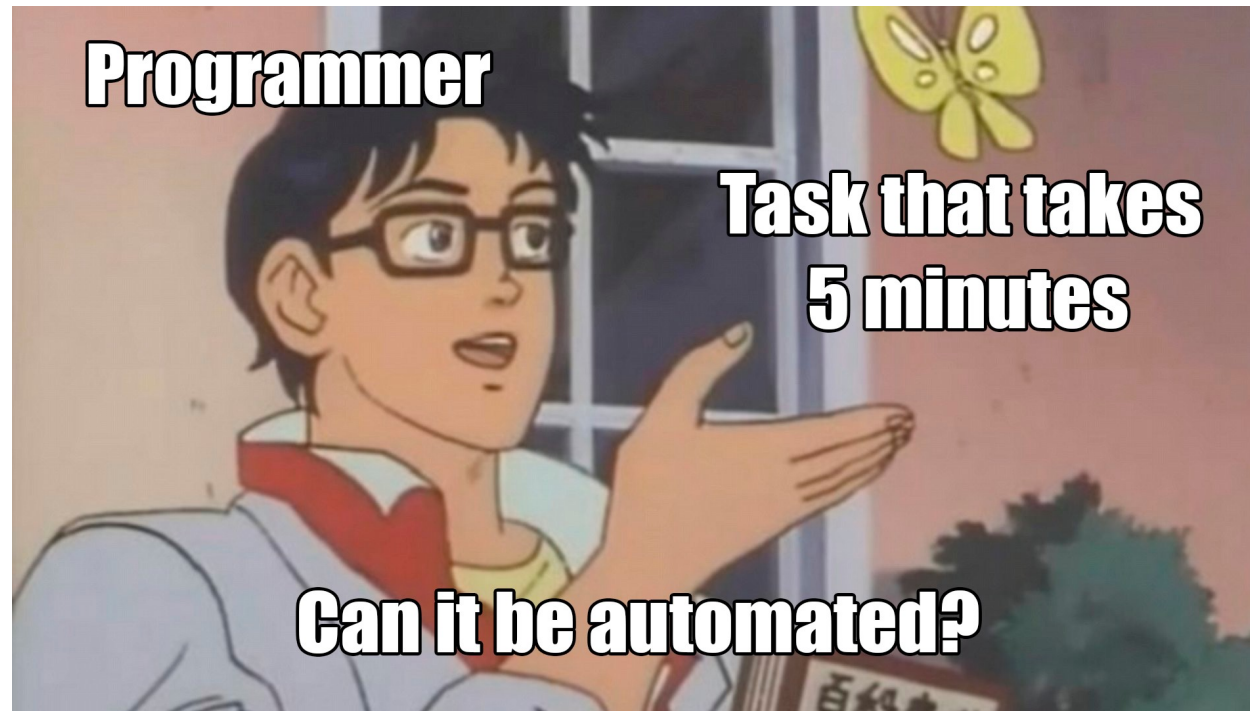

Automatisation d'un repository : Just

<https://github.com/casey/just>

<https://just.systems/man/en/>

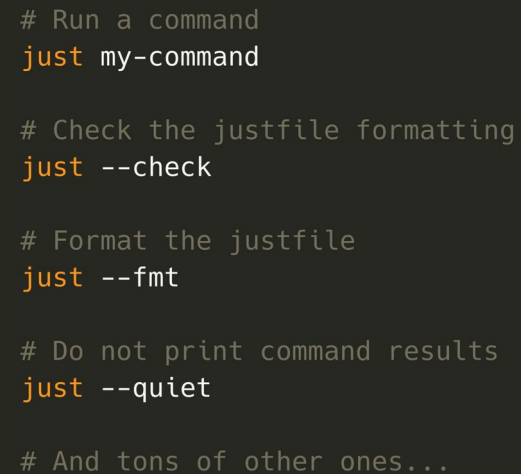A terminal window with a dark background and light gray text. It shows several Just commands preceded by a hash symbol. The commands are: 'just my-command', 'just --check', 'just --fmt', 'just --quiet', and 'And tons of other ones...'. The window has three colored dots (red, yellow, green) in the top left corner.

```
# Run a command
just my-command

# Check the justfile formatting
just --check

# Format the justfile
just --fmt

# Do not print command results
just --quiet

# And tons of other ones...
```



Automatisation d'un repository : Just

```
default:  
  @just --list  
  
setup:  
  poetry install --without dev --sync --no-root  
  
setup-dev:  
  poetry install --sync --no-root  
  
lock:  
  poetry lock --no-update  
  
update:  
  poetry lock
```



Automatisation d'un repository : Just

```
set dotenv-load

default:
  @just --list

thirdparties:
  docker compose up postgres s3 clickhouse

dagster-dev: thirdparties
  dagster dev --port $PORT --log-level $LOG_LEVEL
```



Automatisation d'un repository : Just

```
default:
  @just --list

# Start thirdparties used for in dev env
thirdparties:
  docker compose up postgres s3 clickhouse

# Start dagster server with associated thirdparties
dagster-dev: thirdparties
  echo $0
  dagster dev --port $1 --log-level $2

# Invoke using
# just dagster-dev 8888 warning
```



Automatisation d'un repository : Just

```
default:
  @just --list

polyglot: python js perl sh ruby nu

python:
  #!/usr/bin/env python3
  print('Hello from python!')

js:
  #!/usr/bin/env node
  console.log('Greetings from JavaScript!')

perl:
  #!/usr/bin/env perl
  print "Larry Wall says Hi!\n";

sh:
  #!/usr/bin/env sh
  hello='Yo'
  echo "$hello from a shell script!"

ruby:
  #!/usr/bin/env ruby
  puts "Hello from ruby!"
```



Automatisation d'un repository : Just

```
set dotenv-load

default:
    @just --list

generate-extract-sql-query:
    python scripts/generate_extract_sql_query.py --dsn $POSTGRES_DSN --database
    $1 --table $2

generate-catchup-batch-data:
    python scripts/generate_catchup_batch_data.py --dsn $POSTGRES_DSN --database
    $1 --table $2 --date-start $3 --date-end $4
```



Automatisation d'un repository : Custom scripts

```
from typing import Optional

import typer

app = typer.Typer()

@app.command()
def hello(name: Optional[str] = None):
    if name:
        typer.echo(f"Hello {name}")
    else:
        typer.echo("Hello World!")

@app.command()
def bye(name: Optional[str] = None):
    if name:
        typer.echo(f"Bye {name}")
    else:
        typer.echo("Goodbye!")

if __name__ == "__main__":
    app()
```



Automatisation d'un repository : Custom scripts



```
$ python my_custom_script.py hello  
Hello World!
```

```
$ python my_custom_script.py hello --name Lucas  
Hello Lucas!
```

```
$ python my_custom_script.py bye --name Lucas  
Bye Lucas
```



Automatisation d'un repository : Custom scripts

```
set dotenv-load

default:
    @just --list

hello:
    python my_custom_script.py --name $1

bye:
    python my_custom_script.py bye --name $1
```



TP

Créer un justfile permettant de gérer les migrations pour une database PostgreSQL (des outils existent)

- Démarrage d'un docker compose avec un PostgreSQL dedans et exposé au local
- Génération d'une migration
- Upgrade vers la dernière migration
- Downgrade vers une database vierge
- Upgrade de la migration suivante par rapport à celle en cours
- Downgrade de la migration précédent par rapport à celle en cours
- Dump le SQL entre deux migrations données

