

There were issues affecting this run of Lighthouse:

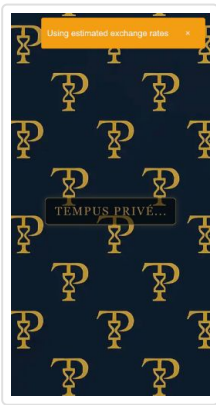
- **Chrome extensions negatively affected this page's load performance. Try auditing the page in incognito mode or from a Chrome profile without extensions.**



Performance

Values are estimated and may vary. The [performance score is calculated](#) directly from these metrics. [See calculator.](#)

▲ 0–49 50–89 90–100



METRICS

Expand view

First Contentful Paint

▲ Largest Contentful Paint

2.1 s

6.2 s

Total Blocking Time

0 ms

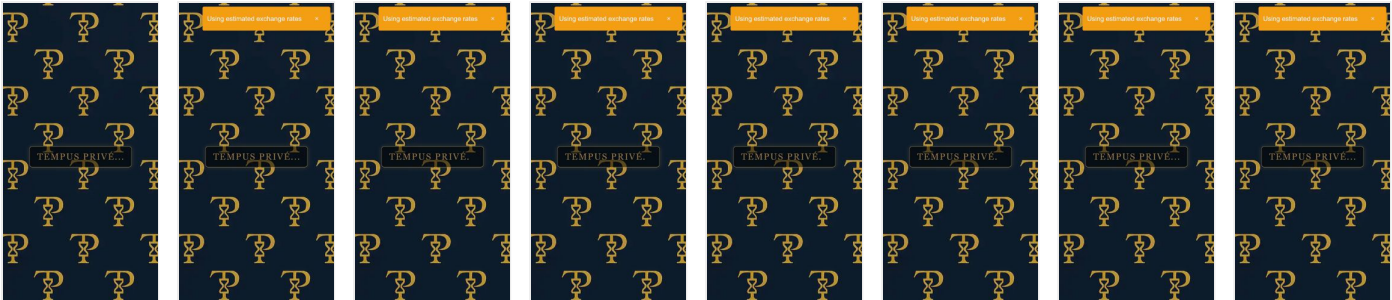
Cumulative Layout Shift

0

Speed Index

2.1 s

 [View Treemap](#)



 Later this year, insights will replace performance audits. [Learn more and provide feedback here.](#)

[Try insights](#)

Show audits relevant to: [All](#) [FCP](#) [LCP](#) [TBT](#) [CLS](#)

DIAGNOSTICS

 Enable text compression — Est savings of 256 KiB




Text-based resources should be served with compression (gzip, deflate or brotli) to minimize total network bytes. [Learn more about text compression.](#) FCP LCP

URL	Transfer Size	Est Savings
127.0.0.1 1st Party	337.2 KiB	255.7 KiB
/index.html (127.0.0.1)	51.9 KiB	41.3 KiB
/css/styles-min.css (127.0.0.1)	20.9 KiB	16.3 KiB
/js/loading-states.js (127.0.0.1)	19.6 KiB	14.7 KiB
/css/mobile-overrides.css (127.0.0.1)	19.4 KiB	14.7 KiB
/css/services.css (127.0.0.1)	16.4 KiB	12.9 KiB

URL	Transfer Size	Est Savings
/js/services.js (127.0.0.1)	17.0 KiB	12.5 KiB
/js/currency-service.js (127.0.0.1)	16.2 KiB	11.9 KiB
/css/collection-styles.css (127.0.0.1)	14.9 KiB	11.6 KiB
/js/filter-counts.js (127.0.0.1)	14.9 KiB	10.9 KiB
/js/main-min.js (127.0.0.1)	14.8 KiB	10.8 KiB
/js/animations-min.js (127.0.0.1)	14.1 KiB	10.6 KiB
/css/search-modal.css (127.0.0.1)	12.6 KiB	9.8 KiB
/css/loading-states.css (127.0.0.1)	13.1 KiB	9.7 KiB
/admin-populate-all-watches-instructions.js (127.0.0.1)	11.9 KiB	9.6 KiB
/js/search-min.js (127.0.0.1)	12.4 KiB	9.2 KiB
/js/luxury-sections-min.js (127.0.0.1)	11.8 KiB	8.5 KiB
/css/private-collection.css (127.0.0.1)	9.8 KiB	7.7 KiB
/css/maison-styles.css (127.0.0.1)	9.6 KiB	7.2 KiB
/js/private-collection-min.js (127.0.0.1)	9.8 KiB	7.1 KiB
/css/currency-switcher.css (127.0.0.1)	9.3 KiB	6.7 KiB
/css/filter-counts.css (127.0.0.1)	7.1 KiB	5.4 KiB
/js/footer.js (127.0.0.1)	6.2 KiB	4.4 KiB
/css/footer.css (127.0.0.1)	3.4 KiB	2.3 KiB

▲ Largest Contentful Paint element — 6,240 ms ^

This is the largest contentful element painted within the viewport. [Learn more about the Largest Contentful Paint element](#) LCP

Element	
	img.watch-image

Phase	% of LCP	Timing
TTFB	7%	450 ms
Load Delay	0%	0 ms
Load Time	0%	0 ms
Render Delay	93%	5,790 ms

▲ Defer offscreen images — Est savings of 316 KiB

^

Consider lazy-loading offscreen and hidden images after all critical resources have finished loading to lower time to interactive. [Learn how to defer offscreen images.](#) FCP LCP

URL		Resource Size	Est Savings
127.0.0.1	1st Party	315.8 KiB	315.8 KiB
img.loading-logo	...assets/tp-monogram-background.webp (127.0.0.1)	315.8 KiB	315.8 KiB

▲ Minify CSS — Est savings of 66 KiB

^

Minifying CSS files can reduce network payload sizes. [Learn how to minify CSS.](#) FCP LCP

URL		Transfer Size	Est Savings
127.0.0.1	1st Party	119.0 KiB	66.1 KiB
/css/mobile-overrides.css	(127.0.0.1)	19.8 KiB	12.8 KiB
/css/services.css	(127.0.0.1)	16.7 KiB	10.1 KiB
/css/loading-states.css	(127.0.0.1)	13.4 KiB	7.6 KiB

URL	Transfer Size	Est Savings
/css/collection-styles.css (127.0.0.1)	15.2 KiB	7.3 KiB
/css/search-modal.css (127.0.0.1)	12.9 KiB	6.8 KiB
/css/currency-switcher.css (127.0.0.1)	9.6 KiB	5.2 KiB
/css/private-collection.css (127.0.0.1)	10.2 KiB	5.1 KiB
/css/maison-styles.css (127.0.0.1)	9.9 KiB	4.4 KiB
/css/filter-counts.css (127.0.0.1)	7.4 KiB	3.9 KiB
/css/footer.css (127.0.0.1)	3.8 KiB	2.9 KiB

▲ Minify JavaScript — Est savings of 56 KiB



Minifying JavaScript files can reduce payload sizes and script parse time. [Learn how to minify JavaScript](#). LCP

☒ Show 3rd-party resources (1)

URL	Transfer Size	Est Savings
127.0.0.1 1st Party	85.8 KiB	52.2 KiB
/js/services.js (127.0.0.1)	17.0 KiB	11.3 KiB
/js/filter-counts.js (127.0.0.1)	14.9 KiB	10.4 KiB
/js/currency-service.js (127.0.0.1)	16.2 KiB	10.4 KiB
/js/loading-states.js (127.0.0.1)	19.6 KiB	10.3 KiB
/js/footer.js (127.0.0.1)	6.2 KiB	5.1 KiB
/admin-populate-all-watches-instructions.js (127.0.0.1)	11.9 KiB	4.7 KiB
WhatRuns Chrome Extension	6.6 KiB	3.9 KiB
chrome-extension://cmkdbmfndkfgebldhnbkbfhlneefdaaip/js/browser-polyfill.js	6.6 KiB	3.9 KiB

▲ Reduce unused CSS — Est savings of 52 KiB



Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed by network activity. [Learn how to reduce unused CSS.](#) FCP LCP

URL	Transfer Size	Est Savings
127.0.0.1 1st Party	61.5 KiB	52.3 KiB
/css/services.css (127.0.0.1)	16.4 KiB	15.9 KiB
/css/loading-states.css (127.0.0.1)	13.1 KiB	12.2 KiB
/css/mobile-overrides.css (127.0.0.1)	19.4 KiB	12.1 KiB
/css/search-modal.css (127.0.0.1)	12.6 KiB	12.1 KiB

▲ Eliminate render-blocking resources — Est savings of 260 ms


Resources are blocking the first paint of your page. Consider delivering critical JS/CSS inline and deferring all non-critical JS/styles. [Learn how to eliminate render-blocking resources.](#) FCP LCP

☒ Show 3rd-party resources (1)

URL	Transfer Size	Est Savings
Google Fonts Cdn	0.9 KiB	790 ms
/css2?family=... (fonts.googleapis.com)	0.9 KiB	790 ms
127.0.0.1 1st Party	54.5 KiB	2,410 ms
/css/mobile-overrides.css (127.0.0.1)	19.8 KiB	900 ms
/css/loading-states.css (127.0.0.1)	13.4 KiB	750 ms
/css/styles-min.css (127.0.0.1)	21.3 KiB	750 ms

▲ Properly size images — Est savings of 17 KiB

Serve images that are appropriately-sized to save cellular data and improve load time. [Learn how to size images.](#) FCP LCP

URL		Resource Size	Est Savings
127.0.0.1	1st Party	21.0 KiB	16.8 KiB
	img.brand-logo.brand-logo-img	...assets/tp-logo.webp (127.0.0.1)	9.8 KiB
	img.maison-logo.maison-logo-img	...brands/richard-mille-logo.webp (127.0.0.1)	11.2 KiB
			9.7 KiB


▲ Page prevented back/forward cache restoration — 1 failure reason ^

Many navigations are performed by going back to a previous page, or forwards again. The back/forward cache (bfcache) can speed up these return navigations. [Learn more about the bfcache](#)

Failure reason	Failure type
Pages with WebSocket cannot enter back/forward cache. /index.html (127.0.0.1)	Pending browser support

Image elements do not have explicit width and height ^

Set an explicit width and height on image elements to reduce layout shifts and improve CLS. [Learn how to set image dimensions](#) CLS

URL	
127.0.0.1	1st Party
img.maison-logo.maison-logo-img	...brands/richard-mille-logo.webp (127.0.0.1)
	img.brand-logo.brand-logo-img
	img.footer-logo.brand-logo-img
	...assets/tp-logo.webp (127.0.0.1)

URL	
img.maison-logo.maison-logo-img	...brands/longines-logo.webp (127.0.0.1)
img.maison-logo.maison-logo-img	...brands/rolex-logo.webp (127.0.0.1)
img.maison-logo.maison-logo-img	...brands/patek-philippe-logo.webp (127.0.0.1)
img.maison-logo.maison-logo-img	...brands/audemars-piguet- logo.webp (127.0.0.1)
img.maison-logo.maison-logo-img	...brands/cartier-logo.webp (127.0.0.1)
img.maison-logo.maison-logo-img	...brands/hublot-logo.webp (127.0.0.1)
img.maison-logo.maison-logo-img	...brands/omega-logo.webp (127.0.0.1)

Avoid serving legacy JavaScript to modern browsers — Est savings of 10 KiB

^

Polyfills and transforms enable legacy browsers to use new JavaScript features. However, many aren't necessary for modern browsers. Consider modifying your JavaScript build process to not transpile [Baseline](#) features, unless you know you must support legacy browsers. [Learn why most sites can deploy ES6+ code without transpiling](#) FCP LCP

URL	Est Savings
chrome-extension://nkbihfbeogaeaoehlefnkodbefgpgknn/scripts/lockdown-install.js	9.2 KiB
lockdown-install.js:1	Object.isExtensible
lockdown-install.js:1	Object.isFrozen
lockdown-install.js:1	Object.isSealed
lockdown-install.js:1	Reflect.isExtensible
chrome-extension://nkbihfbeogaeaoehlefnkodbefgpgknn/scripts/inpage.js	0.3 KiB
inpage.js:12	@babel/plugin-transform-classes
chrome-extension://nkbihfbeogaeaoehlefnkodbefgpgknn/scripts/contentscript.js	0.3 KiB

URL	Est Savings
contentscript.js:55 chrome-extension://fjgncogppolhfdpijihbpmeohpaadpc/g9nhm28jb13afdh.js	@babel/plugin-transform-classes 0.3 KiB
g9nhm28jb13afdh.js:2	@babel/plugin-transform-classes

Reduce unused JavaScript — Est savings of 407 KiB

Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity. [Learn how to reduce unused JavaScript.](#) FCP LCP

☒ Show 3rd-party resources (1)

URL	Transfer Size	Est Savings
Unattributable	862.1 KiB	386.6 KiB
chrome-extension://nkbihfbeogaeaoehlefnkodbefgpgknn/scripts/contentscript.js	518.4 KiB	257.1 KiB
chrome-extension://fjgncogppolhfdpijihbpmeohpaadpc/g9nhm28jb13afdh.js	116.1 KiB	61.2 KiB
chrome-extension://nkbihfbeogaeaoehlefnkodbefgpgknn/scripts/inpage.js	91.7 KiB	44.9 KiB
chrome-extension://pejdijmoenmkgeppbflobdenhhabjlaj/content_script.js	135.9 KiB	23.4 KiB
WhatRuns Chrome Extension	27.9 KiB	20.0 KiB
chrome-extension://cmkdbmfndkfgebldhnkbfhlneeftdaaip/js/jquery-3.2.1.min.js	27.9 KiB	20.0 KiB

Minimize main-thread work — 2.2 s

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to minimize main-thread work](#) TBT

Category	Time Spent
Script Evaluation	811 ms

Category	Time Spent
Other	579 ms
Script Parsing & Compilation	355 ms
Style & Layout	312 ms
Rendering	86 ms
Parse HTML & CSS	63 ms
Garbage Collection	14 ms

User Timing marks and measures — 1 user timing

Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. [Learn more about User Timing marks.](#)

Name	Type	Start Time	Duration
Wappalyzer: getDom	Measure	1,497.80 ms	24.70 ms

Avoid non-composited animations — 44 animated elements found

Animations which are not composited can be janky and increase CLS. [Learn how to avoid non-composited animations](#) CLS

Element	Name
<code>::after</code> <code><::after></code>	
Unsupported CSS Property: content	loading-dots
<code>div.skeleton-card > div.skeleton</code> <code><div class="skeleton skeleton-image"></code>	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
<code>div.skeleton-card > div.skeleton-content > div.skeleton</code> <code><div class="skeleton skeleton-text skeleton-specs"></code>	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color

Element	Name
div.skeleton-card > div.skeleton-content > div.skeleton<div class="skeleton skeleton-text skeleton-title">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton<div class="skeleton skeleton-image">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton-content > div.skeleton<div class="skeleton skeleton-text skeleton-price">	
Unsupported CSS Property: background-position-x	skeleton-loading
div.skeleton-card > div.skeleton<div class="skeleton skeleton-image">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton-content > div.skeleton<div class="skeleton skeleton-text skeleton-price">	
Unsupported CSS Property: background-position-x	skeleton-loading
div.skeleton-card > div.skeleton-content > div.skeleton<div class="skeleton skeleton-text skeleton-specs">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton-content > div.skeleton<div class="skeleton skeleton-text skeleton-price">	
Unsupported CSS Property: background-position-x	skeleton-loading
div.skeleton-card > div.skeleton-content > div.skeleton<div class="skeleton skeleton-text skeleton-title">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton-content > div.skeleton<div class="skeleton skeleton-text skeleton-specs">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color

Element	Name
div.skeleton-card > div.skeleton-content > div.skeleton<div class="skeleton skeleton-text skeleton-specs">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton<div class="skeleton skeleton-image">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton-content > div.skeleton<div class="skeleton skeleton-text skeleton-title">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton-content > div.skeleton<div class="skeleton skeleton-text skeleton-price">	
Unsupported CSS Property: background-position-x	skeleton-loading
div.skeleton-card > div.skeleton-content > div.skeleton<div class="skeleton skeleton-text skeleton-price">	
Unsupported CSS Property: background-position-x	skeleton-loading
div.skeleton-card > div.skeleton-content > div.skeleton<div class="skeleton skeleton-text skeleton-price">	
Unsupported CSS Property: background-position-x	skeleton-loading
div.skeleton-card > div.skeleton-content > div.skeleton<div class="skeleton skeleton-text skeleton-title">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton-content > div.skeleton<div class="skeleton skeleton-text skeleton-brand">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton-content > div.skeleton<div class="skeleton skeleton-text skeleton-specs">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color

Element	Name
div.skeleton-card > div.skeleton-content > div.skeleton <div class="skeleton skeleton-text skeleton-brand">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton-content > div.skeleton <div class="skeleton skeleton-text skeleton-brand">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton <div class="skeleton skeleton-image">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton-content > div.skeleton <div class="skeleton skeleton-text skeleton-title">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton-content > div.skeleton <div class="skeleton skeleton-text skeleton-brand">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton-content > div.skeleton <div class="skeleton skeleton-text skeleton-title">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton-content > div.skeleton <div class="skeleton skeleton-text skeleton-brand">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton-content > div.skeleton <div class="skeleton skeleton-text skeleton-brand">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton-content > div.skeleton	

Element	Name
<div class="skeleton skeleton-text skeleton-title">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton	
<div class="skeleton skeleton-image">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton	
<div class="skeleton skeleton-image">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton-content > div.skeleton	
<div class="skeleton skeleton-text skeleton-price">	
Unsupported CSS Property: background-position-x	skeleton-loading
div.skeleton-card > div.skeleton-content > div.skeleton	
<div class="skeleton skeleton-text skeleton-specs">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton	
<div class="skeleton skeleton-image">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton-content > div.skeleton	
<div class="skeleton skeleton-text skeleton-specs">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton-content > div.skeleton	
<div class="skeleton skeleton-text skeleton-title">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton-content > div.skeleton	
<div class="skeleton skeleton-text skeleton-brand">	
Unsupported CSS Property: background-position-x	skeleton-loading

Element	Name
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton-content > div.skeleton<div class="skeleton skeleton-text skeleton-brand">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
div.skeleton-card > div.skeleton-content > div.skeleton<div class="skeleton skeleton-text skeleton-price">	
Unsupported CSS Property: background-position-x	skeleton-loading
div.skeleton-card > div.skeleton-content > div.skeleton<div class="skeleton skeleton-text skeleton-specs">	
Unsupported CSS Property: background-position-x	skeleton-loading
Unsupported CSS Property: background-color	background-color
span.tab-count	
Unsupported CSS Property: box-shadow	badgePulse
span.tab-count	
Unsupported CSS Property: box-shadow	badgePulse
span.tab-count	
Unsupported CSS Property: box-shadow	badgePulse

Avoid chaining critical requests — 4 chains found

The Critical Request Chains below show you what resources are loaded with a high priority. Consider reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. [Learn how to avoid chaining critical requests.](#)

Maximum critical path latency: **61.288 ms**

Initial Navigation

- /index.html (127.0.0.1)
- /css2?family=... (fonts.googleapis.com) - **48.447 ms**, 0.91 KiB
- /css/styles-min.css (127.0.0.1) - **6.44 ms**, 21.28 KiB
- /css/loading-states.css (127.0.0.1) - **8.375 ms**, 13.41 KiB
- /css/mobile-overrides.css (127.0.0.1) - **8.516 ms**, 19.78 KiB

Minimize third-party usage — Third-party code blocked the main thread for 0 ms

Third-party code can significantly impact load performance. Limit the number of redundant third-party providers and try to load third-party code after your page has primarily finished loading. [Learn how to minimize third-party impact.](#) TBT

Third-Party	Transfer Size	Main-Thread Blocking Time
Wappalyzer - Technology profiler Chrome Extension	3 KiB	0 ms
chrome-extension://gppongmhjkpfnbhagpmjfkannfbllamg/js/dom.js	2 KiB	0 ms
chrome-extension://gppongmhjkpfnbhagpmjfkannfbllamg/js/js.js	1 KiB	0 ms
Google Fonts Cdn	1 KiB	0 ms
/css2?family=... (fonts.googleapis.com)	1 KiB	0 ms
WhatRuns Chrome Extension	1 KiB	0 ms
chrome-extension://cmkdbmfndkfgebldhnkbfhlneefdaaip/js/wrs_env.js	1 KiB	0 ms
openexchangerates.org	0 KiB	0 ms
/api/latest.json?app_id=99a07d3...&base=GBP (openexchangerates.org)	0 KiB	0 ms

○ Avoid long main-thread tasks — 7 long tasks found



Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. [Learn how to avoid long main-thread tasks](#) TBT

☒ Show 3rd-party resources (1)

URL	Start Time	Duration
127.0.0.1 1st Party		857 ms
/index.html (127.0.0.1)	902 ms	711 ms
/index.html (127.0.0.1)	1,613 ms	85 ms
/index.html (127.0.0.1)	1,899 ms	61 ms
Unattributable		260 ms
chrome-extension://nkbihfbeogaeaoehlefnkodbefgpgknn/scripts/inpage.js	2,033 ms	92 ms
chrome-extension://pejdijmoenmkgeppbflobdenhhabjlaj/content_script.js	1,809 ms	90 ms

URL	Start Time	Duration
chrome-extension://fjgncogppolhfdpijihbpfmeohpaadpc/g9nhm28jb13afdh.js	1,731 ms	78 ms
Wappalyzer - Technology profiler Chrome Extension		73 ms
chrome-extension://gppongmhjkgfnbhagpmjfkannfbllamg/js/content.js	1,960 ms	73 ms

More information about the performance of your application. These numbers don't [directly affect](#) the Performance score.

PASSED AUDITS (20)

Hide

Efficiently encode images

^

Optimized images load faster and consume less cellular data. [Learn how to efficiently encode images.](#) FCP LCP

Serve images in next-gen formats

^

Image formats like WebP and AVIF often provide better compression than PNG or JPEG, which means faster downloads and less data consumption. [Learn more about modern image formats.](#) FCP LCP

Preconnect to required origins

^

Warnings: A `<link rel=preconnect>` was found for "https://fonts.gstatic.com" but was not used by the browser. Only use `preconnect` for important origins that the page will certainly request.

Consider adding preconnect or dns-prefetch resource hints to establish early connections to important third-party origins. [Learn how to preconnect to required origins.](#) LCP FCP

Initial server response time was short — Root document took 0 ms

^

Keep the server response time for the main document short because all other requests depend on it. [Learn more about the Time to First Byte metric.](#) FCP LCP

URL	Time Spent
127.0.0.1 1st Party	0 ms
/index.html (127.0.0.1)	0 ms

Avoid multiple page redirects

^

Redirects introduce additional delays before the page can be loaded. [Learn how to avoid page redirects.](#) LCP FCP

Use HTTP/2

HTTP/2 offers many benefits over HTTP/1.1, including binary headers and multiplexing. [Learn more about HTTP/2.](#) LCP FCP

Use video formats for animated content

Large GIFs are inefficient for delivering animated content. Consider using MPEG4/WebM videos for animations and PNG/WebP for static images instead of GIF to save network bytes. [Learn more about efficient video formats](#) FCP LCP

Remove duplicate modules in JavaScript bundles

Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network activity. FCP LCP

Preload Largest Contentful Paint image

If the LCP element is dynamically added to the page, you should preload the image in order to improve LCP. [Learn more about preloading LCP elements.](#) LCP

Avoids enormous network payloads — Total size was 952 KiB

Large network payloads cost users real money and are highly correlated with long load times. [Learn how to reduce payload sizes.](#)

URL	Transfer Size
127.0.0.1 1st Party	636.8 KiB
...assets/tp-monogram-background.webp (127.0.0.1)	316.2 KiB
...assets/tp-monogram.webp (127.0.0.1)	57.6 KiB
/index.html (127.0.0.1)	52.3 KiB
...longines/longines-pocket-master-main.webp (127.0.0.1)	47.2 KiB
...rolex/rolex-daytona-white-main.webp (127.0.0.1)	45.2 KiB
...richard-mille/rm-11-03-mclaren-main.webp (127.0.0.1)	40.1 KiB
/css/styles-min.css (127.0.0.1)	21.3 KiB

URL	Transfer Size
/js/loading-states.js (127.0.0.1)	19.9 KiB
/css/mobile-overrides.css (127.0.0.1)	19.8 KiB
/js/services.js (127.0.0.1)	17.3 KiB

Uses efficient cache policy on static assets — 0 resources found

^

A long cache lifetime can speed up repeat visits to your page. [Learn more about efficient cache policies.](#)

Avoids an excessive DOM size — 749 elements

^

A large DOM will increase memory usage, cause longer [style calculations](#), and produce costly [layout reflows](#). [Learn how to avoid an excessive DOM size.](#) TBT

Statistic	Element	Value
Total DOM Elements		749
Maximum DOM Depth	h2.watch-name	12
Maximum Child Elements	body	21

JavaScript execution time — 1.1 s

^

Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. [Learn how to reduce Javascript execution time.](#) TBT

☒ Show 3rd-party resources (1)

URL	Total CPU Time	Script Evaluation	Script Parse
127.0.0.1 1st Party	1,565 ms	511 ms	246 ms
/index.html (127.0.0.1)	1,565 ms	511 ms	246 ms
Unattributable	421 ms	198 ms	86 ms

URL	Total CPU Time	Script Evaluation	Script Parse
chrome-extension://nkbihfbeogaeaoehlefnkodbefgpgknn/scripts/inpage.js	131 ms	112 ms	0 ms
Unattributable	114 ms	5 ms	0 ms
chrome-extension://pejdijmoenmkgeppbflobdenhhabjlaj/content_script.js	90 ms	40 ms	46 ms
chrome-extension://fjgncogppolhfdpijihbpmeohpaadpc/g9nhm28jb13afdh.js	86 ms	42 ms	40 ms
Wappalyzer - Technology profiler Chrome Extension	89 ms	19 ms	2 ms
chrome-extension://gppongmhjkpfnbhagpmjfkannfbllamg/js/content.js	89 ms	19 ms	2 ms

All text remains visible during webfont loads



Leverage the font-display CSS feature to ensure text is user-visible while webfonts are loading. [Learn more about font-display.](#)

☐ Lazy load third-party resources with facades




Some third-party embeds can be lazy loaded. Consider replacing them with a facade until they are required. [Learn how to defer third-parties with a facade.](#) TBT

Largest Contentful Paint image was not lazily loaded



Above-the-fold images that are lazily loaded render later in the page lifecycle, which can delay the largest contentful paint. [Learn more about optimal lazy loading.](#) LCP

Element
img.watch-image

○ Avoid large layout shifts



These are the largest layout shifts observed on the page. Each table item represents a single layout shift, and shows the element that shifted the most. Below each item are possible root causes that led to the layout shift. Some of these layout shifts may not be included in the CLS metric value due to [windowing](#). [Learn how to improve CLS](#) CLS

Uses passive listeners to improve scrolling performance



Consider marking your touch and wheel event listeners as passive to improve your page's scroll performance. [Learn more about adopting passive event listeners](#).

Avoids `document.write()`



For users on slow connections, external scripts dynamically injected via `document.write()` can delay page load by tens of seconds. [Learn how to avoid document.write\(\)](#).

Has a `<meta name="viewport">` tag with `width` or `initial-scale`



A `<meta name="viewport">` not only optimizes your app for mobile screen sizes, but also prevents [a 300 millisecond delay to user input](#). [Learn more about using the viewport meta tag](#).



Accessibility

These checks highlight opportunities to [improve the accessibility of your web app](#). Automatic detection can only detect a subset of issues and does not guarantee the accessibility of your web app, so [manual testing](#) is also encouraged.

CONTRAST

▲ Background and foreground colors do not have a sufficient contrast ratio.



Low-contrast text is difficult or impossible for many users to read. [Learn how to provide sufficient color contrast](#).

Failing Elements

span

button#submit-consultation.btn-luxury-primary

p

footer.footer

Failing Elements
div.tp-logo
span.notification-message
div.notification.notification-warning

These are opportunities to improve the legibility of your content.

NAMES AND LABELS

 Select elements do not have associated label elements. 

Form elements without effective labels can create frustrating experiences for screen reader users. [Learn more about the select element.](#)

Failing Elements
select#luxury-sort

These are opportunities to improve the semantics of the controls in your application. This may enhance the experience for users of assistive technology, like a screen reader.

ADDITIONAL ITEMS TO MANUALLY CHECK (10)

 Interactive controls are keyboard focusable 

Custom interactive controls are keyboard focusable and display a focus indicator. [Learn how to make custom controls focusable.](#)

 Interactive elements indicate their purpose and state 

Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. [Learn how to decorate interactive elements with affordance hints.](#)

 The page has a logical tab order 

Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. [Learn more about logical tab ordering.](#)

 Visual order on the page follows DOM order 

DOM order matches the visual order, improving navigation for assistive technology. [Learn more about DOM and visual ordering.](#)

☐ User focus is not accidentally trapped in a region ^

A user can tab into and out of any control or region without accidentally trapping their focus. [Learn how to avoid focus traps.](#)

☐ The user's focus is directed to new content added to the page ^

If new content, such as a dialog, is added to the page, the user's focus is directed to it. [Learn how to direct focus to new content.](#)

☐ HTML5 landmark elements are used to improve navigation ^

Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. [Learn more about landmark elements.](#)

☐ Offscreen content is hidden from assistive technology ^

Offscreen content is hidden with display: none or aria-hidden=true. [Learn how to properly hide offscreen content.](#)

☐ Custom controls have associated labels ^

Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. [Learn more about custom controls and labels.](#)

☐ Custom controls have ARIA roles ^

Custom interactive controls have appropriate ARIA roles. [Learn how to add roles to custom controls.](#)

These items address areas which an automated testing tool cannot cover. Learn more in our guide on [conducting an accessibility review](#).

PASSED AUDITS (26)

Hide

`[aria-*` attributes match their roles ^

Each ARIA role supports a specific subset of `aria-*` attributes. Mismatching these invalidates the `aria-*` attributes. [Learn how to match ARIA attributes to their roles.](#)

`[aria-hidden="true"]` is not present on the document `<body>` ^

Assistive technologies, like screen readers, work inconsistently when `aria-hidden="true"` is set on the document `<body>`. [Learn how `aria-hidden` affects the document body.](#)

`[role]`s have all required `[aria-*)` attributes



Some ARIA roles have required attributes that describe the state of the element to screen readers. [Learn more about roles and required attributes.](#)

`[aria-*)` attributes have valid values



Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. [Learn more about valid values for ARIA attributes.](#)

`[aria-*)` attributes are valid and not misspelled



Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. [Learn more about valid ARIA attributes.](#)

Buttons have an accessible name



When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. [Learn how to make buttons more accessible.](#)

Image elements have `[alt]` attributes



Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. [Learn more about the alt attribute.](#)

`[user-scalable="no"]` is not used in the `<meta name="viewport">` element and the `[maximum-scale]` attribute is not less than 5.



Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. [Learn more about the viewport meta tag.](#)

`button`, `link`, and `menuitem` elements have accessible names



When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to make command elements more accessible.](#)

ARIA attributes are used as specified for the element's role



Some ARIA attributes are only allowed on an element under certain conditions. [Learn more about conditional ARIA attributes.](#)

`[aria-hidden="true"]` elements do not contain focusable descendents



Focusable descendents within an `[aria-hidden="true"]` element prevent those interactive elements from being available to users of assistive technologies like screen readers. [Learn how aria-hidden affects focusable elements.](#)

Elements use only permitted ARIA attributes



Using ARIA attributes in roles where they are prohibited can mean that important information is not communicated to users of assistive technologies. [Learn more about prohibited ARIA roles.](#)

[role] values are valid



ARIA roles must have valid values in order to perform their intended accessibility functions. [Learn more about valid ARIA roles.](#)

Document has a <title> element



The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. [Learn more about document titles.](#)

<html> element has a [lang] attribute



If a page doesn't specify a lang attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might not announce the page's text correctly. [Learn more about the lang attribute.](#)

<html> element has a valid value for its [lang] attribute



Specifying a valid [BCP 47 language](#) helps screen readers announce text properly. [Learn how to use the lang attribute.](#)

Form elements have associated labels



Labels ensure that form controls are announced properly by assistive technologies, like screen readers. [Learn more about form element labels.](#)

Links have a discernible name



Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. [Learn how to make links accessible.](#)

Lists contain only elements and script supporting elements (<script> and <template>).



Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. [Learn more about proper list structure.](#)

List items () are contained within , or <menu> parent elements



Screen readers require list items () to be contained within a parent , or <menu> to be announced

08/07/2025, 01:30	about:blank
properly. Learn more about proper list structure.	
No element has a <code>[tabindex]</code> value greater than 0	^
A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. Learn more about the tabindex attribute.	
Touch targets have sufficient size and spacing.	^
Touch targets with sufficient size and spacing help users who may have difficulty targeting small controls to activate the targets. Learn more about touch targets.	
Heading elements appear in a sequentially-descending order	^
Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. Learn more about heading order.	
Uses ARIA roles only on compatible elements	^
Many HTML elements can only be assigned certain ARIA roles. Using ARIA roles where they are not allowed can interfere with the accessibility of the web page. Learn more about ARIA roles.	
Deprecated ARIA roles were not used	^
Deprecated ARIA roles may not be processed correctly by assistive technology. Learn more about deprecated ARIA roles.	
Image elements do not have <code>[alt]</code> attributes that are redundant text.	^
Informative elements should aim for short, descriptive alternative text. Alternative text that is exactly the same as the text adjacent to the link or image is potentially confusing for screen reader users, because the text will be read twice. Learn more about the alt attribute.	
NOT APPLICABLE (29)	Hide
☐ <code>[accesskey]</code> values are unique	^
Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. Learn more about access keys.	
☐ Elements with <code>role="dialog"</code> or <code>role="alertdialog"</code> have accessible names.	^
ARIA dialog elements without accessible names may prevent screen readers users from discerning the purpose of these elements. Learn how to make ARIA dialog elements more accessible.	
about:blank	26/36

○ ARIA input fields have accessible names



When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about input field labels](#).

○ ARIA `meter` elements have accessible names



When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to name meter elements](#).

○ ARIA `progressbar` elements have accessible names



When a progressbar element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to label progressbar elements](#).

○ Elements with an ARIA `[role]` that require children to contain a specific `[role]` have all required children.



Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. [Learn more about roles and required children elements](#).

○ `[role]`s are contained by their required parent element



Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions. [Learn more about ARIA roles and required parent element](#).

○ Elements with the `role=text` attribute do not have focusable descendents.



Adding `role=text` around a text node split by markup enables VoiceOver to treat it as one phrase, but the element's focusable descendents will not be announced. [Learn more about the `role=text` attribute](#).

○ ARIA toggle fields have accessible names



When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about toggle fields](#).

○ ARIA `tooltip` elements have accessible names



When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn how to name tooltip elements](#).

○ ARIA `treeitem` elements have accessible names



When a `treeitem` element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. [Learn more about labeling `treeitem` elements](#).

- The page contains a heading, skip link, or landmark region ^

Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. [Learn more about bypass blocks.](#)

- `<dl>`'s contain only properly-ordered `<dt>` and `<dd>` groups, `<script>`, `<template>` or `<div>` elements. ^

When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. [Learn how to structure definition lists correctly.](#)

- Definition list items are wrapped in `<dl>` elements ^

Definition list items (`<dt>` and `<dd>`) must be wrapped in a parent `<dl>` element to ensure that screen readers can properly announce them. [Learn how to structure definition lists correctly.](#)

- ARIA IDs are unique ^

The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. [Learn how to fix duplicate ARIA IDs.](#)

- No form fields have multiple labels ^

Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use either the first, the last, or all of the labels. [Learn how to use form labels.](#)

- `<frame>` or `<iframe>` elements have a title ^

Screen reader users rely on frame titles to describe the contents of frames. [Learn more about frame titles.](#)

- `<html>` element has an `[xml:lang]` attribute with the same base language as the `[lang]` attribute. ^

If the webpage does not specify a consistent language, then the screen reader might not announce the page's text correctly. [Learn more about the lang attribute.](#)

- Input buttons have discernible text. ^

Adding discernable and accessible text to input buttons may help screen reader users understand the purpose of the input button. [Learn more about input buttons.](#)

- `<input type="image">` elements have `[alt]` text ^

When an image is being used as an `<input>` button, providing alternative text can help screen reader users understand the purpose of the button. [Learn about input image alt text.](#)

- Links are distinguishable without relying on color. ^

Low-contrast text is difficult or impossible for many users to read. Link text that is discernible improves the experience for users with low vision. [Learn how to make links distinguishable](#).

- The document does not use `<meta http-equiv="refresh">` ^

Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. [Learn more about the refresh meta tag](#).

- `<object>` elements have alternate text ^

Screen readers cannot translate non-text content. Adding alternate text to `<object>` elements helps screen readers convey meaning to users. [Learn more about alt text for object elements](#).

- Skip links are focusable. ^

Including a skip link can help users skip to the main content to save time. [Learn more about skip links](#).

- Tables have different content in the summary attribute and `<caption>`. ^

The summary attribute should describe the table structure, while `<caption>` should have the onscreen title. Accurate table mark-up helps users of screen readers. [Learn more about summary and caption](#).

- Cells in a `<table>` element that use the `[headers]` attribute refer to table cells within the same table. ^

Screen readers have features to make navigating tables easier. Ensuring `<td>` cells using the `[headers]` attribute only refer to other cells in the same table may improve the experience for screen reader users. [Learn more about the headers attribute](#).

- `<th>` elements and elements with `[role="columnheader"/"rowheader"]` have data cells they describe. ^

Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. [Learn more about table headers](#).

- `[lang]` attributes have a valid value ^

Specifying a valid [BCP 47 language](#) on elements helps ensure that text is pronounced correctly by a screen reader. [Learn how to use the lang attribute](#).

- `<video>` elements contain a `<track>` element with `[kind="captions"]` ^

When a video provides a caption it is easier for deaf and hearing impaired users to access its information. [Learn more about video captions](#).



Best Practices

GENERAL

▲ Browser errors were logged to the console ^

Errors logged to the console indicate unresolved problems. They can come from network request failures and other browser concerns. [Learn more about this errors in console diagnostic audit](#)

☒ Show 3rd-party resources (1)

Source	Description
127.0.0.1 1st Party	
currency-service.js:132	Failed to fetch exchange rates: Error: API responded with status: 403 at CurrencyService.fetchRates (http://127.0.0.1:5500/js/currency-service.js:112:23) at async CurrencyService.init (http://127.0.0.1:5500/js/currency-service.js:65:17) at async HTMLDocument.<anonymous> (http://127.0.0.1:5500/js/currency-service.js:447:5)
currency-service.js:221	ReferenceError: startTime is not defined at http://127.0.0.1:5500/js/currency-service.js:221:52
main-min.js:1	ReferenceError: updateActiveNav is not defined at initializeNavigation (http://127.0.0.1:5500/js/main-min.js:1:7628) at initializeNavigation (http://127.0.0.1:5500/js/main-min.js:1:14089) at HTMLDocument.<anonymous> (http://127.0.0.1:5500/js/main-min.js:1:10212)
index.html:1	Unchecked runtime.lastError: The message port closed before a response was received.
index.html:1	Unchecked runtime.lastError: The message port closed before a response was received.
openexchangerates.org	
openexchangerates.or...3d9aabc4&base=GBP:1	Failed to load resource: the server responded with a status of 403 (Forbidden)
Unattributable	

Source	Description
<code>g9nhm28jb13afdh.js:2</code>	Permissions policy violation: unload is not allowed in this document.

 Issues were logged in the [Issues](#) panel in Chrome Devtools

^

Issues logged to the Issues panel in Chrome Devtools indicate unresolved problems. They can come from network request failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more details on each issue.

Issue type
Content security policy

TRUST AND SAFETY

☐ Ensure CSP is effective against XSS attacks

^

A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. [Learn how to use a CSP to prevent XSS](#)

Description	Directive	Severity
No CSP found in enforcement mode		High

☐ Use a strong HSTS policy

^

Deployment of the HSTS header significantly reduces the risk of downgrading HTTP connections and eavesdropping attacks. A rollout in stages, starting with a low max-age is recommended. [Learn more about using a strong HSTS policy.](#)

Description	Directive	Severity
No HSTS header found		High

☐ Ensure proper origin isolation with COOP

^

The Cross-Origin-Opener-Policy (COOP) can be used to isolate the top-level window from other documents such as pop-ups. [Learn more about deploying the COOP header.](#)

Description	Directive	Severity
No COOP header found		High

 Mitigate clickjacking with XFO or CSP



The X-Frame-Options (XFO) header or the frame-ancestors directive in the Content-Security-Policy (CSP) header control where a page can be embedded. These can mitigate clickjacking attacks by blocking some or all sites from embedding the page. [Learn more about mitigating clickjacking.](#)

Description	Severity
No frame control policy found	High

PASSED AUDITS (13)

Hide

Uses HTTPS



All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding [mixed content](#), where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite for HTTP/2 and many new web platform APIs. [Learn more about HTTPS.](#)

Avoids deprecated APIs



Deprecated APIs will eventually be removed from the browser. [Learn more about deprecated APIs.](#)

Avoids third-party cookies



Third-party cookies may be blocked in some contexts. [Learn more about preparing for third-party cookie restrictions.](#)

Allows users to paste into input fields



Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers.[Learn more about user-friendly input fields.](#)

Avoids requesting the geolocation permission on page load



Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. [Learn more about the geolocation permission.](#)

Avoids requesting the notification permission on page load



Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request to user gestures instead. [Learn more about responsibly getting permission for notifications.](#)

Displays images with correct aspect ratio



Image display dimensions should match natural aspect ratio. [Learn more about image aspect ratio.](#)

Serves images with appropriate resolution



Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. [Learn how to provide responsive images.](#)

Has a `<meta name="viewport">` tag with `width` or `initial-scale`



A `<meta name="viewport">` not only optimizes your app for mobile screen sizes, but also prevents [a 300 millisecond delay to user input](#). [Learn more about using the viewport meta tag.](#)

Document uses legible font sizes — 99.99% legible text



Font sizes less than 12px are too small to be legible and require mobile visitors to “pinch to zoom” in order to read. Strive to have >60% of page text ≥12px. [Learn more about legible font sizes.](#)

Source	Selector	% of Page Text	Font Size
127.0.0.1 1st Party			
styles-min.css:1	body	0.01%	11.2px
Unattributable			
Legible text		99.99%	≥ 12px

Page has the HTML doctype



Specifying a doctype prevents the browser from switching to quirks-mode. [Learn more about the doctype declaration.](#)

Properly defines charset



A character encoding declaration is required. It can be done with a `<meta>` tag in the first 1024 bytes of the HTML or in the Content-Type HTTP response header. [Learn more about declaring the character encoding.](#)

Page has valid source maps



Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. [Learn more about source maps.](#)

NOT APPLICABLE (2)

Hide

- Redirects HTTP traffic to HTTPS

^

Make sure that you redirect all HTTP traffic to HTTPS in order to enable secure web features for all your users. [Learn more.](#)

- Detected JavaScript libraries

^

All front-end JavaScript libraries detected on the page. [Learn more about this JavaScript library detection diagnostic audit.](#)



SEO

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on [Core Web Vitals](#). [Learn more about Google Search Essentials.](#)

ADDITIONAL ITEMS TO MANUALLY CHECK (1)

Hide

- Structured data is valid

^

Run the [Structured Data Testing Tool](#) and the [Structured Data Linter](#) to validate structured data. [Learn more about Structured Data.](#)

Run these additional validators on your site to check additional SEO best practices.

PASSED AUDITS (8)

Hide

- Page isn't blocked from indexing

^

Search engines are unable to include your pages in search results if they don't have permission to crawl them. [Learn more about crawler directives.](#)

Document has a `<title>` element



The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a page is relevant to their search. [Learn more about document titles.](#)

Document has a meta description



Meta descriptions may be included in search results to concisely summarize page content. [Learn more about the meta description.](#)

Page has successful HTTP status code



Pages with unsuccessful HTTP status codes may not be indexed properly. [Learn more about HTTP status codes.](#)

Links have descriptive text



Descriptive link text helps search engines understand your content. [Learn how to make links more accessible.](#)

Links are crawlable



Search engines may use href attributes on links to crawl websites. Ensure that the href attribute of anchor elements links to an appropriate destination, so more pages of the site can be discovered. [Learn how to make links crawlable](#)

Image elements have `[alt]` attributes



Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. [Learn more about the alt attribute.](#)

Document has a valid `hreflang`



hreflang links tell search engines what version of a page they should list in search results for a given language or region. [Learn more about hreflang.](#)

NOT APPLICABLE (2)

Hide

☐ robots.txt is valid



If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. [Learn more about robots.txt.](#)

☐ Document has a valid `rel=canonical`



Canonical links suggest which URL to show in search results. [Learn more about canonical links.](#)

■ Captured at Jul 8, 2025, 1:30 AM GMT+1	■ Emulated Moto G Power with Lighthouse 12.6.0	■ Single page session
■ Initial page load	■ Slow 4G throttling	■ Using Chromium 138.0.0.0 with devtools

Generated by **Lighthouse** 12.6.0 | [File an issue](#)