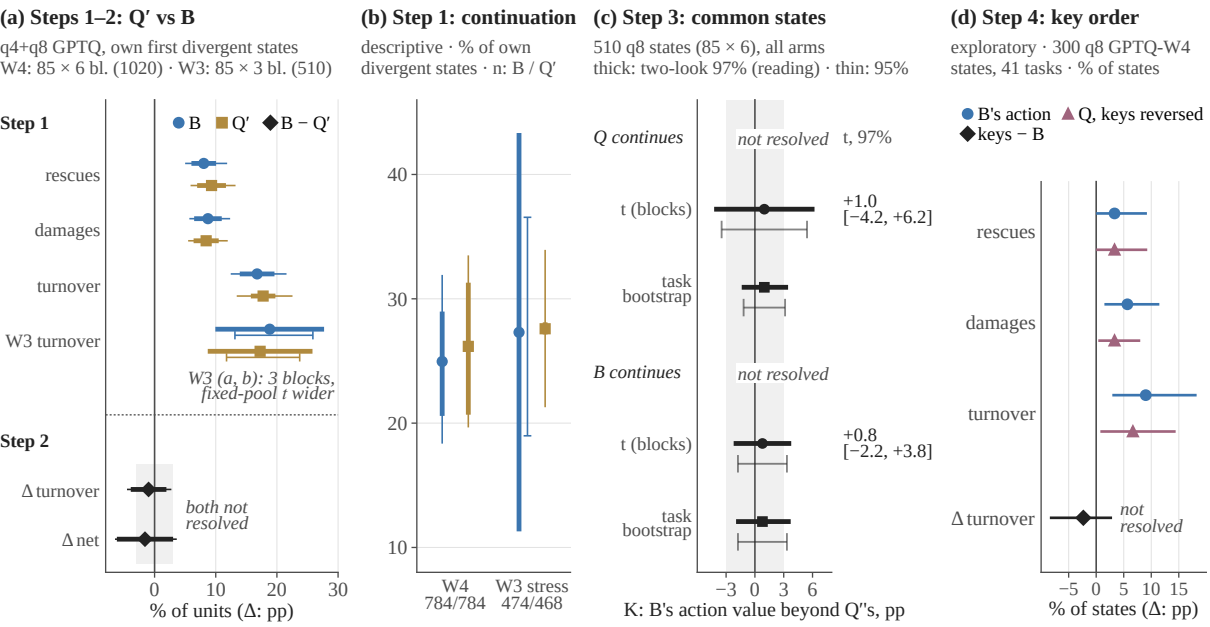
(a) Steps 1–2: Q′ vs B
q4+q8 GPTQ, own first divergent states
W4: 85 × 6 bl. (1020) · W3: 85 × 3 bl. (510)
Step 1
B
Q′
B − Q′
rescues
damages
turnover
W3 turnover
W3 (a, b): 3 blocks, fixed-pool t wider
Step 2
Δ turnover
Δ net
both not resolved
0
10
20
30
% of units (Δ: pp)
(b) Step 1: continuation
descriptive · % of own divergent states · n: B / Q′
40
30
20
10
W4 784/784
W3 stress 474/468
(c) Step 3: common states
510 q8 states (85 × 6), all arms
thick: two-look 97% (reading) · thin: 95%
Q continues
not resolved
t, 97%
t (blocks)
+1.0 [−4.2, +6.2]
task bootstrap
B continues
not resolved
t (blocks)
+0.8 [−2.2, +3.8]
task bootstrap
−3
0
3
6
K: B's action value beyond Q″s, pp
(d) Step 4: key order
exploratory · 300 q8 GPTQ-W4 states, 41 tasks · % of states
B's action
Q, keys reversed
keys − B
rescues
damages
turnover
Δ turnover
not resolved
−5
0
5
10
15
% of states (Δ: pp)