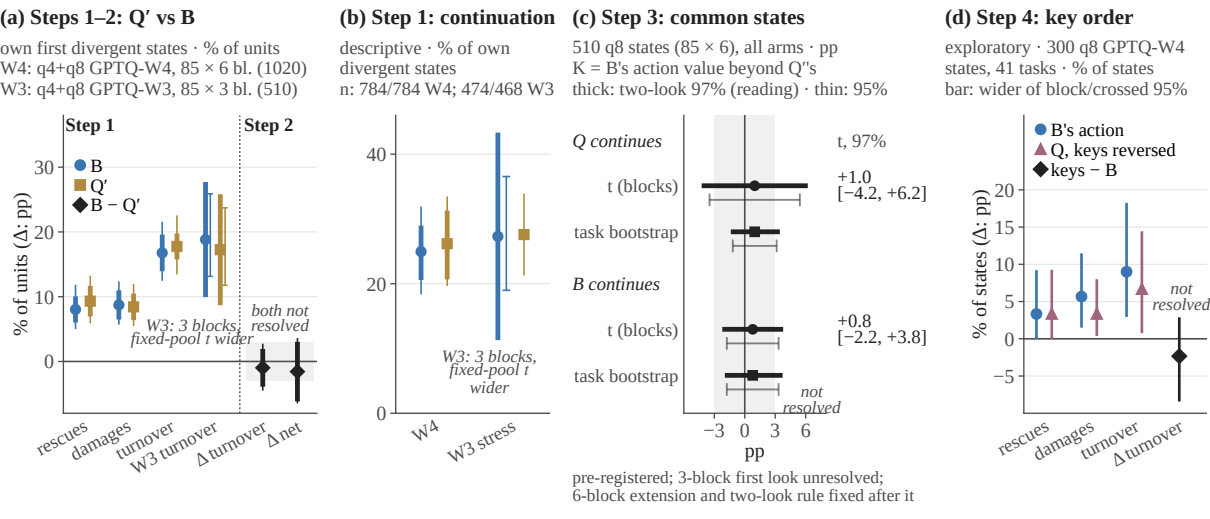
(a) Steps 1–2: Q′ vs B
own first divergent states · % of units
W4: q4+q8 GPTQ-W4, 85 × 6 bl. (1020)
W3: q4+q8 GPTQ-W3, 85 × 3 bl. (510)
Step 1
Step 2
B
Q′
B − Q′
% of units (Δ: pp)
30
20
10
0
W3: 3 blocks, fixed-pool t wider
both not resolved
rescues
damages
turnover
W3 turnover
Δ turnover
Δ net
(b) Step 1: continuation
descriptive · % of own divergent states
n: 784/784 W4; 474/468 W3
40
20
0
W3: 3 blocks, fixed-pool t wider
W4
W3 stress
(c) Step 3: common states
510 q8 states (85 × 6), all arms · pp
K = B's action value beyond Q''s
thick: two-look 97% (reading) · thin: 95%
Q continues
t, 97%
t (blocks)
+1.0
[−4.2, +6.2]
task bootstrap
B continues
t (blocks)
+0.8
[−2.2, +3.8]
task bootstrap
not resolved
−3
0
3
6
pp
pre-registered; 3-block first look unresolved;
6-block extension and two-look rule fixed after it
(d) Step 4: key order
exploratory · 300 q8 GPTQ-W4 states, 41 tasks · % of states
bar: wider of block/crossed 95%
B's action
Q, keys reversed
keys − B
% of states (Δ: pp)
20
15
10
5
0
−5
not resolved
rescues
damages
turnover
Δ turnover