


Relazione Progetto

1) Introduzione

oggi abbiamo usato Nmap e Nessus

2) Struttura Nmap tramite Kalo

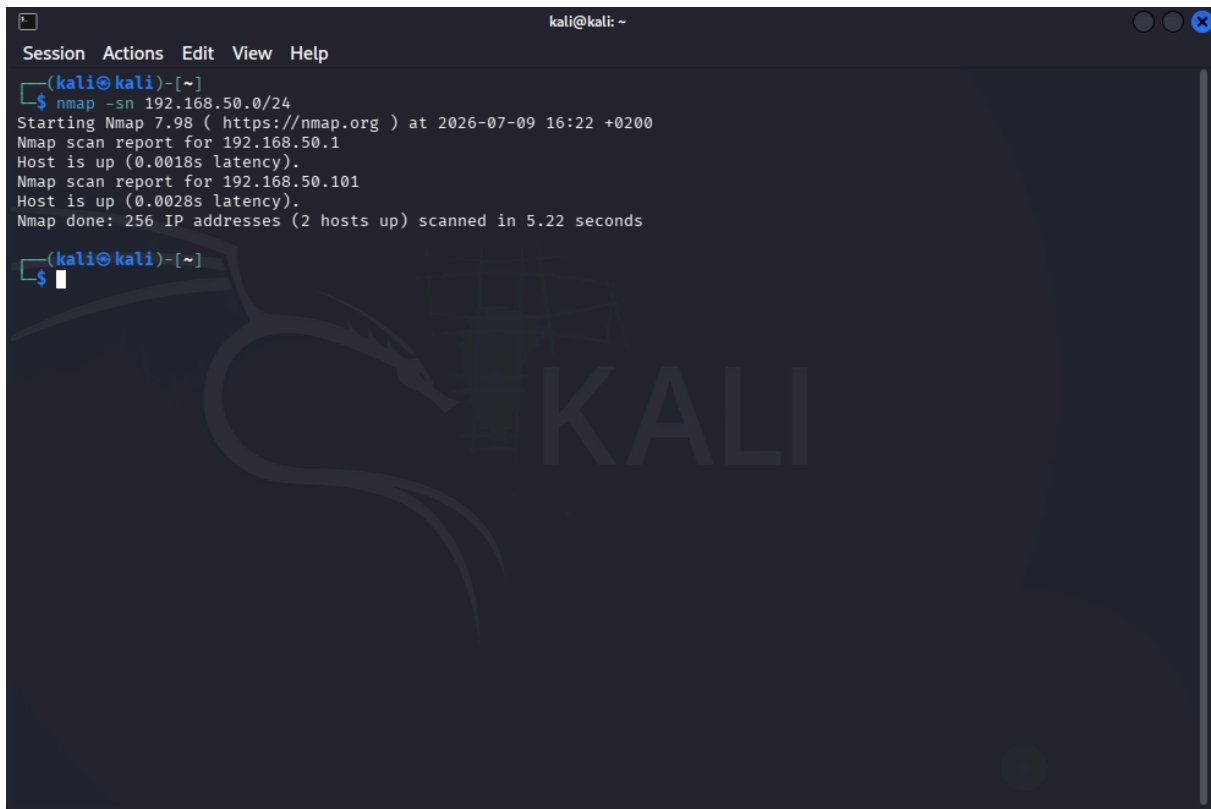

```
kali@kali: ~  
Session Actions Edit View Help  
(kali@kali)-[~]  
$ nmap -sn 192.168.50.0/24  
Starting Nmap 7.98 ( https://nmap.org ) at 2026-07-09 16:22 +0200  
Nmap scan report for 192.168.50.1  
Host is up (0.0018s latency).  
Nmap scan report for 192.168.50.101  
Host is up (0.0028s latency).  
Nmap done: 256 IP addresses (2 hosts up) scanned in 5.22 seconds  
(kali@kali)-[~]  
$
```

Per verificare quali host sono attivi e raggiungibili


```
kali@kali: ~  
Session Actions Edit View Help  
(kali@kali)-[~]  
$ nmap 192.168.50.101  
Starting Nmap 7.98 ( https://nmap.org ) at 2026-07-09 16:24 +0200  
Nmap scan report for 192.168.50.101  
Host is up (0.0090s latency).  
Not shown: 977 closed tcp ports (reset)  
PORT      STATE SERVICE  
21/tcp    open  ftp  
22/tcp    open  ssh  
23/tcp    open  telnet  
25/tcp    open  smtp  
53/tcp    open  domain  
80/tcp    open  http  
111/tcp   open  rpcbind  
139/tcp   open  netbios-ssn  
445/tcp   open  microsoft-ds  
512/tcp   open  exec  
513/tcp   open  login  
514/tcp   open  shell  
1099/tcp  open  rmiregistry  
1524/tcp  open  ingreslock  
2049/tcp  open  nfs  
2121/tcp  open  ccproxy-ftp  
3306/tcp  open  mysql  
5432/tcp  open  postgresql  
5900/tcp  open  vnc  
6000/tcp  open  X11  
6667/tcp  open  irc  
8009/tcp  open  ajp13  
8180/tcp  open  unknown  
  
Nmap done: 1 IP address (1 host up) scanned in 0.98 seconds  
(kali@kali)-[~]  
$
```

per verificare quali porte sono aperte

```
kali@kali: ~  
Session Actions Edit View Help  
(kali@kali)-[~]  
$ nmap -sV 192.168.50.101  
Starting Nmap 7.98 ( https://nmap.org ) at 2026-07-09 16:10 +0200  
Nmap scan report for 192.168.50.101  
Host is up (0.0059s latency).  
Not shown: 977 closed tcp ports (reset)  
PORT      STATE SERVICE      VERSION  
21/tcp    open  ftp          vsftpd 2.3.4  
22/tcp    open  ssh          OpenSSH 4.7p1 Debian 8ubuntu1 (protocol 2.0)  
23/tcp    open  telnet       Linux telnetd  
25/tcp    open  smtp         Postfix smtpd  
53/tcp    open  domain       ISC BIND 9.4.2  
80/tcp    open  http         Apache httpd 2.2.8 ((Ubuntu) DAV/2)  
111/tcp   open  rpcbind      2 (RPC #100000)  
139/tcp   open  netbios-ssn  Samba smbd 3.X - 4.X (workgroup: WORKGROUP)  
445/tcp   open  netbios-ssn  Samba smbd 3.X - 4.X (workgroup: WORKGROUP)  
512/tcp   open  exec         netkit-rsh rexecd  
513/tcp   open  login?       Netkit rshd  
514/tcp   open  shell        Netkit rshd  
1099/tcp  open  java-rmi     GNU Classpath grmiregistry  
1524/tcp  open  bindshell    Metasploitable root shell  
2049/tcp  open  nfs          2-4 (RPC #100003)  
2121/tcp  open  ccproxy-ftp? MySQL 5.0.51a-3ubuntu5  
3306/tcp  open  mysql        PostgreSQL DB 8.3.0 - 8.3.7  
5432/tcp  open  postgresql   VNC (protocol 3.3)  
5900/tcp  open  vnc          (access denied)  
6000/tcp  open  X11          UnrealIRCd  
6667/tcp  open  irc          Apache Jserv (Protocol v1.3)  
8009/tcp  open  ajp13        Apache Tomcat/Coyote JSP engine 1.1  
8180/tcp  open  http         Apache Tomcat/Coyote JSP engine 1.1  
Service Info: Hosts: metasploitable.localdomain, irc.Metasploitable.LAN; OSs: Unix, Linux; CPE: cpe:/o:linux:linux_kernel  
  
Service detection performed. Please report any incorrect results at https://nmap.org/submit/ .  
Nmap done: 1 IP address (1 host up) scanned in 173.83 seconds
```

per avere informazioni al riguardo dei dispositivi

e poi tramite ricerca su google ho trovato il comando che permette di salvare il documento in un file txt sul pc

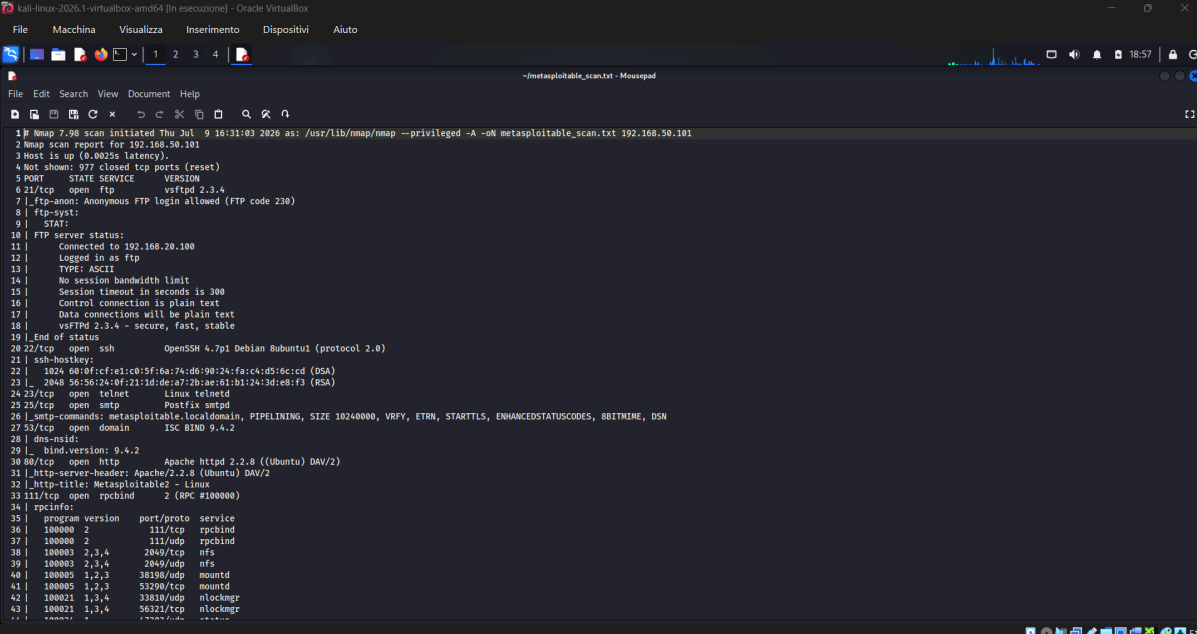


The screenshot shows a Kali Linux virtual machine window titled "kali-linux-2026-1-virtualbox-amd64 [in esecuzione] - Oracle VM VirtualBox". The window has a menu bar with "File", "Macchina", "Visualizza", "Inserimento", "Dispositivi", and "Aiuto". Below the menu bar is a toolbar with icons for file operations. The main area is a terminal window titled "~metasploitable_scan.txt - Mousepad" displaying the output of an Nmap scan. The scan was initiated on Thu Jul 9 16:31:03 2026 as: /usr/lib/nmap/mmap --privileged -A -oW metasploitable_scan.txt 192.168.50.101. The output shows the host is up (0.0025s latency), not showing 977 closed tcp ports (reset), and a list of open ports: 21/tcp (open ftp vsftpd 2.3.4), 23/tcp (open anonymous FTP login allowed (FTP code 230)), 25/tcp (open smtp Postfix smtpd), 80/tcp (open http Apache httpd 2.2.8 ((Ubuntu) DAV/2)), and 111/tcp (open rpcbind 2 (RPC #100000)). A table of program versions is also shown.

```
1 # Nmap 7.98 scan initiated Thu Jul 9 16:31:03 2026 as: /usr/lib/nmap/mmap --privileged -A -oW metasploitable_scan.txt 192.168.50.101
2 Nmap scan report for 192.168.50.101
3 Host is up (0.0025s latency).
4 Not shown: 977 closed tcp ports (reset)
5 PORT      STATE SERVICE      VERSION
6 21/tcp    open  ftp          vsftpd 2.3.4
7 |_ftp-anon: Anonymous FTP login allowed (FTP code 230)
8 |_ftp-syst:
9 |  STAT:
10 |  FTP server status:
11 |    Connected to 192.168.20.100
12 |    Logged in as ftp
13 |    TYPE: ASCII
14 |    No session bandwidth limit
15 |    Session timeout in seconds is 300
16 |    Control connection is plain text
17 |    Data connections will be plain text
18 |    vsFTPd 2.3.4 - secure, fast, stable
19 |_end of status
20 22/tcp    open  ssh          OpenSSH 4.7p1 Debian 8ubuntu1 (protocol 2.0)
21 |_ssh-hostkey:
22 |    1024 60:0f:cf:ef:c0:5f:6a:7a:d6:90:24:fa:c4:d5:6c:cd (DSA)
23 |    2048 56:56:24:0f:21:1d:de:a7:2b:ae:61:b1:24:3d:e8:f3 (RSA)
24 23/tcp    open  telnet       Linux telnetd
25 25/tcp    open  smtp          Postfix smtpd
26 |_smtp_commands: metasploitable.localdomain, PIPELINING, SIZE 10240000, VRFY, ETRN, STARTTLS, ENHANCEDSTATUSCODES, 8BITMIME, DSN
27 25/tcp    open  domain       ISC BIND 9.4.2
28 |_dns-nsid:
29 |_bind.version: 9.4.2
30 80/tcp    open  http          Apache httpd 2.2.8 ((Ubuntu) DAV/2)
31 |_http_server_header: Apache/2.2.8 (Ubuntu) DAV/2
32 |_http_title: Metasploitable2 - Linux
33 111/tcp   open  rpcbind       2 (RPC #100000)
34 _rpcinfo:
35 |  program version  port/proto  service
36 |  100000  2           111/tcp    rpcbind
37 |  100000  2           111/udp    rpcbind
38 |  100003  2,3,4       2049/tcp   nfs
39 |  100003  2,3,4       2049/udp   nfs
40 |  100005  1,2,3       38198/udp  mountd
41 |  100005  1,2,3       51299/tcp  mountd
42 |  100021  1,3,4       33810/udp  nlockmgr
43 |  100021  1,3,4       56321/tcp  nlockmgr
```

```
kali-linux-2026.1-virtualbox-amd64 [in esecuzione] - Oracle VM VirtualBox
File Macchina Visualizza Inserimento Dispositivi Aiuto
~metasploitable_scan.txt - Mousepad
File Edit Search View Document Help
70 | vnc-info:
71 | Protocol version: 3.3
72 | Security types:
73 | VNC Authentication (2)
74 6800/tcp open X11 (access denied)
75 6667/tcp open irc UnrealIRCd
76 8809/tcp open ajp13 Apache Jserv (Protocol v1.3)
77 |_ajp-methods: Failed to get a valid response for the OPTIONS request
78 8180/tcp open http Apache Tomcat/Coyote JSP engine 1.1
79 |_http-title: Apache Tomcat/5.5
80 |_http-favicon: Apache Tomcat
81 Device type: general purpose
82 Running: Linux 2.6.X
83 OS CPE: cpe:/o:linux:linux_kernel:2.6
84 OS details: Linux 2.6.15 - 2.6.26 (likely embedded)
85 Network Distance: 2 hops
86 Service Info: Hosts: metasploitable.localdomain, irc.Metasploitable.LAN; OS: Unix, Linux; CPE: cpe:/o:linux:linux_kernel
87
88 Host script results:
89 |_smb2-time: Protocol negotiation failed (SMB2)
90 |_status: NetBIOS name: METASPLOITABLE, NetBIOS user: <unknown>, NetBIOS MAC: <unknown> (unknown)
91 |_smb-os-discovery:
92 | OS: Unix (Samba 3.0.28-Debian)
93 | Computer name: metasploitable
94 | NetBIOS computer name:
95 | Domain name: localdomain
96 | FQDN: metasploitable.localdomain
97 | System time: 2026-07-09T10:33:42-04:00
98 |_clock-skew: mean: 1h19m58s, deviation: 2h18m33s, median: -1s
99 |_smb-security-mode:
100 | account_used: guest
101 | authentication_level: user
102 | challenge_response: supported
103 |_message_signing: disabled (dangerous, but default)
104
105 TRACEROUTE (using port 587/tcp)
106 Hop RTT ADDRESS
107 1 2.27 ms pSense.home.arpa (192.168.20.1)
108 2 2.41 ms 192.168.50.101
109
110 OS and Service detection performed. Please report any incorrect results at https://nmap.org/submit/.
111 # Nmap done at Thu Jul 9 16:34:58 2026 -- 1 IP address (1 host up) scanned in 235.13 seconds
112
```

```
kali-linux-2026.1-virtualbox-amd64 [in esecuzione] - Oracle VM VirtualBox
File Macchina Visualizza Inserimento Dispositivi Aiuto
~metasploitable_scan.txt - Mousepad
File Edit Search View Document Help
44 | 100024 1 47283/udp status
45 | 100024 1 57771/tcp status
46 139/tcp open netbios-ssn Samba smbd 3.X - 4.X (workgroup: WORKGROUP)
47 445/tcp open netbios-ssn Samba smbd 3.0.28-Debian (workgroup: WORKGROUP)
48 512/tcp open exec netkit-rsh rshcd
49 513/tcp open login?
50 514/tcp open shell Netkit rshd
51 8099/tcp open java-rmi GNU Classpath gmiregistry
52 1524/tcp open bindshell Metasploitable root shell
53 2849/tcp open nfs 2-4 (RPC #100003)
54 2121/tcp open ccproxy-ftp?
55 3306/tcp open mysql MySQL 5.0.51a-3ubuntu5
56 | mysql-info:
57 | Protocol: 10
58 | Version: 5.0.51a-3ubuntu5
59 | Thread ID: 139
60 | Capabilities Flags: 43564
61 | Some Capabilities: SupportsCompression, SupportsTransactions, ConnectWithDatabase, SwitchToSSLAfterHandshake, Speaks41ProtocolNew, LongColumnFlag, Support41Auth
62 | Status: Autocommit
63 |_Salt: -yk,6k:[*2sq2Pav0g;.
64 5432/tcp open postgresql PostgreSQL DB 8.3.0 - 8.3.7
65 | ssl-cert: Subject: commonName=subuntu084-base.localdomain/organizationName=OC05A/stateOrProvinceName=There is no such thing outside US/countryName=XX
66 | Not valid before: 2010-03-17T14:07:45
67 | Not valid after: 2010-04-16T14:07:45
68 |_ssl-date: 2026-07-09T14:34:14+00:00; -1s from scanner time.
69 5900/tcp open vnc VNC (protocol 3.3)
70 | vnc-info:
71 | Protocol version: 3.3
72 | Security types:
73 | VNC Authentication (2)
74 6800/tcp open X11 (access denied)
75 6667/tcp open irc UnrealIRCd
76 8809/tcp open ajp13 Apache Jserv (Protocol v1.3)
77 |_ajp-methods: Failed to get a valid response for the OPTIONS request
78 8180/tcp open http Apache Tomcat/Coyote JSP engine 1.1
79 |_http-title: Apache Tomcat/5.5
80 |_http-favicon: Apache Tomcat
81 Device type: general purpose
82 Running: Linux 2.6.X
83 OS CPE: cpe:/o:linux:linux_kernel:2.6
84 OS details: Linux 2.6.15 - 2.6.26 (likely embedded)
85 Network Distance: 2 hops
86 Service Info: Hosts: metasploitable.localdomain, irc.Metasploitable.LAN; OS: Unix, Linux; CPE: cpe:/o:linux:linux_kernel
```

2) Struttura Nessus

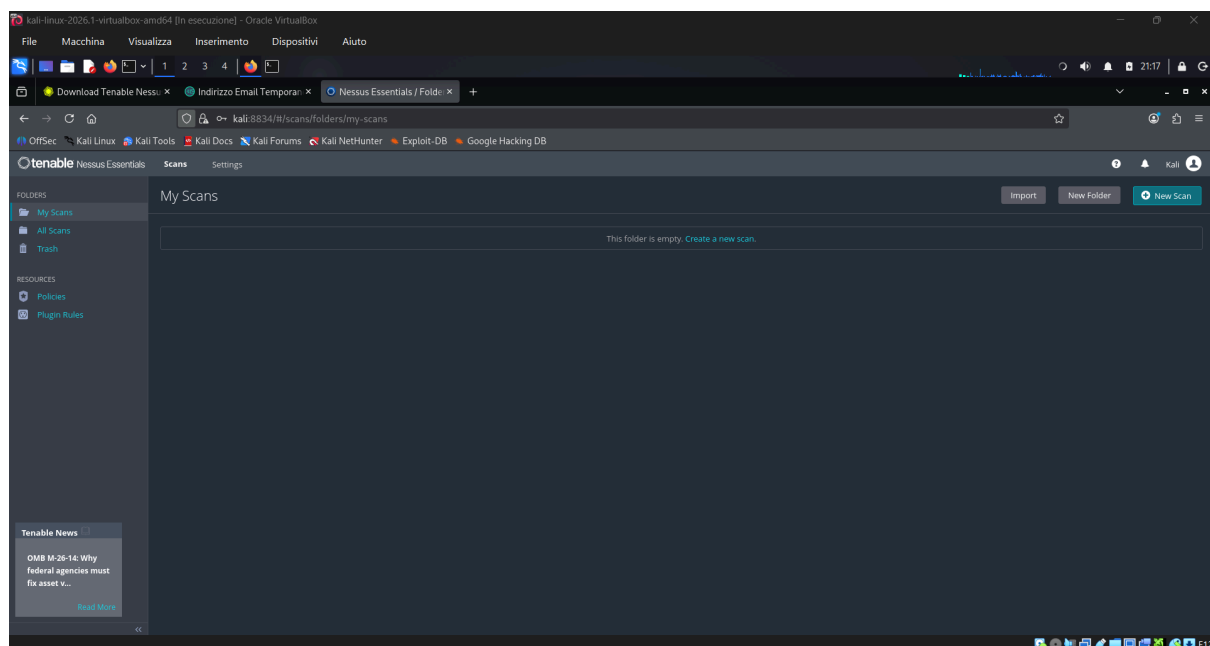

Nessus permette di fare la stessa cosa di Nmap con un'interfaccia e possiamo verificare direttamente le vulnerabilità del indirizzo che abbiamo cercato

