


TP1

- Reprendre le Code donné ci-dessous, tester et comprendre.

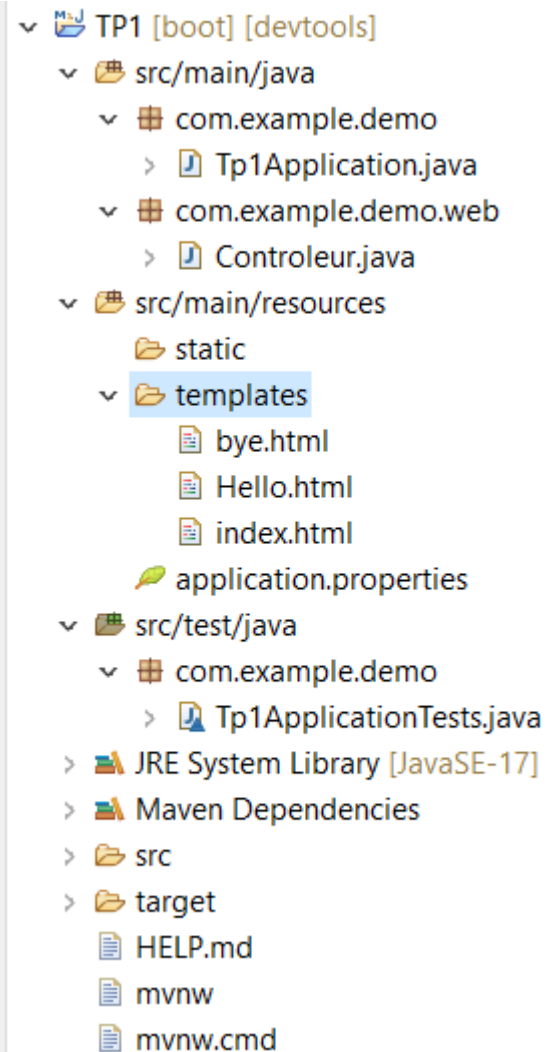

```
package com.example.demo;
import org.springframework.boot.SpringApplication;
import org.springframework.boot.autoconfigure.SpringBootApplication;
@SpringBootApplication
public class Tp1Application {

    public static void main(String[] args) {
        SpringApplication.run(Tp1Application.class, args);
        System.out.println("A tester !!!!");
    }
}
```

Tp1Application.java

```
package com.example.demo.web;
import org.springframework.stereotype.Controller;
import org.springframework.web.bind.annotation.RequestMapping;
@Controller
public class Controleur {
    @RequestMapping("/")
    String index() {return "index";}
    @RequestMapping("/hello")
    String hello() {return "hello";}
    @RequestMapping("/bye")
    String bye() {return "bye";}
}
```

Controleur.java

```
<!DOCTYPE html>
<html>
<head>
<meta charset="ISO-8859-1">
<title>Insert title here</title>
</head>
<body>
<h1>Main Page</h1>
</body>
</html>
```

index.html

```
<!DOCTYPE html>
<html>
<head>
<meta charset="ISO-8859-1">
<title>Insert title here</title>
</head>
<body>
<h1>Hello!!!!</h1>
</body>
</html>
```

hello.html

```
<!DOCTYPE html>
<html>
<head>
<meta charset="ISO-8859-1">
<title>Insert title here</title>
</head>
<body>
<h1>Bye!!!!</h1>
</body>
</html>
```

bye.html