

Helm

Charts

本地Helm
添加Repo

仓库位置1

仓库位置2

```
helm repo add bitnami https://charts.bitnami.com/bitnami
helm search repo bitnami mysql
helm search hub mysql
```

```
helm repo update #更新仓库索引
```


Repository
<https://artifacthub.io/>

bytedance repo


atguigu repo

alibaba repo


集群架构

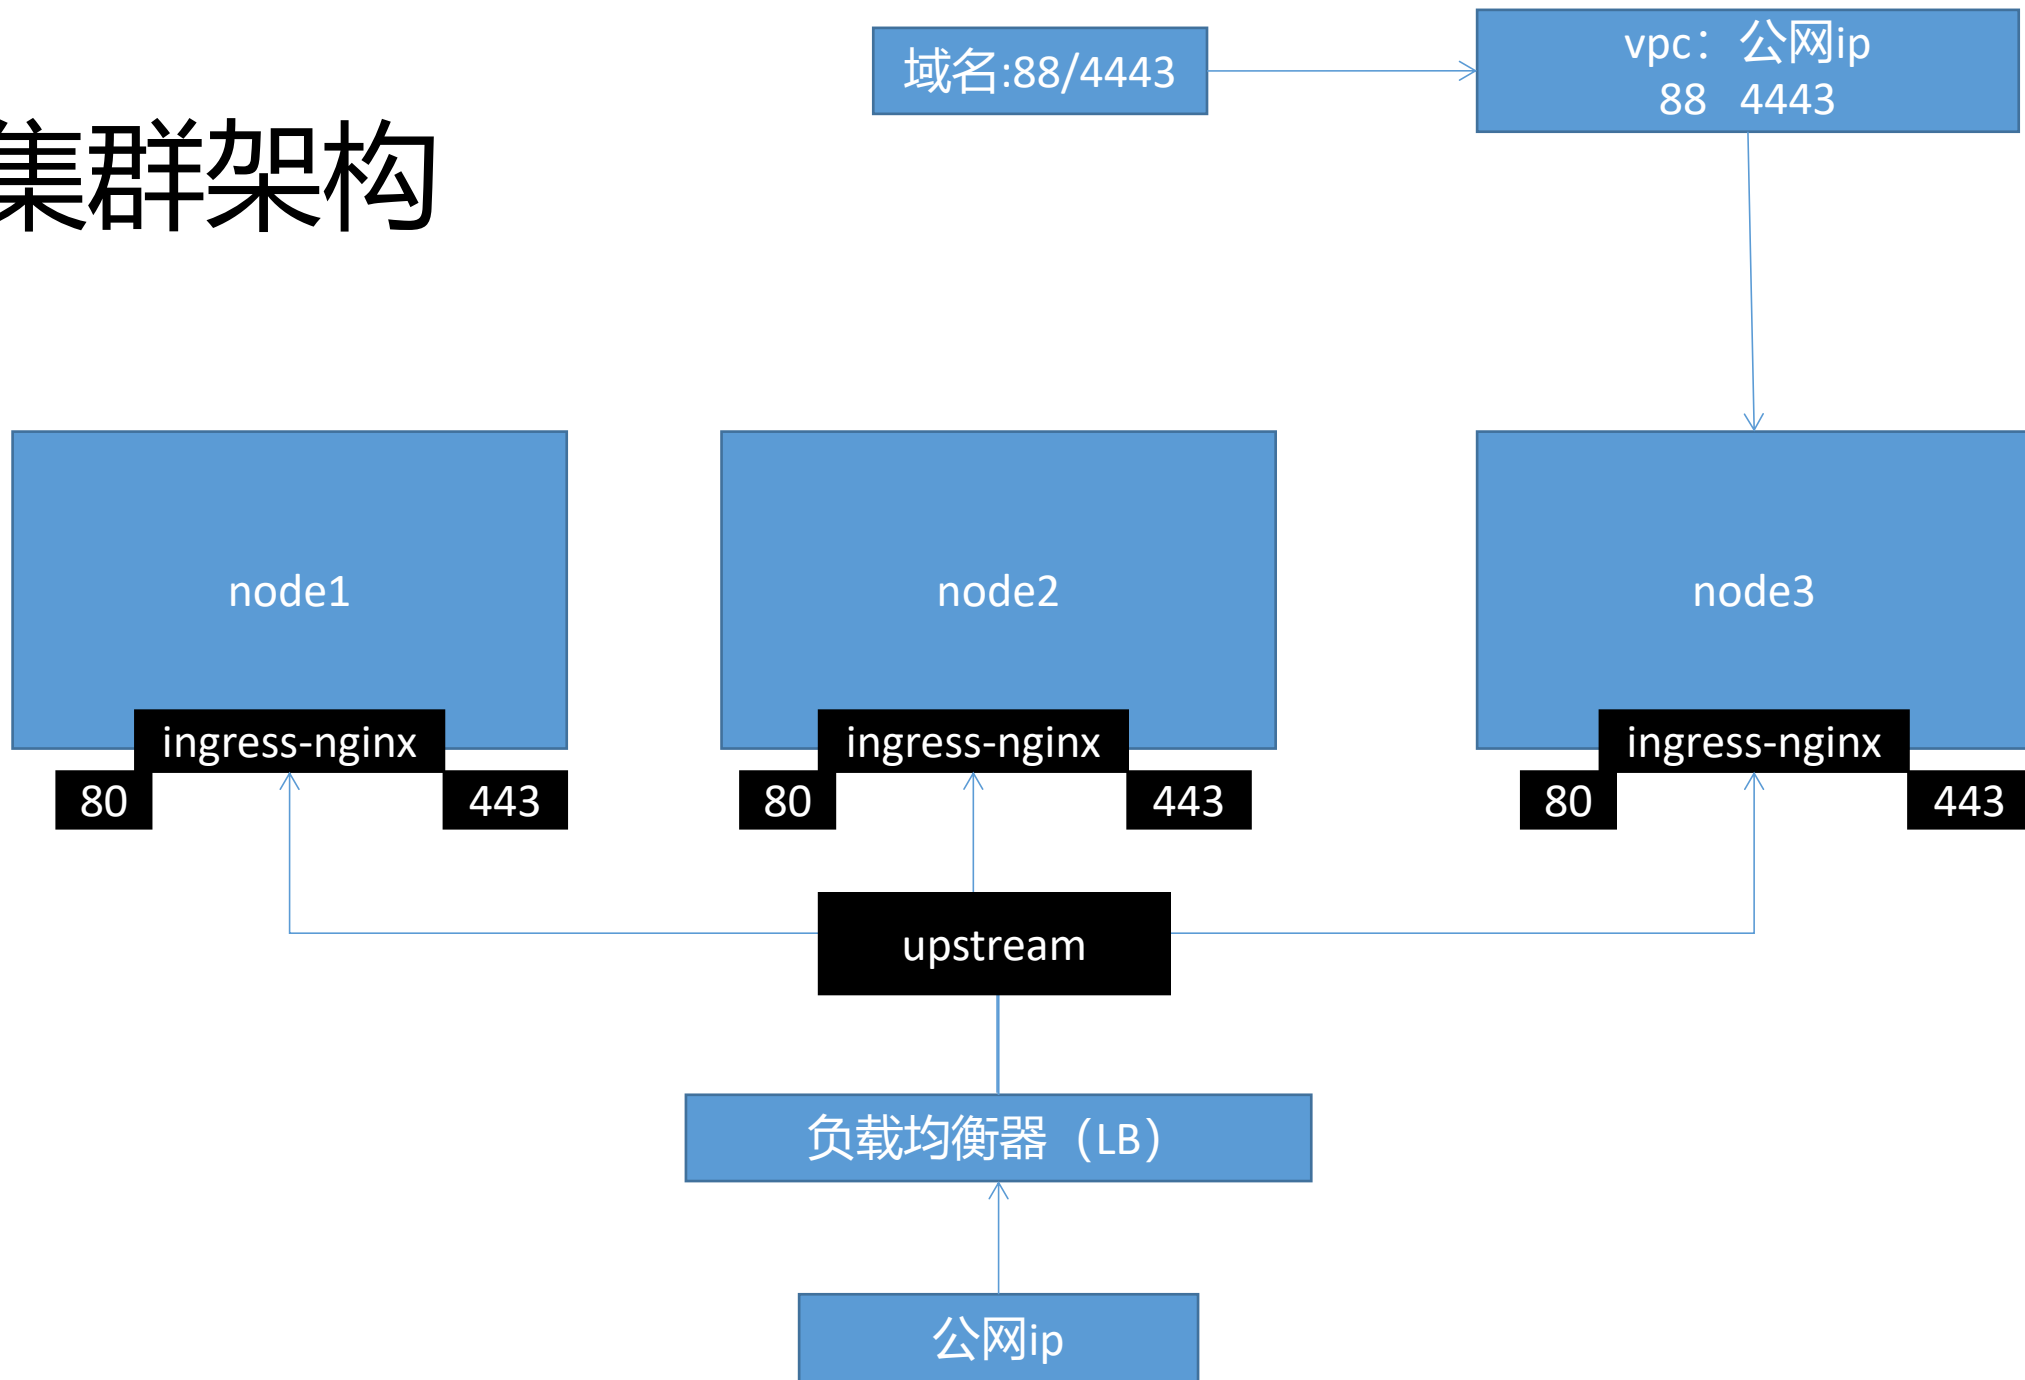

存储集群

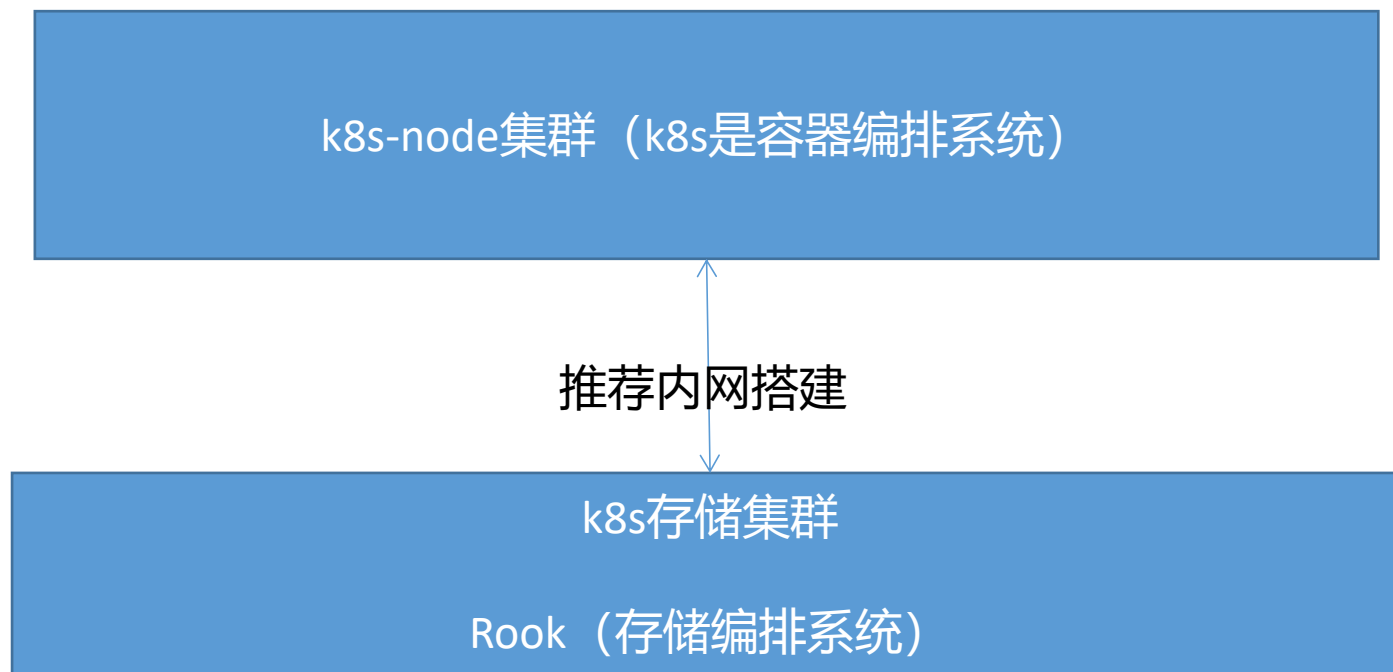

网络

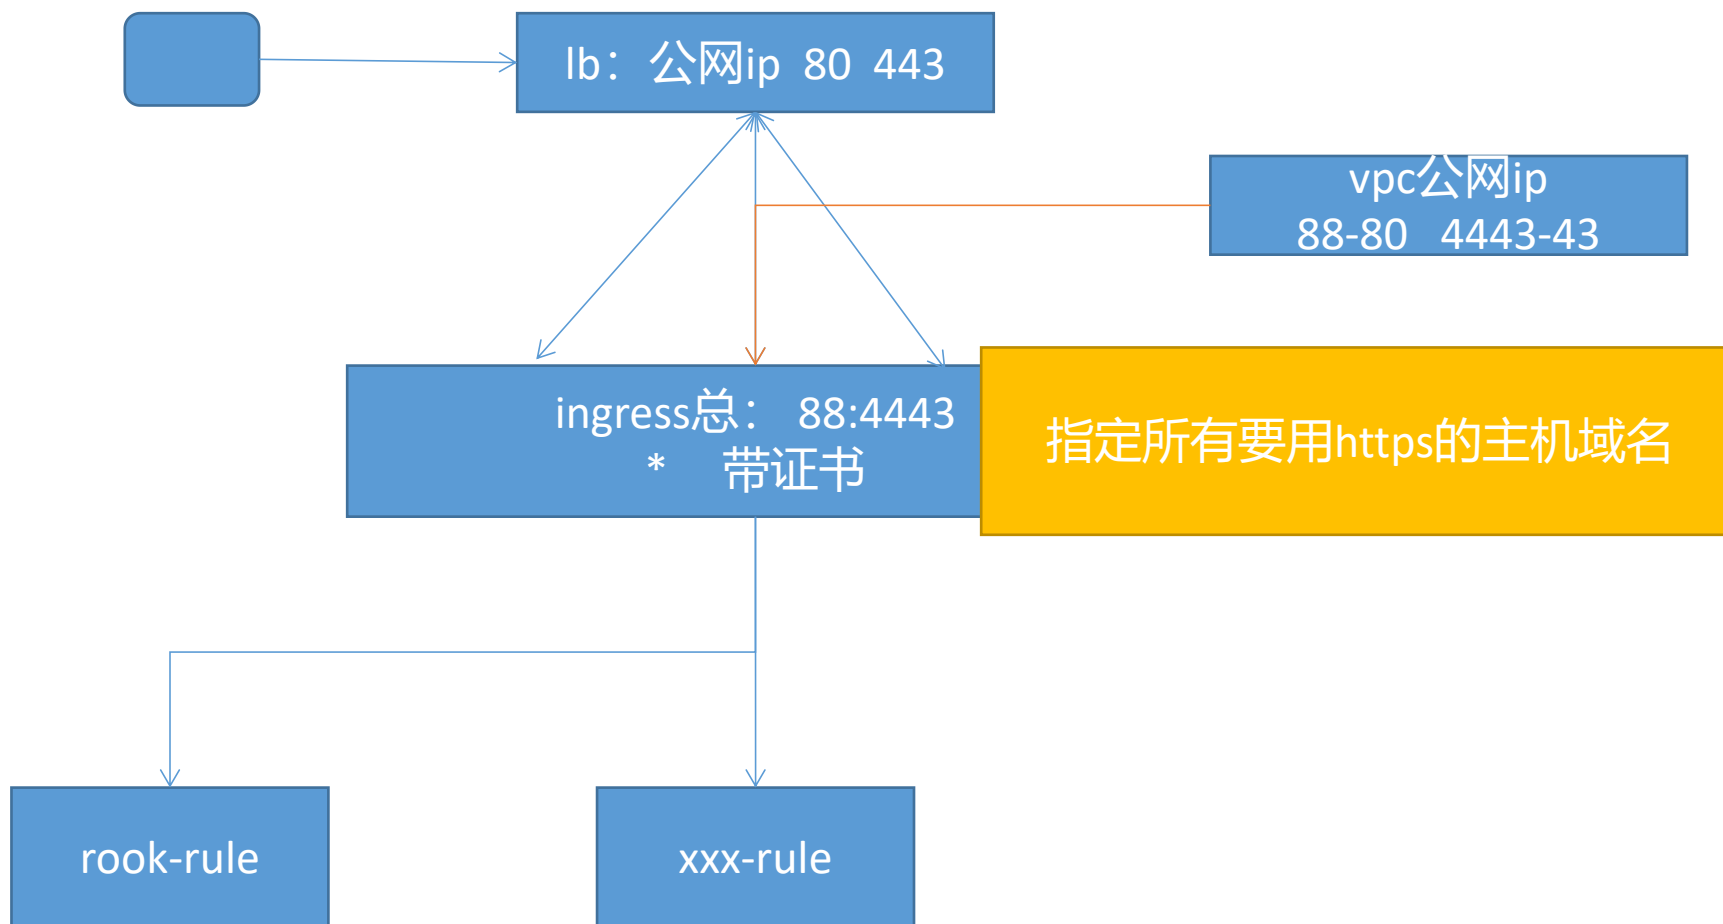


ceph-mgr的高可用


- a:主 b:备standby




集群规划

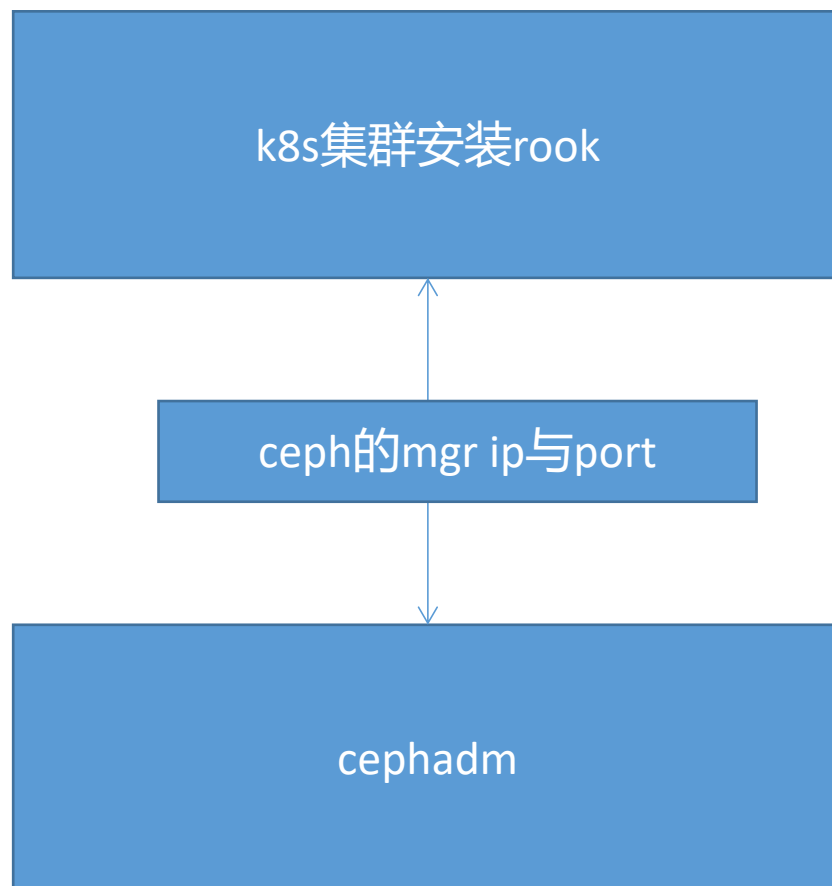

ingress

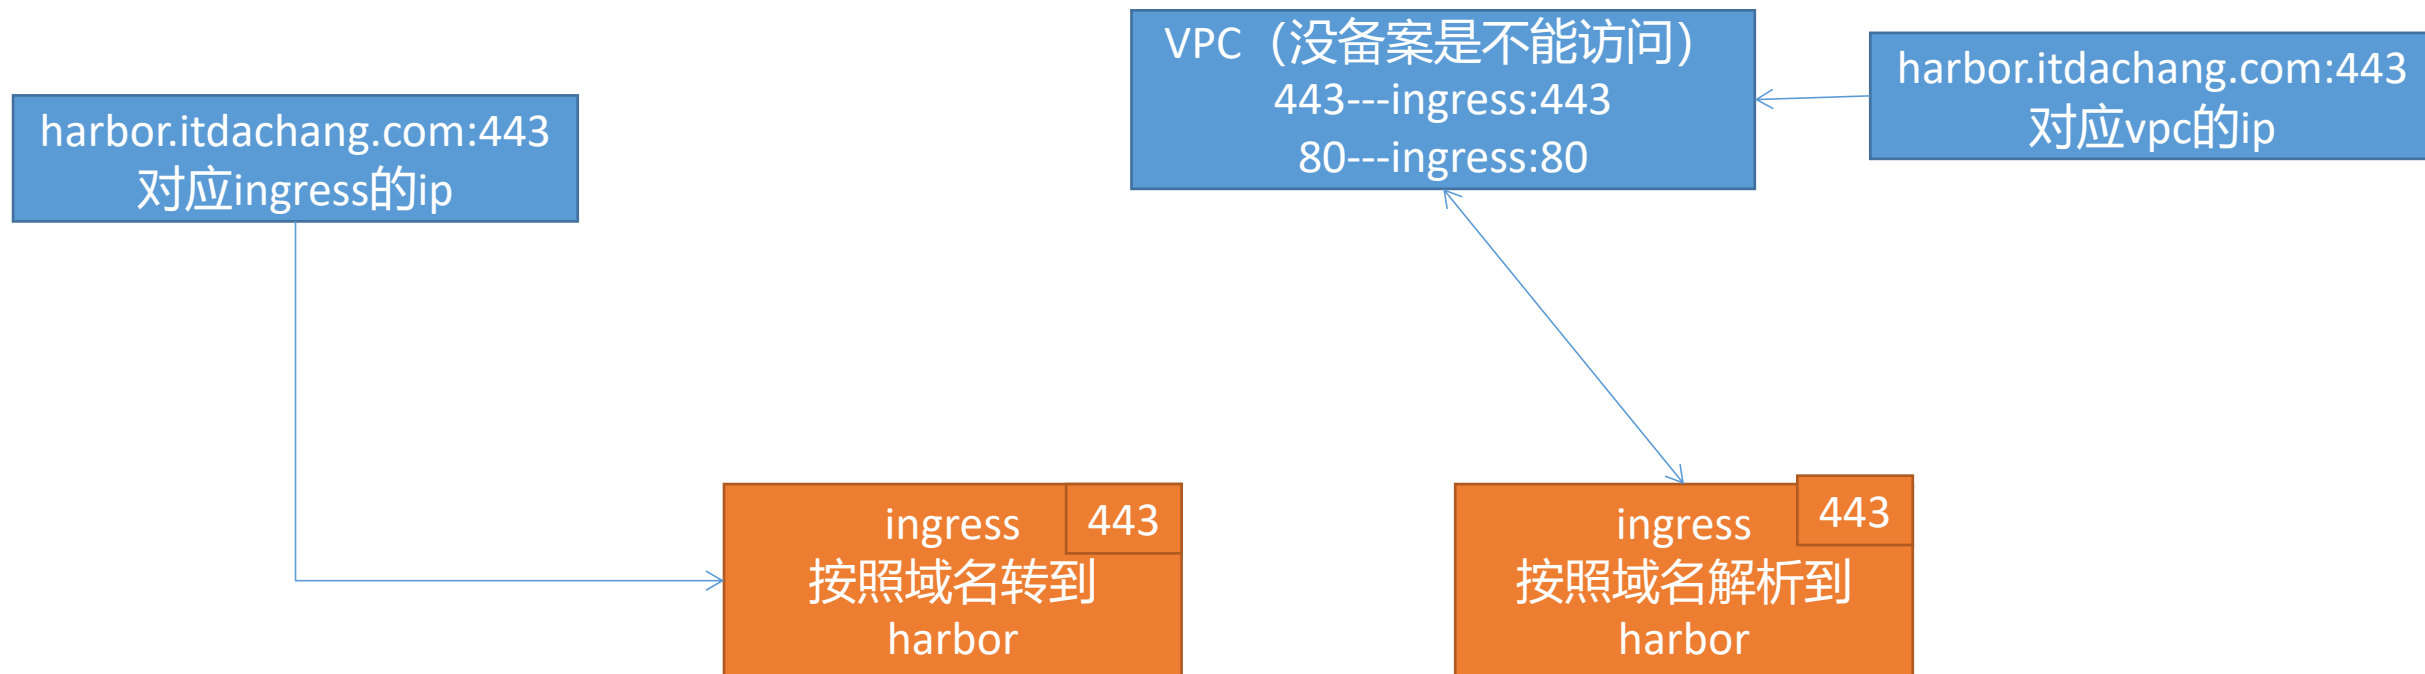


打包机

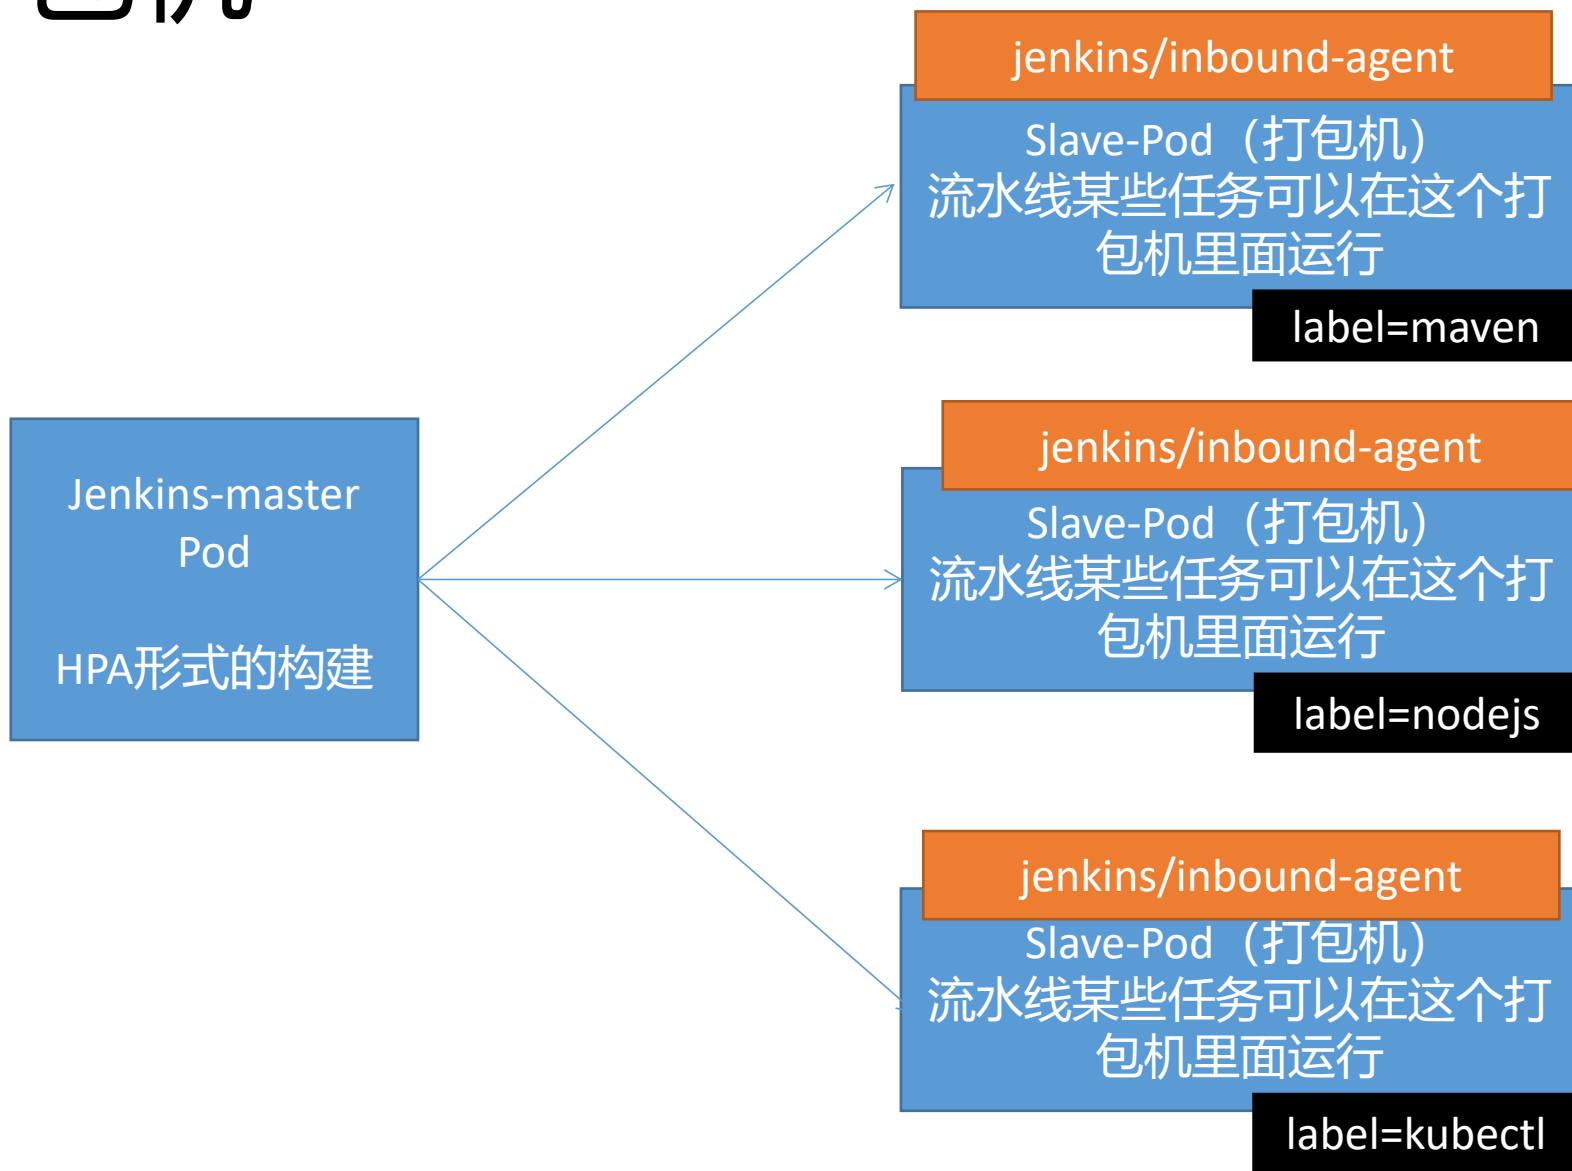


```
多阶段
stages{
  stage(){
    agent {
      label: "maven"
    }
  }
}
```



打包机-maven

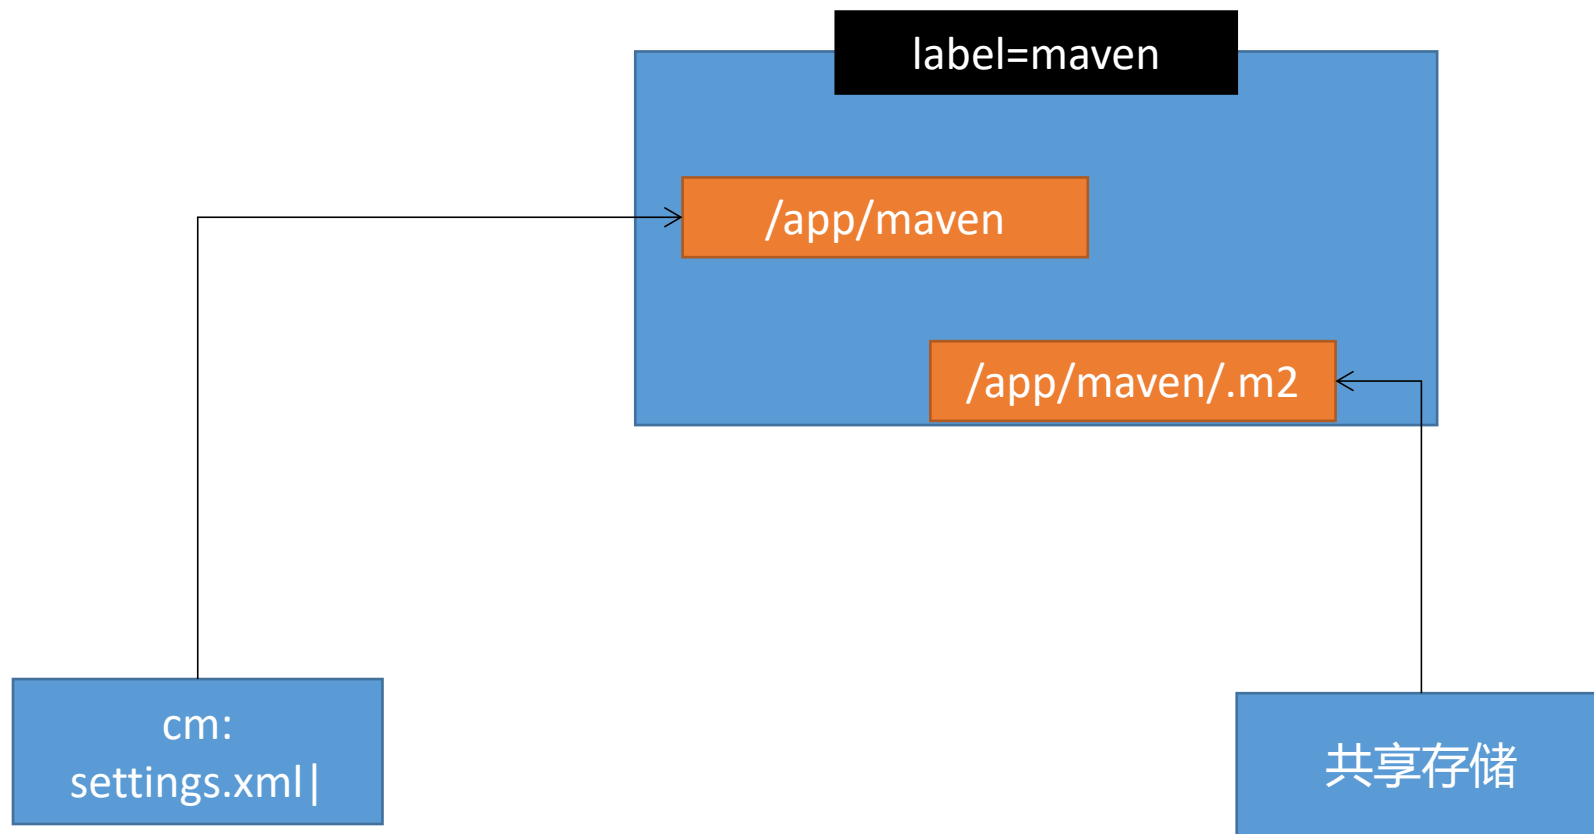

打包机-kubectl

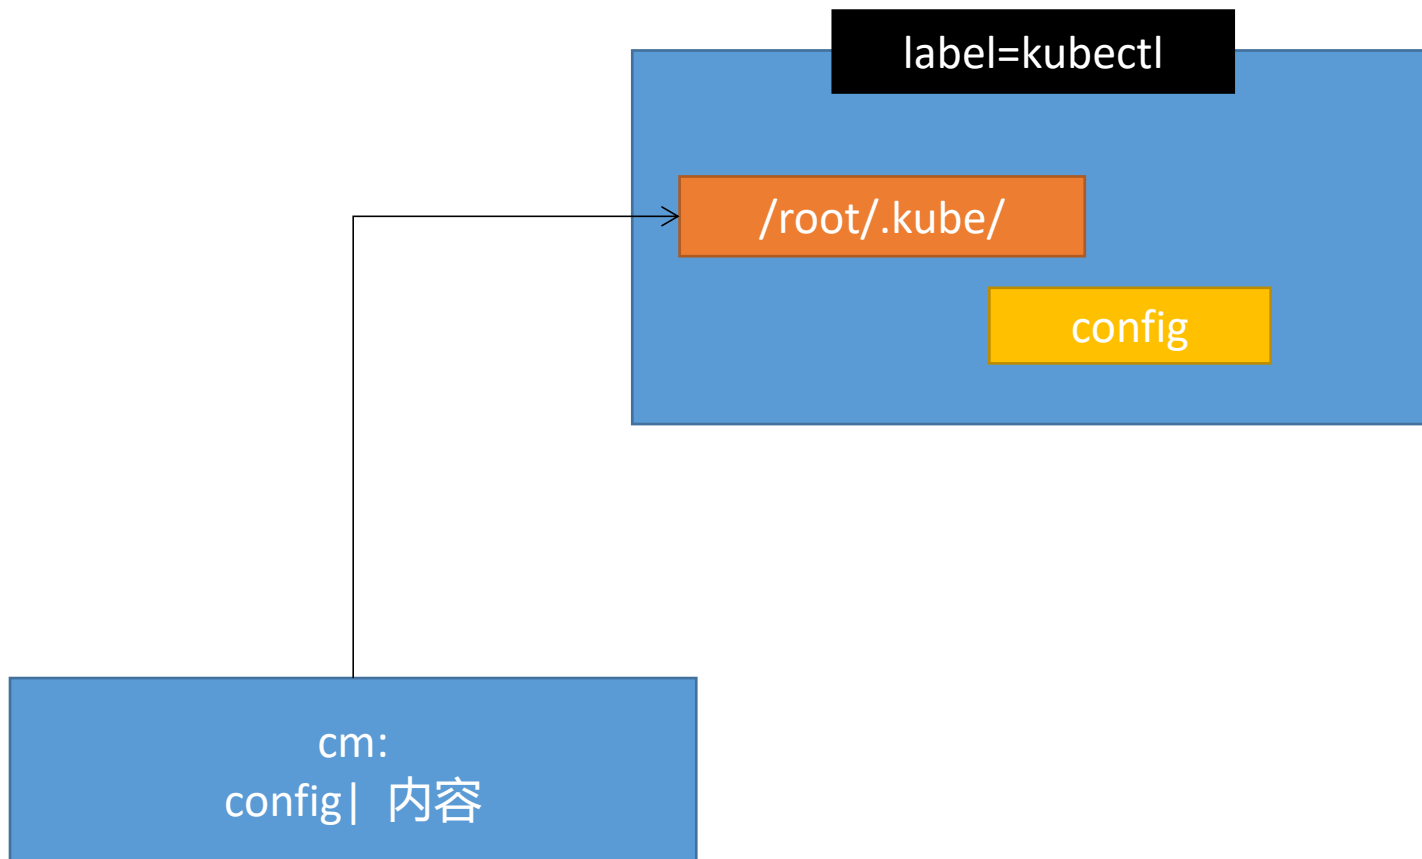


Istio与SpringCloud

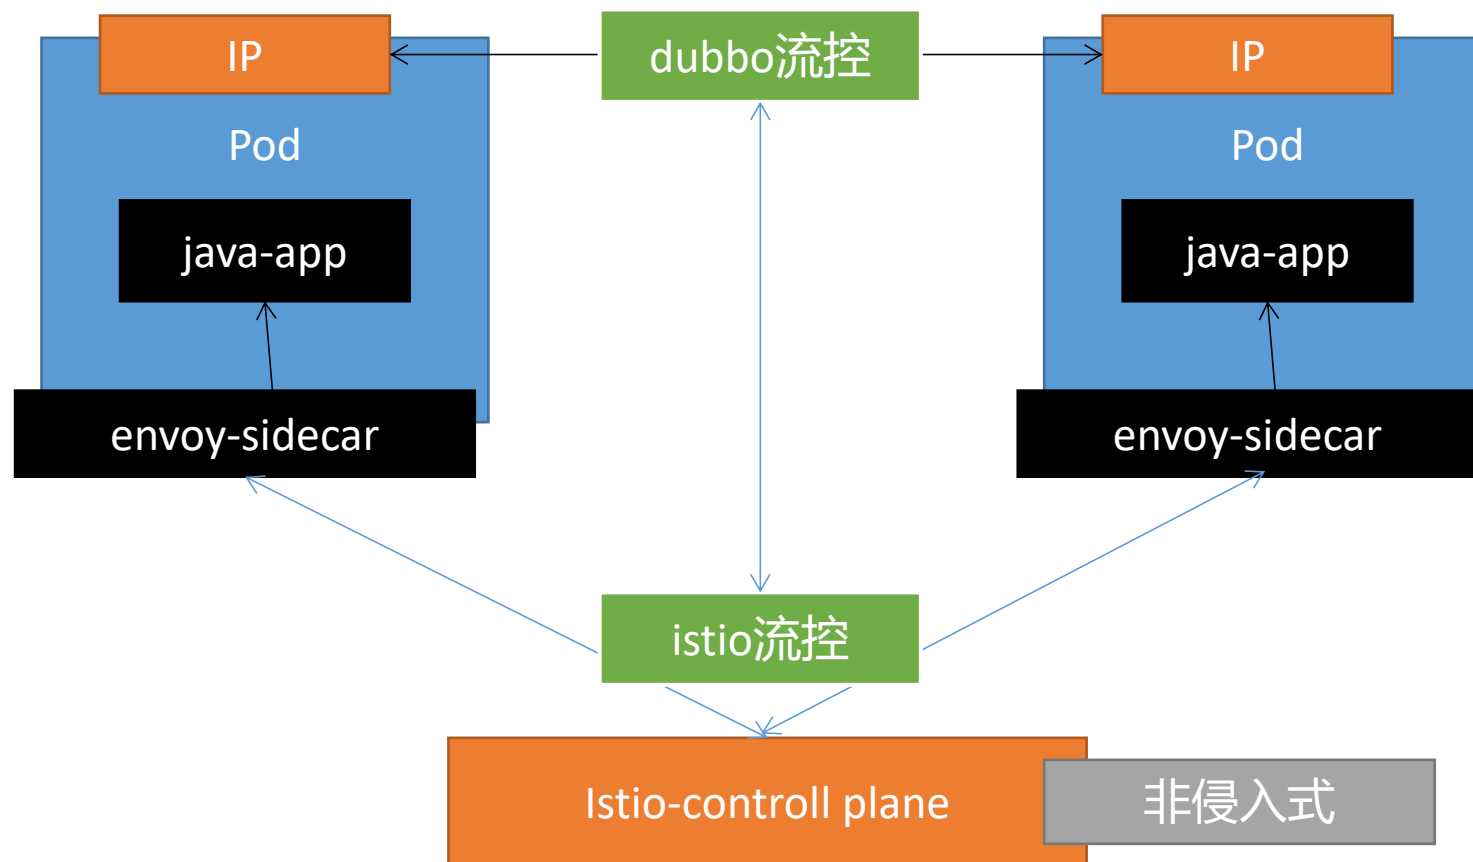

Serverless

- ServiceMesh公有云版?
 - 有了ServiceMesh
 - 专注写应用，自己打好镜像，部署上去就能调用通
 - 自己的应用可以有一个唯一域名（应用名的MD5就是服务名）
 - 别的应用想要调用。
 - `@FeignClient("http://aservice")`
 - `interface HelloService`
 - 私有云的istio都能访问通。
- 阿里云公有云的Istio
 - 给阿里云部署一个应用
 - 阿里云给你产生一个服务名，公网可访问
 - 你的应用，别人的应用
 - `curl xxx`
 - `@FeignClient("http://yourservice")`
 - 写好应用，自动打包
 - 云厂商给你的应用开一个Pod（按分钟付费、按流量付费）。

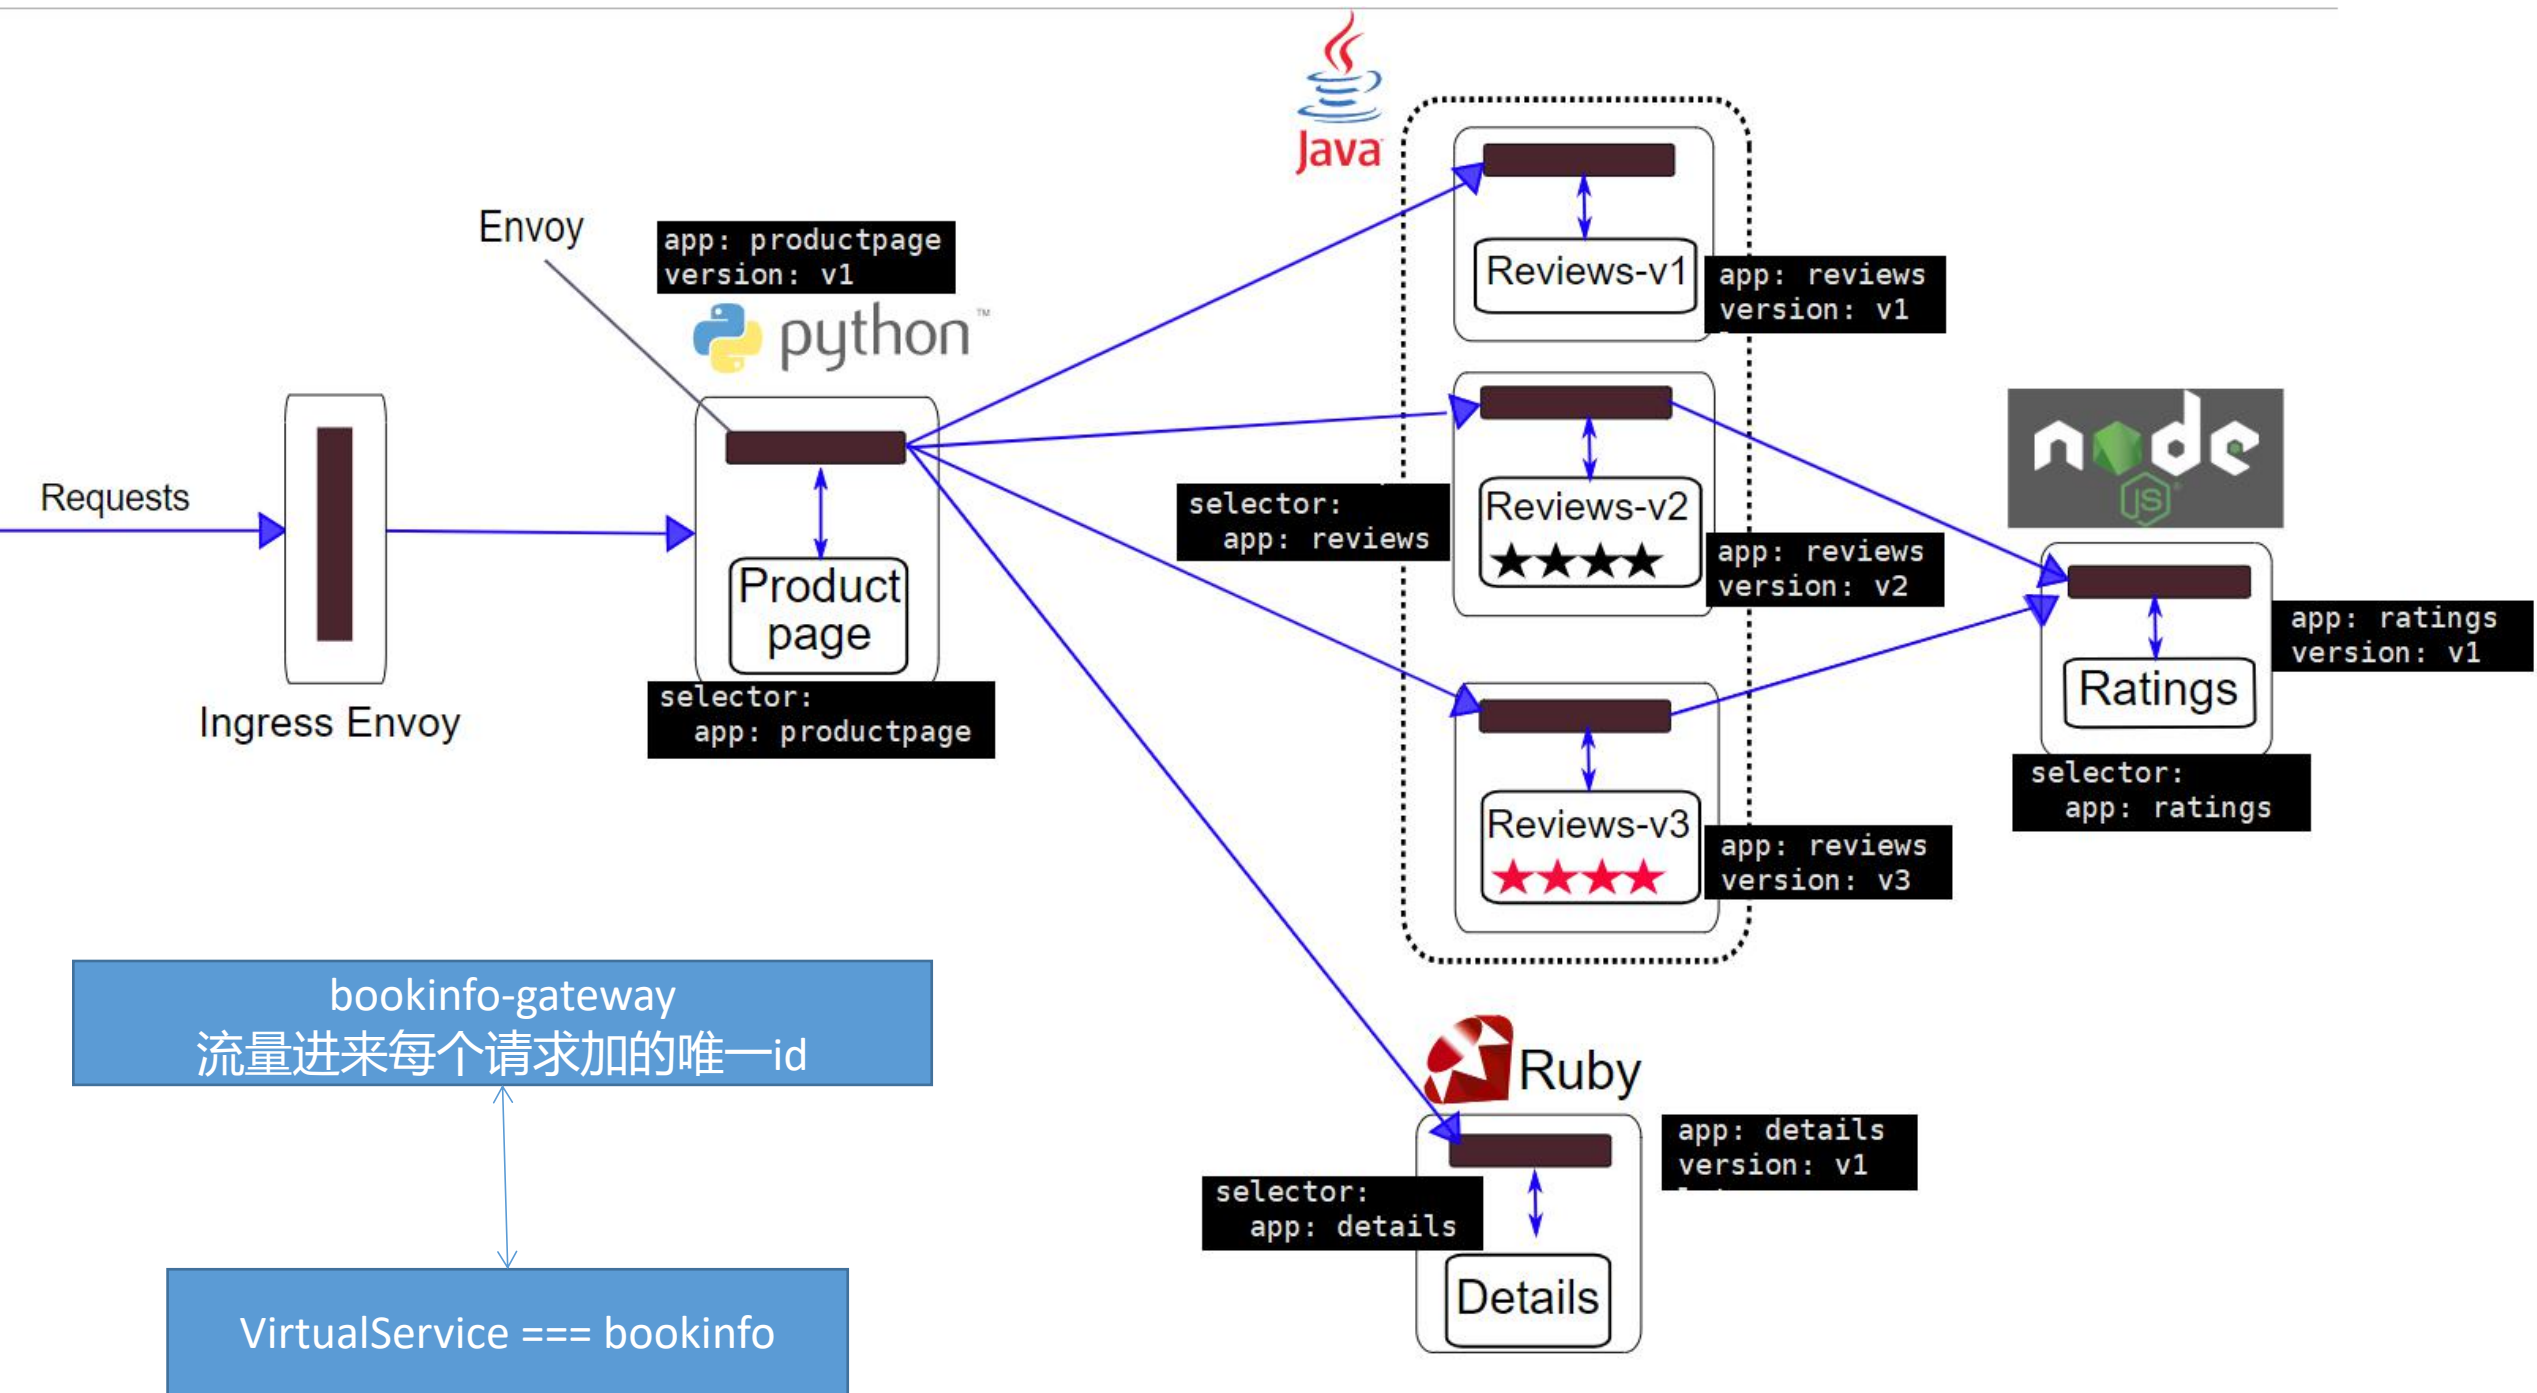

VirtualService === bookinfo

Gateway

```
http:
- match:
  - uri:
      exact: /productpage
  - uri:
      prefix: /static
  - uri:
      exact: /login
  - uri:
      exact: /logout
  - uri:
      prefix: /api/v1/products
route:
- destination:
    host: productpage
    port:
        number: 9080
```

PORT(S)

15021:32625/TCP, 80:31267/TCP, 443:32548/TCP, 81400:30031/TCP, 15443:31755/TCP

AGE

41m

Ingress

VirtualService

```
metadata:  
  name: ratings  
spec:  
  hosts:  
  - ratings  
  http:  
  - route:  
    - destination:  
      host: ratings  
      subset: v1
```

```
metadata:  
  name: details  
spec:  
  hosts:  
  - details  
  http:  
  - route:  
    - destination:  
      host: details  
      subset: v1
```