Institute of Management and Planning & Advanced Computer Training

(IMPACT) , Patna

Affiliated to Aryabhatta Knowledge University

Project Report

on

"HOTEL MANAGEMENT SYSTEM"

In Partial fulfilment for the award of the degree of

BCA DEGREE (Bachelor of Computer Applications(

2023

6th Semester

Paper Code: 303604

Session: 2020-2023

Guide Name: Mr B.K.Prasad **Student Name: Shyam Sunder Kumar**

Designation : Faculty **Reg. No: 20303316089**

ACKNOWLEDGEMENT

The most awaited moment of successful completion of endeavor is always result of persons involved explicitly or implicitly there in. It is impossible without the help and guidance of the people around to carry on this project work. I take the opportunity to express my sincere gratitude to each and every person who gave me the guidance and help for preparing the report.

I take this opportunity to thanks to Institute of Management and Planning & Advanced Computer Training (IMPACT) College for providing me an opportunity to work for this research.

I am also desirous of placing on record profound indebtedness to Project Guide and all the members of faculty of IMPACT College, Danapur, for the valuable advice, guidance and support that they offered.

Last but not the least, I would also like to thanks all the respondents for giving me their time and relevant information.

My strength and inspiration are the blessings of my parents which they do every day for me. I owe all my success and achievements to them.

Shyam Sunder Kumar

CERTIFICATE OF ORIGINALITY

This is to certify that the project report entitled "**Hotel Management System**" submitted to Aryabhatta Knowledge University in partial fulfilment of the requirement of the award of the degree BCA, is an original work carried out by **Shyam Sunder Kumar** Registration Number **20303316089** under the guidance of **Mr. B.K.Prasad**

The matter embodied in this project is a genuine work done by the student and has not been submitted whether to this University or to any other university / institute for the fulfilment of the requirement of any course of study.

Signature of Student: Signature of Guide

Name and Address of Student: Name, Designation and Address of guide:

GUIDE DETAILS:

CurriculumVitae

Mr B.K.Prasad

Profile

Mr B.K.Prasad

M. Tech. (IT), M. Phil. (Computer Science), MCA, MBA (Corporate Secretaryship)

Experiences:

More than 21 years of teaching experience at various Colleges under recognized and reputed Universities.

Achievements:

Attended many International and National level Seminars and Conferences. Wrote many articles for the publication in academic journals.

Signature Of Guide

DECLARATION

I the undersigned, a BCA student of IMPACT College bearing registration number **20303316089** do solemnly declare that project work **Hotel Management System** work, carried out under the supervision of guide **Mr. B.K.Prasad**. I assert that the statements made are the outcome of my work. I ensure that project work is original, not a copy paste job and consequences of plagiarism. I affirm that this project work has not been submitted whether to this University or to any other University/institute for the fulfilment of the requirement of any course of study.

Signature of the Student

TEAM MEMBERS

s. No	Student Name	Reg No
1.	Shyam Sunder Kumar	20303316089
2.	Krrish Sharma	20303316095
3.	Aditi Raj	20303316093
4.	Chandani Kumari	20303316086

CONTENTS

S. no.	Topics	Page no.
1	Introduction	8
2	Project category	10
3	Tools/platform, language to be used	11
4	System Analysis	12
5	Software Requriment Specification	15
6	Language Overview	16
7	System Design	18
8	Input/Output Design	21
9	Database Design	23
10	Implementation	26
11	System Testing	28
12	Future Inhancement / Conclusion	30
13	Source Code	31
14	HMS Output Screens	66
15	Limitations of project	74
16	Scope/Features of application	75
17	Bibliography	76

1. INTRODUCTION

ABOUT THE PROJECT –HOTEL MANAGEMENT SYSTEM

Objective:

To develop an application that provides the following

- Enquiries with the Customer
- Creation of Reservation
- Availing room/suite
- Generation of reports based on the requirements

Introduction:

In Hotels all areas are being computerized and administration of Hotels is fully automated. There are several areas in hotel field it so huge. The major roles played in Hotels are Customers, Visitors and Catering service. So I took some important areas, which is relevant to them.

Visitors are normally eager to know the facilities about their Hotel and Customers and also they can fix the Enquiry with Customers at any specialized area. Then hotel are needed to maintain records about the Visitors for their further process and so I used Hotel person as accountant to maintain the record and stock details.

OBJECTIVE:

The HOTEL MANAGEMENT SYSTEM covers three main functional areas. They are

- Visitor Management System
- Report Generation.

Visitor Management System:

This module deals with Visitor registration where it gets the basic personnel information such as name, date of birth and other information from the user when he/she is login in for the first time. The user will create their own user id and password, which will be validated with the database, and thereafter the user can sign in directly and will be recognized by the system as a registered user by means of the user id and the password. The user is allowed to edit his details whenever the need arises in future.

Customer's profile gives you effective information about the Customers such his/her experience, designation, e-mail id, further higher studies. This provides Visitor to look at Customer's profile and get confident about Customer for their checkups.

Enquiry scheduling allows the user to make a choice of date by looking at the availability of Enquiry dates.

Prescription and referrals deals with the suggestions given by the Customer to the Visitor after the consultation.

Report generation:

This module generates the reports according to the needs such as Visitor wise sheets and Enquiry history, stock list, daily room distribution list, daily customer admission records, Visitors treated by a specific Customer, check out of Visitor room wise

2.PROJECT CATEGORY

The undergoing project falls under

Internet Technologies

And

RDBMS category

The project has been developed using RDBMS (Relational Data Base Management system) concepts as prescribed by BUA. RDBMS category for this project has been chosen because it is conceptually simple and more importantly based on mathematically theory of relation. We can easily establish relationship using primary and foreign keys. Features of RDBMS are following:-

TOOLS /PLATFORMS , LANGUAGE TO BE USED

Front End GUI Tools	:	JAVA
RDBMS Back End	:	Oracle 10g XE
Operating System	:	Windows 7/8/10/11

SYSTEM ANALYSIS

2.1 PROBLEM DEFINITION

- Because of the present system works manually the user cannot access data frequently.
- There is no security for the data.
- There is not any catalog facility.
- The user can be informed for any purpose by the any relative via the registers.
- The management should not take any decision on the present manual system
- Frequently updating on training is not possible in present manual system.

2.2 EXISTING SYSTEM

The existing system does not allow the Visitor to choose the Enquiry date by looking the available dates at anywhere and any time. The systems that are available at present are mostly either Visitor or Catering service based and do not provide a blend of both. The system does not provide online booking of room.

PROBLEMS IN EXISTING SYSTEM

- Scheduling of Enquiry is not efficient
- Searching of records is difficult
- Reorder of room is difficult
- deluxe room are difficult to identify
- Doesn’t allow E-booking

2.3 PROPOSED SYSTEM

The proposed system also has complete control over the Hotel management as well as the management of Catering service. The pro of this project is implementation of web services. The administrator can register the Customer and Visitor details, can maintain the Suite reorder levels efficiently. The Visitor can also register through online and can also get e-Enquiry. Each user will be identified using a unique identification number.

In the case of Enquiry, the information of the Visitor who as got Enquiry will be sent to the corresponding Customer. The Customer can generate case sheet and case history reports and he can also able to view his time slots on particular day. The Visitor will be intimated about the date and time of the Enquiry through our service.

Application Services promise to bring information into the applications from the databaset in much the same way that UI have made information available to end users.
In the proposed system, when a user wants to find the details of any Hotel located in Patna it can be found using the help web service.

The proposed system does not allow unauthorized users login into others ID, if done so, the unauthorized user will be prompted your login session expired. Session can be accessed from any JAVA page and they are remembered from one page to another. A session is defined as the period of time that a unique user interacts with an application.

2.4 REQUIREMENT SPECIFICATION

Software requirement specification is a document that completely describes what the proposed software should do without describing how the software will do it. The basic purpose of SRS is to bridge the communication gap between the user and the developers. An SRS establishes the basis for agreements between the client and the suppliers or what the software product will do. It also provides a reference for validation of the final product. A high quality SRS is perquisite for high quality software. A high quality SRS reduces the development cost.

The main requirement of the developed computer software is for Visitor and Visitor together with Customer's information.

The Project Contains mainly following activity.

- Populate the database part with all departments working in Hotel with different location.
- Adding details of all the Customers available in all departments with there full details.
- Doing registration of Visitors depending on the Customer available on the particular time.
- Doing registration of Visitor
- Allocating Room No, Room service No etc with date of admission show that this record can be used for query
- Entering Billing form for Visitor bill.
- Maintaining availability and non availability of Room service in each room of admission of Visitor.
- Next activity is query for Visitor so that any relative of admission Visitor can get the details of Visitor
- The last activity is report generation for administrative use.

HARDWARE REQUIREMENTS

- Processor : Pentium IV onwards
- RAM : 512 MB or more
- Hard Disk : 512 MB HDD or more

SOFTWARE REQUIREMENTS

- Operating System : Microsoft Windows7/Microsoft Windows 8/10/11
- Software Used : Java
- Front End : Swimg,AWT.
- Back End : Oracle 10g XE

2.5 LANGUAGE OVERVIEW

ABOUT JAVA

Java is a class-based, object-oriented programming language that is designed to have as few implementation dependencies as possible. It is a general-purpose programming language intended to let application developers *write once, run anywhere* (WORA), meaning that compiled Java code can run on all platforms that support Java without the need for recompilation. Java applications are typically compiled to bytecode that can run on any Java virtual machine (JVM) regardless of the underlying computer architecture. The syntax of Java is similar to C and C++, but has fewer low-level facilities than either of them. The Java runtime provides dynamic capabilities (such as reflection and runtime code modification) that are typically not available in traditional compiled languages. As of 2019, Java was one of the most popular programming languages in use according to GitHub, particularly for client-server web applications, with a reported 9 million developers.[21]

Java was originally developed by James Gosling at Sun Microsystems (which has since been acquired by Oracle) and released in 1995 as a core component of Sun Microsystems' Java platform. The original and reference implementation Java compilers, virtual machines, and class libraries were originally released by Sun under proprietary licenses. As of May 2007, in compliance with the specifications of the Java Community Process, Sun had relicensed most of its Java technologies under the GNU General Public License. Oracle offers its own HotSpot Java Virtual Machine, however the official reference implementation is the OpenJDK JVM which is free open source software and used by most developers including the Eclipse IDE and is the default JVM for almost all Linux distributions.

The latest version is Java 15, released in September 2020, with Java 11, a currently supported long-term support (LTS) version, released on September 25, 2018; Oracle released for the legacy Java 8 LTS the last zero-cost public update in January 2019 for commercial use, although it will otherwise still support Java 8 with public updates for personal use up to at least December 2020. Other vendors have begun to offer zero-cost builds of OpenJDK 8 and 11 that are still receiving security and other upgrades.

Oracle

Oracle allows companies to gain greater insight from their business information and achieve faster results for a competitive advantage

Key Capabilities:-

- **High Availability:** Ensure business continuity with the highest levels of system availability through technologies that protect your data against costly human errors and minimize disaster recovery downtime.
- **Performance and Scalability:** Deliver an infrastructure that can grow with your business and has a proven record in handling today's large amounts of data and most critical enterprise workloads.
- **Security:** Provide a secure environment to address privacy and compliance requirements with built-in features that protect your data against unauthorized access.
- **Manageability:** Manage your infrastructure with automated diagnostics, tuning, and configuration to reduce operational costs while reducing maintenance and easily managing very large amounts of data.
- **Developer Productivity:** Build and deploy critical business-ready applications more quickly by improving developer productivity and reducing project life cycle times.
- **Business Intelligence:** Gain deeper insight into your business with integrated, comprehensive analysis and reporting for enhanced decision making.

3 SYSTEM DESIGN

3.1 DATA FLOW DIAGRAM

Level 0 Data Flow Diagram

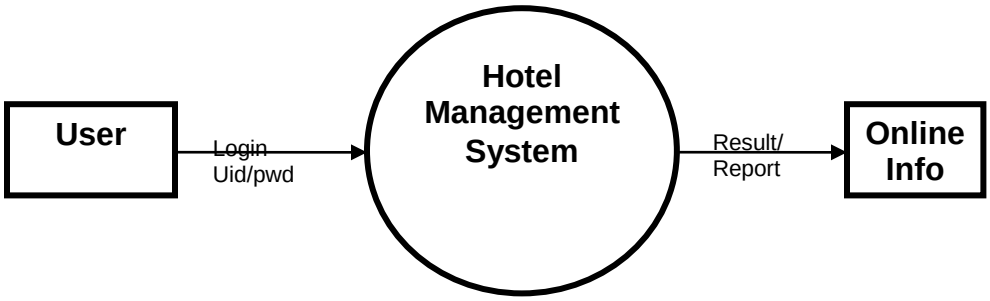

Fig. HOTEL MANAGEMENT SYSTEM

Level 1 Data Flow Diagram

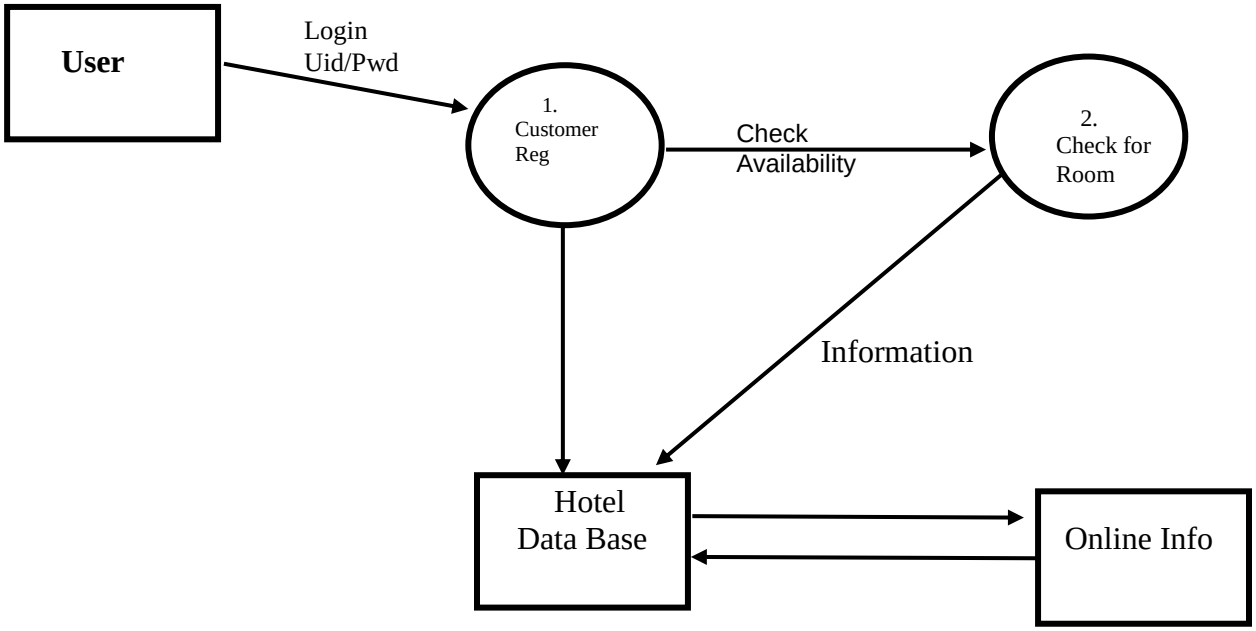

Fig. Coustomer Information System

Level 2 Data Flow Diagram

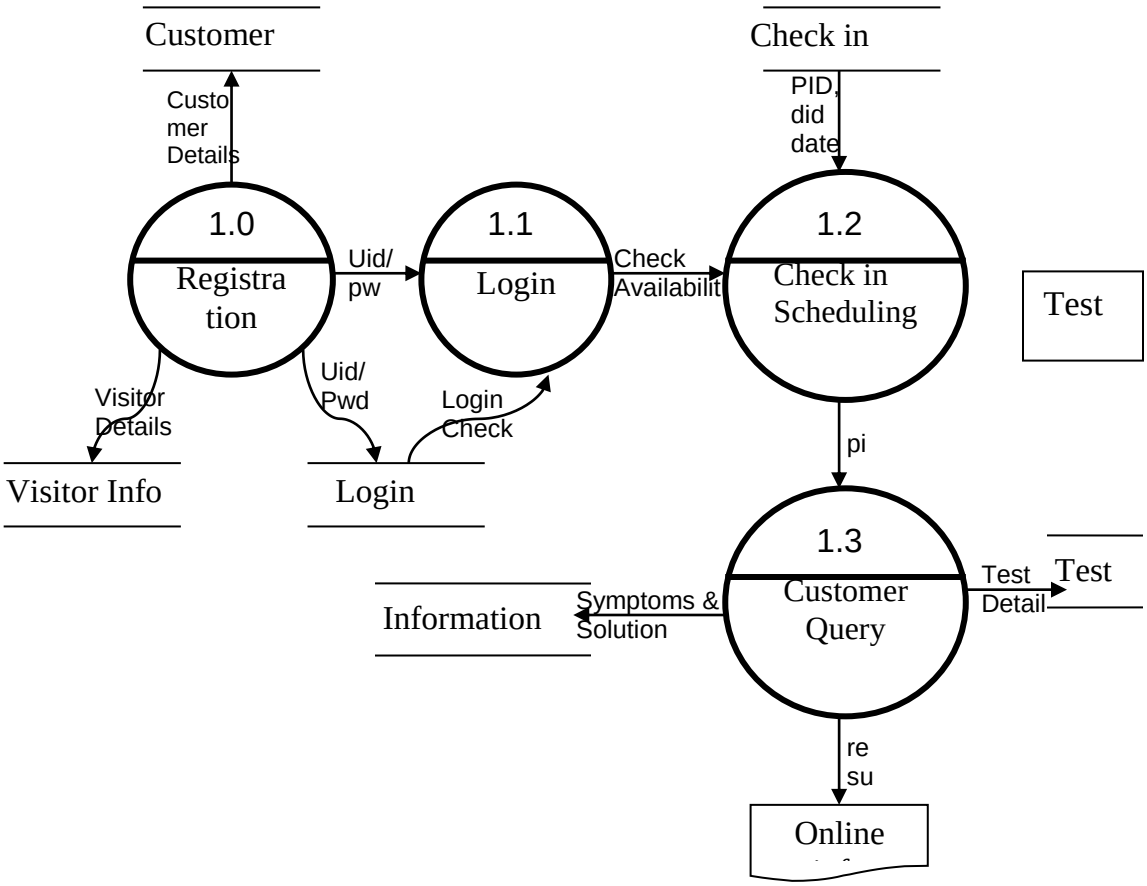

Fig. Visitor Management System

<u>E-R Diagram</u>

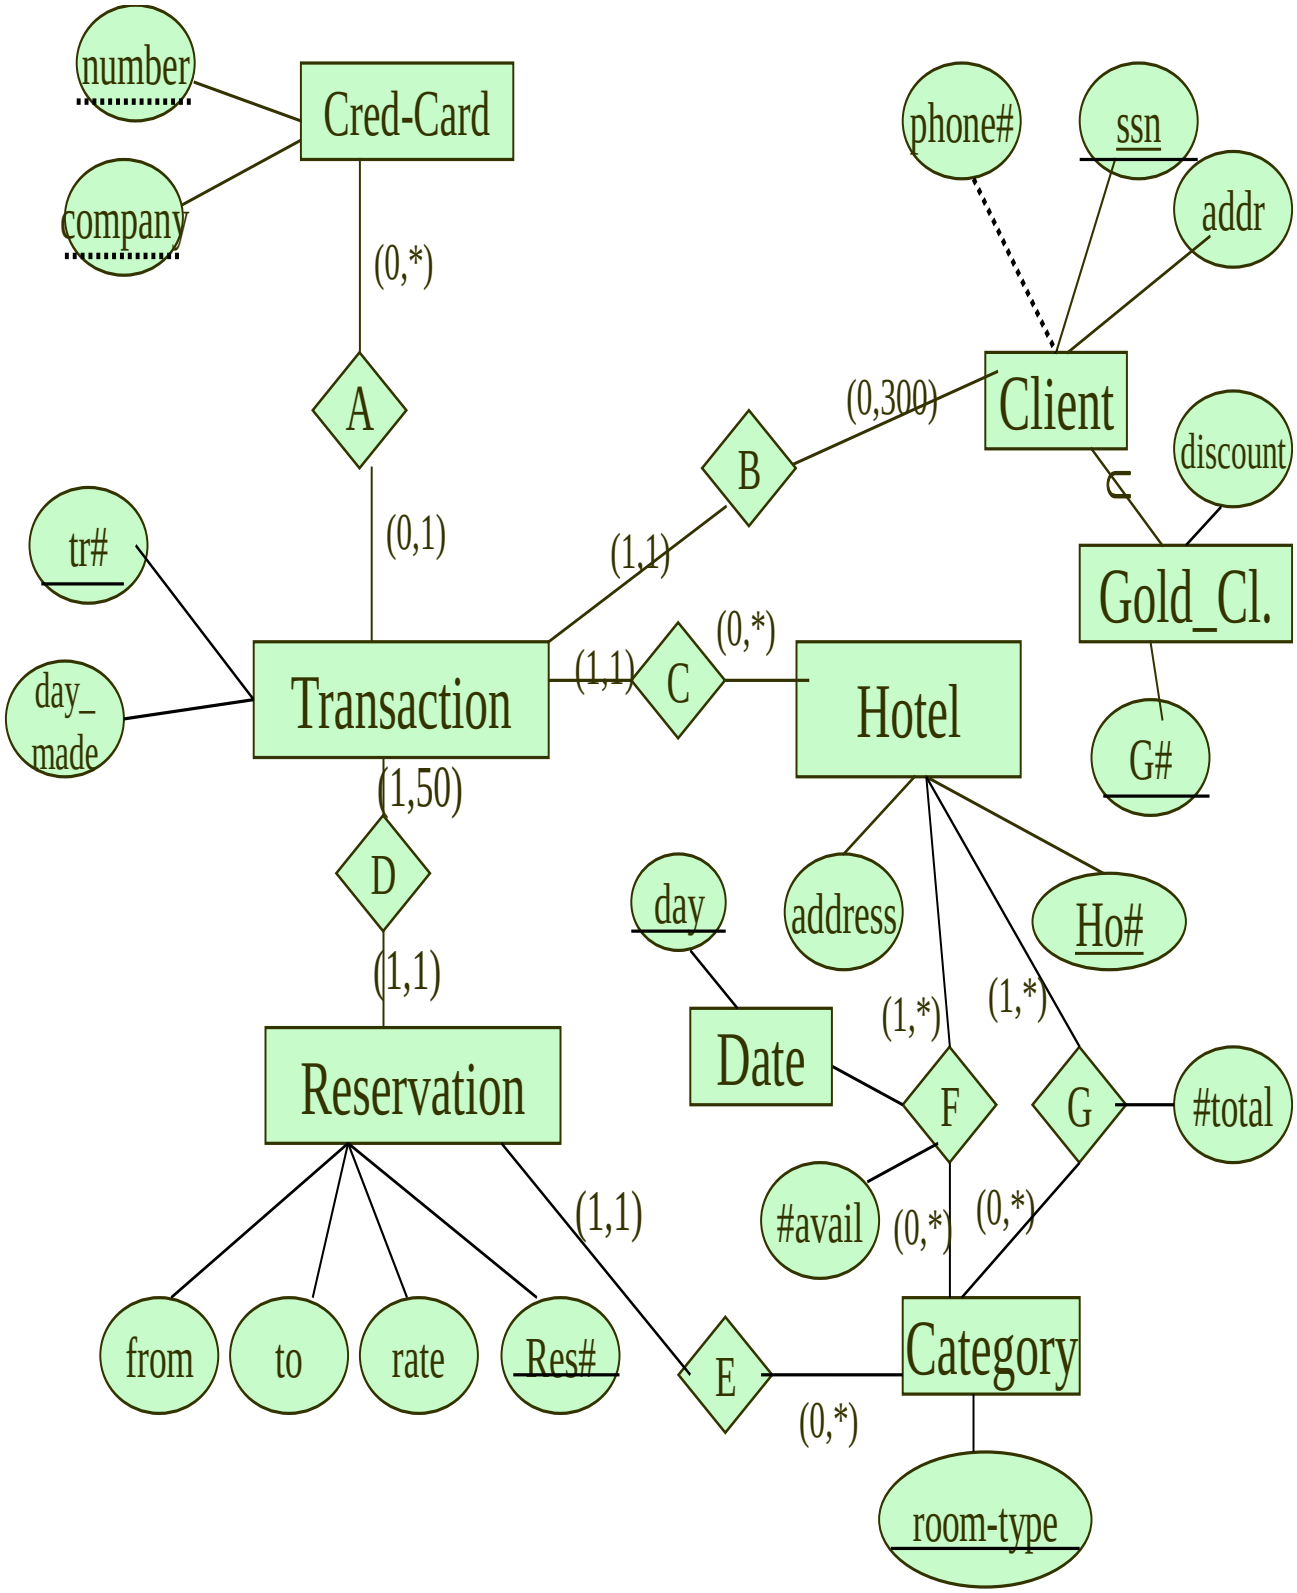

A:=guaranteed; B:=has_transaction; C:=for_hotel; D:=consists_of;
E:=for_category; F=avail-rooms; G=total-rooms; **modified on Feb. 3, 2004**

3.2 INPUT OUTPUT DESIGN

INPUT DESIGN

Login Screen

This is the main screen that is displayed to the user when he visits the site. Login page authorizes the user to use the resources of the site. This login screen categories the user into administrator, Customer and Visitor based on the login id and the password.

If the user logins as administrator he will given special permissions to maintain Catering service details, register Customer and Visitor details and also the administrator can generate several reports.

If the user logins as Customer he will be able to view his daily schedule and also able to generate case sheets and case history reports.

If the user logins as Visitor then he can register in online and he can also able to get e-Enquiry.

Visitor Registration

If a new user enters the site and if he wants to make use of the resources, he has to register or signup first so as to use the resources. The user registers oneself with the site by means of this screen. The user has to give the details that are asked to get register.

Customer Registration

This facility is provided only to the administrator where he can add new Customer details.

Enquiry

This facility is provided to the user who needs online Enquiry where he can post Enquiry details to the site.

OUTPUT DESIGN

View Schedule screen

In this screen the Customer can see his daily time slot. This contains calendar with available and appointed dates.

Prescription screen

This screen provides Customer with information such as the prescriRoom service room, Visitor's id, blood pressure, temperature, symptoms and problem identified.

Customer's details screen

This screen provide administrator with all the details of the Customers like name, address, specialization, doj etc. that can retrieve from the Customer table database.

Visitor's details screen

This screen provide administrator with all the details of the Visitors like name, address, ailment, dob, gender etc. which can retrieved from the Visitor table data base.

Visitor treated by a specific Customer screen

In this screen the administrator can view reports that are generated with all Visitors treated by a specific Customer.

Admit screen

This screen is used to view the details of Visitors who are all admitted on a particular day.

Discharge screen

This screen is used to view the details of Visitors who are all discharged on a particular day.

3.3 HMS DATABASE DESIGN

DB Tables

Table Name :- Booking

Database | Data | DDL | Design | SQL

Databases

Database	Status	File Name	File Size	Tables	Views	Indexes	Triggers
main	Connected (read-write)	C:\Users\vishn\OneDrive\Documents\NetBeansProjects\HotelManagement\HotelManagement\hotel.sqlite	14336	9	0	1	0

Database properties

Name	Value	Modified
application_id	0	☐
auto_vacuum	none	☐
cache_size	-2000	☐
collation_list	[BINARY], [NOCASE], [RTRIM]	☐
encoding	UTF-8	☐
freelist_count	1	☐
journal_mode	delete	☐
journal_size_limit	-1	☐
max_page_count	1073741823	☐
mmap_size	0	☐
page_count	14	☐
page_size	1024	☐
schema_version	131	☐
user_version	0	☐
writable_schema	off	☐

Library/Session/Connection properties

Name	Value	Modified
analysis_limit	0	☐
automatic_index	on	☐
busy_timeout	3000	☐
cache_spill	1765	☐
case_sensitive_like	off	☐
cell_size_check	off	☐
checkpoint_fullfsync	off	☐
compile_options	[ATOMIC_INTRINSICS=0], [COMPILER=msvc-1929], [DEFAULT_AUTOVACUUM], [DEFAULT_CACHE_SIZE=-2000], [DEFAULT_FILE_FORMAT=4], [DEFAULT_JOURNAL_SIZE_LIMIT=-1], [DEFAULT_MMAP_SIZE=0], [DEFAULT_PAGE_SIZE=4096], [DEFAULT_PCACHE_INITSZ=20], [DEFAULT_RECURSIVE_TRIGGERS], [DEFAULT_SECTOR_SIZE=4096], [DEFAULT_SYNCHRONOUS=2], [DEFAULT_WAL_AUTOCHECKPOINT=1000], [DEFAULT_WAL_SYNCHRONOUS=2], [DEFAULT_WORKER_THREADS=0], [ENABLE_COLUMN_METADATA], [ENABLE_EXPLAIN_COMMENTS], [ENABLE_FTS3], [ENABLE_FTS3_PARENTHESIS], [ENABLE_FTS4], [ENABLE_FTS5], [ENABLE_RTREE], [MALLOC_SOFT_LIMIT=1024], [MAX_ATTACHED=10], [MAX_COLUMN=2000], [MAX_COMPOUND_SELECT=500], [MAX_DEFAULT_PAGE_SIZE=8192], [MAX_EXPR_DEPTH=1000], [MAX_FUNCTION_ARG=127], [MAX_LENGTH=1000000000],	☐

Table Name : food

Database | Data | DDL | Design | SQL

Databases

Database	Status	File Name	File Size	Tables	Views	Indexes	Trigger
main	Connected (read-write)	C:\Users\vishn\OneDrive\Documents\NetBeansProjects\HotelManagement\HotelManagement\hotel.sqlite	14336	9	0	1	

Database properties

Name	Value	Modified
application_id	0	☐
auto_vacuum	none	☐
cache_size	-2000	☐
collation_list	[BINARY], [NOCASE], [RTRIM]	☐
encoding	UTF-8	☐
freelist_count	1	☐
journal_mode	delete	☐
journal_size_limit	-1	☐
max_page_count	1073741823	☐
mmap_size	0	☐
page_count	14	☐
page_size	1024	☐
schema_version	131	☐
user_version	0	☐
writable_schema	off	☐

Library/Session/Connection properties

Name	Value	Modified
analysis_limit	0	☐
automatic_index	on	☐
busy_timeout	3000	☐
cache_spill	1765	☐
case_sensitive_like	off	☐
cell_size_check	off	☐
checkpoint_fullfsync	off	☐
compile_options	[ATOMIC_INTRINSICS=0], [COMPILER=msvc-1929], [DEFAULT_AUTOVACUUM], [DEFAULT_CACHE_SIZE=-2000], [DEFAULT_FILE_FORMAT=4], [DEFAULT_JOURNAL_SIZE_LIMIT=-1], [DEFAULT_MMAP_SIZE=0], [DEFAULT_PAGE_SIZE=4096], [DEFAULT_PCACHE_INITSZ=20], [DEFAULT_RECURSIVE_TRIGGERS], [DEFAULT_SECTOR_SIZE=4096], [DEFAULT_SYNCHRONOUS=2], [DEFAULT_WAL_AUTOCHECKPOINT=1000], [DEFAULT_WAL_SYNCHRONOUS=2], [DEFAULT_WORKER_THREADS=0], [ENABLE_COLUMN_METADATA], [ENABLE_EXPLAIN_COMMENTS], [ENABLE_FTS3], [ENABLE_FTS3_PARENTHESIS], [ENABLE_FTS4], [ENABLE_FTS5], [ENABLE_RTREE], [MALLOC_SOFT_LIMIT=1024], [MAX_ATTACHED=10], [MAX_COLUMN=2000], [MAX_COMPOUND_SELECT=500], [MAX_DEFAULT_PAGE_SIZE=8192], [MAX_EXPR_DEPTH=1000], [MAX_FUNCTION_ARG=127], [MAX_LENGTH=1000000000],	☐

Table Name : item

Database | Data | DDL | Design | SQL

Databases

Database	Status	File Name	File Size	Tables	Views	Indexes	Triggers
main	Connected (read-write)	C:\Users\vishn\OneDrive\Documents\NetBeansProjects\HotelManagement\HotelManagement\hotel.sqlite	14336	9	0	1	0

Database properties

Name	Value	Modified
application_id	0	☐
auto_vacuum	none	☐
cache_size	-2000	☐
collation_list	[BINARY], [NOCASE], [RTRIM]	☐
encoding	UTF-8	☐
freelist_count	1	☐
journal_mode	delete	☐
journal_size_limit	-1	☐
max_page_count	1073741823	☐
mmap_size	0	☐
page_count	14	☐
page_size	1024	☐
schema_version	131	☐
user_version	0	☐
writable_schema	off	☐

Library/Session/Connection properties

Name	Value	Modified
analysis_limit	0	☐
automatic_index	on	☐
busy_timeout	3000	☐
cache_spill	1765	☐
case_sensitive_like	off	☐
cell_size_check	off	☐
checkpoint_fullfsync	off	☐
compile_options	[ATOMIC_INTRINSICS=0], [COMPILER=msvc-1929], [DEFAULT_AUTOVACUUM], [DEFAULT_CACHE_SIZE=-2000], [DEFAULT_FILE_FORMAT=4], [DEFAULT_JOURNAL_SIZE_LIMIT=-1], [DEFAULT_MMAP_SIZE=0], [DEFAULT_PAGE_SIZE=4096], [DEFAULT_PCACHE_INITSZ=20], [DEFAULT_RECURSIVE_TRIGGERS], [DEFAULT_SECTOR_SIZE=4096], [DEFAULT_SYNCHRONOUS=2], [DEFAULT_WAL_AUTOCHECKPOINT=1000], [DEFAULT_WAL_SYNCHRONOUS=2], [DEFAULT_WORKER_THREADS=0], [ENABLE_COLUMN_METADATA], [ENABLE_EXPLAIN_COMMENTS], [ENABLE_FTS3], [ENABLE_FTS3_PARENTHESIS], [ENABLE_FTS4], [ENABLE_FTS5], [ENABLE_RTREE], [MALLOC_SOFT_LIMIT=1024], [MAX_ATTACHED=10], [MAX_COLUMN=2000], [MAX_COMPOUND_SELECT=500], [MAX_DEFAULT_PAGE_SIZE=8192], [MAX_EXPR_DEPTH=1000], [MAX_FUNCTION_ARG=127], [MAX_LENGTH=1000000000],	☐

Apply | Cancel | Refresh | Check | Vacuum | Reindex All Tables

Table Name :login

Database | Data | DDL | Design | SQL

Databases

Database	Status	File Name	File Size	Tables	Views	Indexes	Triggers
main	Connected (read-write)	C:\Users\vishn\OneDrive\Documents\NetBeansProjects\HotelManagement\HotelManagement\hotel.sqlite	14336	9	0	1	0

Database properties

Name	Value	Modified
application_id	0	☐
auto_vacuum	none	☐
cache_size	-2000	☐
collation_list	[BINARY], [NOCASE], [RTRIM]	☐
encoding	UTF-8	☐
freelist_count	1	☐
journal_mode	delete	☐
journal_size_limit	-1	☐
max_page_count	1073741823	☐
mmap_size	0	☐
page_count	14	☐
page_size	1024	☐
schema_version	131	☐
user_version	0	☐
writable_schema	off	☐

Library/Session/Connection properties

Name	Value	Modified
analysis_limit	0	☐
automatic_index	on	☐
busy_timeout	3000	☐
cache_spill	1765	☐
case_sensitive_like	off	☐
cell_size_check	off	☐
checkpoint_fullfsync	off	☐
compile_options	[ATOMIC_INTRINSICS=0], [COMPILER=msvc-1929], [DEFAULT_AUTOVACUUM], [DEFAULT_CACHE_SIZE=-2000], [DEFAULT_FILE_FORMAT=4], [DEFAULT_JOURNAL_SIZE_LIMIT=-1], [DEFAULT_MMAP_SIZE=0], [DEFAULT_PAGE_SIZE=4096], [DEFAULT_PCACHE_INITSZ=20], [DEFAULT_RECURSIVE_TRIGGERS], [DEFAULT_SECTOR_SIZE=4096], [DEFAULT_SYNCHRONOUS=2], [DEFAULT_WAL_AUTOCHECKPOINT=1000], [DEFAULT_WAL_SYNCHRONOUS=2], [DEFAULT_WORKER_THREADS=0], [ENABLE_COLUMN_METADATA], [ENABLE_EXPLAIN_COMMENTS], [ENABLE_FTS3], [ENABLE_FTS3_PARENTHESIS], [ENABLE_FTS4], [ENABLE_FTS5], [ENABLE_RTREE], [MALLOC_SOFT_LIMIT=1024], [MAX_ATTACHED=10], [MAX_COLUMN=2000], [MAX_COMPOUND_SELECT=500], [MAX_DEFAULT_PAGE_SIZE=8192], [MAX_EXPR_DEPTH=1000], [MAX_FUNCTION_ARG=127], [MAX_LENGTH=1000000000],	☐

Apply | Cancel | Refresh | Check | Vacuum | Reindex All Tables

Table Name :Room

Database | Data | DDL | Design | SQL

Databases

Database	Status	File Name	File Size	Tables	Views	Indexes	Triggers
main	Connected (read-write)	C:\Users\vishn\OneDrive\Documents\NetBeansProjects\HotelManagement\HotelManagement\hotel.sqlite	14336	9	0	1	0

Database properties

Name	Value	Modified
application_id	0	☐
auto_vacuum	none	☐
cache_size	-2000	☐
collation_list	[BINARY], [NOCASE], [RTRIM]	☐
encoding	UTF-8	☐
freelist_count	1	☐
journal_mode	delete	☐
journal_size_limit	-1	☐
max_page_count	1073741823	☐
mmap_size	0	☐
page_count	14	☐
page_size	1024	☐
schema_version	131	☐
user_version	0	☐
writable_schema	off	☐

Library/Session/Connection properties

Name	Value	Modified
analysis_limit	0	☐
automatic_index	on	☐
busy_timeout	3000	☐
cache_spill	1765	☐
case_sensitive_like	off	☐
cell_size_check	off	☐
checkpoint_fullfsync	off	☐
compile_options	[ATOMIC_INTRINSICS=0], [COMPILER=msvc-1929], [DEFAULT_AUTOVACUUM], [DEFAULT_CACHE_SIZE=-2000], [DEFAULT_FILE_FORMAT=4], [DEFAULT_JOURNAL_SIZE_LIMIT=-1], [DEFAULT_MMAP_SIZE=0], [DEFAULT_PAGE_SIZE=4096], [DEFAULT_PCACHE_INITSZ=20], [DEFAULT_RECURSIVE_TRIGGERS], [DEFAULT_SECTOR_SIZE=4096], [DEFAULT_SYNCHRONOUS=2], [DEFAULT_WAL_AUTOCHECKPOINT=1000], [DEFAULT_WAL_SYNCHRONOUS=2], [DEFAULT_WORKER_THREADS=0], [ENABLE_COLUMN_METADATA], [ENABLE_EXPLAIN_COMMENTS], [ENABLE_FTS3], [ENABLE_FTS3_PARENTHESIS], [ENABLE_FTS4], [ENABLE_FTS5], [ENABLE_RTREE], [MALLOC_SOFT_LIMIT=1024], [MAX_ATTACHED=10], [MAX_COLUMN=2000], [MAX_COMPOUND_SELECT=500], [MAX_DEFAULT_PAGE_SIZE=8192], [MAX_EXPR_DEPTH=1000], [MAX_FUNCTION_ARG=127], [MAX_LENGTH=1000000000],	☐

Apply | Cancel | Refresh | Check | Vacuum | Reindex All Tables

Table Name :Room type

4 IMPLEMENTATION

Implementation means the process of converting a new or a revised system design into an operational one. It is the most crucial stage in achieving a new successful system and in giving confidence on the new system for the users that it will work efficiently and effectively. In this phase, we can build the components either from scratch or by composition. Given the architecture document from the design phase and requirement document from the analysis phase, we can build exactly what has been requested.

Verification:

Verification that is done by software engineer. When the software engineer finished their project and before the delivery of the project to customer, the software engineer examine the software is working properly or not. If it working properly then they submit it to customer otherwise not.

Validation:

Validation that is done by customer. When the software engineer finished their project and delivery the project to customer, then customer examines the software that is working properly or not. If it is not working properly then he submits it to software engineer otherwise not.

SOFTWARE MAINTENANCE

Software maintenance traditionally denotes the process of modifying a software product after it has been delivered to the customer. Maintenance is inevitable for almost any kind of product. Software need maintenance on account of the following the three reasons. They are-

Corrective:

Corrective maintenance of a software product may be necessary either to rectify some bugs observed while the system is in use, or to enhance the performance of the system.

Adaptive:

A software product might need maintenance when the customer need the product to run on a new platforms, on new operating systems, or when they need the product to interface with new hardware and software.

Perfective:

A software product needs maintenance to support the new features that the users want or to change different functionalities of the system according to customer demands.

5 SYSTEM TESTING

TESTING OBJECTIVES

The objective of testing is to uncover errors and to ensure that the software functions appropriately. The objectives are

- The input values have to be validated for the variable type and size specified in the DB
- Secured pages should be accessed only through session
- Logical sequence in navigation has to be maintained

To plan and execute tests, we consider the software and the output it generates, the inputs and how they can be combined, and the environment in which the software will operate.

Following types of tests were carried out:

- Unit testing
- Integration testing
- System testing
- Security Testing
- Navigation Testing

UNIT TESTING

Unit testing concentrates on each unit of the software implemented in the source code. Each of the individual modules mentioned in the previous chapters was taken independently. Input values were given and tested for required results. The most frequently used independent paths through the control structure were tested to ensure that all statements in a module execute at least once. This was done as it was not feasible for every path to be tested. For every set of inputs to the system, a set of expected outputs

was first defined and then compared with the actual output. Then, all error-handling and validation paths were tested. This was done to ensure that the expected error messages were generated for incorrect inputs.

INTEGRATION TESTING

Integration testing is a systematic technique to constructing the problem structure, while at the same time conducting tests to uncover errors associated with interfacing. A bottom-up approach was followed. First the modules were executed according to their workflow. Sessions were used to hold values that needed to be passed between modules. In some cases, a shared bean was used to hold values. At different points in execution, these values were printed out onto the web to ensure that the values were passed across the modules.

SYSTEM TESTING

System level testing demonstrates that all specified functionality exists and that the software product is trustworthy. This testing verifies the as-built program's functionality and performance with respect to the requirements for the software product as exhibited on the specified operating platform(s). System level software testing addresses functional concerns and the following elements of a device's software that are related to the intended use(s).

SECURITY TESTING

The process to determine that an Information System protects data and maintains functionality as intended. The six basic security concepts that need to be covered by security testing are: confidentiality, integrity, authentication, authorization, availability and non-repudiation.

NAVIGATION TESTING

Navigation differs from information architecture in that it tells uses where they are, where to go and how to get there. If information architecture is the roads the site runs along navigation are the signposts and the map. Good navigation is essential because a website can be a very complex and disconcerting place to be for the new user. The user needs to feel that they have control over where to go. If the user is comfortable in your web site and can easily see where other areas of interest are they will stay and go to those other areas of interest. No one wants to be in a place where they do not feel comfortable.

Good navigation contributes considerably to the usability of a web site. Good navigation though will not solve the problem of poor site architecture. There are three main categories of navigation

Global - the top-level navigation. This should be on every page and the standard is now to have it at the top of the page

Local - this is navigating within a top-level category

Additional navigation - normally at the bottom of the page and relates to other pages similar to the one just read

6. FUTURE ENHANCEMENT

The proposed system is the application software which can be used in the individual system in Hotel Management. This system is only capable to handle the whole management system in the Hotel. That can be implemented by enhancing the web features. The process system is typically developed based on the English language. We can develop the system using internationalization feature which will support different language across the country, and it will more user-friendly to operate the system in an easy manner.

7. CONCLUSION

The system is menu driven, easily maintainable and accessible .Handling of the system in easy and provides timely information about Hotel status. The package 'HOTEL MANAGEMENT SYSTEM' being developed to assist the Hotel in its working .The system saves lot of time and effort of the Hotel personals and provides an easy environment to work with.

As we all know that nothing is 100% perfect in this world. If we talk about Software then we can say that it is changing drastically. Reason is quite clear, either user requirement is change with very fast rate or software is limited to few areas only. So future enhancement these limitations play vital role.

As far as the limitation of developed system (HOTEL MANAGEMENT SYSTEM) is concerned it is limited to system, system, department and Customer's detail only.

This package is not going to solve the record maintenance problem of pathology branch of any Hotel. This package is not design to solve the problem of Customers and employee related to their payment

Excluding above written limitation the package" HOTEL MANAGEMENT SYSTEM "is free from any more or less all drawbacks.

8. SOURCE CODE

```
dialog.setVisible(true);
        }
    });
  }

  // Variables declaration - do not modify
  private javax.swing.JButtonbtn_add;
  private javax.swing.JButtonbtn_delete;
  private javax.swing.JButtonbtn_edit;
  private javax.swing.JLabel jLabel1;
  private javax.swing.JLabel jLabel2;
  private javax.swing.JLabel jLabel3;
  private javax.swing.JLabel jLabel4;
  private javax.swing.JPanel jPanel1;
  private javax.swing.JScrollPane jScrollPane1;
  private javax.swing.JTabletable_food;
  private javax.swing.JTextFieldtf_food_id;
  private javax.swing.JTextFieldtf_food_name;
  private javax.swing.JTextFieldtf_food_price;
  // End of variables declaration

}
```

ItemPanel

```
/*
 * To change this license header, choose License Headers in Project
Properties.
```

```
 * To change this template file, choose Tools | Templates
 * and open the template in the editor.
 */
package I3.UI;

import I3.DatabaseOperation.DatabaseOperation;
import I3.Classes.Food;
import I3.Classes.Item;
import I3.DatabaseOperation.FoodDb;
import I3.DatabaseOperation.ItemDb;
import java.awt.Color;
import java.awt.event.KeyAdapter;
import java.awt.event.KeyEvent;
import java.sql.ResultSet;
import java.util.Vector;
import javax.swing.DefaultComboBoxModel;
import javax.swing.text.JTextComponent;
import net.proteanit.sql.DbUtils;
import org.jdesktop.swingx.autocomplete.AutoCompleteDecorator;
//import org.jdesktop.swingx.combobox.*;



/**
 *
 * @author www.Skidaweb.com
 */
public class ItemPanel extends javax.swing.JDialog {

    /**
     * Creates new form FoodPanel
     */
Item  item;
ResultSet result;
ItemDbdb = new ItemDb();
    Vector comboItems = new Vector();

    public ItemPanel(java.awt.Frame parent, boolean modal) {
super(parent, modal);
initComponents();
```

```
this.getContentPane().setBackground(new Color(241,241,242));
populateFoodTable();


    }

    private void itemObjectCreation() {
        item = new Item();
item.setItem_name(tf_item_name.getText());
item.setDescription(tf_item_desc.getText());
item.setPrice(Integer.parseInt(tf_item_price.getText()));

        try {
item.setItem_id(Integer.parseInt(tf_item_id.getText()));
        } catch (Exception ex) {
item.setItem_id(-1);
        }
    }

    /**
     * This method is called from within the constructor to initialize the form.
     * WARNING: Do NOT modify this code. The content of this method is
always
     * regenerated by the Form Editor.
     */
    @SuppressWarnings("unchecked")
    // <editor-fold defaultstate="collapsed" desc="Generated Code">
    private void initComponents() {

        jScrollPane1 = new javax.swing.JScrollPane();
table_item = new javax.swing.JTable();
        jPanel1 = new javax.swing.JPanel();
btn_edit = new javax.swing.JButton();
        jLabel2 = new javax.swing.JLabel();
tf_item_id = new javax.swing.JTextField();
btn_delete = new javax.swing.JButton();
        jLabel1 = new javax.swing.JLabel();
btn_add = new javax.swing.JButton();
tf_item_price = new javax.swing.JTextField();
        jLabel3 = new javax.swing.JLabel();
```

```
        jLabel4 = new javax.swing.JLabel();
tf_item_name = new javax.swing.JTextField();
        jScrollPane2 = new javax.swing.JScrollPane();
tf_item_desc = new javax.swing.JTextArea();


setDefaultCloseOperation(javax.swing.WindowConstants.DISPOSE_ON_C
LOSE);

table_item.setModel(new javax.swing.table.DefaultTableModel(
            new Object [][] {
                {null, null, null, null},
                {null, null, null, null},
                {null, null, null, null},
                {null, null, null, null}
            },
            new String [] {
                "Title 1", "Title 2", "Title 3", "Title 4"
            }
        ));
table_item.addMouseListener(new java.awt.event.MouseAdapter() {
            public void mouseClicked(java.awt.event.MouseEventevt) {
table_itemMouseClicked(evt);
            }
        });
        jScrollPane1.setViewportView(table_item);

        jPanel1.setBackground(new java.awt.Color(230, 231, 232));

btn_edit.setIcon(new
javax.swing.ImageIcon(getClass().getResource("/resources/EditButton.png"
))); // NOI18N
btn_edit.addActionListener(new java.awt.event.ActionListener() {
            public void actionPerformed(java.awt.event.ActionEventevt) {
btn_editActionPerformed(evt);
            }
        });

        jLabel2.setText("Item Description");
```

```
tf_item_id.setEditable(false);
tf_item_id.setBackground(new java.awt.Color(209, 210, 212));

btn_delete.setIcon(new
javax.swing.ImageIcon(getClass().getResource("/resources/DeleteButton.pn
g"))); // NOI18N
btn_delete.addActionListener(new java.awt.event.ActionListener() {
            public void actionPerformed(java.awt.event.ActionEventevt) {
btn_deleteActionPerformed(evt);
            }
        });

        jLabel1.setText("Item  ID");

btn_add.setIcon(new
javax.swing.ImageIcon(getClass().getResource("/resources/DefaultButton.p
ng"))); // NOI18N
btn_add.addActionListener(new java.awt.event.ActionListener() {
            public void actionPerformed(java.awt.event.ActionEventevt) {
btn_addActionPerformed(evt);
            }
        });

tf_item_price.addKeyListener(new java.awt.event.KeyAdapter() {
            public void keyTyped(java.awt.event.KeyEventevt) {
tf_item_priceKeyTyped(evt);
            }
        });

        jLabel3.setText("Price");

        jLabel4.setText("Item Name");


pack();
    }// </editor-fold>

    private void
btn_checkOutActionPerformed(java.awt.event.ActionEventevt) {
```

```
        //System.out.println("faysal  .... "+ bookingId);
        if (bookingId != 1) {
bookingdB.updateCheckOut(bookingId, new Date().getTime() / 1000);
            result = bookingdB.getABooking(bookingId);
            // bookingdB.flushAll();
            try {
                int duration = 1;
                int checkIn = result.getInt("check_in");
                int checkOut = result.getInt("check_out");
                String roomName = result.getString("booking_room");

                long diff = Math.abs((checkOut * 1000) - (checkIn * 1000));
                // System.out.println(">>>>>>>>>>xxxxxxxxxxx  "+
diff.toDuration().toStandardDays().toString());

                int durationDays = (int) TimeUnit.DAYS.convert(diff,
TimeUnit.MILLISECONDS);
                int roomFare = bookingdB.getRoomPrice(bookingId);

bookingdB.flushAll();
                //orderDb.flushAll();
                if (roomFare != -1) {

System.out.println("working as expected " + roomFare);
bookingdB.insertOrder(new Order(
bookingId,
roomName,
roomFare,
durationDays,
                        (roomFare * durationDays)
                    ));
                }
                // System.out.println ("Days: " + days);
            } catch (Exception ex) {
JOptionPane.showMessageDialog(null, "no booking result found\n " +
ex.toString());
            }

        } else {
```

```
JOptionPane.showMessageDialog(null, "no booking selected, try to select
one hitting enter from suggestion box");
        }

    }

    private void jButton1ActionPerformed(java.awt.event.ActionEventevt) {
        if (bookingId != -1) {
            result = bookingdB.getAllPaymentInfo(bookingId);
populatePaymentTable(result);
        } else {
JOptionPane.showMessageDialog(null, "no booking selected, try to select
one hitting enter from suggestion box");
        }
    }

    private void jButton2ActionPerformed(java.awt.event.ActionEventevt) {
        try {
MessageFormat header = new MessageFormat("I3 Technologies");
MessageFormat footer = new MessageFormat("I3 hotel Management, Faysal
Ahmed");

table_payment.print(JTable.PrintMode.NORMAL, header, footer);
        } catch (PrinterException ex) {
JOptionPane.showMessageDialog(null, "Error printer \n" + ex.toString());
        }
    }

    private void
table_paymentPropertyChange(java.beans.PropertyChangeEventevt) {
        if (table_payment.getModel().getRowCount() != 0) {
System.out.println(table_payment.getModel().getRowCount() + " ,,,");
            //updateTotalCheckBox();

        }

    }

    private void updateTotalCheckBox() {
        int total = 0;
```

```
        int rows = table_payment.getRowCount();
        //int selectedUserId = (int) table_customer.getModel().getValueAt(row,
0);

        try {
            for (int i = 0; i< rows; i++) {
                total += (int) table_payment.getModel().getValueAt(i, 5);
            }
tf_total.setText(total + "");
        } catch (ClassCastException ex) {
System.err.println("waiting for a int value");
        }

    }

    private void populatePaymentTable(ResultSet result) {

table_payment.setModel(DbUtils.resultSetToTableModel(result));
    }

    public void bookingComboFill(ResultSet result) {
bookingList.clear();
        try {

            while (result.next()) {
                // System.out.println(">>>>>> "+result.getString("name"));
bookingList.add(result.getString("booking_room") + ", " +
result.getString("name") + "," + result.getString("booking_id"));
            }
        } catch (SQLException ex) {
JOptionPane.showMessageDialog(null, "bookingCombo fill error");
        }

    }

    public void searchHelper() {
        final DefaultComboBoxModel model = new
DefaultComboBoxModel(bookingList);
combo_booking.setModel(model);
```

```
JTextComponent editor = (JTextComponent)
combo_booking.getEditor().getEditorComponent();
editor.addKeyListener(new KeyAdapter() {

        @Override
        public void keyTyped(KeyEventevt) {

            if (evt.getKeyChar() == KeyEvent.VK_ENTER) {
                String details = (String) combo_booking.getSelectedItem();
                //System.out.println(details);
                if (!details.contains(",")) {
JOptionPane.showMessageDialog(null, "no booking found, try adding a new
booking");
                } else {
bookingId = Integer.parseInt(details.substring(details.lastIndexOf(",") + 1));
                    //tf_bookingId.setText(bookinId+"");
                    // A if condition should be here, but not required as the last
line has no chance of returning -1.

                }

            }

            /// suggestion generation
            String value = "";
            try {
                value = combo_booking.getEditor().getItem().toString();
                // System.out.println(value +" <<<<<<<<<<<<<");

            } catch (Exception ex) {
            }
            if (value.length() >= 2) {

                // System.out.println("working");
bookingComboFill(bookingdB.bookingsReadyForOrder(value));
                // bookingdB.flushAll();
            }

        }
    });
```

```
    }

    /**
     * @param args the command line arguments
     */
    public static void main(String args[]) {
        /* Set the Nimbus look and feel */
        //<editor-fold defaultstate="collapsed" desc=" Look and feel setting
code (optional) ">
        /* If Nimbus (introduced in Java SE 6) is not available, stay with the
default look and feel.
         * For details see
http://download.oracle.com/javase/tutorial/uiswing/lookandfeel/plaf.html
         */
        try {
            for (javax.swing.UIManager.LookAndFeelInfo info :
javax.swing.UIManager.getInstalledLookAndFeels()) {
                if ("Nimbus".equals(info.getName())) {
javax.swing.UIManager.setLookAndFeel(info.getClassName());
                    break;
                }
            }
        } catch (ClassNotFoundException ex) {
java.util.logging.Logger.getLogger(PaymentPanel.class.getName()).log(java
.util.logging.Level.SEVERE, null, ex);
        } catch (InstantiationException ex) {
java.util.logging.Logger.getLogger(PaymentPanel.class.getName()).log(java
.util.logging.Level.SEVERE, null, ex);
        } catch (IllegalAccessException ex) {
java.util.logging.Logger.getLogger(PaymentPanel.class.getName()).log(java
.util.logging.Level.SEVERE, null, ex);
        } catch (javax.swing.UnsupportedLookAndFeelException ex) {
java.util.logging.Logger.getLogger(PaymentPanel.class.getName()).log(java
.util.logging.Level.SEVERE, null, ex);
        }
        //</editor-fold>

        /* Create and display the dialog */
java.awt.EventQueue.invokeLater(new Runnable() {
            public void run() {
```

```
PaymentPanel dialog = new PaymentPanel(new javax.swing.JFrame(), true);
dialog.addWindowListener(new java.awt.event.WindowAdapter() {
                @Override
                public void windowClosing(java.awt.event.WindowEvent e) {
System.exit(0);
                }
            });
dialog.setVisible(true);
        }
    });
  }

  // Variables declaration - do not modify
  private javax.swing.JButtonbtn_checkOut;
  private javax.swing.JComboBoxcombo_booking;
  private javax.swing.JButton jButton1;
  private javax.swing.JButton jButton2;
  private javax.swing.JLabel jLabel1;
  private javax.swing.JScrollPane jScrollPane1;
  private javax.swing.JTabletable_payment;
  private javax.swing.JTextFieldtf_total;
  // End of variables declaration

}
```

RoomPanel

```
package I3.UI;

import I3.DatabaseOperation.DatabaseOperation;
import I3.Classes.Room;
import I3.Classes.RoomFare;
import I3.DatabaseOperation.RoomDb;
import java.awt.Color;
import java.awt.event.KeyEvent;
import java.sql.ResultSet;
import java.sql.SQLException;
import java.util.ArrayList;
import java.util.logging.Level;
import java.util.logging.Logger;
import javax.swing.JComboBox;
```

```
import javax.swing.JOptionPane;
import net.proteanit.sql.DbUtils;

/**
 *
 * @author www.Skidaweb.com
 */
public class RoomPanel extends javax.swing.JDialog {

    /**
     * Creates new form RoomPanel
     */

RoomFareroomType = new RoomFare();
    Room room = new Room("");

ResultSet result;
ArrayList<String>roomClass = new ArrayList<>();

    //DatabaseOperationdb = new DatabaseOperation();
RoomDbroomdb = new RoomDb();
    public RoomPanel(java.awt.Frame parent, boolean modal) {
super(parent, modal);
initComponents();
this.getContentPane().setBackground(new Color(241,241,242));
populateCombo();
populateRoomTable();
populateRoomTypeTable();

    }

    /**
     * This method is called from within the constructor to initialize the form.
     * WARNING: Do NOT modify this code. The content of this method is
always
     * regenerated by the Form Editor.
     */
    @SuppressWarnings("unchecked")
    // <editor-fold defaultstate="collapsed" desc="Generated Code">
    private void initComponents() {
```

```
tabbedPane = new javax.swing.JTabbedPane();
        jPanel1 = new javax.swing.JPanel();
        jScrollPane1 = new javax.swing.JScrollPane();
table_rooms = new javax.swing.JTable();
        jPanel4 = new javax.swing.JPanel();
check_phone = new javax.swing.JCheckBox();
        jLabel3 = new javax.swing.JLabel();
tf_roomNo = new javax.swing.JTextField();
combo_roomType = new javax.swing.JComboBox();
        jLabel1 = new javax.swing.JLabel();
btn_edit = new javax.swing.JButton();
        jLabel6 = new javax.swing.JLabel();
check_tv = new javax.swing.JCheckBox();
check_wifi = new javax.swing.JCheckBox();
        jLabel2 = new javax.swing.JLabel();
check_gizer = new javax.swing.JCheckBox();
tf_roomID = new javax.swing.JTextField();
btn_delete = new javax.swing.JButton();
btn_add = new javax.swing.JButton();
tf_beds = new javax.swing.JTextField();
        jButton1 = new javax.swing.JButton();
        jPanel2 = new javax.swing.JPanel();
        jPanel3 = new javax.swing.JPanel();
btn_addRoomType = new javax.swing.JButton();
        jLabel5 = new javax.swing.JLabel();
btn_deleteRoomType = new javax.swing.JButton();
tf_roomType = new javax.swing.JTextField();
tf_price = new javax.swing.JTextField();
        jLabel4 = new javax.swing.JLabel();
btn_editRoomType = new javax.swing.JButton();
        jScrollPane2 = new javax.swing.JScrollPane();
table_roomType = new javax.swing.JTable();


setDefaultCloseOperation(javax.swing.WindowConstants.DISPOSE_ON_C
LOSE);

table_rooms.setModel(new javax.swing.table.DefaultTableModel(
            new Object [][] {
```

```
                {null, null, null, null},
                {null, null, null, null},
                {null, null, null, null},
                {null, null, null, null}
            },
            new String [] {
                "Title 1", "Title 2", "Title 3", "Title 4"
            }
        ));
table_rooms.setToolTipText("");
table_rooms.addMouseListener(new java.awt.event.MouseAdapter() {
            public void mouseClicked(java.awt.event.MouseEventevt) {
table_roomsMouseClicked(evt);
            }
        });
        jScrollPane1.setViewportView(table_rooms);

        jPanel4.setBackground(new java.awt.Color(230, 231, 232));

check_phone.setText("Phone Service");

        jLabel3.setText("Beds");

        jLabel1.setText("Room ID");

btn_edit.setIcon(new
javax.swing.ImageIcon(getClass().getResource("/resources/EditButton.png"
))); // NOI18N
btn_edit.setEnabled(false);
btn_edit.addActionListener(new java.awt.event.ActionListener() {
            public void actionPerformed(java.awt.event.ActionEventevt) {
btn_editActionPerformed(evt);
            }
        });

        jLabel6.setText("Category");

check_tv.setText("TV");

check_wifi.setText("WIFI");
```

```
check_wifi.addActionListener(new java.awt.event.ActionListener() {
            public void actionPerformed(java.awt.event.ActionEventevt) {
check_wifiActionPerformed(evt);
            }
        });

        jLabel2.setText("Room No");

check_gizer.setText("Gizer");

tf_roomID.setEditable(false);
tf_roomID.setBackground(new java.awt.Color(204, 204, 255));

btn_delete.setBackground(new java.awt.Color(255, 0, 0));
btn_delete.setIcon(new
javax.swing.ImageIcon(getClass().getResource("/resources/DeleteButton.pn
g"))); // NOI18N
btn_delete.setEnabled(false);
btn_delete.addActionListener(new java.awt.event.ActionListener() {
            public void actionPerformed(java.awt.event.ActionEventevt) {
btn_deleteActionPerformed(evt);
            }
        });

btn_add.setIcon(new
javax.swing.ImageIcon(getClass().getResource("/resources/DefaultButton.p
ng"))); // NOI18N
btn_add.addActionListener(new java.awt.event.ActionListener() {
            public void actionPerformed(java.awt.event.ActionEventevt) {
btn_addActionPerformed(evt);
            }
        });

javax.swing.GroupLayout jPanel4Layout = new
javax.swing.GroupLayout(jPanel4);
        jPanel4.setLayout(jPanel4Layout);
        jPanel4Layout.setHorizontalGroup(

jPanel4Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LE
ADING)
```

```
.addGroup(jPanel4Layout.createSequentialGroup()
.addGroup(jPanel4Layout.createParallelGroup(javax.swing.GroupLayout.Al
ignment.LEADING, false)
.addGroup(jPanel4Layout.createSequentialGroup()
.addContainerGap()
.addGroup(jPanel4Layout.createParallelGroup(javax.swing.GroupLayout.Al
ignment.TRAILING, false)
.addComponent(jLabel1, javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)
.addComponent(jLabel2, javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)
.addComponent(jLabel3, javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE, Short.MAX_VALUE)
.addComponent(jLabel6, javax.swing.GroupLayout.Alignment.LEADING,
javax.swing.GroupLayout.DEFAULT_SIZE, 80, Short.MAX_VALUE))
.addGap(18, 18, 18)
.addGroup(jPanel4Layout.createParallelGroup(javax.swing.GroupLayout.Al
ignment.LEADING, false)
.addComponent(combo_roomType, 0, 100, Short.MAX_VALUE)
.addComponent(tf_roomID)
.addComponent(tf_roomNo)
.addComponent(tf_beds)))
.addGroup(jPanel4Layout.createSequentialGroup()
.addGap(40, 40, 40)
.addComponent(check_tv, javax.swing.GroupLayout.PREFERRED_SIZE,
80, javax.swing.GroupLayout.PREFERRED_SIZE)
.addGap(18, 18, 18)
.addComponent(check_phone))
.addGroup(javax.swing.GroupLayout.Alignment.TRAILING,
jPanel4Layout.createSequentialGroup()
.addContainerGap(javax.swing.GroupLayout.DEFAULT_SIZE,
Short.MAX_VALUE)
.addGroup(jPanel4Layout.createParallelGroup(javax.swing.GroupLayout.Al
ignment.LEADING, false)
.addComponent(btn_add, javax.swing.GroupLayout.PREFERRED_SIZE,
191, javax.swing.GroupLayout.PREFERRED_SIZE)
.addGroup(jPanel4Layout.createSequentialGroup()
.addComponent(check_wifi, javax.swing.GroupLayout.PREFERRED_SIZE,
80, javax.swing.GroupLayout.PREFERRED_SIZE)
.addGap(18, 18, 18)
```

```
.addComponent(check_gizer,
javax.swing.GroupLayout.PREFERRED_SIZE, 93,
javax.swing.GroupLayout.PREFERRED_SIZE))
.addComponent(btn_edit, javax.swing.GroupLayout.PREFERRED_SIZE, 0,
Short.MAX_VALUE)
.addComponent(btn_delete, javax.swing.GroupLayout.PREFERRED_SIZE,
0, Short.MAX_VALUE))))
.addContainerGap(76, Short.MAX_VALUE))
        );
        jPanel4Layout.setVerticalGroup(

jPanel4Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LE
ADING)
.addGroup(jPanel4Layout.createSequentialGroup()
.addContainerGap()
.addGroup(jPanel4Layout.createParallelGroup(javax.swing.GroupLayout.Al
ignment.BASELINE)
.addComponent(jLabel1)
.addComponent(tf_roomID, javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE))
.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.UNRELA
TED)
.addGroup(jPanel4Layout.createParallelGroup(javax.swing.GroupLayout.Al
ignment.BASELINE)
.addComponent(jLabel2)
.addComponent(tf_roomNo,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE))
.addGap(18, 18, 18)
.addGroup(jPanel4Layout.createParallelGroup(javax.swing.GroupLayout.Al
ignment.BASELINE)
.addComponent(jLabel3)
.addComponent(tf_beds, javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE))
.addGap(18, 18, 18)
.addGroup(jPanel4Layout.createParallelGroup(javax.swing.GroupLayout.Al
ignment.BASELINE)
```

```
.addComponent(jLabel6)
.addComponent(combo_roomType,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE))
.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RELATE
D, 66, Short.MAX_VALUE)
.addGroup(jPanel4Layout.createParallelGroup(javax.swing.GroupLayout.Al
ignment.BASELINE)
.addComponent(check_tv)
.addComponent(check_phone))
.addGap(18, 18, 18)
.addGroup(jPanel4Layout.createParallelGroup(javax.swing.GroupLayout.Al
ignment.BASELINE)
.addComponent(check_gizer)
.addComponent(check_wifi))
.addGap(18, 18, 18)
.addComponent(btn_add, javax.swing.GroupLayout.PREFERRED_SIZE,
31, javax.swing.GroupLayout.PREFERRED_SIZE)
.addGap(18, 18, 18)
.addComponent(btn_edit, javax.swing.GroupLayout.PREFERRED_SIZE,
31, javax.swing.GroupLayout.PREFERRED_SIZE)
.addGap(18, 18, 18)
.addComponent(btn_delete, javax.swing.GroupLayout.PREFERRED_SIZE,
31, javax.swing.GroupLayout.PREFERRED_SIZE)
.addGap(106, 106, 106))
        );

        jButton1.setIcon(new
javax.swing.ImageIcon(getClass().getResource("/resources/reset.png"))); //
NOI18N
        jButton1.addActionListener(new java.awt.event.ActionListener() {
            public void actionPerformed(java.awt.event.ActionEventevt) {
                jButton1ActionPerformed(evt);
            }
        });

javax.swing.GroupLayout jPanel1Layout = new
javax.swing.GroupLayout(jPanel1);
        jPanel1.setLayout(jPanel1Layout);
```

```
        jPanel1Layout.setHorizontalGroup(

jPanel1Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LE
ADING)
.addGroup(javax.swing.GroupLayout.Alignment.TRAILING,
jPanel1Layout.createSequentialGroup()
.addGap(25, 25, 25)
.addComponent(jButton1, javax.swing.GroupLayout.PREFERRED_SIZE,
50, javax.swing.GroupLayout.PREFERRED_SIZE)
.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RELATE
D, 86, Short.MAX_VALUE)
.addComponent(jPanel4, javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE)
.addGap(53, 53, 53)
.addComponent(jScrollPane1,
javax.swing.GroupLayout.PREFERRED_SIZE, 677,
javax.swing.GroupLayout.PREFERRED_SIZE)
.addContainerGap())
        );
        jPanel1Layout.setVerticalGroup(

jPanel1Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LE
ADING)
.addGroup(jPanel1Layout.createSequentialGroup()
.addGroup(jPanel1Layout.createParallelGroup(javax.swing.GroupLayout.Al
ignment.LEADING)
.addGroup(jPanel1Layout.createSequentialGroup()
.addContainerGap()
.addComponent(jScrollPane1))
.addGroup(jPanel1Layout.createSequentialGroup()
.addGap(29, 29, 29)
.addComponent(jPanel4, javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE)
.addGap(0, 0, Short.MAX_VALUE)))
.addContainerGap())
.addGroup(jPanel1Layout.createSequentialGroup()
.addGap(191, 191, 191)
```

```
.addComponent(jButton1, javax.swing.GroupLayout.PREFERRED_SIZE,
51, javax.swing.GroupLayout.PREFERRED_SIZE)
.addContainerGap(javax.swing.GroupLayout.DEFAULT_SIZE,
Short.MAX_VALUE))
        );

tabbedPane.addTab("Room Information", jPanel1);

        jPanel3.setBackground(new java.awt.Color(230, 231, 232));

btn_addRoomType.setIcon(new
javax.swing.ImageIcon(getClass().getResource("/resources/DefaultButton.p
ng"))); // NOI18N
btn_addRoomType.addActionListener(new java.awt.event.ActionListener()
{
            public void actionPerformed(java.awt.event.ActionEventevt) {
btn_addRoomTypeActionPerformed(evt);
            }
        });

        jLabel5.setText("Price");

btn_deleteRoomType.setIcon(new
javax.swing.ImageIcon(getClass().getResource("/resources/DeleteButton.pn
g"))); // NOI18N
btn_deleteRoomType.setEnabled(false);
btn_deleteRoomType.addActionListener(new
java.awt.event.ActionListener() {
            public void actionPerformed(java.awt.event.ActionEventevt) {
btn_deleteRoomTypeActionPerformed(evt);
            }
        });

tf_price.addKeyListener(new java.awt.event.KeyAdapter() {
            public void keyTyped(java.awt.event.KeyEventevt) {
tf_priceKeyTyped(evt);
            }
        });

        jLabel4.setText("Room Type");
```

```
btn_editRoomType.setIcon(new
javax.swing.ImageIcon(getClass().getResource("/resources/EditButton.png"
))); // NOI18N
btn_editRoomType.setEnabled(false);
btn_editRoomType.addActionListener(new java.awt.event.ActionListener()
{
            public void actionPerformed(java.awt.event.ActionEventevt) {
btn_editRoomTypeActionPerformed(evt);
            }
        });

javax.swing.GroupLayout jPanel3Layout = new
javax.swing.GroupLayout(jPanel3);
        jPanel3.setLayout(jPanel3Layout);
        jPanel3Layout.setHorizontalGroup(

jPanel3Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LE
ADING)
.addGroup(jPanel3Layout.createSequentialGroup()
.addGroup(jPanel3Layout.createParallelGroup(javax.swing.GroupLayout.Al
ignment.LEADING)
.addGroup(jPanel3Layout.createSequentialGroup()
.addContainerGap()
.addGroup(jPanel3Layout.createParallelGroup(javax.swing.GroupLayout.Al
ignment.LEADING)
.addGroup(jPanel3Layout.createSequentialGroup()
.addComponent(jLabel4, javax.swing.GroupLayout.PREFERRED_SIZE,
100, javax.swing.GroupLayout.PREFERRED_SIZE)
.addGap(18, 18, 18)
.addComponent(tf_roomType,
javax.swing.GroupLayout.PREFERRED_SIZE, 146,
javax.swing.GroupLayout.PREFERRED_SIZE))
.addGroup(jPanel3Layout.createSequentialGroup()
.addComponent(jLabel5, javax.swing.GroupLayout.PREFERRED_SIZE,
100, javax.swing.GroupLayout.PREFERRED_SIZE)
.addGap(18, 18, 18)
.addComponent(tf_price, javax.swing.GroupLayout.PREFERRED_SIZE,
146, javax.swing.GroupLayout.PREFERRED_SIZE))))
.addGroup(jPanel3Layout.createSequentialGroup()
```

```
.addGap(99, 99, 99)
.addGroup(jPanel3Layout.createParallelGroup(javax.swing.GroupLayout.Al
ignment.TRAILING)
.addComponent(btn_editRoomType,
javax.swing.GroupLayout.PREFERRED_SIZE, 200,
javax.swing.GroupLayout.PREFERRED_SIZE)
.addComponent(btn_addRoomType,
javax.swing.GroupLayout.PREFERRED_SIZE, 200,
javax.swing.GroupLayout.PREFERRED_SIZE)
.addComponent(btn_deleteRoomType,
javax.swing.GroupLayout.PREFERRED_SIZE, 200,
javax.swing.GroupLayout.PREFERRED_SIZE))))
.addContainerGap(123, Short.MAX_VALUE))
        );
        jPanel3Layout.setVerticalGroup(

jPanel3Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LE
ADING)
.addGroup(jPanel3Layout.createSequentialGroup()
.addGap(55, 55, 55)
.addGroup(jPanel3Layout.createParallelGroup(javax.swing.GroupLayout.Al
ignment.BASELINE)
.addComponent(tf_roomType,
javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE)
.addComponent(jLabel4))
.addGap(29, 29, 29)
.addGroup(jPanel3Layout.createParallelGroup(javax.swing.GroupLayout.Al
ignment.LEADING)
.addComponent(jLabel5)
.addComponent(tf_price, javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE))
.addGap(31, 31, 31)
.addComponent(btn_addRoomType,
javax.swing.GroupLayout.PREFERRED_SIZE, 30,
javax.swing.GroupLayout.PREFERRED_SIZE)
.addGap(18, 18, 18)
```

```
.addComponent(btn_editRoomType,
javax.swing.GroupLayout.PREFERRED_SIZE, 30,
javax.swing.GroupLayout.PREFERRED_SIZE)
.addGap(18, 18, 18)
.addComponent(btn_deleteRoomType,
javax.swing.GroupLayout.PREFERRED_SIZE, 30,
javax.swing.GroupLayout.PREFERRED_SIZE)
.addContainerGap(56, Short.MAX_VALUE))
        );

table_roomType.setModel(new javax.swing.table.DefaultTableModel(
            new Object [][] {
                {null, null, null, null},
                {null, null, null, null},
                {null, null, null, null},
                {null, null, null, null}
            },
            new String [] {
                "Title 1", "Title 2", "Title 3", "Title 4"
            }
        ));
table_roomType.addMouseListener(new java.awt.event.MouseAdapter() {
            public void mouseClicked(java.awt.event.MouseEventevt) {
table_roomTypeMouseClicked(evt);
            }
        });
        jScrollPane2.setViewportView(table_roomType);

javax.swing.GroupLayout jPanel2Layout = new
javax.swing.GroupLayout(jPanel2);
        jPanel2.setLayout(jPanel2Layout);
        jPanel2Layout.setHorizontalGroup(

jPanel2Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LE
ADING)
.addGroup(jPanel2Layout.createSequentialGroup()
.addGap(256, 256, 256)
.addComponent(jPanel3, javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE)
```

```
.addPreferredGap(javax.swing.LayoutStyle.ComponentPlacement.RELATE
D, 26, Short.MAX_VALUE)
.addComponent(jScrollPane2,
javax.swing.GroupLayout.PREFERRED_SIZE, 417,
javax.swing.GroupLayout.PREFERRED_SIZE)
.addGap(87, 87, 87))
        );
        jPanel2Layout.setVerticalGroup(

jPanel2Layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LE
ADING)
.addGroup(jPanel2Layout.createSequentialGroup()
.addGroup(jPanel2Layout.createParallelGroup(javax.swing.GroupLayout.Al
ignment.LEADING)
.addGroup(jPanel2Layout.createSequentialGroup()
.addGap(31, 31, 31)
.addComponent(jScrollPane2,
javax.swing.GroupLayout.PREFERRED_SIZE, 402,
javax.swing.GroupLayout.PREFERRED_SIZE))
.addGroup(jPanel2Layout.createSequentialGroup()
.addGap(85, 85, 85)
.addComponent(jPanel3, javax.swing.GroupLayout.PREFERRED_SIZE,
javax.swing.GroupLayout.DEFAULT_SIZE,
javax.swing.GroupLayout.PREFERRED_SIZE)))
.addContainerGap(128, Short.MAX_VALUE))
        );

tabbedPane.addTab("Room Class", jPanel2);

javax.swing.GroupLayout layout = new
javax.swing.GroupLayout(getContentPane());
getContentPane().setLayout(layout);
layout.setHorizontalGroup(
layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING
)
.addComponent(tabbedPane)
        );
layout.setVerticalGroup(
layout.createParallelGroup(javax.swing.GroupLayout.Alignment.LEADING
)
```

```
.addComponent(tabbedPane)
        );

pack();
    }// </editor-fold>

    private void
btn_addRoomTypeActionPerformed(java.awt.event.ActionEventevt) {
roomTypeObjectCreation();
roomdb.insertRoomType(roomType);
        //populateRoomTable();
populateRoomTypeTable();

    }

    private void populateCombo()
    {
        try {
ResultSetrs = roomdb.getRoomType();
            while(rs.next())
            {
roomClass.add(rs.getString("type"));
combo_roomType.addItem(rs.getString("type"));
            }

        } catch (SQLException ex) {
JOptionPane.showMessageDialog(this, "Combo Fillup failed");
        }

    }

    private void populateRoomTypeTable()
    {
        //System.out.println(tabbedPane.getSelectedIndex());
        result = roomdb.getRoomType();
table_roomType.setModel(DbUtils.resultSetToTableModel(result));
roomdb.flushAll();
    }

    private void populateRoomTable()
```

```
    {
        result = roomdb.getRooms();
table_rooms.setModel(DbUtils.resultSetToTableModel(result));
roomdb.flushAll();
    }

    private void tf_priceKeyTyped(java.awt.event.KeyEventevt) {
        char c = evt.getKeyChar();

        if(!(Character.isDigit(c) || c== KeyEvent.VK_BACK_SPACE || c ==
KeyEvent.VK_DELETE ))
        {
evt.consume();
        }
    }

    private void btn_addActionPerformed(java.awt.event.ActionEventevt) {

roomObjectCreation();
roomdb.insertRoom(room);
populateRoomTable();
clearRoomPanel();

        //System.out.println(combo_roomType.getSelectedItem().toString());

    }

    private void
btn_editRoomTypeActionPerformed(java.awt.event.ActionEventevt) {
roomTypeObjectCreation();
roomdb.updateRoomType(roomType);
populateRoomTypeTable();
btn_editRoomType.setEnabled(false);
btn_addRoomType.setEnabled(true);


    }

    private void
table_roomTypeMouseClicked(java.awt.event.MouseEventevt) {
```

```
roomType = new RoomFare();
        int row = table_roomType.getSelectedRow();
displayToTextField(row);
btn_addRoomType.setEnabled(false);
btn_editRoomType.setEnabled(true);
btn_deleteRoomType.setEnabled(true);
    }

    private void table_roomsMouseClicked(java.awt.event.MouseEventevt) {
        room = new Room(null);
btn_edit.setEnabled(true);
btn_delete.setEnabled(true);
btn_add.setEnabled(false);
        int row = table_rooms.getSelectedRow();
displayToRoomTextField(row);
       // System.out.println(table_rooms.getValueAt(row, 1)+"");
        //System.out.println(">>>>>>> "+row );

    }

    private void btn_editActionPerformed(java.awt.event.ActionEventevt) {
roomObjectCreation();
roomdb.updateRoom(room);
populateRoomTable();
clearRoomPanel();
btn_add.setEnabled(true);

    }

    private void btn_deleteActionPerformed(java.awt.event.ActionEventevt)
{
        int roomId =Integer.parseInt( tf_roomID.getText() );
roomdb.deleteRoom(roomId);
populateRoomTable();
clearRoomPanel();
btn_add.setEnabled(true);
    }

    private void jButton1ActionPerformed(java.awt.event.ActionEventevt) {
clearRoomPanel();
```

```
    }

    private void
btn_deleteRoomTypeActionPerformed(java.awt.event.ActionEventevt) {
        //int roomId =Integer.parseInt( tf_roomType.getText() );

JOptionPane.showMessageDialog(null, "no method written yet");

    }

    private void check_wifiActionPerformed(java.awt.event.ActionEventevt)
{
        // TODO add your handling code here:
    }

    private void clearRoomPanel()
    {

        room = new Room(null);
tf_beds.setText("");
tf_price.setText("");
tf_roomID.setText("");
tf_roomNo.setText("");
tf_roomType.setText("");
table_rooms.clearSelection();
check_gizer.setSelected(false);
check_phone.setSelected(false);
check_tv.setSelected(false);
check_wifi.setSelected(false);
combo_roomType.setSelectedIndex(0);

btn_add.setEnabled(true);
btn_edit.setEnabled(false);
btn_delete.setEnabled(false);




    }
```

```
    private void clearRoomTypePanel()
    {
roomType = new RoomFare();
tf_roomType.setText("");
tf_price.setText("");
btn_addRoomType.setEnabled(true);
btn_editRoomType.setEnabled(false);
btn_deleteRoomType.setEnabled(false);
    }

    private void displayToRoomTextField(int row)
    {
      // for(int i=0; combo_roomType.)
tf_roomID.setText(table_rooms.getModel().getValueAt(row, 0)+"");
tf_roomNo.setText(table_rooms.getModel().getValueAt(row, 1)+"");
tf_beds.setText(table_rooms.getModel().getValueAt(row, 2)+"");
check_tv.setSelected((table_rooms.getModel().getValueAt(row,
3)+"").equals("true") ? true:false);
check_wifi.setSelected((table_rooms.getModel().getValueAt(row,
4)+"").equals("true") ? true:false);
check_gizer.setSelected((table_rooms.getModel().getValueAt(row,
5)+"").equals("true") ? true:false);
check_phone.setSelected((table_rooms.getModel().getValueAt(row,
6)+"").equals("true") ? true:false);
       int selectedIndex =
getComboSearchIndex(table_rooms.getModel().getValueAt(row, 7)+"");
combo_roomType.setSelectedIndex(selectedIndex);
       //tv,wifi,gizer,phone
       //value ? "true" : "false";

    }
     private void displayToTextField(int row) {
tf_roomType.setText(table_roomType.getModel().getValueAt(row, 0)+"");
tf_price.setText(table_roomType.getModel().getValueAt(row, 1)+"");

       }

     private int getComboSearchIndex(String item)
     {
for( inti=0;i<roomClass.size() ; i++)
```

```
        {
            if(item.equals(roomClass.get(i)))
            {
                return i;
            }
        }
        return -1;
    }

    private void roomObjectCreation()
    {
        // ************************************** null add korsi "" er
jaygay  **********************
        room = new Room(null);
room.setRoom_no(tf_roomNo.getText());
room.setBed_number(Integer.parseInt(tf_beds.getText()));
room.setHasTV(check_tv.isSelected());
room.setHasWIFI(check_wifi.isSelected());
room.setHasGizer(check_gizer.isSelected());
room.setHasPhone(check_phone.isSelected());

        // setting the inner object of RoomType

room.setRoom_class(new RoomFare());
room.getRoom_class().setRoom_type(combo_roomType.getSelectedItem().t
oString());

        try
        {
room.setRoom_id(Integer.parseInt(tf_roomID.getText()));
        }
catch(Exception ex)
        {
room.setRoom_id(-1);
        }
    }
    private void roomTypeObjectCreation()
    {
roomType = new RoomFare();
roomType.setRoom_type(tf_roomType.getText());
```

```
roomType.setPricePerDay(Integer.parseInt(tf_price.getText()));
    }
    /**
     * @param args the command line arguments
     */
    public static void main(String args[]) {
        /* Set the Nimbus look and feel */
        //<editor-fold defaultstate="collapsed" desc=" Look and feel setting
code (optional) ">
        /* If Nimbus (introduced in Java SE 6) is not available, stay with the
default look and feel.
         * For details see
http://download.oracle.com/javase/tutorial/uiswing/lookandfeel/plaf.html
         */
        try {
            for (javax.swing.UIManager.LookAndFeelInfo info :
javax.swing.UIManager.getInstalledLookAndFeels()) {
                if ("Nimbus".equals(info.getName())) {
javax.swing.UIManager.setLookAndFeel(info.getClassName());
                    break;
                }
            }
        } catch (ClassNotFoundException ex) {
java.util.logging.Logger.getLogger(RoomPanel.class.getName()).log(java.ut
il.logging.Level.SEVERE, null, ex);
        } catch (InstantiationException ex) {
java.util.logging.Logger.getLogger(RoomPanel.class.getName()).log(java.ut
il.logging.Level.SEVERE, null, ex);
        } catch (IllegalAccessException ex) {
java.util.logging.Logger.getLogger(RoomPanel.class.getName()).log(java.ut
il.logging.Level.SEVERE, null, ex);
        } catch (javax.swing.UnsupportedLookAndFeelException ex) {
java.util.logging.Logger.getLogger(RoomPanel.class.getName()).log(java.ut
il.logging.Level.SEVERE, null, ex);
        }
        //</editor-fold>

        /* Create and display the dialog */
java.awt.EventQueue.invokeLater(new Runnable() {
            public void run() {
```

```
RoomPanel dialog = new RoomPanel(new javax.swing.JFrame(), true);
dialog.addWindowListener(new java.awt.event.WindowAdapter() {
                @Override
                public void windowClosing(java.awt.event.WindowEvent e) {
System.exit(0);
                }
            });
dialog.setVisible(true);
        }
    });
  }

  // Variables declaration - do not modify
  private javax.swing.JButtonbtn_add;
  private javax.swing.JButtonbtn_addRoomType;
  private javax.swing.JButtonbtn_delete;
  private javax.swing.JButtonbtn_deleteRoomType;
  private javax.swing.JButtonbtn_edit;
  private javax.swing.JButtonbtn_editRoomType;
  private javax.swing.JCheckBoxcheck_gizer;
  private javax.swing.JCheckBoxcheck_phone;
  private javax.swing.JCheckBoxcheck_tv;
  private javax.swing.JCheckBoxcheck_wifi;
  private javax.swing.JComboBoxcombo_roomType;
  private javax.swing.JButton jButton1;
  private javax.swing.JLabel jLabel1;
  private javax.swing.JLabel jLabel2;
  private javax.swing.JLabel jLabel3;
  private javax.swing.JLabel jLabel4;
  private javax.swing.JLabel jLabel5;
  private javax.swing.JLabel jLabel6;
  private javax.swing.JPanel jPanel1;
  private javax.swing.JPanel jPanel2;
  private javax.swing.JPanel jPanel3;
  private javax.swing.JPanel jPanel4;
  private javax.swing.JScrollPane jScrollPane1;
  private javax.swing.JScrollPane jScrollPane2;
  private javax.swing.JTabbedPanetabbedPane;
  private javax.swing.JTabletable_roomType;
  private javax.swing.JTabletable_rooms;
```

```
    private javax.swing.JTextFieldtf_beds;
    private javax.swing.JTextFieldtf_price;
    private javax.swing.JTextFieldtf_roomID;
    private javax.swing.JTextFieldtf_roomNo;
    private javax.swing.JTextFieldtf_roomType;
    // End of variables declaration


}
```

Testing

```
/*
 * To change this license header, choose License Headers in Project
Properties.
 * To change this template file, choose Tools | Templates
 * and open the template in the editor.
 */
package I3.UI;

import I3.TableModel.BookingTableModel;
import I3.TableModel.CustomCellRenderer;
import java.awt.Color;
import java.util.Date;
import javax.swing.table.TableCellEditor;
import org.joda.time.DateTime;

/**
 *
 * @author www.Skidaweb.com
 */
public class testing extends javax.swing.JFrame {

    /**
     * Creates new form testing
     */
    public int getPricePerDay() {
        return pricePerDay;
    }

    public void setPricePerDay(int pricePerDay) {
this.pricePerDay = pricePerDay;
```

```
    }



}
```

UserInfo

```
/*
 * To change this license header, choose License Headers in Project
Properties.
 * To change this template file, choose Tools | Templates
 * and open the template in the editor.
 */
package I3.Classes;

/**
 *
 * @author www.Skidaweb.com
 */
public class UserInfo {



    //USER PROPERTIES
    private int customer_id;
    private String name;
    private String address;
    private String phone_no;
    private String type;

    public int getCustomer_id() {
        return customer_id;
    }

    public void setCustomer_id(int customer_id) {
this.customer_id = customer_id;
    }
```

```
    public String getName() {
        return name;
    }

    public void setName(String name) {
        this.name = name;
    }

    public String getAddress() {
        return address;
    }

    public void setAddress(String address) {
this.address = address;
    }

    public String getPhone_no() {
        return phone_no;
    }

    public void setPhone_no(String phone_no) {
this.phone_no = phone_no;
    }

    public String getType() {
        return type;
    }

    public void setType(String type) {
this.type = type;
    }





}
```

Hotel Management System

SCREENSHOTS

Login UI

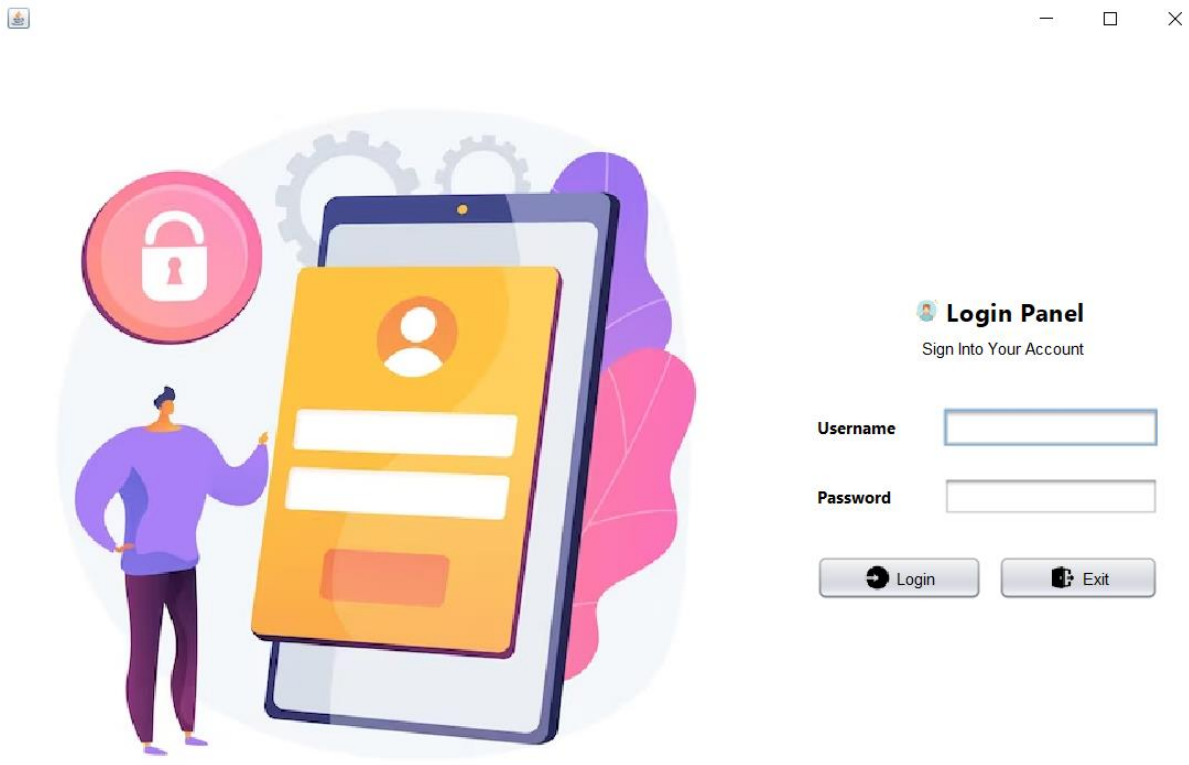

Controlpanel UI

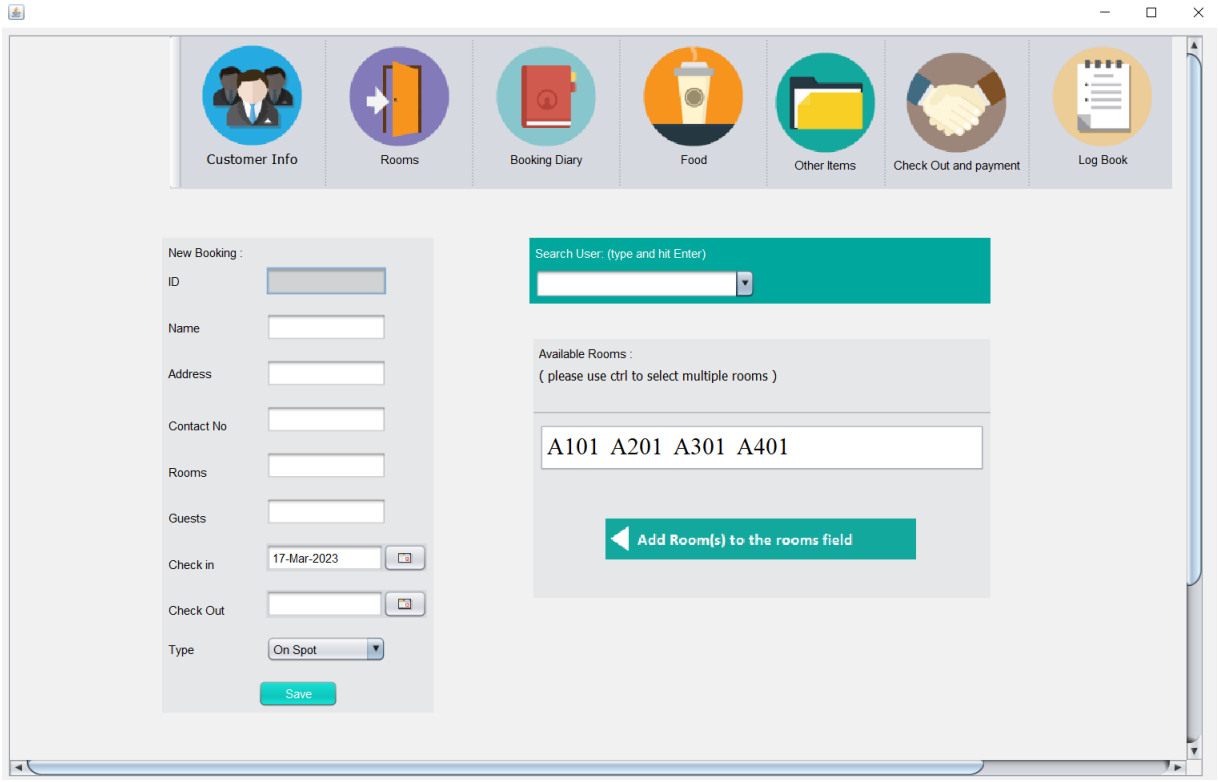

customerpanelUI

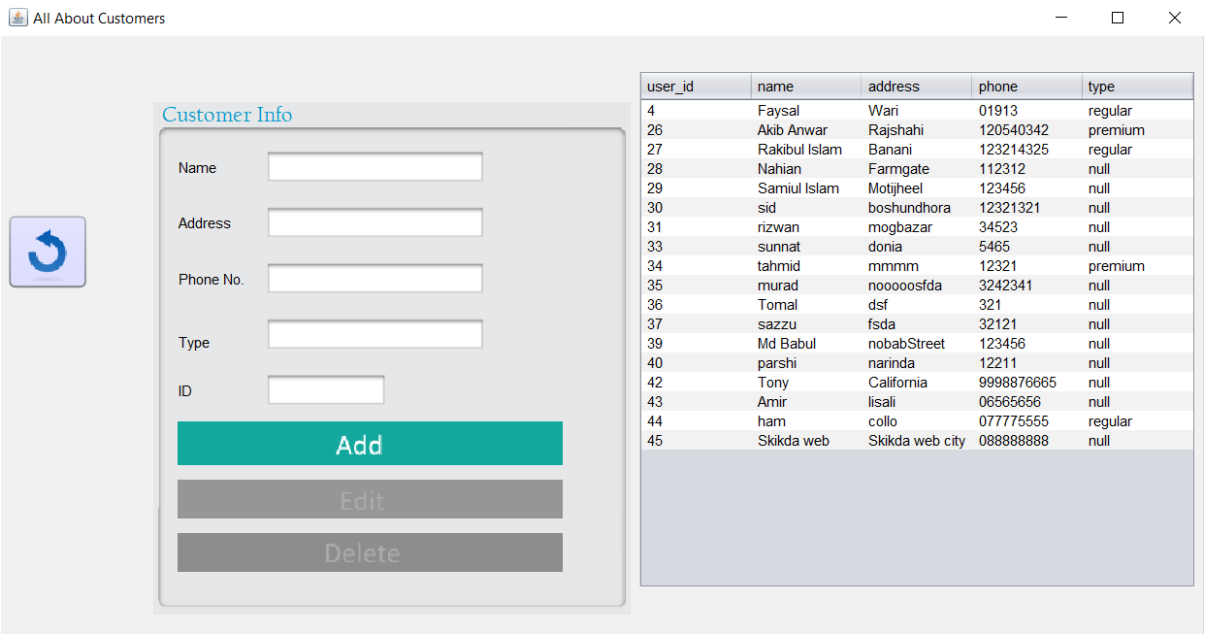

ItemPanel UI

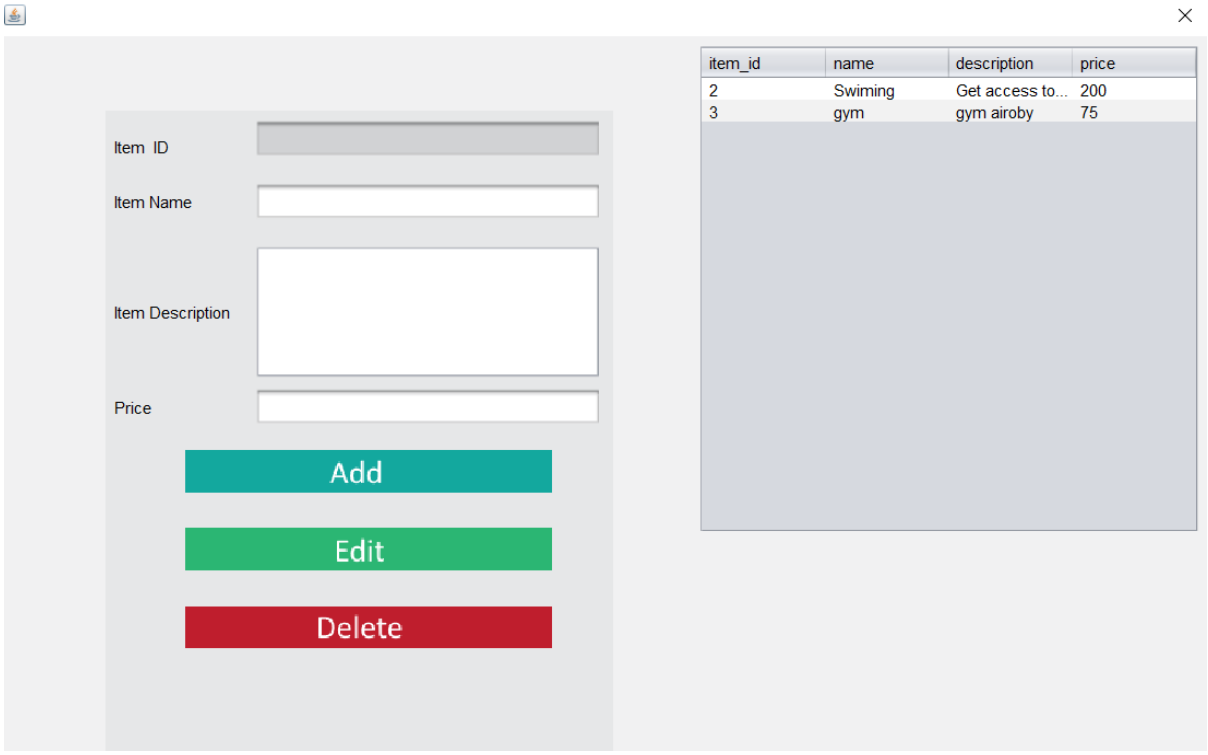

OrderPanel UI

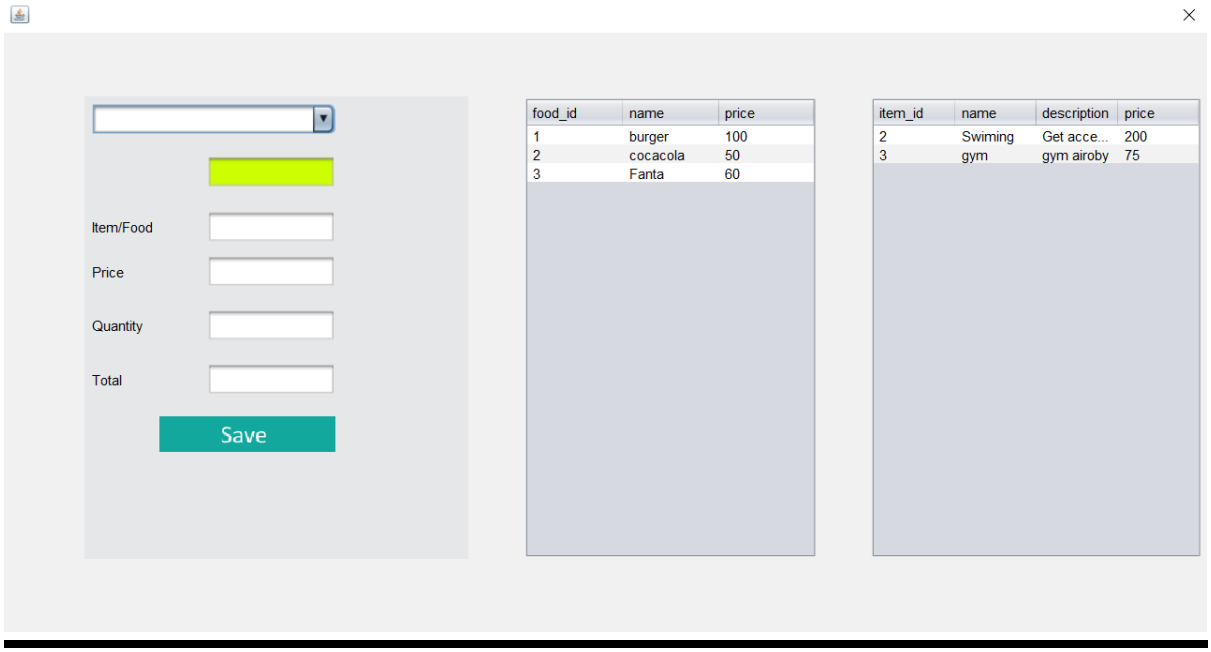

Room panel infromUI

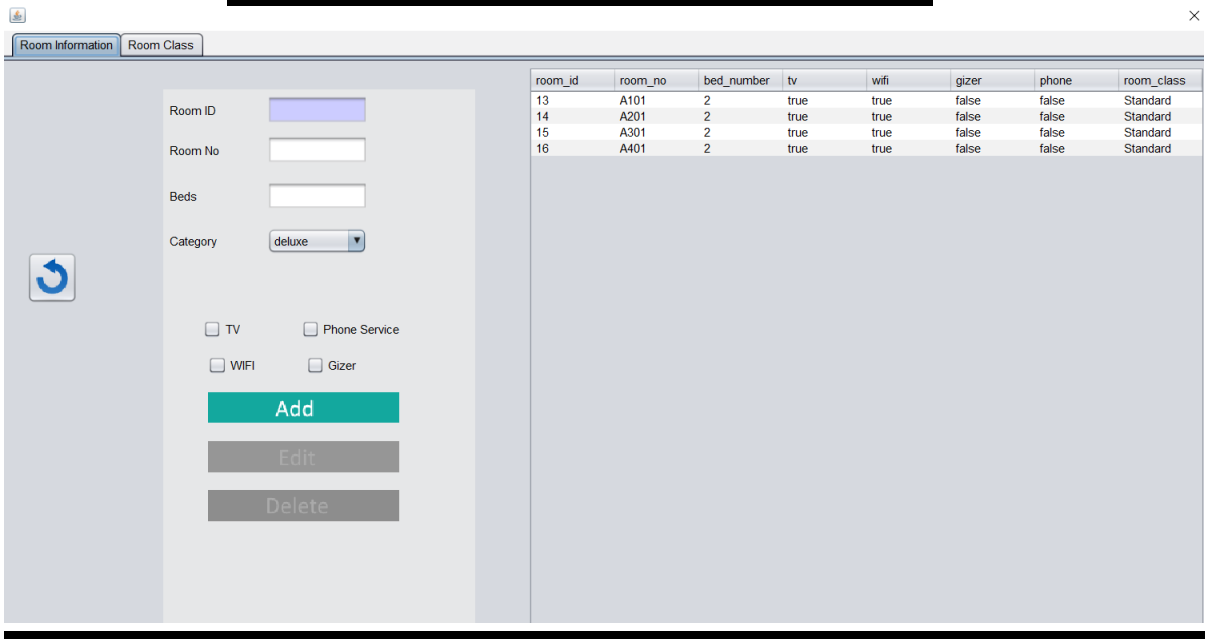

Testing UI

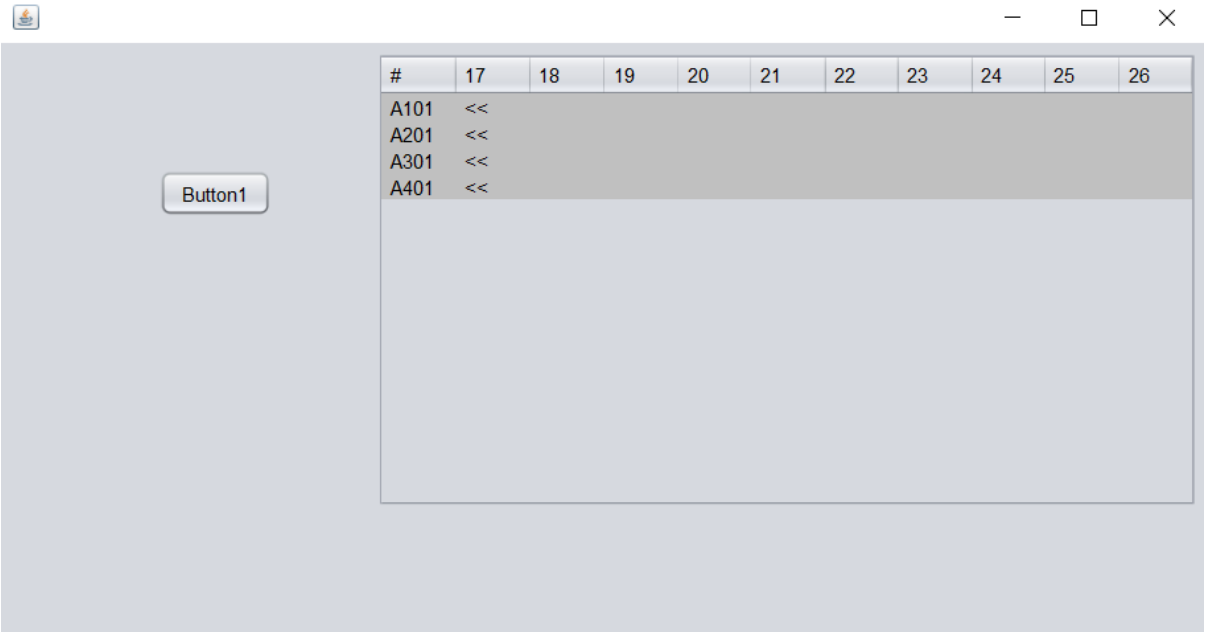

PaymentPanel UI

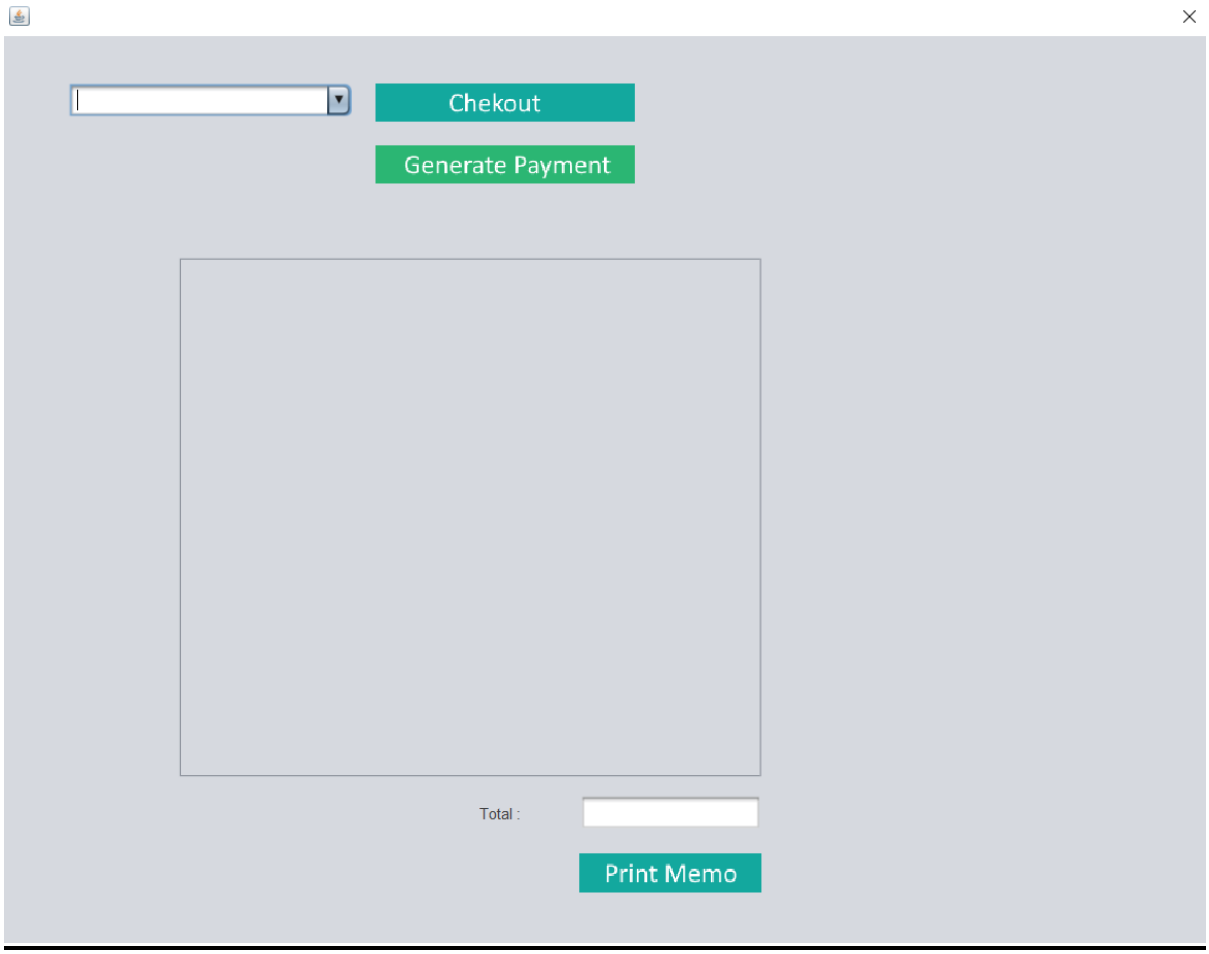

There is no security measure for the proposed system. Any user can run this project, having the knowledge of computer and the username and password set in the project.

SYSTEM SECURITY

DATABASE SECURITY

Security Mechanism is always vital part of any system. For an application using client/server approach security is a prime concern. As my project based on client/server approach so it important for me to concerned various type of security. Implementation of security is a key issue in any software development. I have also taken such consideration while developing my project.

Securing the database is a fundamental part for any security personnel while developing his or her security plan. The database is a collection of useful data and

can be treated as the most essential component of an organization and its economic growth. Therefore, any security effort must keep in mind that they need to provide the strongest level of control for the database. As it is true for any other technology, the security of database management systems depends on many others systems. These primarily include the operating system, the applications that use the DBMS, services that interact with the DBMS, the web server that makes the application available to end users etc. Basically database security can be broken down the following level.

- **Database Connection:** With the ever-increasing number of Dynamic Applications, an application may allow immediate unauthenticated updates to some database. If we are going to allow users makes updates to some database via a web page, please ensure that I validate all such updates. This will ensure that all updates are desirable and safe.

- **Server Security:** Server Security is the process of controlling access to the database server. This is the most import aspect of security and should be carefully planned. The basic idea here is "We cannot access what we do not see". For security purposes, I never let my database server visible to the world. If a database server is supplying information to a web server then I configured in a manner that it allowed connections from that web server only. Such a connection would require a trusted IP Address.

- **Table Access Control:** Table Access control is probably one of the most overlooked but one of the very strong forms of database security because of the difficulty in applying it. Using a table access control properly, I would require the collaboration of both the system administrator as well as the database developer.

- **Restricting Database Access:** By now, I have defined some of the basic issues of database security; let us now look into the specifics of server security, from the point of view of network access of the system. Internet based databases have been the most recent targets of security attacks. As my System is web-based, so I consider web security. Web Security may be defined as technological and managerial procedures applied to computer systems to ensure the availability, integrity, and confidentiality

of information. It means that protection of integrity, availability and confidentiality of computer assets and services from the associated threats and vulnerabilities. Like computer security, it is not the security about the stand alone computer but it is a security related to all the network.

8.2-CREATION OF USER PROFILES AND ACCESS RIGHT

This is a process by which we differentiate between common user, guest and administration. In my system, creation of user takes place by using SignUp form. In SignUp form I asked to enter some of the Personnel Details of user such as Name, Sex, Date of Birth, Email and ContactNo and Login Details such as User Name and Password.

The system authenticates a user by its username and its corresponding password. It is the system administrator who is responsible for granting permissions to any user. He can grant as well as revoke permissions from any user.

There are basically two categories of users. One is Administration and other is Guest. Depending on the category of user my software is open. If User Category is Guest then he is not able to access or alter the specific Form related to entry form in the database for adding route list, updating of the schedule of the bus. If user is Admin then he is able to access all the utilities available in the software.

LIMITATIONS OF PROJECT

- The hardware required limits the use of HDD less than 20GB. Vast Bank Data to be handle in the course of time needs suitable data backup device to be used.

- The application can't work on other operating System other than Windows. Handling of Oracle Backend requires an Expert Hand.

- DATA Entry is must for any required reports to be generated. This System only processes these data to furnish needed info.

- Handling of an Oracle Backend required an expert hand

SCOPE / FUTURE OF THE APPLICATION

This project is being developed keeping in view the future requirement of the Client .The same System can be expended to include complete Management Of the **State Bank Of India, Maurya Loak, Patna .**

Further in case the bank wishes to go for Online banking then enough facility is being provided for same. The tools used are well compatible to the application to be used over Internet

BIBLIOGRAPHY

BOOKS

1. Ellias. M. Award “System Analysis and Design”, Galgotia Publications, New Delhi, Second Edition, 2000.

2. Jeffrey A. Hoffer, Joey F. George, “System Analysis and Design Concepts“, Fourth Edition , 2004.

3. Roger .S. Pressman, “Software Engineering”, McGraw Hill Publications, Fourth Edition, 2003.

4. Kalen Delaney,”Microsoft SQL Server 2000”, Microsoft Press, Second Edition, 2000.
5. William E. Perry, “Effective Methods of Software Testing”, Second Edition, 2000.

6. Herbert Schieldt, The complete Reference Of Java.

7. John M Coliod, Java II

8. Iyan Bayross, Sql/PlSql