

Assignment 03

Hyperparameter Tunning - Group 05

Haoqi Wang

Kaiyue Wei

Yanyan Li

Xulu Wang

September 29, 2023

Assignment Questions (40 Points)

Data Preparation (7 Points):

```
# Add data preparation code here
import random
import pandas as pd

# set random seed
random.seed(1494)

# load dataset
g05_url = "https://archive.ics.uci.edu/ml/machine-learning-databases/00468/online_shoppers
g05_df = pd.read_csv(g05_url)

# check the data info
g05_df.head()
g05_df.info()

# check any missing values and remove it
g05_df.isnull().sum()
g05_df.dropna(inplace=True)
```

```
<class 'pandas.core.frame.DataFrame'>
RangeIndex: 12330 entries, 0 to 12329
Data columns (total 18 columns):
```

#	Column	Non-Null Count	Dtype
0	Administrative	12330 non-null	int64
1	Administrative_Duration	12330 non-null	float64
2	Informational	12330 non-null	int64
3	Informational_Duration	12330 non-null	float64
4	ProductRelated	12330 non-null	int64
5	ProductRelated_Duration	12330 non-null	float64
6	BounceRates	12330 non-null	float64
7	ExitRates	12330 non-null	float64
8	PageValues	12330 non-null	float64
9	SpecialDay	12330 non-null	float64
10	Month	12330 non-null	object
11	OperatingSystems	12330 non-null	int64
12	Browser	12330 non-null	int64
13	Region	12330 non-null	int64
14	TrafficType	12330 non-null	int64
15	VisitorType	12330 non-null	object
16	Weekend	12330 non-null	bool
17	Revenue	12330 non-null	bool

dtypes: bool(2), float64(7), int64(7), object(2)
memory usage: 1.5+ MB

Load the dataset and display the dataframe (2 Points).

```
# Add code here
g05_df.head()
```

	Administrative	Administrative_Duration	Informational	Informational_Duration	ProductRelated	
0	0	0.0	0	0.0	1	0
1	0	0.0	0	0.0	2	0
2	0	0.0	0	0.0	1	0
3	0	0.0	0	0.0	2	2
4	0	0.0	0	0.0	10	0

Use describe to provide statistics on the pandas Dataframe (2 Points).

```
# Add code here
g05_df.describe()
```

	Administrative	Administrative_Duration	Informational	Informational_Duration	ProductRelated
count	12330.000000	12330.000000	12330.000000	12330.000000	12330.000000
mean	2.315166	80.818611	0.503569	34.472398	31.731468
std	3.321784	176.779107	1.270156	140.749294	44.475503
min	0.000000	0.000000	0.000000	0.000000	0.000000
25%	0.000000	0.000000	0.000000	0.000000	7.000000
50%	1.000000	7.500000	0.000000	0.000000	18.000000
75%	4.000000	93.256250	0.000000	0.000000	38.000000
max	27.000000	3398.750000	24.000000	2549.375000	705.000000

Split the dataset into a Training set and a Test set. Justify your preferred split (3 Points).

```
# Add code here

from sklearn.model_selection import train_test_split

# Assuming the target variable is 'Revenue'
g05_X = g05_df.drop('Revenue', axis=1)
g05_y = g05_df['Revenue']

# Splitting the dataset into training (80%) and test set (20%)
g05_X_train, g05_X_test, g05_y_train, g05_y_test = train_test_split(g05_X, g05_y, test_size=0.2)

print(f"Training set has {g05_X_train.shape[0]} samples.")
print(f"Test set has {g05_X_test.shape[0]} samples.")
```

Training set has 9864 samples.

Test set has 2466 samples.

Classification Routine (12 Points):

Execute a classification routine using `RandomForestClassifier()`, `BaggingClassifier()`, and `XGBoostClassifier()`. Independently output the accuracy box plot as discussed in class. Use any package you are comfortable with (seaborn, matplotlib).

RandomForestClassifier():

```
# Add code here
from sklearn.ensemble import RandomForestClassifier
from sklearn.metrics import accuracy_score, classification_report
from sklearn.metrics import confusion_matrix
import seaborn as sns
import matplotlib.pyplot as plt

# one hot encoding
g05_X_train = pd.get_dummies(g05_X_train)
g05_X_test = pd.get_dummies(g05_X_test)

# built rf model
g05_rf = RandomForestClassifier(n_estimators=100)
g05_rf.fit(g05_X_train, g05_y_train)

# make prediction
g05_y_rf_pred = g05_rf.predict(g05_X_test)

# calculate the accuracy
print(f"Accuracy: {accuracy_score(g05_y_test, g05_y_rf_pred) * 100:.2f}%")
print("\nClassification Report:\n", classification_report(g05_y_test, g05_y_rf_pred))

# Calculating the confusion matrix
g05_cm = confusion_matrix(g05_y_test, g05_y_rf_pred)


# Printing the confusion matrix using seaborn for better visualization
plt.figure(figsize=(10,7))
sns.heatmap(g05_cm, annot=True, fmt='g', cmap='Blues')
plt.xlabel('Predicted labels')
plt.ylabel('True labels')
plt.title('Confusion Matrix for RandomForestClassifier')
plt.show()
```

Missing colon in file PosixPath('/Users/iris/.matplotlib/stylelib/mycustom.mplstyle'), line 2
Missing colon in file PosixPath('/Users/iris/.matplotlib/stylelib/lab-1.2.mplstyle'), line 2

Accuracy: 89.05%

Classification Report:

	precision	recall	f1-score	support
False	0.91	0.97	0.94	2055
True	0.75	0.51	0.61	411
accuracy			0.89	2466
macro avg	0.83	0.74	0.77	2466
weighted avg	0.88	0.89	0.88	2466

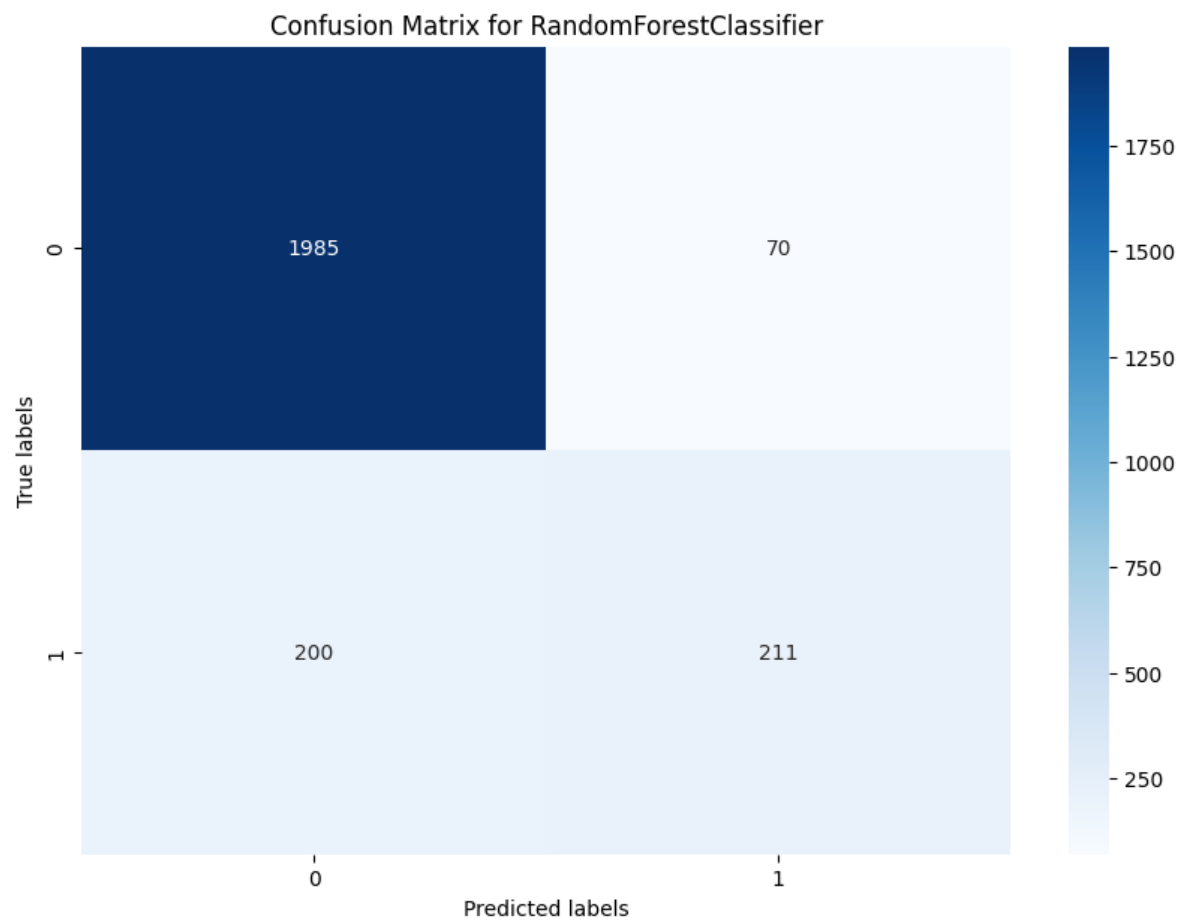

BaggingClassifier():

```
# Add code here
from sklearn.ensemble import BaggingClassifier
from sklearn.tree import DecisionTreeClassifier
from sklearn.metrics import make_scorer, accuracy_score, classification_report, confusion_matrix

seed = 3225
num_folds = 5
scoring = {'AUC': 'roc_auc', 'Accuracy': make_scorer(accuracy_score)}

# built rf model
# g05_bag = BaggingClassifier(n_estimators=100)
g05_bag = BaggingClassifier(DecisionTreeClassifier(max_features="auto",
                                                    splitter="random",
                                                    max_leaf_nodes=16,
                                                    random_state=seed),
                            n_estimators=100)

g05_bag.fit(g05_X_train, g05_y_train)

# make prediction
g05_y_bag_pred = g05_bag.predict(g05_X_test)

# calculate the accuracy
print(f"Accuracy: {accuracy_score(g05_y_test, g05_y_bag_pred) * 100:.2f}%")
print("\nClassification Report:\n", classification_report(g05_y_test, g05_y_bag_pred))


# Calculating the confusion matrix
g05_bag_cm = confusion_matrix(g05_y_test, g05_y_bag_pred)

# Printing the confusion matrix using seaborn for better visualization
plt.figure(figsize=(10,7))
sns.heatmap(g05_bag_cm, annot=True, fmt='g', cmap='Blues')
plt.xlabel('Predicted labels')
plt.ylabel('True labels')
plt.title('Confusion Matrix for BaggingClassifier')
plt.show()
```

Accuracy: 83.41%

Classification Report:

	precision	recall	f1-score	support
False	0.83	1.00	0.91	2055
True	0.75	0.01	0.01	411
accuracy			0.83	2466
macro avg	0.79	0.50	0.46	2466
weighted avg	0.82	0.83	0.76	2466

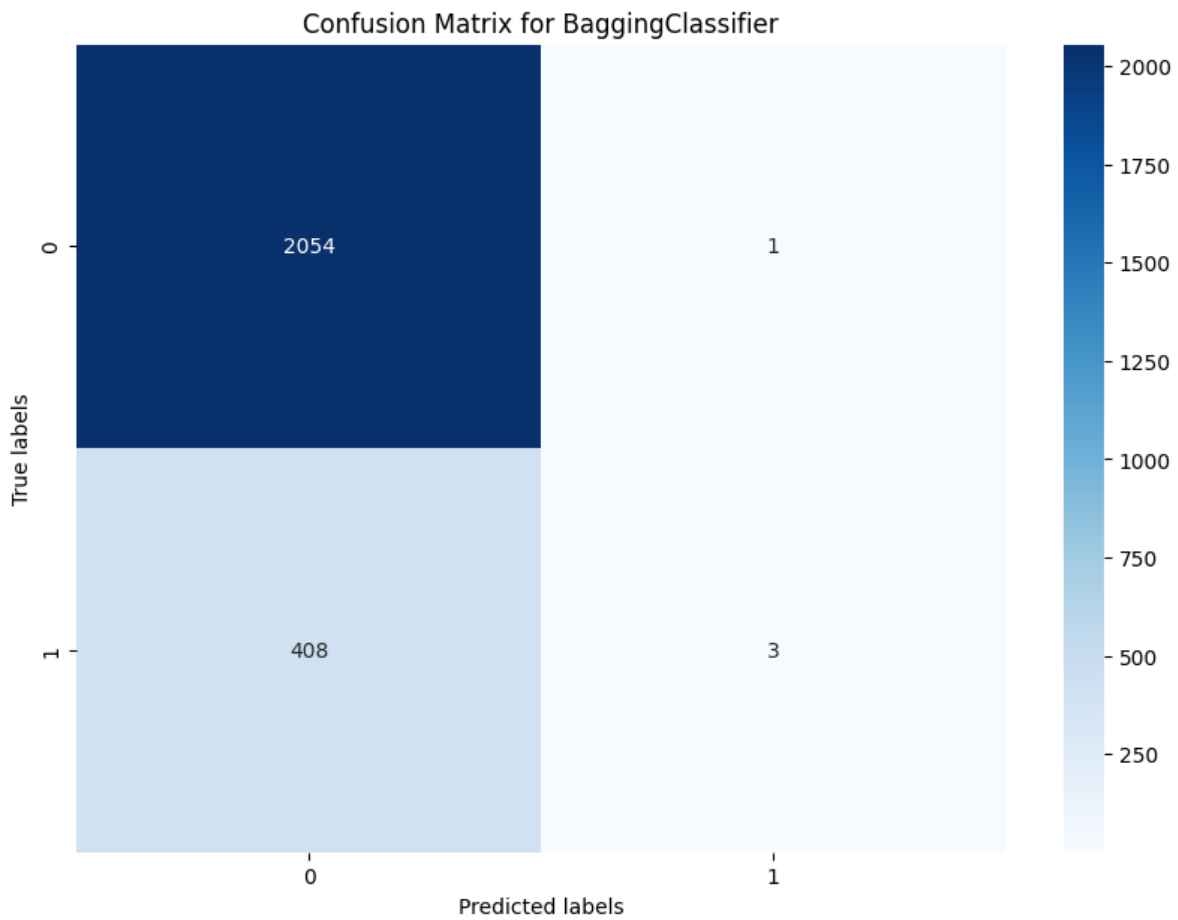

XGboostclassifier():

```
# Add code here
from xgboost import XGBClassifier


# Initialize XGBClassifier
g05_xgb = XGBClassifier(n_estimators=100)
# Fit model
g05_xgb_fit = g05_xgb.fit(g05_X_train, g05_y_train)
# Make predictions
g05_pred_xgb = g05_xgb_fit.predict(g05_X_test)

# Accuracy and classification report
g05_xgb_accuracy = accuracy_score(y_true=g05_y_test, y_pred=g05_pred_xgb)
print("XGBoost Classifier Accuracy: {:.2%}".format(g05_xgb_accuracy))
print(classification_report(g05_y_test, g05_pred_xgb))

# confusion matrix
g05_cm_xgb = confusion_matrix(g05_y_test, g05_pred_xgb)
# Printing the confusion matrix using seaborn for better visualization
plt.figure(figsize=(10,7))
sns.heatmap(g05_cm_xgb, annot=True, fmt='g', cmap='Blues')
plt.xlabel('Predicted labels')
plt.ylabel('True labels')
plt.title('Confusion Matrix for XGBClassifier')
plt.show()
```

XGBoost Classifier Accuracy: 88.89%

	precision	recall	f1-score	support
False	0.92	0.95	0.93	2055
True	0.71	0.57	0.63	411
accuracy			0.89	2466
macro avg	0.81	0.76	0.78	2466
weighted avg	0.88	0.89	0.88	2466

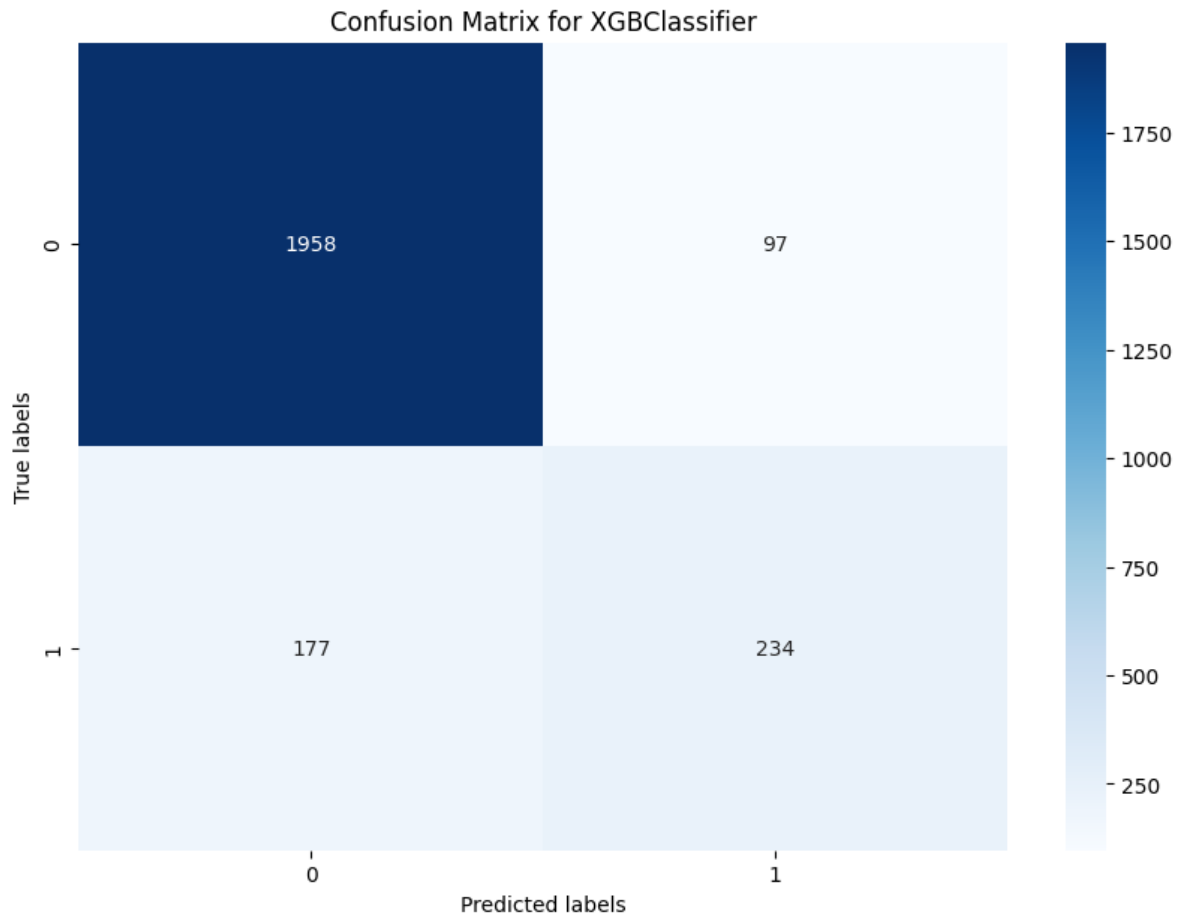

Classification with GridSearchCV (8 Points):

Replicate the classification from Q2 using GridsearchCV().

RandomForestClassifier with GridSearchCV

```
from sklearn.ensemble import RandomForestClassifier
from sklearn.metrics import accuracy_score, classification_report, confusion_matrix
from sklearn.model_selection import GridSearchCV
import seaborn as sns
import matplotlib.pyplot as plt
import pandas as pd # Make sure to import pandas
```

```

# Define the parameter grid
g05_param_grid = {
    'n_estimators': [50, 100, 150],
    'max_depth': [None, 10, 20, 30],
    'min_samples_split': [2, 5, 10],
    'min_samples_leaf': [1, 2, 4]
}

# Create a RandomForestClassifier
g05_rf = RandomForestClassifier()

# Instantiate GridSearchCV with the model and the parameter grid
g05_grid_search = GridSearchCV(estimator=g05_rf, param_grid=g05_param_grid,
                                cv=5, n_jobs=-1, verbose=2, scoring='accuracy')

# Fit the grid search to the data
g05_grid_search.fit(g05_X_train, g05_y_train)

# Display the best score and hyperparameters
print("Best: %f using %s" % (g05_grid_search.best_score_, g05_grid_search.best_params_))

# Get the best model
g05_best_rf = g05_grid_search.best_estimator_

# Make prediction
g05_y_rf_pred = g05_best_rf.predict(g05_X_test)

# Calculate and display the accuracy
accuracy = accuracy_score(g05_y_test, g05_y_rf_pred)
print("\nAccuracy: {:.2%}\n".format(accuracy))

# Display the classification report
print("Classification Report:")
print(classification_report(g05_y_test, g05_y_rf_pred))

# Calculating the confusion matrix
g05_cm = confusion_matrix(g05_y_test, g05_y_rf_pred)

# Printing the confusion matrix using seaborn for better visualization


```

```
plt.figure(figsize=(10,7))
sns.heatmap(g05_cm, annot=True, fmt='g', cmap='Blues')
plt.xlabel('Predicted labels')
plt.ylabel('True labels')
plt.title('Confusion Matrix for Optimized RandomForestClassifier')
plt.show()
```

Accuracy: 89.33%

Classification Report:

	precision	recall	f1-score	support
False	0.92	0.96	0.94	2055
True	0.74	0.56	0.64	411
accuracy			0.89	2466
macro avg	0.83	0.76	0.79	2466
weighted avg	0.89	0.89	0.89	2466

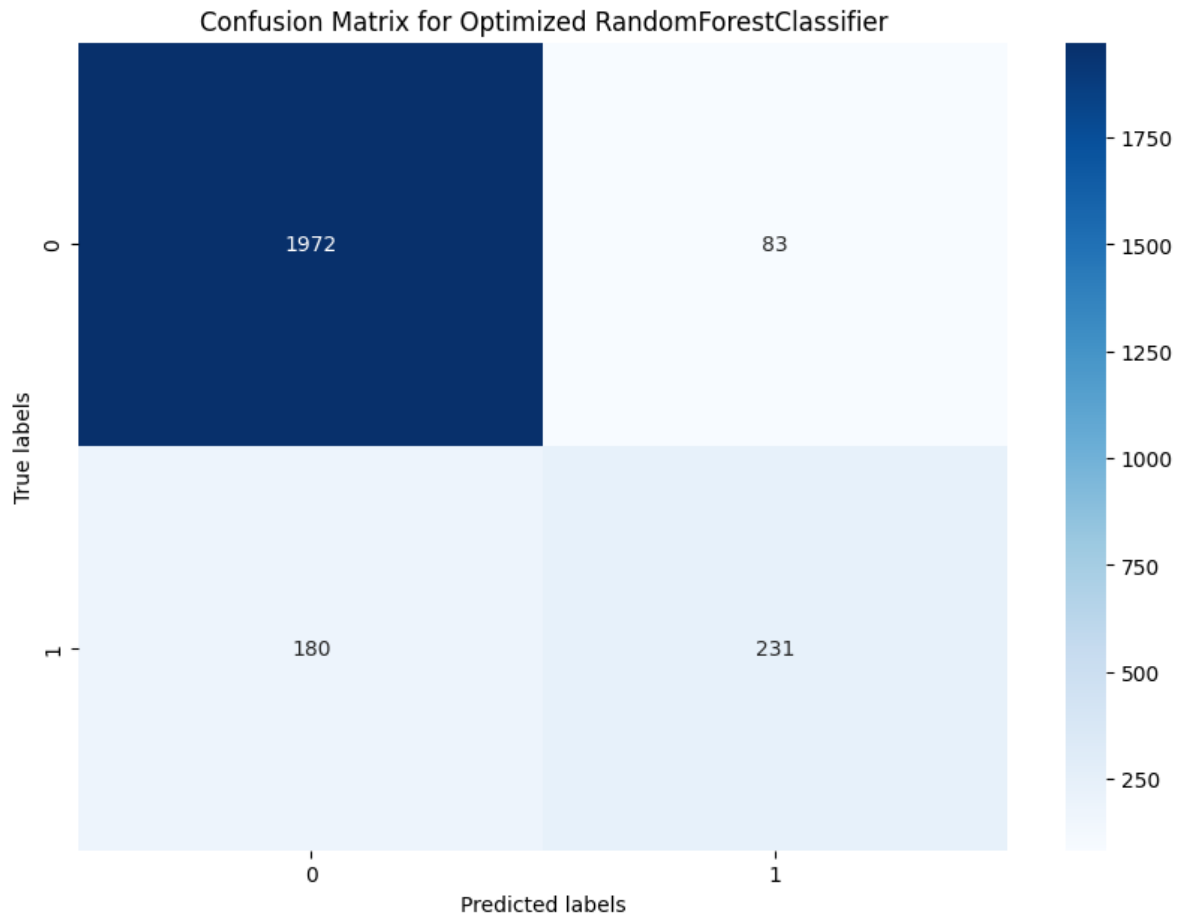

BaggingClassifier with GridSearchCV

```
# Add code here
from sklearn.model_selection import GridSearchCV
from sklearn.model_selection import RepeatedStratifiedKFold
from sklearn.model_selection import StratifiedKFold
# BaggingClassifier
g_05_bagging_grid_para = {
    "n_estimators" : [10, 25, 50, 100, 250, 500, 1000],
    "bootstrap" : [True],
    "max_samples" : [0.05, 0.1, 0.2, 0.5, 0.7],
    "oob_score" : [True] # Only for bootstrap equals to True
}
```

```

kfold = StratifiedKFold(n_splits=num_folds, random_state=seed, shuffle=True)

g_05_baggrid = GridSearchCV(estimator=g05_bag,
                             param_grid=g_05_baggrid_para,
                             cv=kfold,
                             scoring=scoring,
                             return_train_score=True,
                             n_jobs=-1,
                             refit="AUC",
                             verbose=10)

g_05_best_baggrid = g_05_baggrid.fit(g05_X_train, g05_y_train)
# print("Best: %f using %s" % (g_05_best_baggrid.best_score_,g_05_best_baggrid.best_param_))

print("Best: %f using %s" % (g_05_best_baggrid.best_score_,g_05_best_baggrid.best_param_))

g05_y_baggrid_pred = g_05_best_baggrid.predict(g05_X_test)

# calculate the accuracy
print(f"Accuracy: {accuracy_score(g05_y_test, g05_y_baggrid_pred) * 100:.2f}%")
print("\nClassification Report:\n", classification_report(g05_y_test, g05_y_baggrid_pred))

# Calculating the confusion matrix
g05_baggrid_cm = confusion_matrix(g05_y_test, g05_y_baggrid_pred)

# Printing the confusion matrix using seaborn for better visualization
plt.figure(figsize=(10,7))
sns.heatmap(g05_baggrid_cm, annot=True, fmt='g', cmap='Blues')
plt.xlabel('Predicted labels')
plt.ylabel('True labels')
plt.title('Confusion Matrix for BaggingClassifier with Grid Search')
plt.show()


```

Best: 0.921183 using {'bootstrap': True, 'max_samples': 0.7, 'n_estimators': 1000, 'oob_score': True}
Accuracy: 88.69%

Classification Report:

	precision	recall	f1-score	support
False	0.89	0.98	0.94	2055
True	0.81	0.42	0.55	411

accuracy			0.89	2466
macro avg	0.85	0.70	0.74	2466
weighted avg	0.88	0.89	0.87	2466

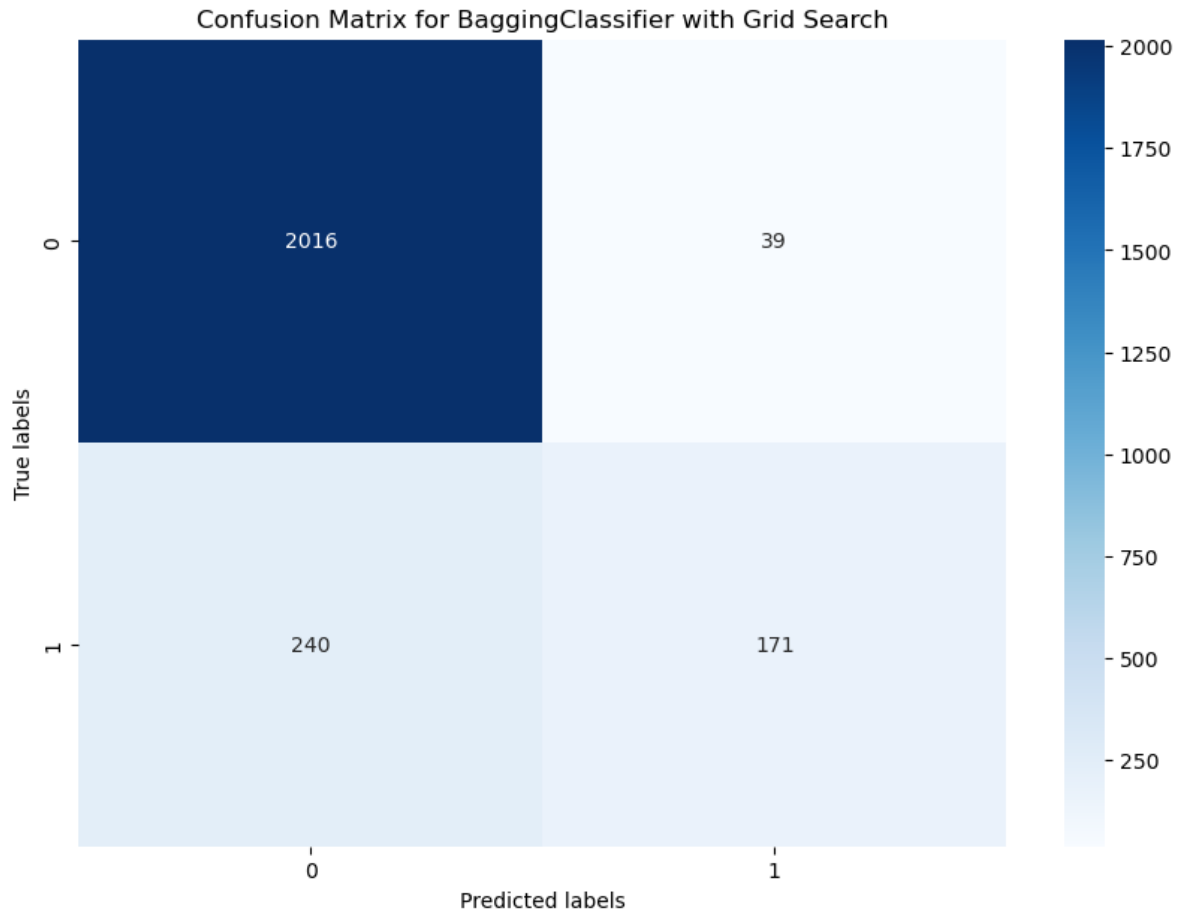

XGBClassifier with GridSearchCV

```
from sklearn.model_selection import GridSearchCV
from sklearn.model_selection import RepeatedStratifiedKFold

# define model
g05_xgb_model = XGBClassifier()
# define search space
g05_xgb_space = dict()
```

```

g05_xgb_space['booster'] = ['gbtree', 'gblinear', 'dart']
g05_xgb_space['learning_rate'] = [1e-5, 1e-4, 1e-3, 1e-2, 1e-1, 1, 10]
g05_xgb_space['gamma'] = [1e-4, 1e-3, 1e-2, 1e-1, 1, 10]

# define evaluation
cv = RepeatedStratifiedKFold(n_splits=5, n_repeats=3, random_state=1)

# define grid search
g05_xgb_grid_search = GridSearchCV(g05_xgb_model, g05_xgb_space, scoring='accuracy', n_jobs=-1)

g05_xgb_grid_result = g05_xgb_grid_search.fit(g05_X_train, g05_y_train)
g05_xgb_grid_pred = g05_xgb_grid_result.predict(g05_X_test)
# summarize result
print('Best Score: %s' % g05_xgb_grid_result.best_score_)
print('Best Hyperparameters chosen by GridSearchCV: %s' % g05_xgb_grid_result.best_params_)

# Accuracy and classification report
g05_xgb_grid_accuracy = accuracy_score(y_true=g05_y_test, y_pred=g05_xgb_grid_pred)
print("XGBoost Classifier Accuracy: {:.2%}".format(g05_xgb_grid_accuracy))
print(classification_report(g05_y_test, g05_xgb_grid_pred))

# confusion matrix
g05_cm_grid_xgb = confusion_matrix(g05_y_test, g05_xgb_grid_pred)
# Printing the confusion matrix using seaborn for better visualization
plt.figure(figsize=(10,7))
sns.heatmap(g05_cm_grid_xgb, annot=True, fmt='g', cmap='Blues')
plt.xlabel('Predicted labels')
plt.ylabel('True labels')
plt.title('Confusion Matrix for XGBClassifier')
plt.show()


```

Best Score: 0.9053462274855237

Best Hyperparameters chosen by GridSearchCV: {'booster': 'gbtree', 'gamma': 1, 'learning_rate': 0.0001}

XGBoost Classifier Accuracy: 89.42%

	precision	recall	f1-score	support
False	0.92	0.96	0.94	2055
True	0.73	0.58	0.65	411
accuracy			0.89	2466
macro avg	0.82	0.77	0.79	2466
weighted avg	0.89	0.89	0.89	2466

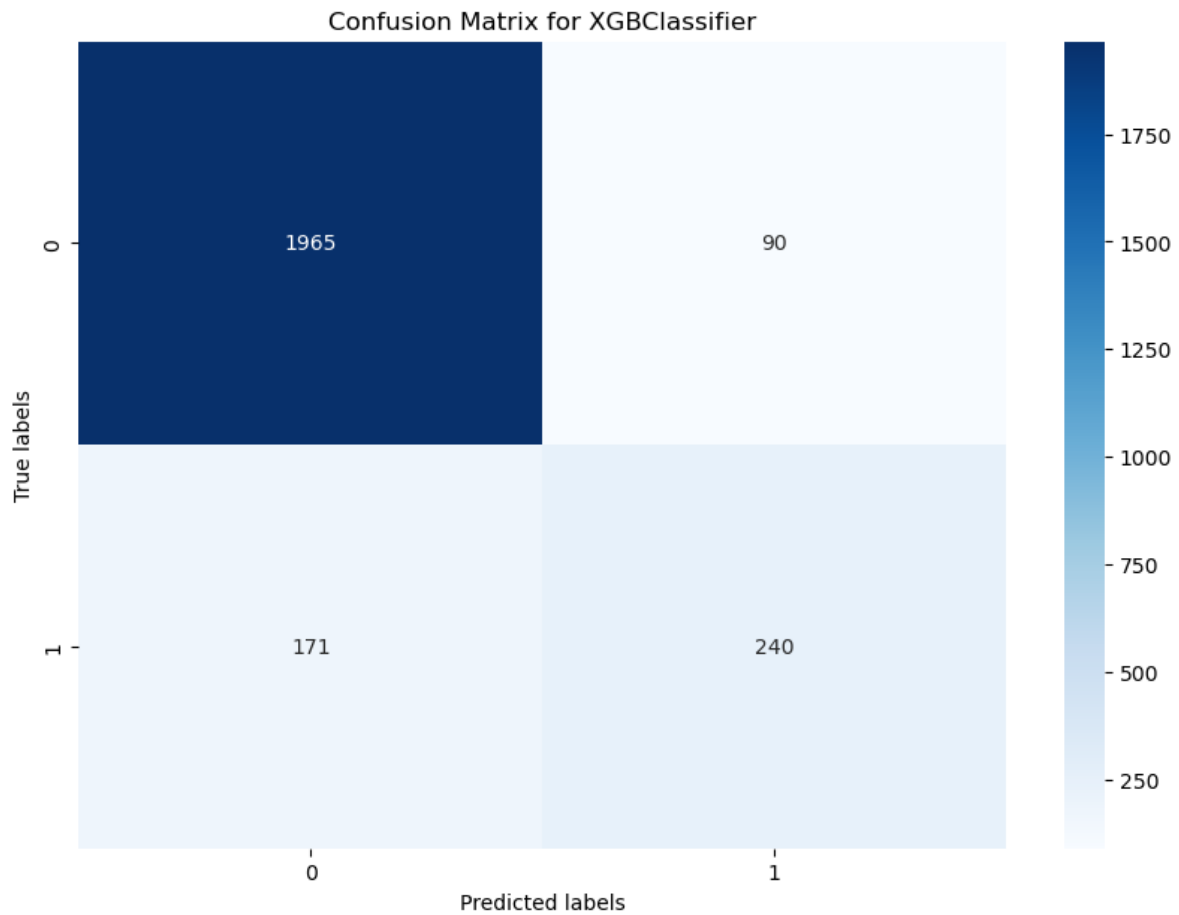

Classification with RandomSearchCV (8 Points):

Replicate the classification from Q2 using RandomSearchCV().

RandomForestClassifier with RandomSearchCV

```
from sklearn.ensemble import RandomForestClassifier
from sklearn.metrics import accuracy_score, classification_report, confusion_matrix
from sklearn.model_selection import RandomizedSearchCV
from scipy.stats import randint
import seaborn as sns
import matplotlib.pyplot as plt
```



```

# Define the parameter space
g05_param_dist = {
    'n_estimators': randint(10, 200),
    'max_depth': [None] + list(randint(1, 20).rvs(10)),
    'min_samples_split': randint(2, 11),
    'min_samples_leaf': randint(1, 11),
    'bootstrap': [True, False]
}

# Create a RandomForestClassifier
g05_rf = RandomForestClassifier()

# Instantiate RandomizedSearchCV with the model and the parameter distribution
random_search = RandomizedSearchCV(estimator=g05_rf, param_distributions=g05_param_dist,
                                   n_iter=100, cv=5, n_jobs=-1, verbose=2, scoring='accuracy')

# Fit the random search to the data
random_search.fit(g05_X_train, g05_y_train)

# Display the best score and hyperparameters
print("Best: %f using %s" % (random_search.best_score_, random_search.best_params_))

# Get the best model
g05_best_rf = random_search.best_estimator_

# Make prediction
g05_y_rf_pred = g05_best_rf.predict(g05_X_test)

# Display results
print("\nAccuracy: {:.2%}".format(accuracy_score(g05_y_test, g05_y_rf_pred)))
print("Classification Report:")
print(classification_report(g05_y_test, g05_y_rf_pred))

# Calculating the confusion matrix
g05_cm = confusion_matrix(g05_y_test, g05_y_rf_pred)

# Printing the confusion matrix using seaborn for better visualization
plt.figure(figsize=(10,7))
sns.heatmap(g05_cm, annot=True, fmt='g', cmap='Blues')
plt.xlabel('Predicted labels')
plt.ylabel('True labels')


```

```
plt.title('Confusion Matrix for Optimized RandomForestClassifier with RandomSearchCV')
plt.show()
```

Accuracy: 89.54%

Classification Report:

	precision	recall	f1-score	support
False	0.91	0.97	0.94	2055
True	0.78	0.52	0.62	411
accuracy			0.90	2466
macro avg	0.84	0.75	0.78	2466
weighted avg	0.89	0.90	0.89	2466

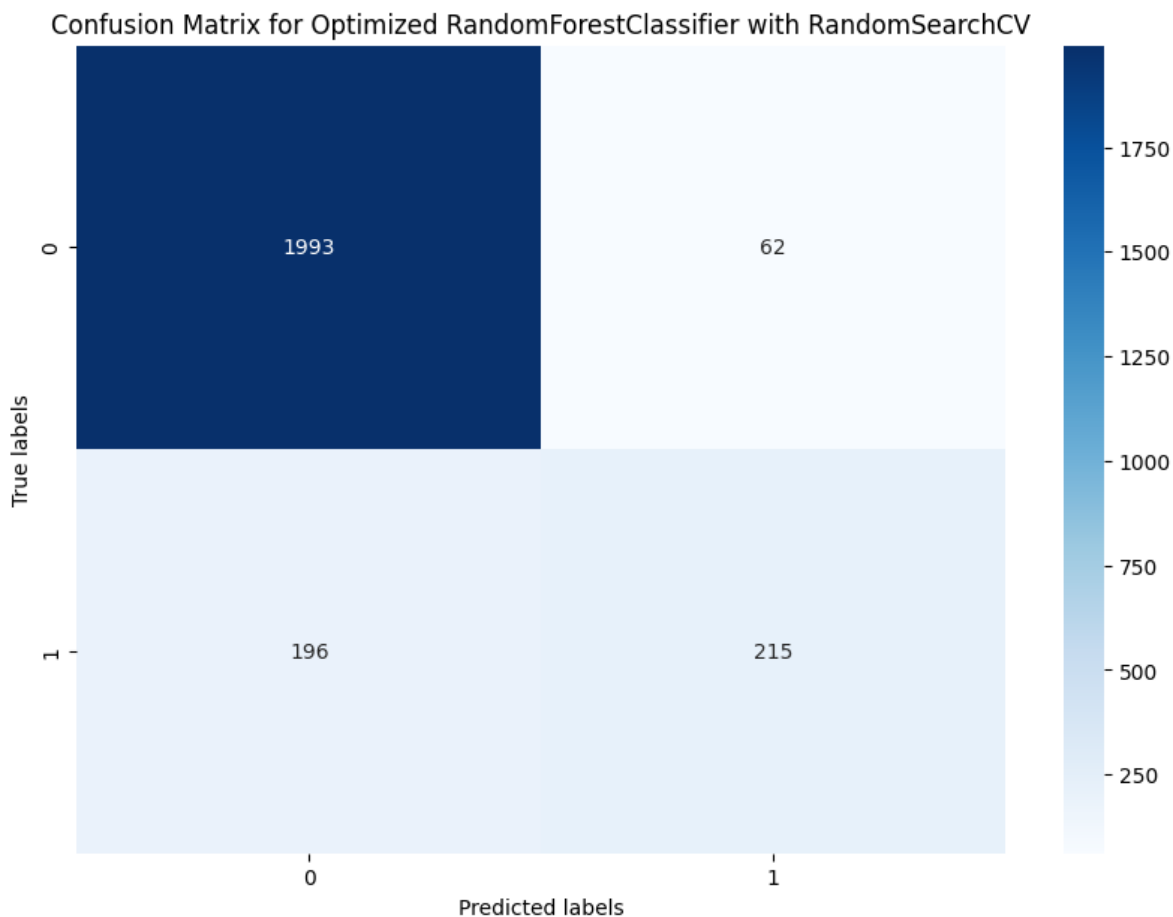

BaggingClassifier with RandomSearchCV

```
# Add code here
import numpy as np
from sklearn.model_selection import RandomizedSearchCV

num_folds = 5
kfold = StratifiedKFold(n_splits=num_folds, random_state=seed, shuffle=True)

# Number of trees in bagging classifier base model - decision tree
n_estimators = [int(x) for x in np.linspace(start = 200, stop = 2000, num = 10)]
# Number of features to consider at every split
max_features = [0.5, 0.7, 1.0]
# max samples to consider at every split
max_samples = [0.05, 0.1, 0.2, 0.5, 0.6, 0.7]

# Create the random grid
g_05_bagg_random_para = {'n_estimators' : n_estimators,
                        'max_features': max_features,
                        'max_samples' : max_samples}

g_05_bagg_random=RandomizedSearchCV(estimator=g05_bagg,
                                    param_distributions=g_05_bagg_random_para,
                                    n_iter=50,
                                    cv=kfold,
                                    verbose=2,
                                    random_state=seed,
                                    n_jobs=-1)

g_05_best_bagg_random = g_05_bagg_random.fit(g05_X_train, g05_y_train)

best_random_grid=g_05_best_bagg_random.best_estimator_

print("Best: %f using %s" % (g_05_best_bagg_random.best_score_,g_05_best_bagg_random.best_

g05_y_bagg_random_pred = g_05_best_bagg_random.predict(g05_X_test)

# calculate the accuracy
print(f"Accuracy: {accuracy_score(g05_y_test, g05_y_bagg_random_pred) * 100:.2f}%")
print("\nClassification Report:\n", classification_report(g05_y_test, g05_y_bagg_random_pr
```

```

# Calculating the confusion matrix
g05_bagg_random_cm = confusion_matrix(g05_y_test, g05_y_bagg_random_pred)


# Printing the confusion matrix using seaborn for better visualization
plt.figure(figsize=(10,7))
sns.heatmap(g05_bagg_random_cm, annot=True, fmt='g', cmap='Blues')
plt.xlabel('Predicted labels')
plt.ylabel('True labels')
plt.title('Confusion Matrix for BaggingClassifier with Random Search')
plt.show()

```

Best: 0.902980 using {'n_estimators': 400, 'max_samples': 0.6, 'max_features': 1.0}
Accuracy: 88.85%

Classification Report:

	precision	recall	f1-score	support
False	0.89	0.98	0.94	2055
True	0.82	0.42	0.56	411
accuracy			0.89	2466
macro avg	0.86	0.70	0.75	2466
weighted avg	0.88	0.89	0.87	2466

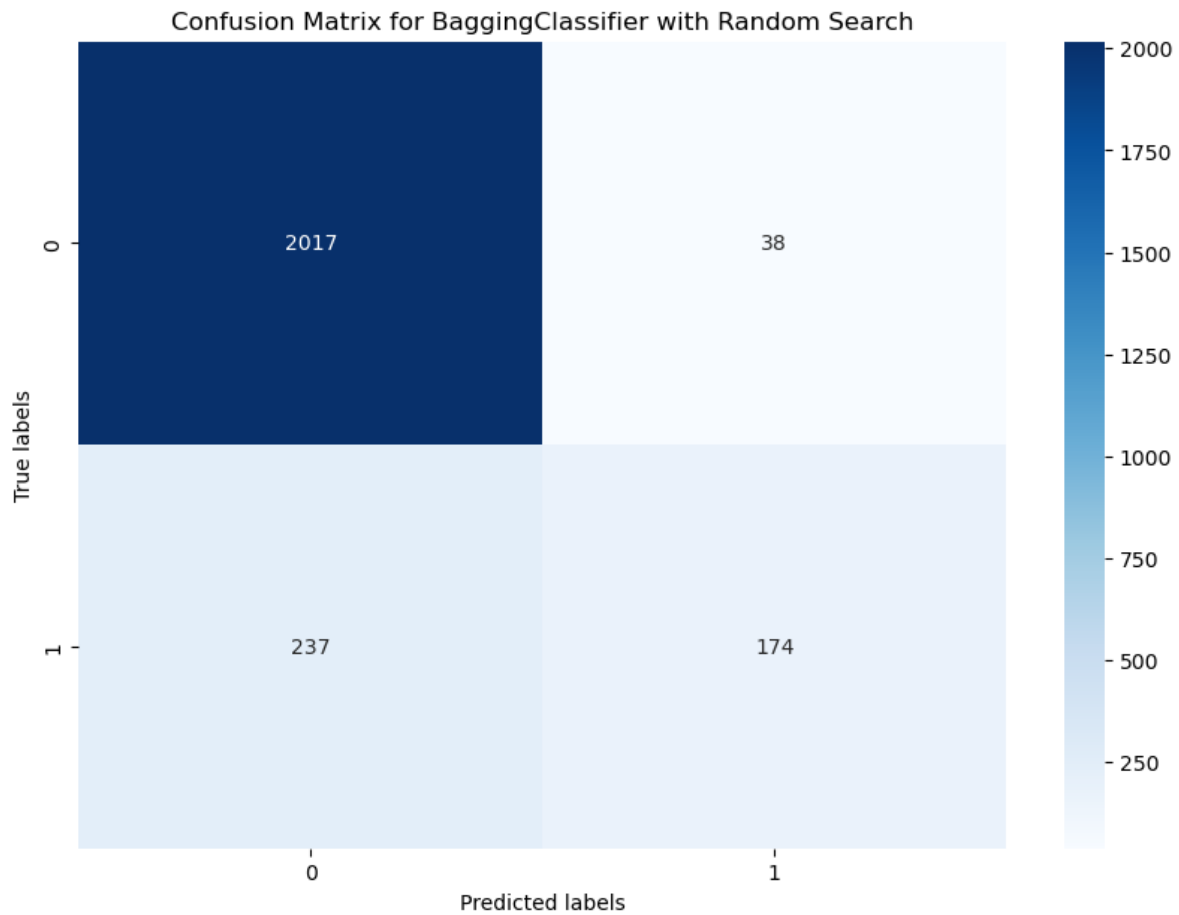

XGBClassifier with RandomSearchCV

```
from scipy.stats import loguniform
from sklearn.model_selection import RandomizedSearchCV

# define search space
g05_xgb_space = dict()
g05_xgb_space['booster'] = ['gbtree', 'gblinear', 'dart']
g05_xgb_space['learning_rate'] = loguniform(1e-5, 10)
g05_xgb_space['gamma'] = loguniform(1e-5, 100)

# define random search
g05_xgb_random_search = RandomizedSearchCV(g05_xgb_model, g05_xgb_space, n_iter=300, scori
```

```

g05_xgb_random_result = g05_xgb_random_search.fit(g05_X_train, g05_y_train)
g05_xgb_random_pred = g05_xgb_random_result.predict(g05_X_test)
# summarize result
print('Best Score: %s' % g05_xgb_random_result.best_score_)
print('Best Hyperparameters: %s' % g05_xgb_random_result.best_params_)

# Accuracy and classification report
g05_xgb_random_accuracy = accuracy_score(y_true=g05_y_test, y_pred=g05_xgb_random_pred)
print("XGBoost Classifier Accuracy: {:.2%}".format(g05_xgb_random_accuracy))
print(classification_report(g05_y_test, g05_xgb_random_pred))

# confusion matrix
g05_cm_random_xgb = confusion_matrix(g05_y_test, g05_xgb_random_pred)
# Printing the confusion matrix using seaborn for better visualization
plt.figure(figsize=(10,7))
sns.heatmap(g05_cm_random_xgb, annot=True, fmt='g', cmap='Blues')
plt.xlabel('Predicted labels')
plt.ylabel('True labels')
plt.title('Confusion Matrix for XGBClassifier')
plt.show()


```

Best Score: 0.9061571581461291

Best Hyperparameters: {'booster': 'gbtree', 'gamma': 4.972389468490119, 'learning_rate': 0.1}

XGBoost Classifier Accuracy: 89.46%

	precision	recall	f1-score	support
False	0.92	0.96	0.94	2055
True	0.74	0.57	0.64	411
accuracy			0.89	2466
macro avg	0.83	0.77	0.79	2466
weighted avg	0.89	0.89	0.89	2466

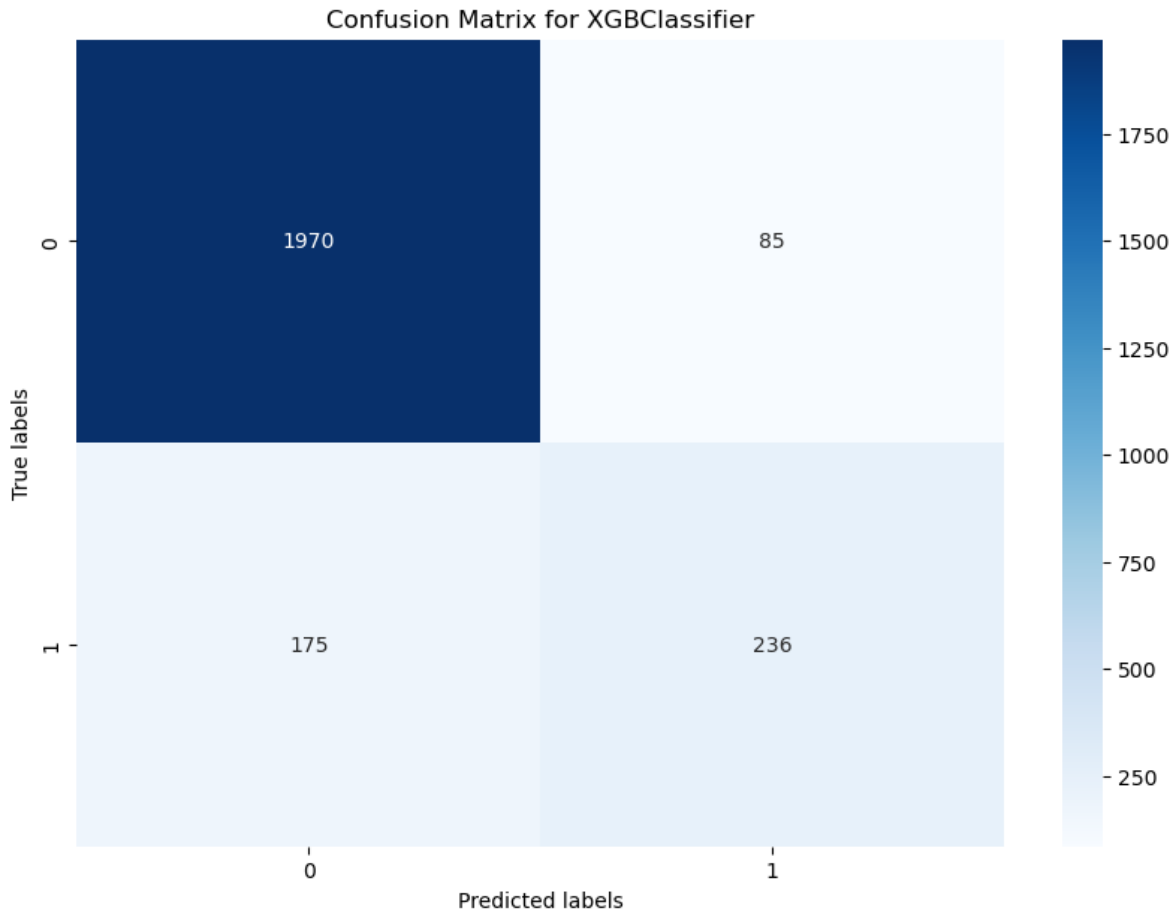

Comparison and Analysis (5 Points):

Compare the results from Q2, Q3, and Q4. Describe the best hyperparameters for all three experiments.

RandomForestClassifier: All three models have a similar accuracy, hovering around 89%. The model optimized with RandomSearchCV has the highest accuracy at 89.54%, but the differences are marginal. The precision for the “True” class has increased slightly in the RandomSearchCV model, indicating that it has reduced the number of false positives relative to the original model. The F1-score considers both precision and recall. The model with GridSearchCV has the highest F1-score for the “True” class, suggesting that it strikes the best balance between precision and recall among the three models. Thus, If you prioritize accuracy and minimizing false predictions, then the model optimized with RandomSearchCV is the best choice. However, if you want a better balance between precision and recall, the model with GridSearchCV seems to strike a better balance.

BaggingClassifier: For the overall accuracy, the models with RandomSearchCV(88.85%) and GridSearchCV(88.69%) improve a lot compared to original model(83.41%). The base BaggingClassifier struggles with predicting the 'True' class, having a recall of just 0.01. Both Grid Search and Random Search considerably enhance the performance, with Random Search having a minor edge over Grid Search in this context. In terms of optimization techniques, both Grid Search and Random Search have shown to be effective in improving the classifier's performance. However, the difference between the two optimization methods is marginal. Thus, Considering accuracy, precision, and recall, the BaggingClassifier with Random Search offers the best performance among the three. However, the difference between Grid Search and Random Search is slight, so the choice may come down to computational resources and time, as Grid Search can be more computationally expensive.

XGBboostClassifier: All three methods produce comparable accuracies, but both Grid Search and Random Search have a slight edge over the original model. Grid Search offers the best precision for the True class, while its recall is comparable to the original method. Random Search's precision for the True class is slightly better than the original but falls a bit behind Grid Search. Fewer False Positives and False Negatives are generally desirable. Grid Search has the fewest False Positives, while Random Search has the fewest False Negatives. In conclusion, while the differences are not massive, both Grid Search and Random Search offer improvements over the original setup. Grid Search seems to provide the best balance in terms of precision, recall, and F1-Score, especially for the class labeled as True. However, the choice between the methods might also depend on computational resources and time, as Grid Search can be more computationally intensive.