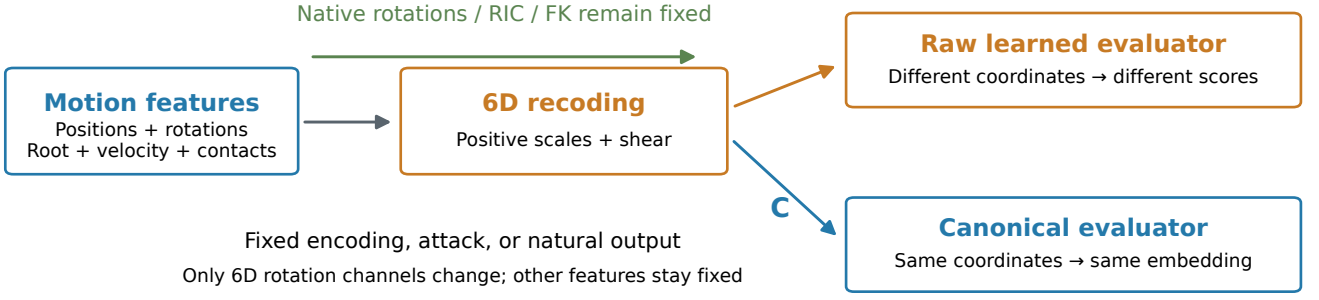
Native rotations / RIC / FK remain fixed
Motion features
Positions + rotations
Root + velocity + contacts
6D recoding
Positive scales + shear
Raw learned evaluator
Different coordinates → different scores
C
Canonical evaluator
Same coordinates → same embedding
Fixed encoding, attack, or natural output
Only 6D rotation channels change; other features stay fixed