

Functional Requirements for the SAMBUG Project

COS301



Abrie van Aardt 13178840
Werner Mostert 13019695
Kele-ab Tessera 13048423
Keagan Thompson 13023782
Michelle Swanepoel 13066294

Vector
Software Developers

May 2015

Contents

1	Background	2
2	Vision	2
3	Scope	2
4	Functional Requirements and Application Design	2
4.1	Domain Model	2
4.2	BugScouting	2
4.2.1	Module Scope	3
4.2.2	Use Cases	3
4.3	BugIntelligence	7
4.3.1	Module Scope	7
4.3.2	Use Cases	7
4.4	BugSecurity	10
4.4.1	Module Scope	10
4.4.2	Use Cases	10
4.5	BugReporting	13
4.5.1	Module Scope	13
4.5.2	Use Cases	13
5	Architectural Requirements	16
5.1	Quality Requirements	16
5.1.1	Maintainability	16
5.1.2	Scalability	16
5.1.3	Performance Requirements	16
5.1.4	Reliability and Availability	16
5.1.5	Security	16
5.1.6	Auditability	16
5.1.7	Testability	16
5.1.8	Usability	16
5.1.9	Deployability	16
5.2	Architecture responsibilities	17
6	Architectural Design	17
6.1	Overview	17
6.2	Infrastructure Layout	18
6.3	Database Design	18
6.4	Process Flow	20
6.5	Technologies	21
6.5.1	Mobile Application	21
6.5.2	Web Backend	21
6.5.3	Web Frontend	21
6.5.4	Builds	22
6.5.5	Testing	22

1 Background


South Africa is currently the largest producer of macadamia nuts in the world. One of the main production and quality limiting factors is the incidence of stink bug damage.

Accurate timing of chemical sprays rely on accurate scout data and economic threshold levels of the insect pests in an orchard. However, scouting for these pests has a major shortfall, namely the accurate identification of pests, despite efforts to train growers and scouts by various means. Area wide control of pests and diseases is a concept that has been considered, but with the lack of scout data from across and within growing regions it is impossible to make such recommendations.

2 Vision

An innovative approach to handling the management and acquisition of scout data is to develop a smartphone application that is able to identify specific hemipteran species by making use of the built-in camera of the smartphone. This application should ideally be able to make use of the smartphones built-in GPS to perform geotagging and uploading information to a central database.

3 Scope

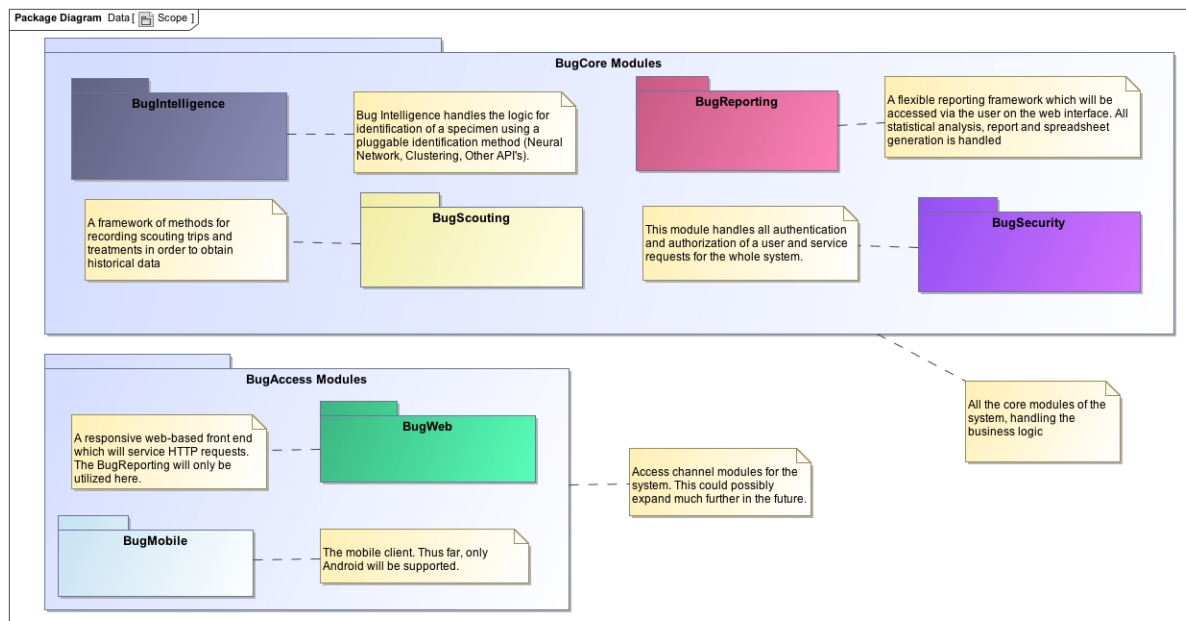

4 Functional Requirements and Application Design

4.1 Domain Model

4.2 BugScouting


The BugScouting module has the following functionality:

1. It provides the functionality for a user to be able to enter data related to a scouting trip - entering data such as the number of trees scouted, the average number of bugs per tree and the different kind of bugs specified. After which a summary should be displayed.

2. It provides the ability for a user to record the details related to spraying.

4.2.1 Module Scope

The scope of the *BugScouting* module is shown below:

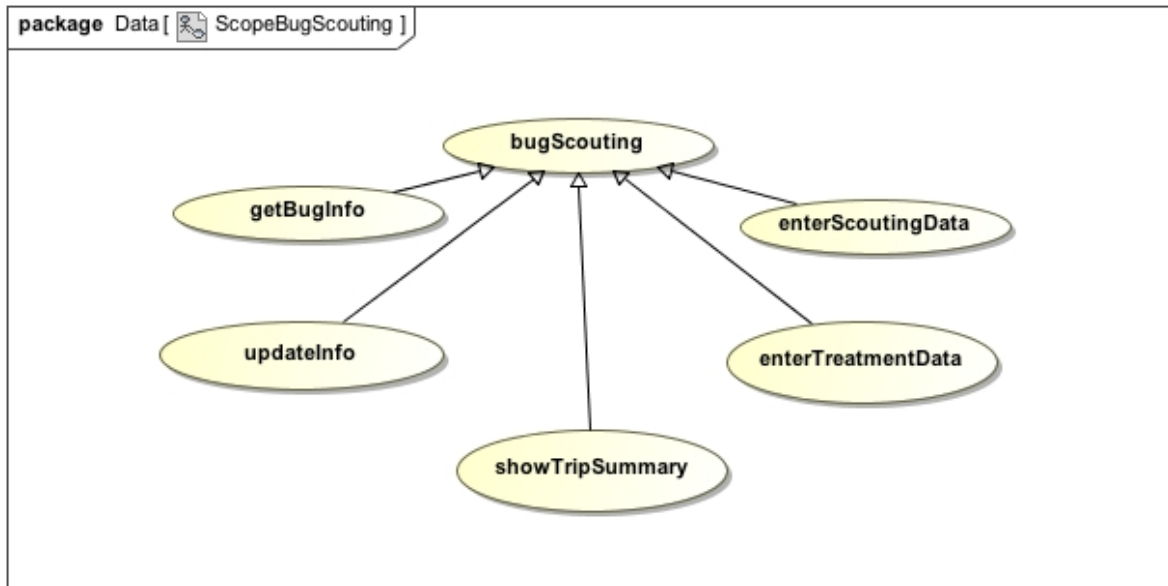


4.2.2 Use Cases

The concrete use cases for the *BugScouting* module follow:

4.2.2.1 **getBugInfo** [Priority - Medium]

This use case uses the BugIntelligence module to retrieve information on a specific specimen which will be used to display to the user a "wiki" like piece which has the purpose of informing the user.


The Service Contract for the *getBugInfo* use case is shown below:

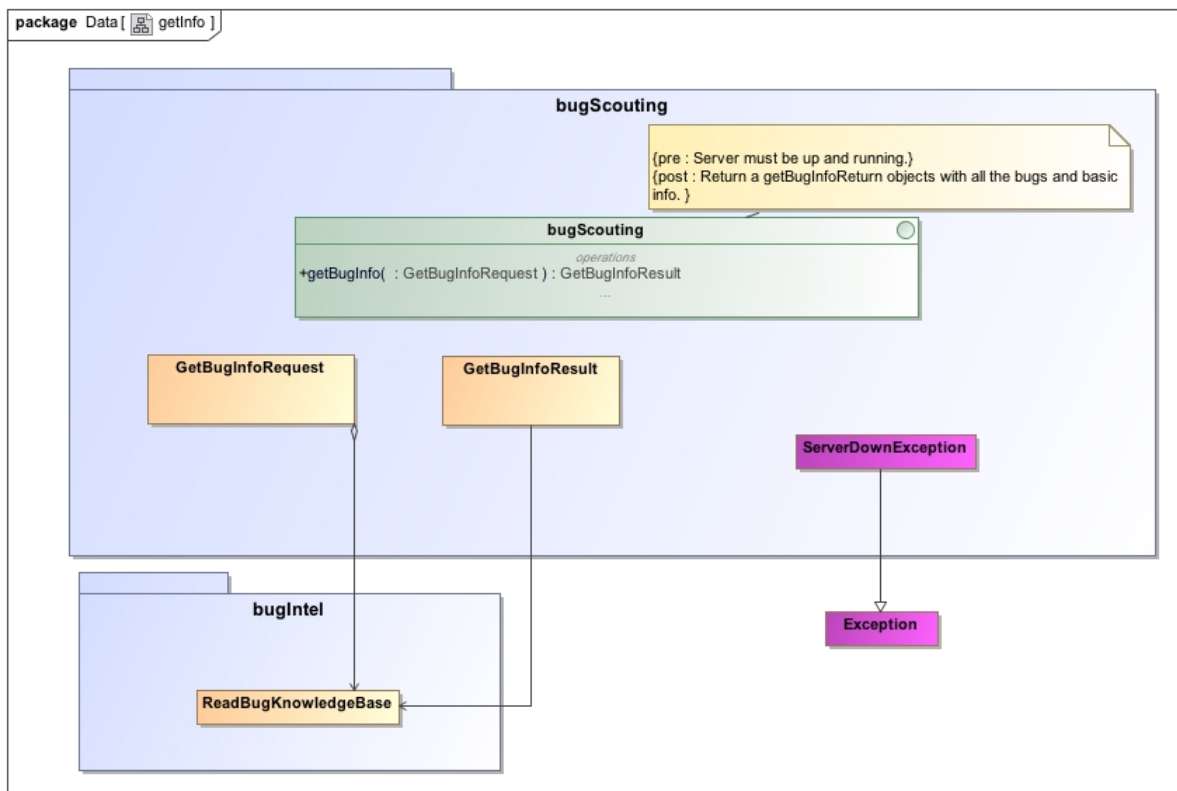

4.2.2.2 updateInfo [Priority - Medium]

The objective of this use case is to provide functionality to retrieve updated bug information and identification method updates.


The Service Contract for the *getBugInfo* use case is shown below:

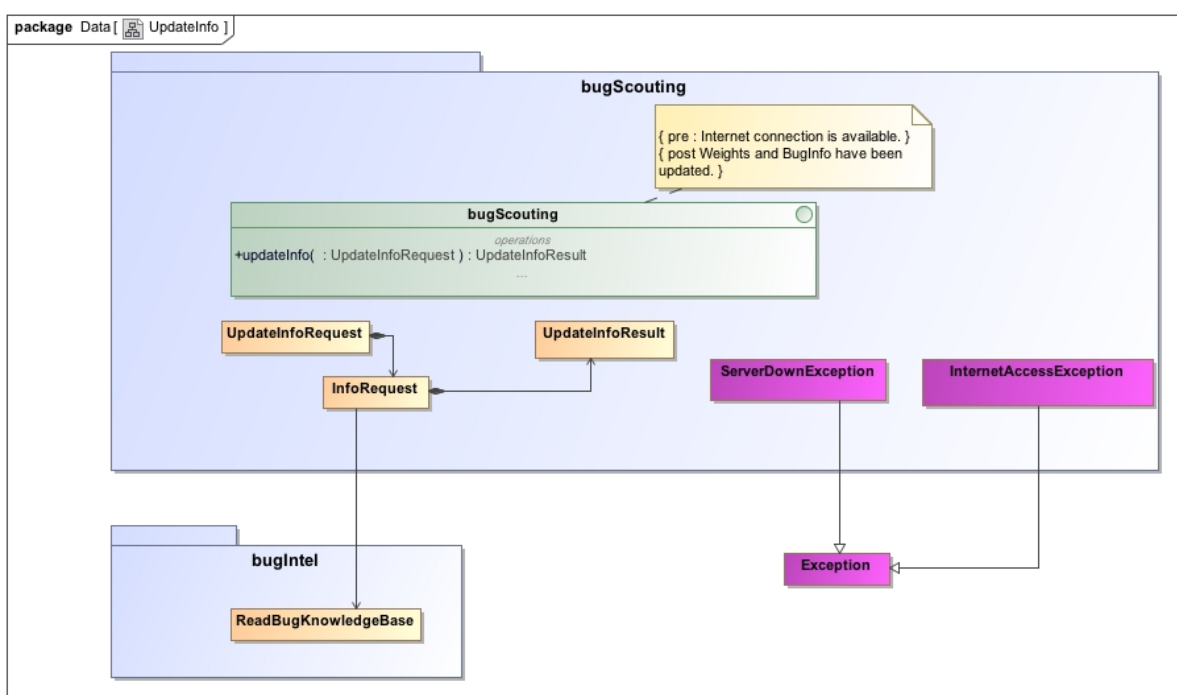

4.2.2.3 showTripSummary [Priority - High]

After completing a full scouting trip, this use case should provide a summary of the entire scouting trip. One scouting trip may consist of many scouting stops. The averages for the scouting trip data is used in the summary.


The Service Contract for the *showTripSummary* use case is shown below:

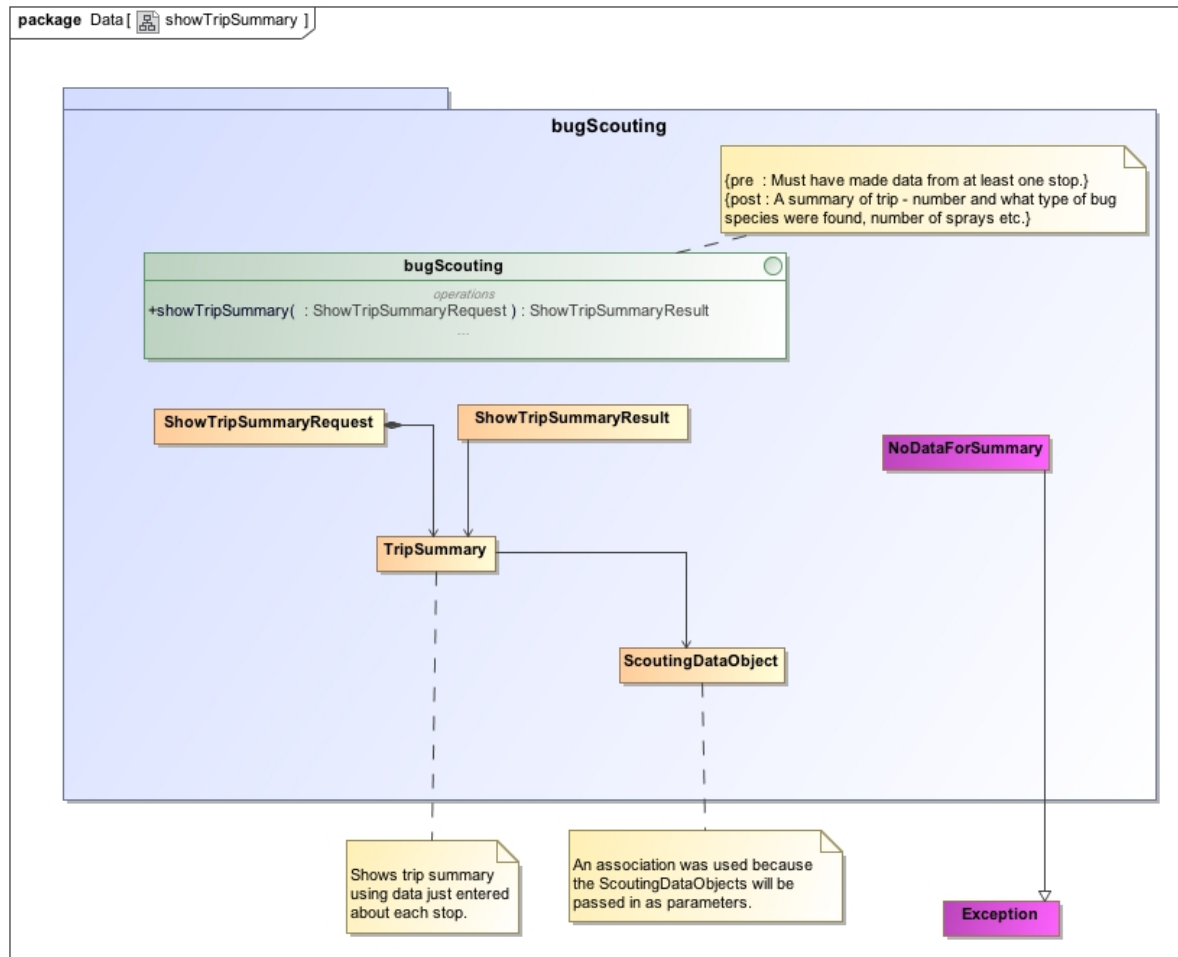

4.2.2.4 enterTreatmentData [Priority - Critical]

This use case is for entering data related to spraying chemicals (pesticide). This allows for the type of chemical, the date and the block or orchard number to be recorded.


The Service Contract for the *enterTreatmentData* use case is shown below:

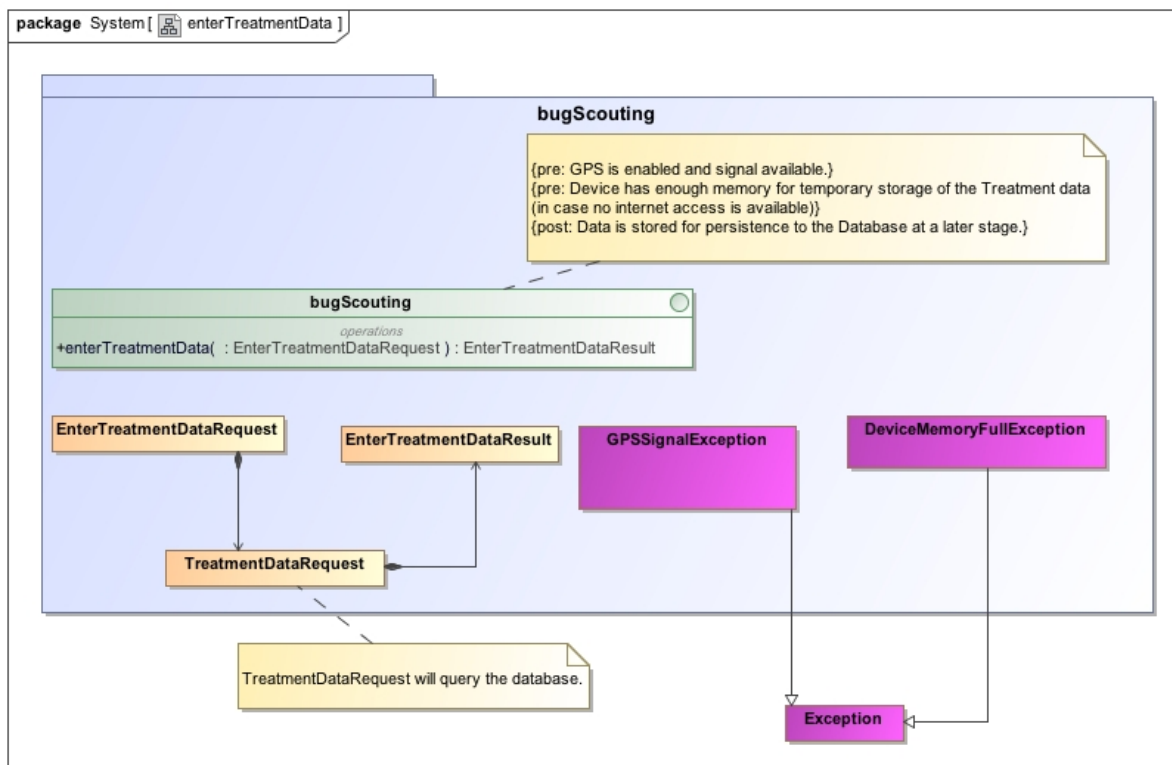


4.2.2.5 enterScoutingData [Priority - Critical]

This is the core use case of this module. This use case allows entering data related to a scouting stop. Data captured should include the number of trees observed, number of bugs counter and the block or orchard number where the scouting took place. After entering the data, the specimen should be identified (classified) before successfully submitting it for persistence.

The Service Contract for the *enterScoutingData* use case is shown below:

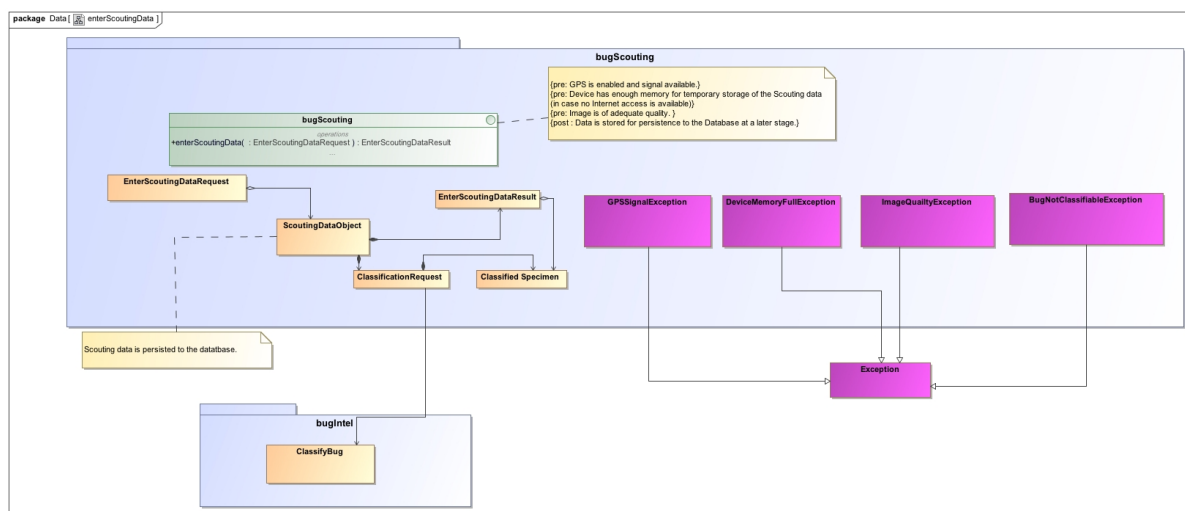

The Process Specification for the *enterScoutingData* use case is shown below:

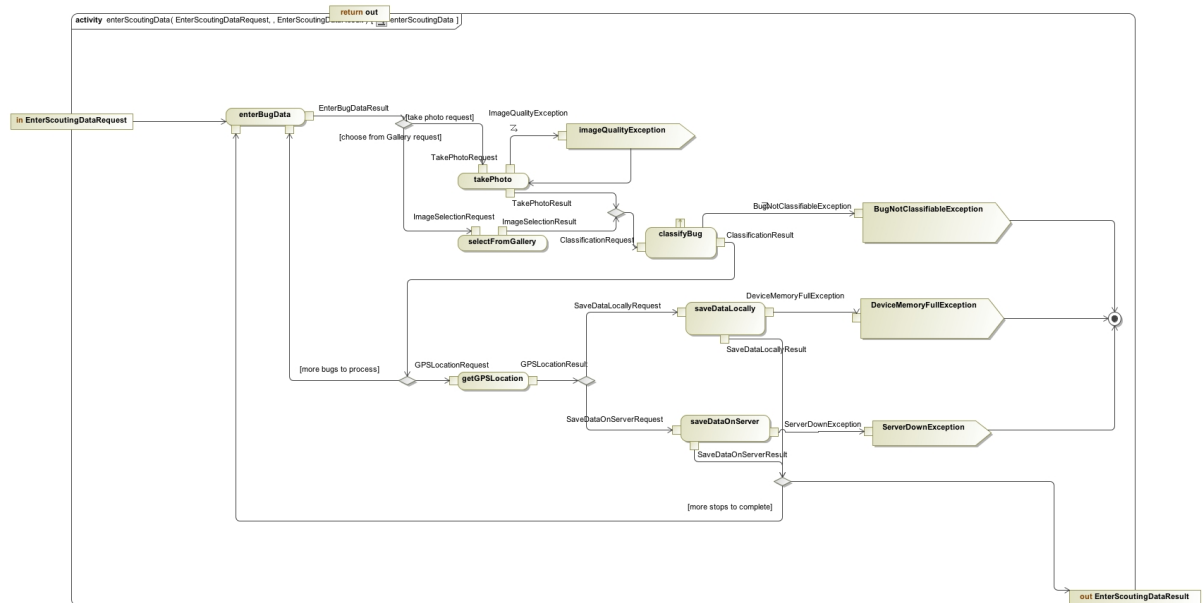


4.3 BugIntelligence

The BugIntelligence module has the following functionality:

1. It provides a pluggable method to classify a specimen according to species and life stage.
2. It provides an interface which can be used to obtain information related to any specific specimen which is identifiable by the system
3. It provides CRUD(Create Read Update Delete) functionality for bug information for specimens identifiable by the identification method

4.3.1 Module Scope

The scope of the *BugIntelligence* module is shown below:

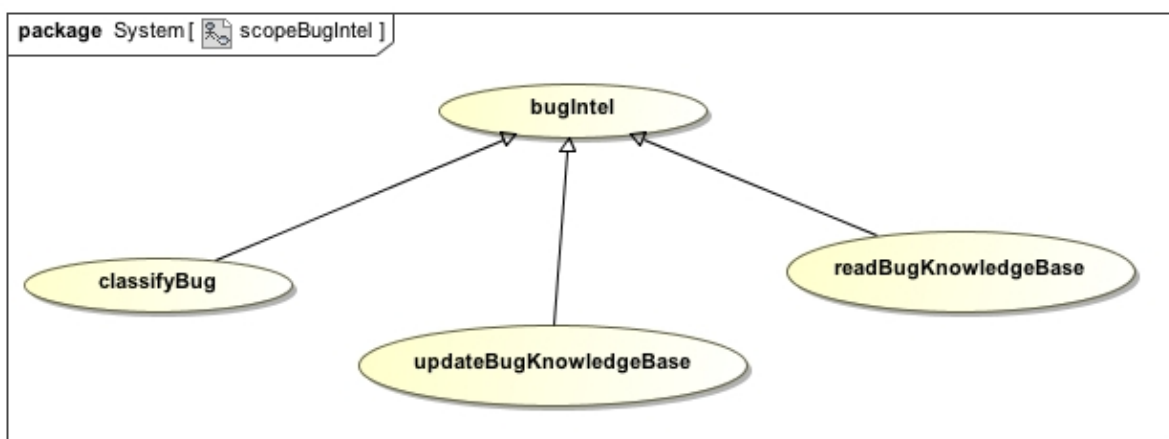


4.3.2 Use Cases

The concrete use cases for the *BugIntelligence* module follow:


4.3.2.1 *classifyBug* [Priority - Critical]

This use case supplies a method to classify the bug according to life stage and species. The classification method used is pluggable.

The Service Contract for the *classifyBug* use case is shown below:

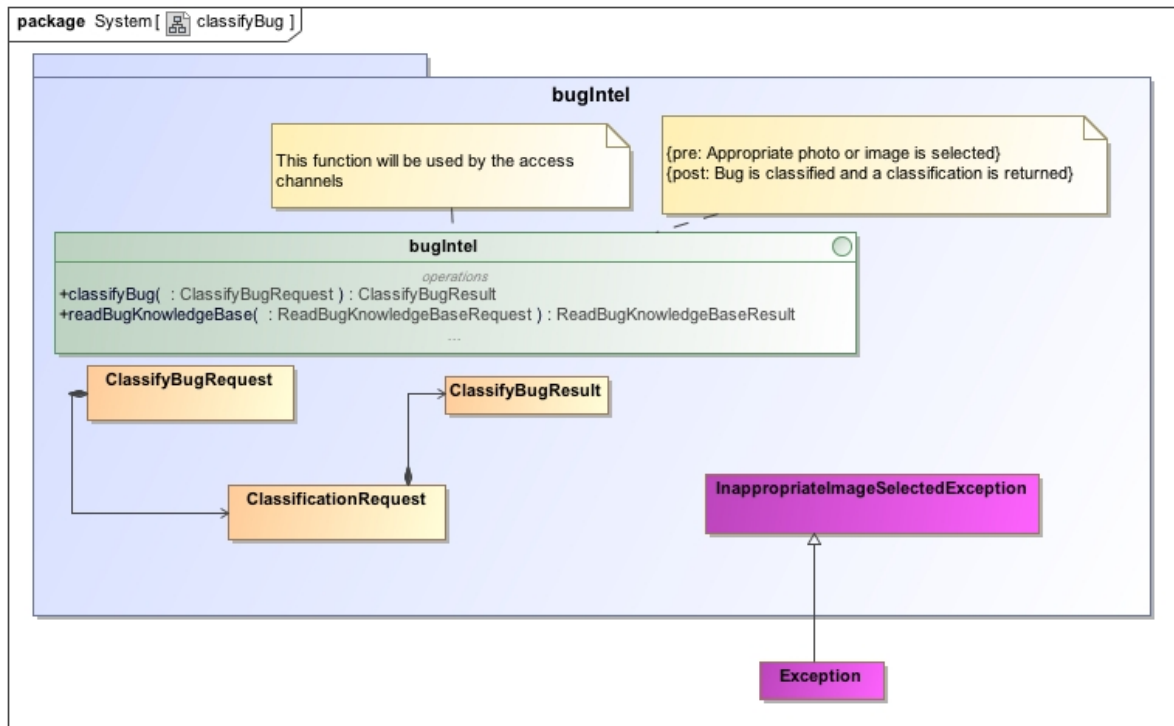


The Process Specification for the *classifyBug* use case is shown below:

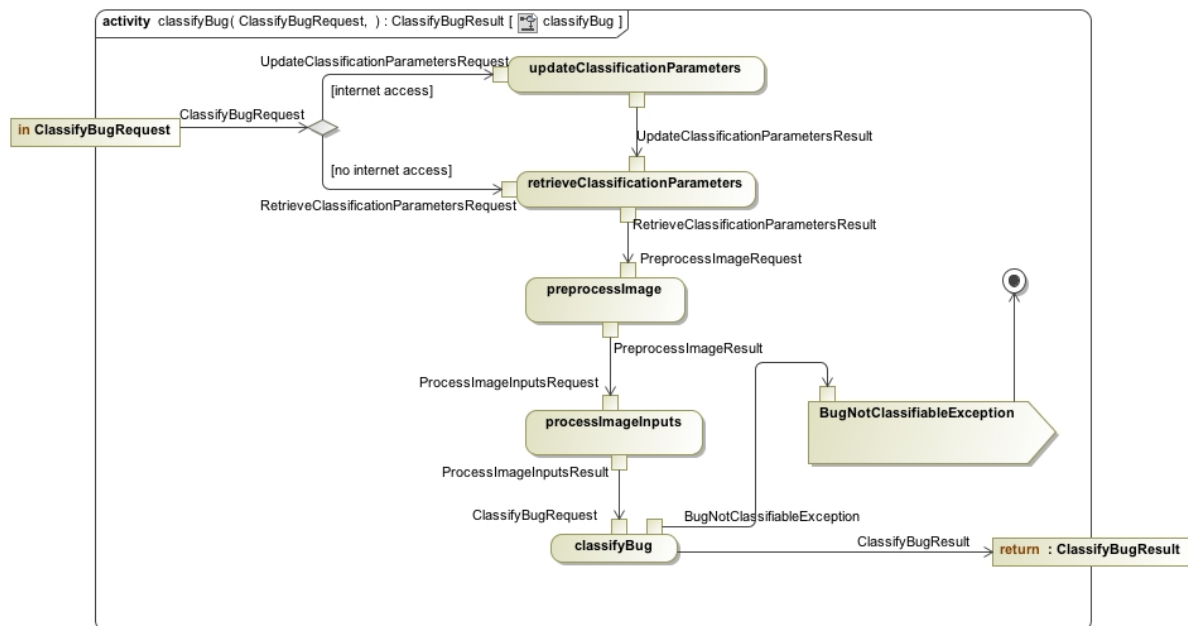


4.3.2.2 updateBugKnowledgeBase [Priority - Low]

This use case provides the functionality to edit the information used for classification. As in the example of a neural network being used as a classification method, the training examples may be edited. The Service Contract for the *updateBugKnowledgeBase* use case is shown below:

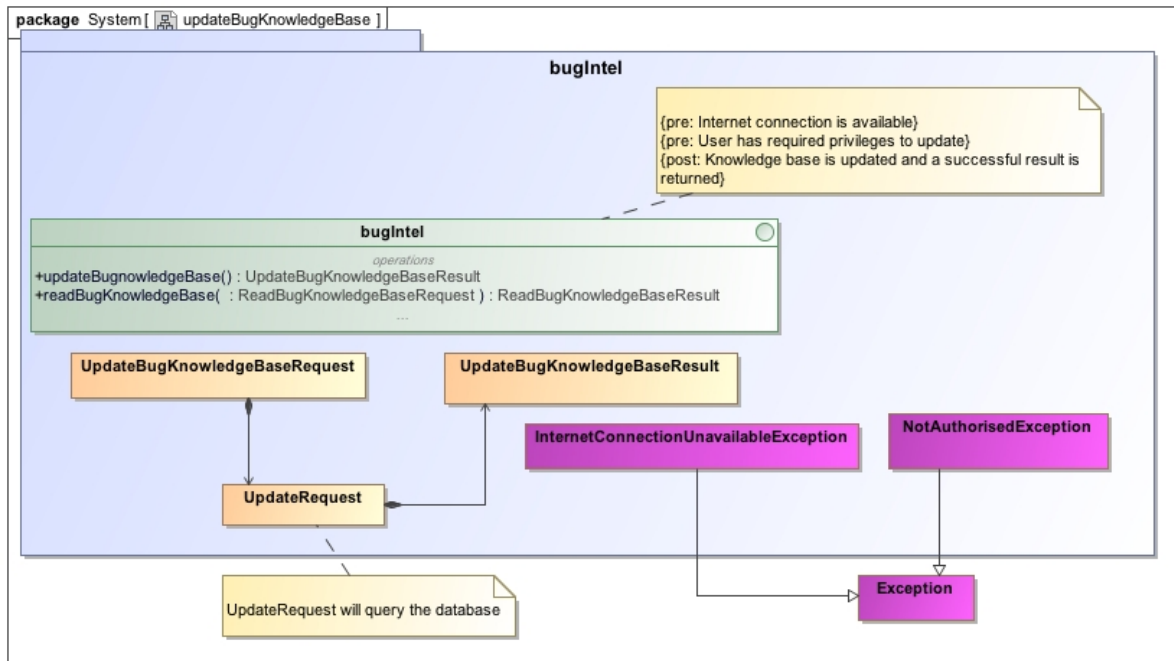

4.3.2.3 readBugKnowledgeBase [Priority - Critical]

This use case provides the functionality to get the information used for classification. As in the example of a neural network being used as a classification method, the training examples may be retrieved. The Service Contract for the *readBugKnowledgeBase* use case is shown below:

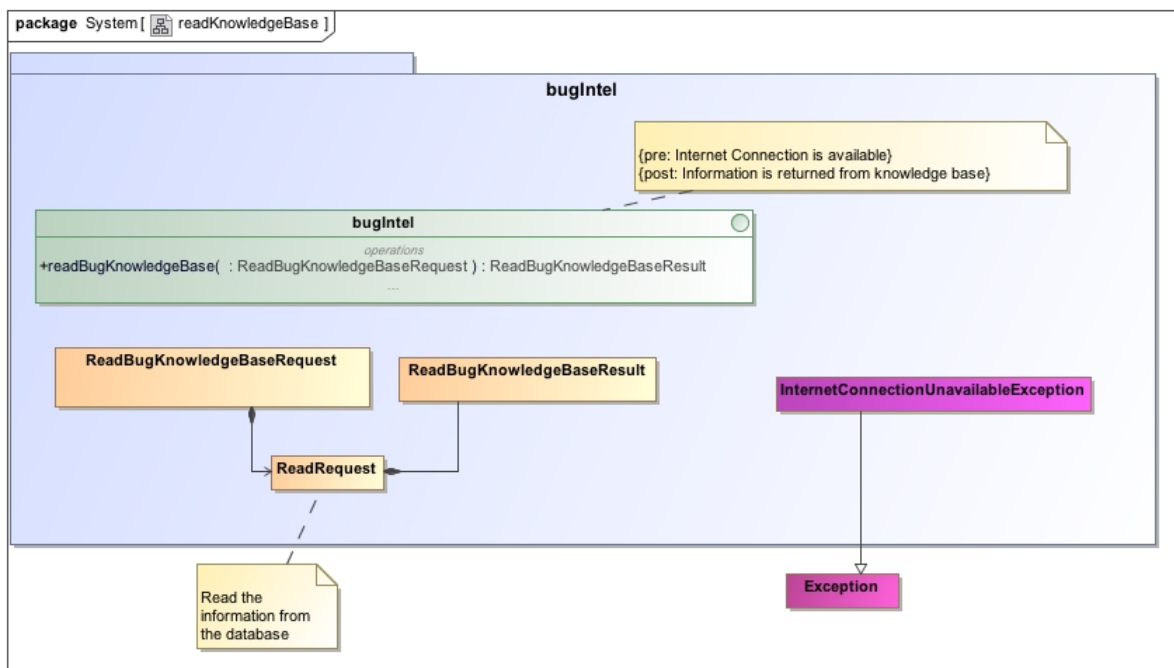


4.4 BugSecurity

The BugSecurity module allows the following functionality:

1. It provides functionality related to user accounts and user roles in order to login, register and recover your account within the capacity of a user role.
2. It provides functionality to determine whether a specific service request should be allowed.

4.4.1 Module Scope

The scope of the *BugSecurity* module is shown below:

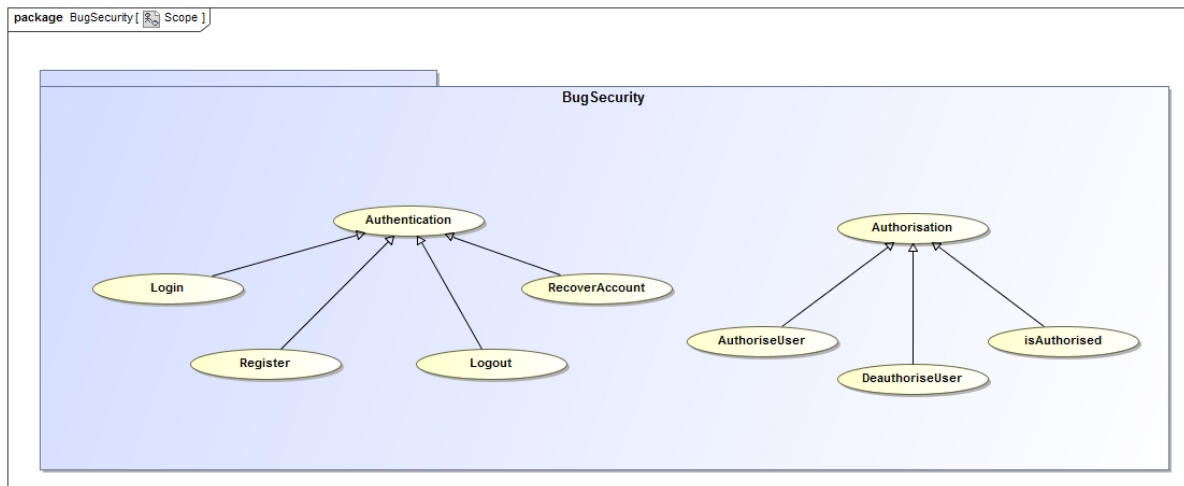


4.4.2 Use Cases

The concrete use cases for the *BugSecurity* module follow:

4.4.2.1 login [Priority - Critical]

This use cases allows one to login with username and password credentials which will be validated and thus allowing the user to be authenticated.


The Service Contract for the *login* use case is shown below:

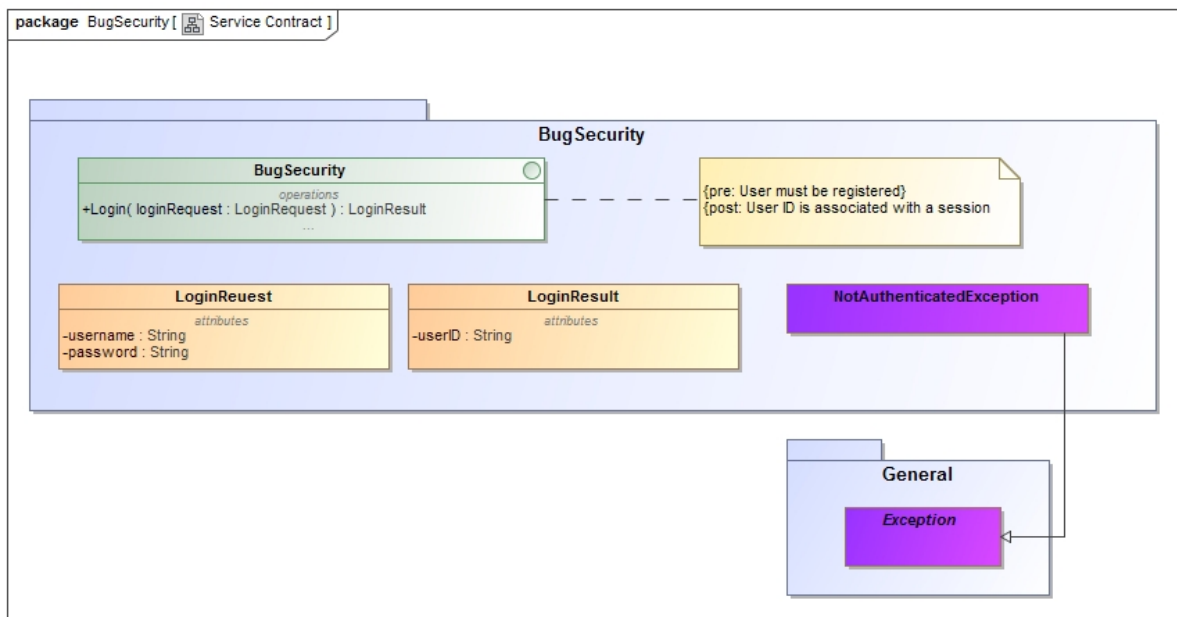

4.4.2.2 register [Priority - Critical]

This use case caters for registration as a new user. A user account is created which is associated with a unique user name. Currently, there are no password format requirements.


The Service Contract for the *register* use case is shown below:

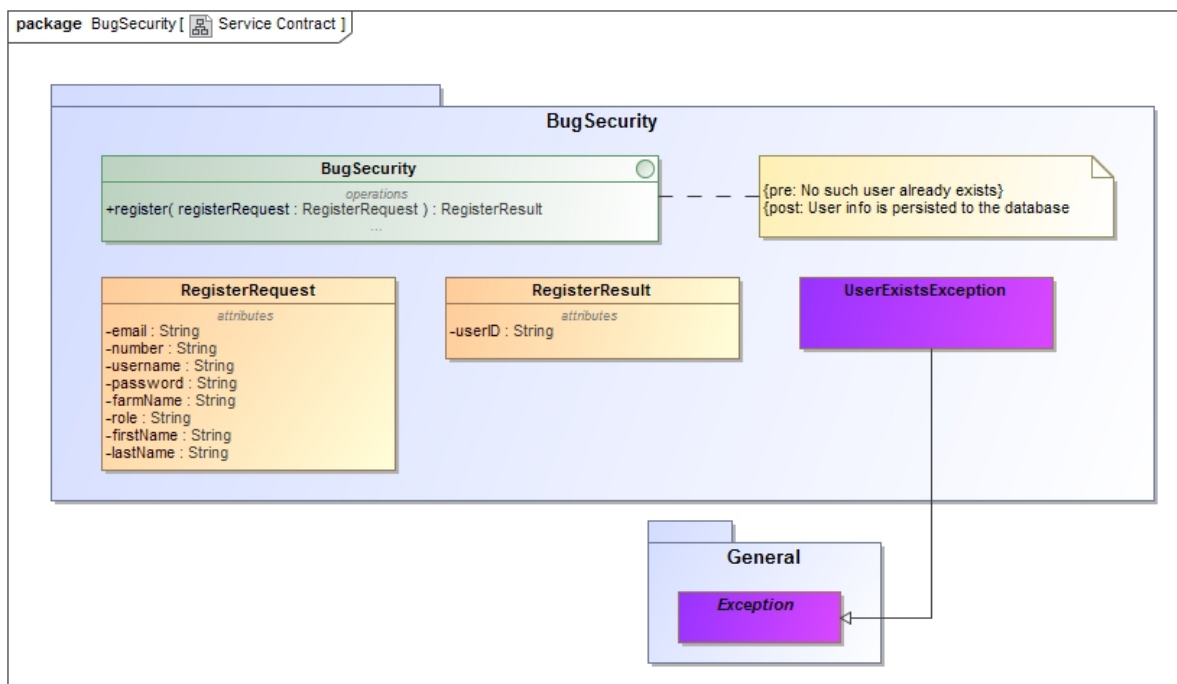

4.4.2.3 logout [Priority - Medium]

This use case provides functionality to log out of the system.


The Service Contract for the *logout* use case is shown below:

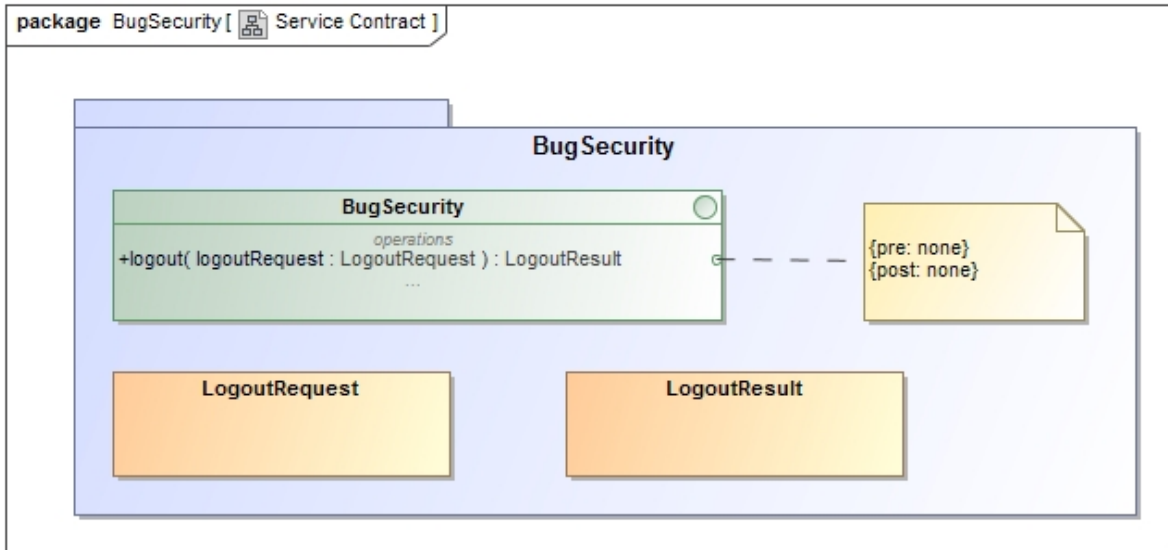

4.4.2.4 recoverAccount [Priority - Low]

In the case where a user forgets or has lost his/her credentials to access the system, this use case provides functionality to recover or to generate a new password. User verification is done via the email address associated with the account.

The Service Contract for the *recoverAccount* use case is shown below:

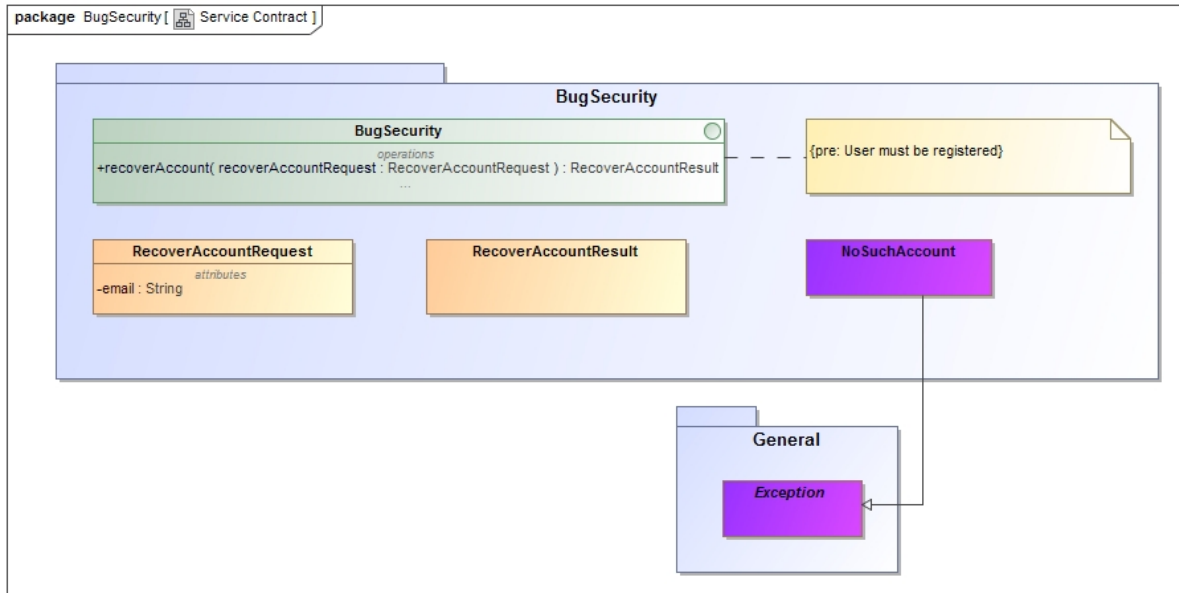

4.4.2.5 isAuthorised [Priority - High]

Whenever a service which should not be accessibility to entire plethora of users is requested, authorization is required. This use case makes provision for this.

The Service Contract for the *isAuthorised* use case is shown below:

4.4.2.6 authoriseUser [Priority - Medium]

This use case allows for an authorization restriction for a service to be added/

The Service Contract for the *authoriseUser* use case is shown below:

4.4.2.7 deauthoriseUser [Priority - Medium]

This use case allows for an authorization restriction for a service to be removed/

The Service Contract for the *deauthoriseUser* use case is shown below:


4.5 BugReporting

The BugReporting module allows the following functionality:

1. It provides functionality to generate historical data in a usable, tabular - as used by Microsoft Excel and similar software, format.
2. It provides functionality to generate a visual representation of historical data in the form of a dynamically chosen set of graphs.
3. It provides functionality to generate a heat map of the farm with regards to the population of stink bugs identified.

4.5.1 Module Scope

The scope of the *BugReporting* module is shown below:

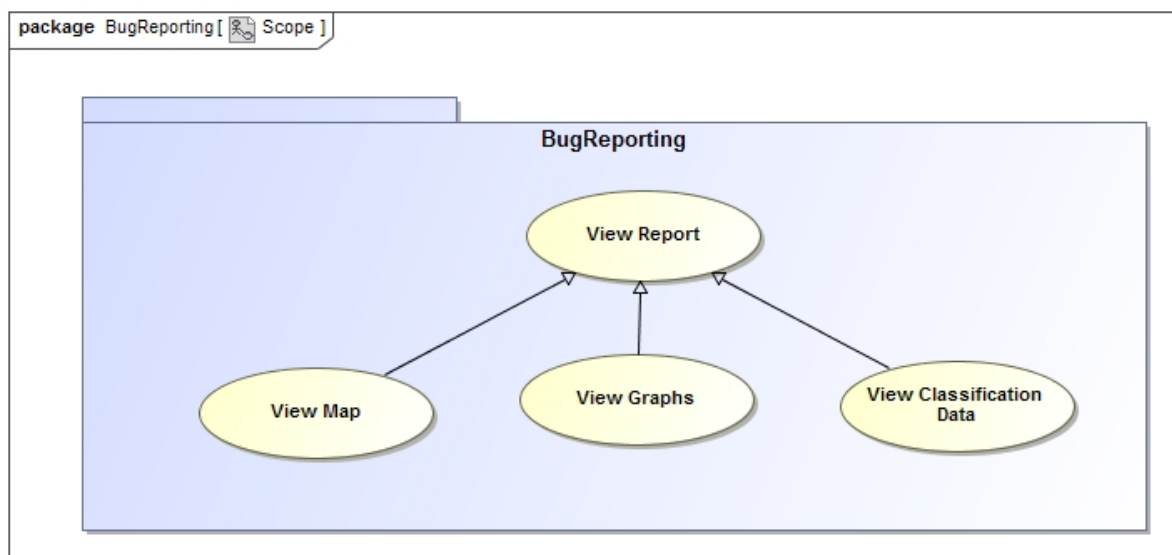


4.5.2 Use Cases

The concrete use cases for the *BugReporting* module follow:

4.5.2.1 viewMap [Priority - Medium]

This use case allows for the generation of a heat map based on historical data.


The Service Contract for the *viewMap* use case is shown below:

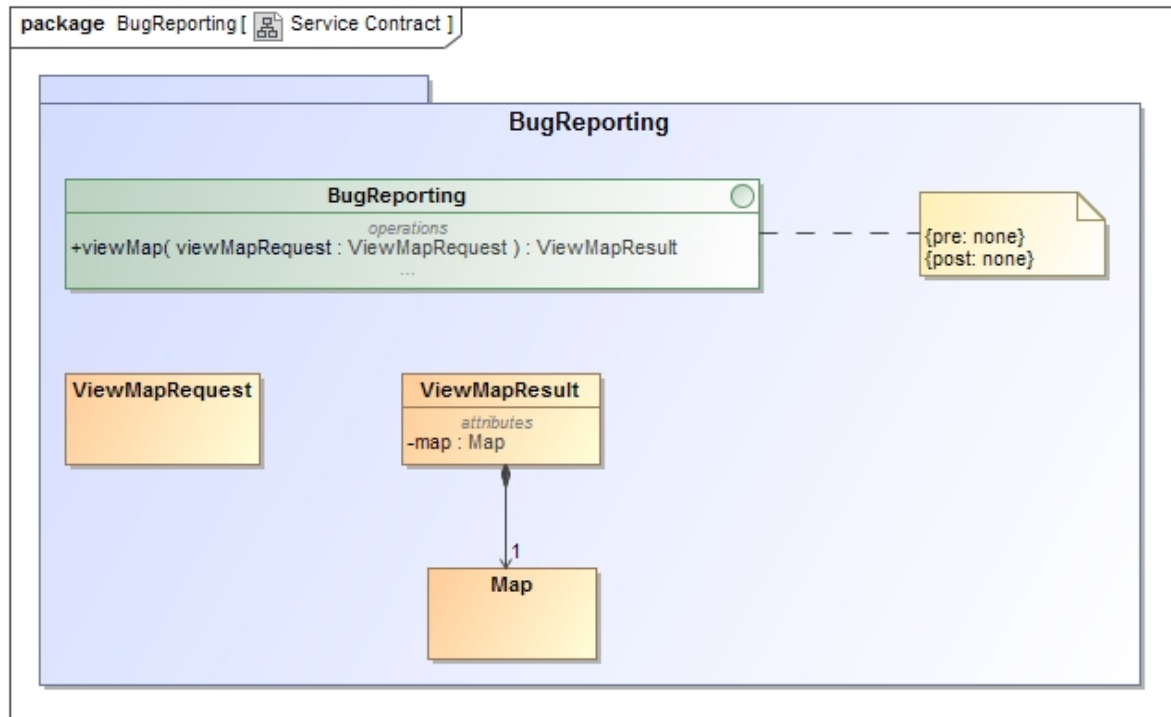

4.5.2.2 viewGraph [Priority - Medium]

This use case allows for the generation of a graphs based on historical data.


The Service Contract for the *viewGraph* use case is shown below:

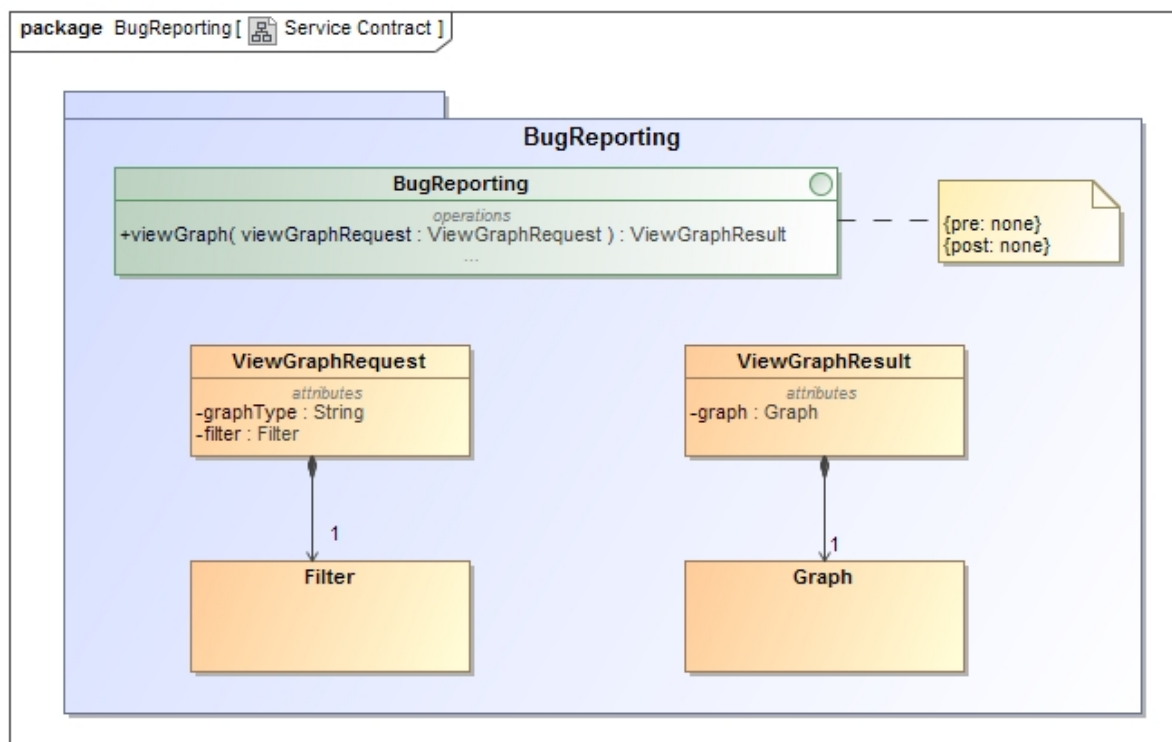

4.5.2.3 viewHistoricalData [Priority - Medium]

This use case allows for the generation of historical data.

The Service Contract for the *viewHistoricalData* use case is shown below:

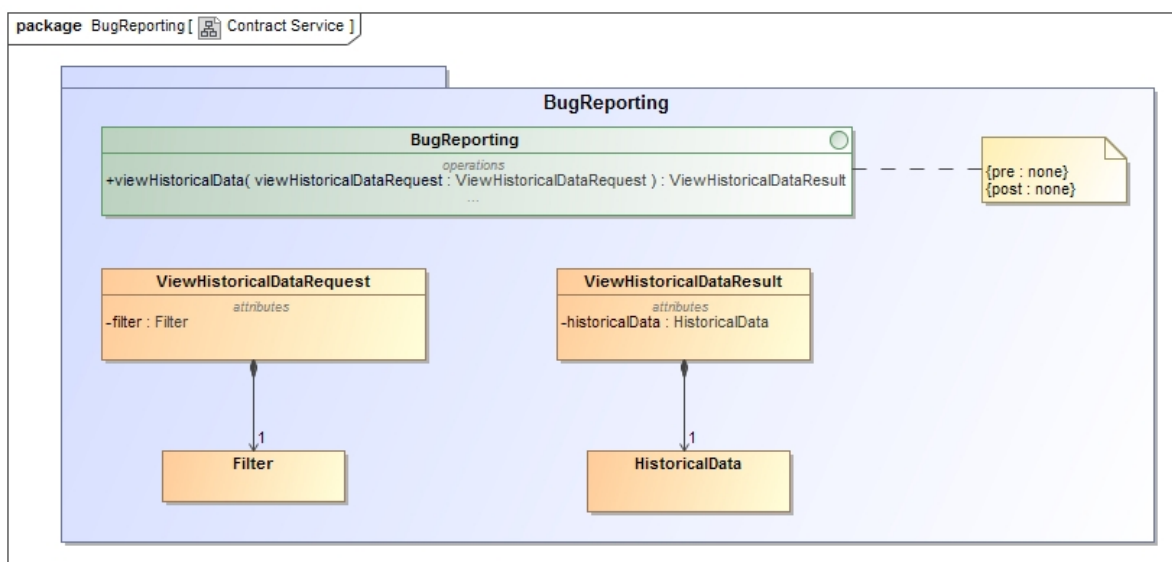

5 Architectural Requirements

5.1 Quality Requirements

5.1.1 Maintainability

As a standard requirement for all projects, SAMBUG needs to be maintainable. This is especially due to the fact that the project has very high expansion potential. SUBTROP has shown interest in further maintaining the project after completion.

5.1.2 Scalability

Since the user base for the system will be comparatively small, scalability is not a great issue. The load on the system will not under any foreseeable circumstances be extremely high.

5.1.3 Performance Requirements

Performance is a very important requirement for the system. The goal of the system is to provide an efficient service rendered. Users of the system will be subject to high pressure environments where time is an issue.

5.1.4 Reliability and Availability

Since users will be relying heavily on this system to make important business decisions the system must be available to be used at all times. As such, a reliable system is of paramount importance.

5.1.5 Security

As specified by the client, for the sake of reducing usage complexity of the system, the security may be relaxed in this case due to the fact that the users are generally not comfortable with using technological products.

5.1.6 Auditability

There is no specific auditability requirement for the system since there will be no business value in tracking user activity.

5.1.7 Testability

Every service offered by the system should be testable via:

1. Unit tests
2. Integration tests

5.1.8 Usability

Usability is the main quality requirement for the system. In order for the system to have any actual business value it should be easy to use and effective.

5.1.9 Deployability

The system must be deployable to any cloud hosted virtual machine or locally hosted server.

5.2 Architecture responsibilities

The architectural responsibilities of the system include providing infrastructure for the following:

- A web access channel
- A mobile access channel
- Hosting for business logic and services offered by the system
- Relational database persistence
- Sending emails for recovering of accounts


6 Architectural Design

6.1 Overview


A layered architecture will be used with the following layers:

- Access Layer
-
- Services Layer
- Data Access Layer


6.2 Infrastructure Layout

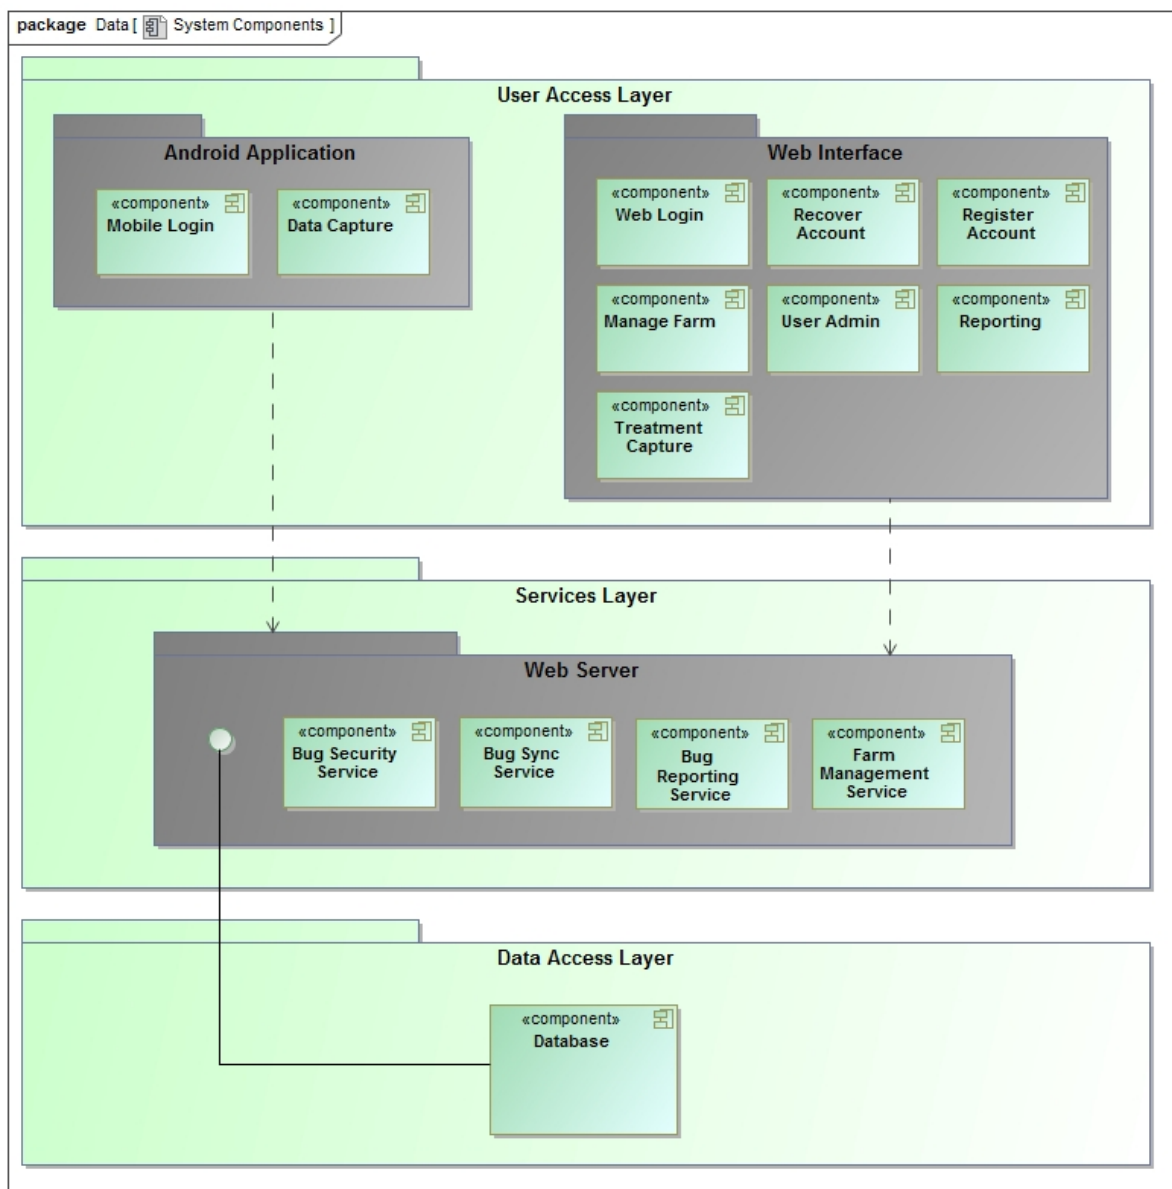

6.3 Database Design

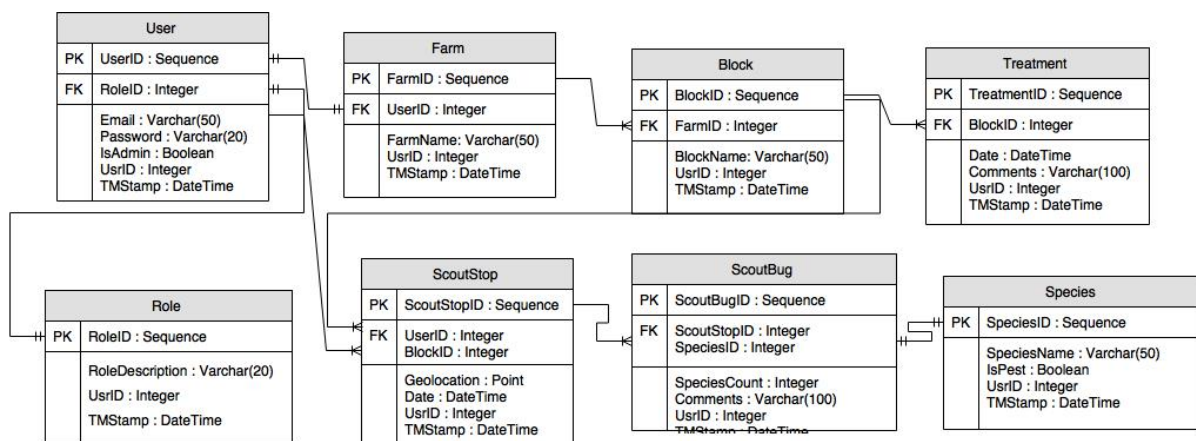

6.4 Process Flow

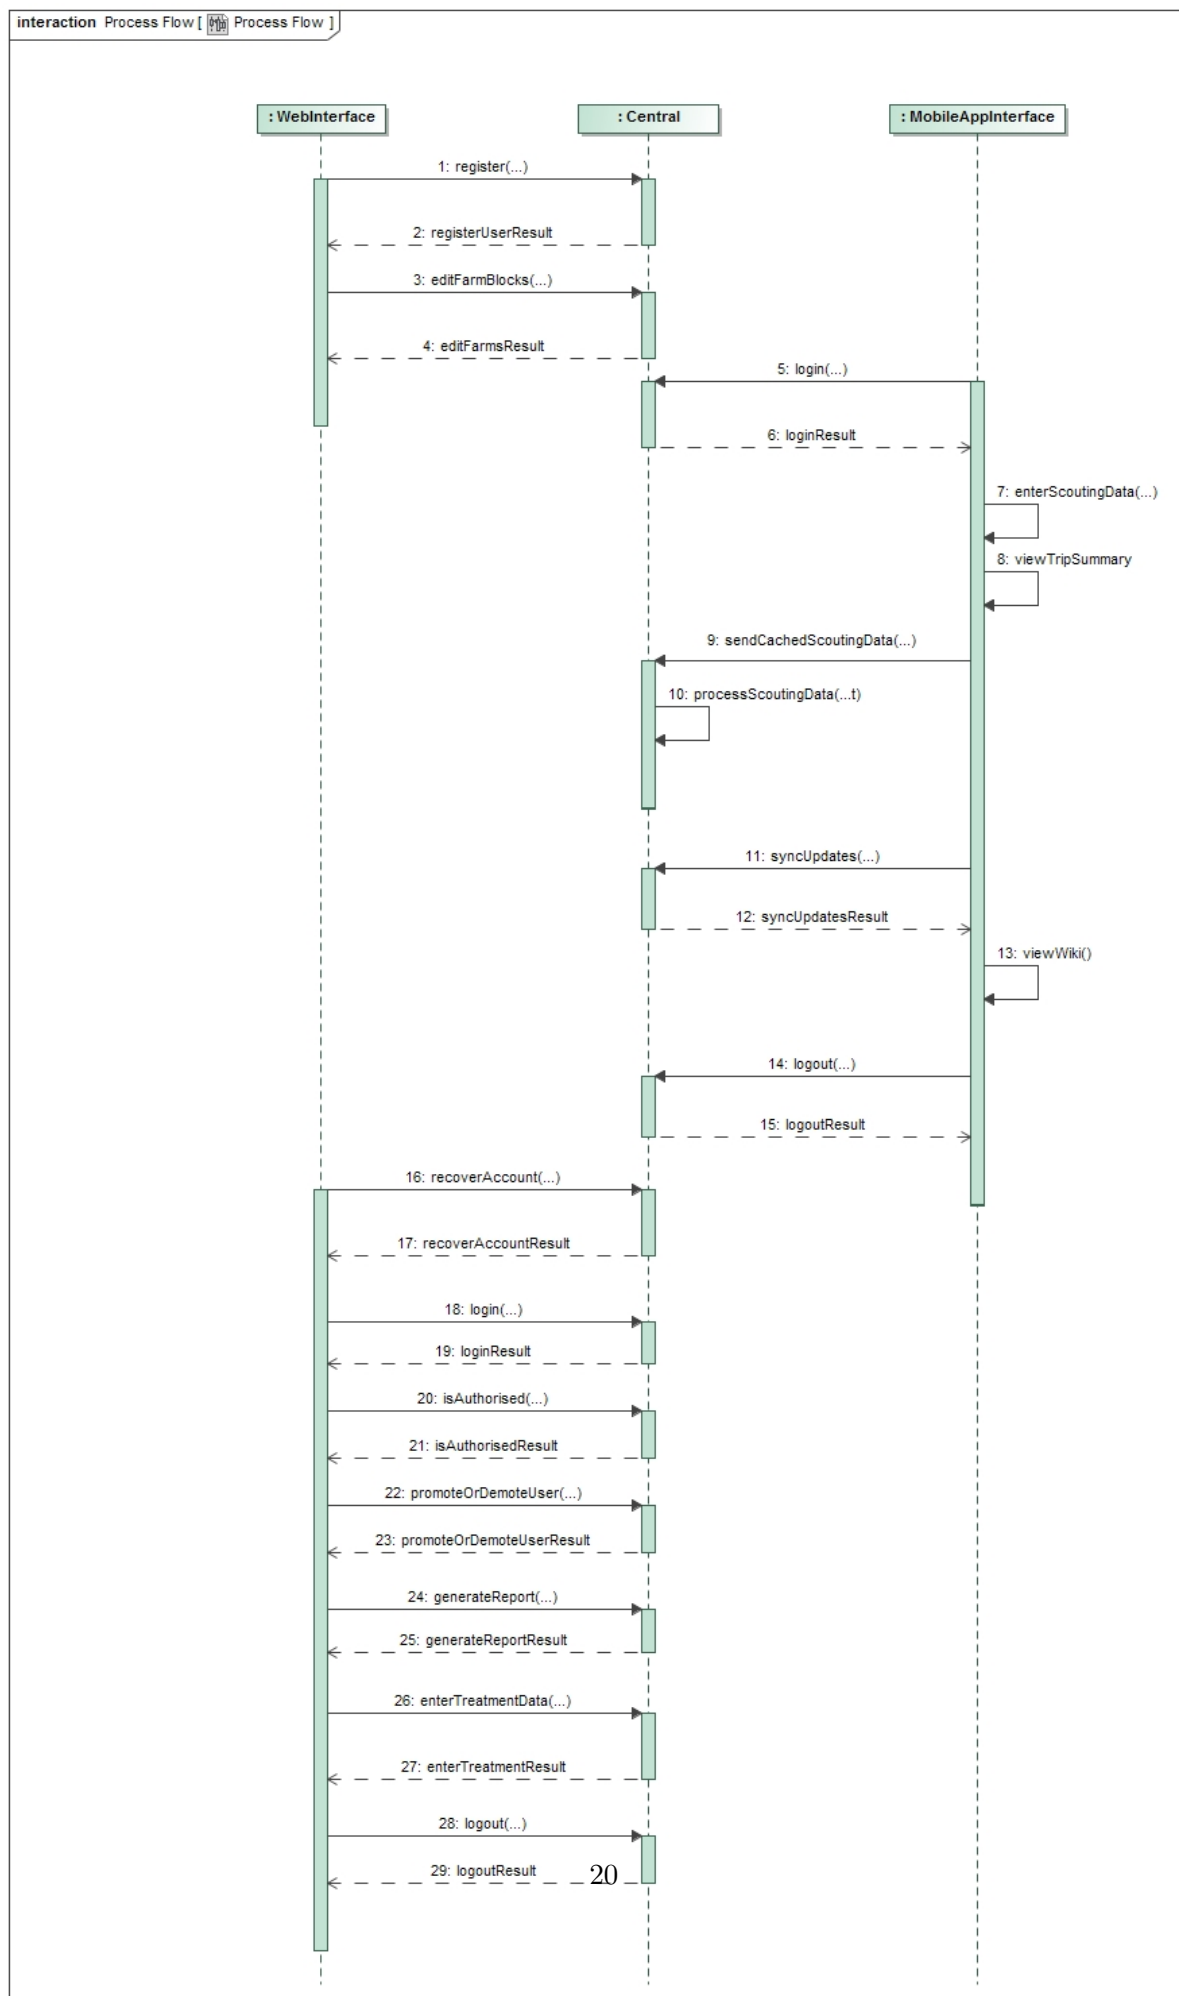

6.5 Technologies

6.5.1 Mobile Application

6.5.1.1 Android Studio

6.5.2 Web Backend

6.5.2.1 .NET WebAPI

The Microsoft .NET framework was chosen as a backend framework for hosting RESTful services. The following factors contributed to this decision:

- The .NET framework is a tried and tested industry standard technology which adds value to the Reliability component of the quality requirements.
- The .NET framework and packages used within the project became open source as announced by Microsoft at the Build 214 conference thus freeing the client from licencing fees. See the .NET Foundation for further details on open source Microsoft Packages.
- The main alternative to the .NET framework was the Java EE reference framework. Since Performance and Scalability is a very important quality requirement .NET was deemed superior due to case studies consulted:
 - Testing .NET vs Java EE with basic web pages
 - How to pick between Java and .NET
 - .NET vs Java Discussion

It is worth noting that Java EE and .NET are very closely matched in many aspects. The difference between the two frameworks are nearly negligible in terms of performance.

- The .NET framework provides seamless integration with the other technologies utilised
- The .NET framework provides for quick and easy set-up for REST services and web front ends using MVC5

6.5.2.2 .NET MVC 5

For the same reasons metioned for the choice of .NET WebAPI. MVC 5 was chosen as a pattern at a lower level of granularity due to the built in support for it in the .NET framework and it can be viewed in most cases as a industry standard for web applications.

6.5.2.3 MSSQL Express

Express is the free version of the Microsoft RDBMS which caters for all the data needs of the system. This technology can easily be swopped out for other free database technologies such as MySQL due to the technology neutral architecural design.

6.5.2.4 AutoFac

AutoFac is used as a mocking framework for unit testing as well as for dependency injection in order to fascilitate more effective unit testing and pluggability. Using this dependency injection framework code maintainability is also improved.

6.5.3 Web Frontend

6.5.3.1 Aurelia.io

Aurelia is the next generation JavaScript client framework for mobile, desktop and web. It provides two-way databinding (as does AngularJS) and extensible HTML as well as other great features such as client side dependency injection . Aurelia is the way forward for client side scripting frameworks. The other major competitor in this area is AngularJS. See Aurelia vs AngularJS Round One: FIGHT!

6.5.4 Builds

6.5.4.1 TeamCity

TeamCity was chosen as a automated build and continious integration environment being run on a development server to fascilitate continious integration and better development as a team.

6.5.4.2 Gradle

6.5.4.3 MSBuild

MSBuild is the standard build script language for the .NET development environment. Since it functions seamlessly there is no need to change this technology.

6.5.5 Testing

6.5.5.1 JUnit

6.5.5.2 MSTest

MSBuild is the standard testing pacakge for the .NET development environment. Since it functions seamlessly there is no need to change this technology.