

Quality Assurance Report

CUSTOMER(고객명)	DESCRIPTION(품명)	PLATING DATE	ISSUED DATE(발행일자)
넥스플러스	BUSBAR-FUSE	2026.07.27	2026.07.27
MATERIAL(재질)	SPEC		수량
AL	Sn : 5.0 ~ 9.0 μ m Ni : 1.0~4.0 μ m		368 EA

I.VISUAL INSPECTION

NO	INSPECTION ITEMS	Ac/Re	RESULT	NO	INSPECTION ITEMS	Ac/Re	RESULT
1	DISCOLORATION(변색)	0/1	V	6	BENT(변형)	0/1	V
2	STAIN(얼룩)	0/1	V	7	NO PLATING(미도금)	0/1	V
3	RUST(부식)	0/1	V	8			
4	CONTAMINATION(오염)	0/1	V	9			
5	PEELING(도금 벗겨짐)	0/1	V	10			


II.DIMENSION INSPECTION

NO	INSPECTION ITEMS	SPECIFICATION	MIN	MAX	AVERAGE	RESULT
11	PLATING THICKNESS (Ni)	5.0~9.0 μ m				
12	PLATING THICKNESS (Sn)	1.0~4.0 μ m				
13						
14						

도금두께 성적서 참조

III.FUNCTIONAL TEST

NO	INSPECTION ITEMS	SPECIFICATION	TEST SAMPLE	RESULT
15	ADHESION TEST (밀착성 시험)	Not permit the peeling	시료 참조	OK
16				

FINAL RESULT	REMARK	PREPARED BY	CHECKED BY	APPROVED BY
		나우인		

업체명: 넥스플러스 Sn : 5.0~9.0 μ m Ni : 1.0~4.0 μ m

품명 : BUSBAR-FUSE



일자 : 2026.07.27

No	μ m Sn	μ m Ni	Sn tolerance
1	6.197	3.199	5.530 5.994 6.458
2	5.687	2.195	
3	6.116	3.009	
4	5.755	2.274	
5	6.157	3.035	
6	5.893	2.411	
7	6.189	3.088	
8	5.678	2.125	
9	6.458	3.113	
10	5.811	2.456	
Mean	5.994	2.691	
S.Dev	0.251	0.411	

FUNC: MEASURE
DATE: 2026-07-28
COL : 0.400 mm

Sn
Ni
Al

SEC : 15 Sec

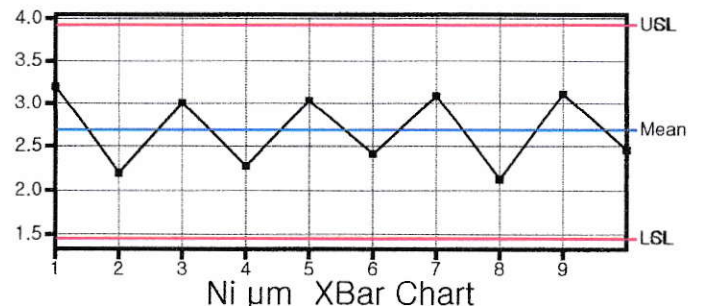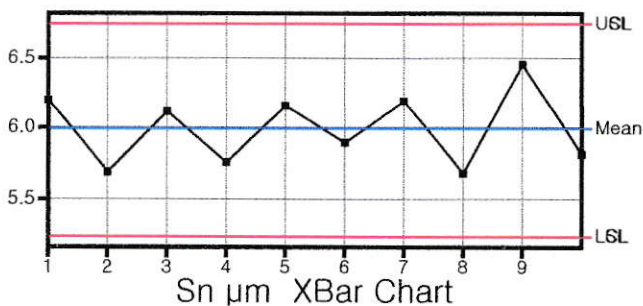

도금원소 : Sn/Ni//Al

측정값 개수 10 10
최대값 6.458 3.199
최소값 5.678 2.125
범위 0.780 1.074
평균값 5.994 2.691
표준편차 0.251 0.411
변동계수 4.190 15.266

발행처 : 우리하이피

