

CTF 6 — Active or Inactive?

Goal: Display different UI depending on a student's status using Angular's conditional rendering.

School Request

"Some students are inactive."

Today's mission introduces `*ngIf`, one of Angular's most important directives. Instead of showing everything all the time, your Student Portal should decide what appears based on data.

You'll also prepare your app for real-world situations like empty lists and loading screens.

Flag 1 — Prepare Your Mission

Objective: Create a new branch for today's challenge.

Create and switch to a new Git branch.

Branch name:

`feature/conditional-ui`

Screenshot:

- The command used to create and switch to the new branch.

```
woj@192 my-app % git checkout -b feature/conditional-ui
Switched to a new branch 'feature/conditional-ui'
woj@192 my-app %
```

Flag 2 — Give Students a Status

Objective: Add an **active** property to every student.

Each student object should now include a boolean status.

Example idea:

- **true**
- **false**

Make sure some students are active while others are inactive.

Screenshot:

- Your student data showing the new **active** property.

```
students = [  
  { name: 'Juan Dela Cruz', course: 'BSIT', year: '2nd Year', isFavorite: false, active: true },  
  { name: 'Maria Santos', course: 'BSIT', year: '3rd Year', isFavorite: false, active: false },  
  { name: 'Pedro Garcia', course: 'BSCS', year: '1st Year', isFavorite: false, active: true },  
  { name: 'Ana Reyes', course: 'BSIS', year: '4th Year', isFavorite: false, active: false }  
];
```

Flag 3 — Reveal Active Students

Objective: Display an "Active" badge only for active students.

Use Angular's `*ngIf` directive.

Hint: The badge should only appear when a student's status is `true`.

Screenshot:

- An active student displaying the badge.

The screenshot displays a list of four students in a light blue-themed interface. Each student entry is contained within a rounded rectangular card. The first card for Juan Dela Cruz and the third card for Pedro Garcia feature a blue "[Active]" badge in the top right corner. All cards include the student's name, program, and year, followed by three buttons: "Favorite" (with a star icon), "Edit", and "Delete".

Rank	Name	Program	Year	Status	Favorite	Edit	Delete
#1	Juan Dela Cruz	BSIT	2nd Year	[Active]	☆	Edit	Delete
#2	Maria Santos	BSIT	3rd Year		☆	Edit	Delete
#3	Pedro Garcia	BSCS	1st Year	[Active]	☆	Edit	Delete
#4	Ana Reyes	BSIS	4th Year		☆	Edit	Delete

Flag 4 — Expose Inactive Students

Objective: Show a different badge for inactive students.


If a student isn't active, display something like:

- Inactive
- Disabled
- Offline

Use Angular's `else` template with `*ngIf`.

Screenshot:

- One active student.
- One inactive student.

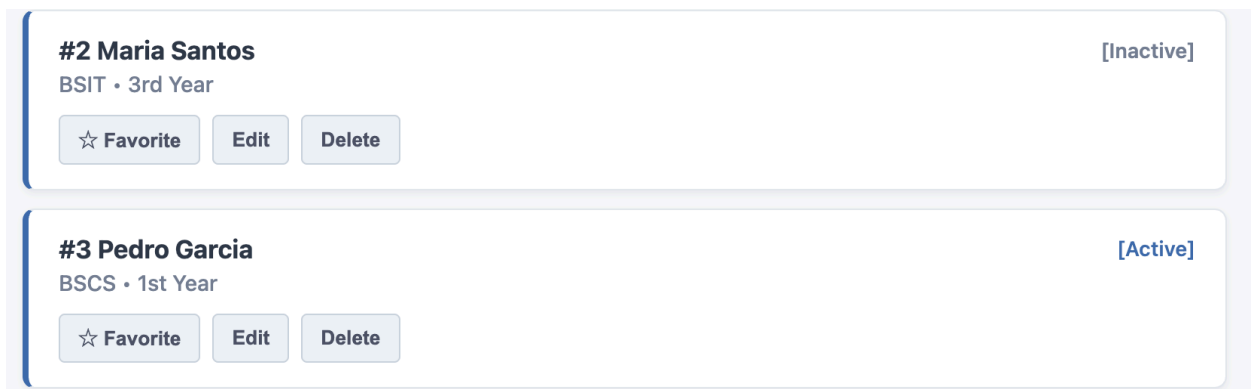

Flag 5 — Lock Inactive Actions

Objective: Prevent inactive students from using actions.

Choose one action button such as:


- Edit
- Favorite
- Delete

Only show or enable that button when the student is active.

Hint: `*ngIf` can hide elements completely.

Screenshot:

- Active student with the button visible.
- Inactive student with the button hidden or disabled.

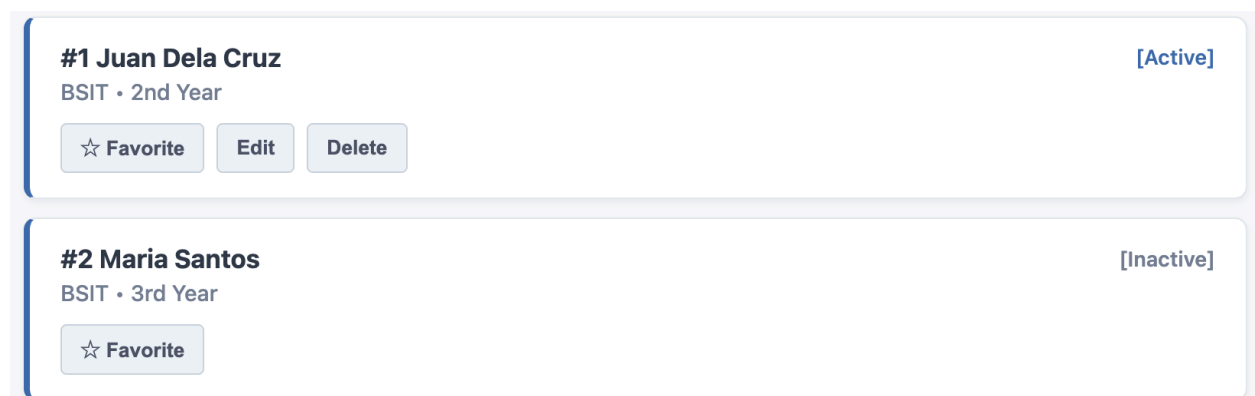

Flag 6 — Build an Empty State

Objective: Prepare for when there are no students.

If the student list becomes empty, display a friendly message instead of blank space.

Example ideas:

No students found.

Add your first student.

Hint: Check the array's length with `*ngIf`.

Screenshot:

- Student list before becoming empty.
- Empty-state message after removing all students.

Student List

#1 Juan Dela Cruz

BSIT • 2nd Year

☆ Favorite

Edit

Delete

[Active]

Student List

No students found

Flag 7 — Simulate Loading

Objective: Create a fake loading screen.

Before displaying the Student Portal, show a loading message.

Ideas:


- Loading students...
- Spinner icon
- Skeleton cards


After changing the loading variable, the student list should appear.

Hint: Use a boolean variable with `*ngIf`.

Screenshot:

- Loading screen.
- Student Portal after loading.

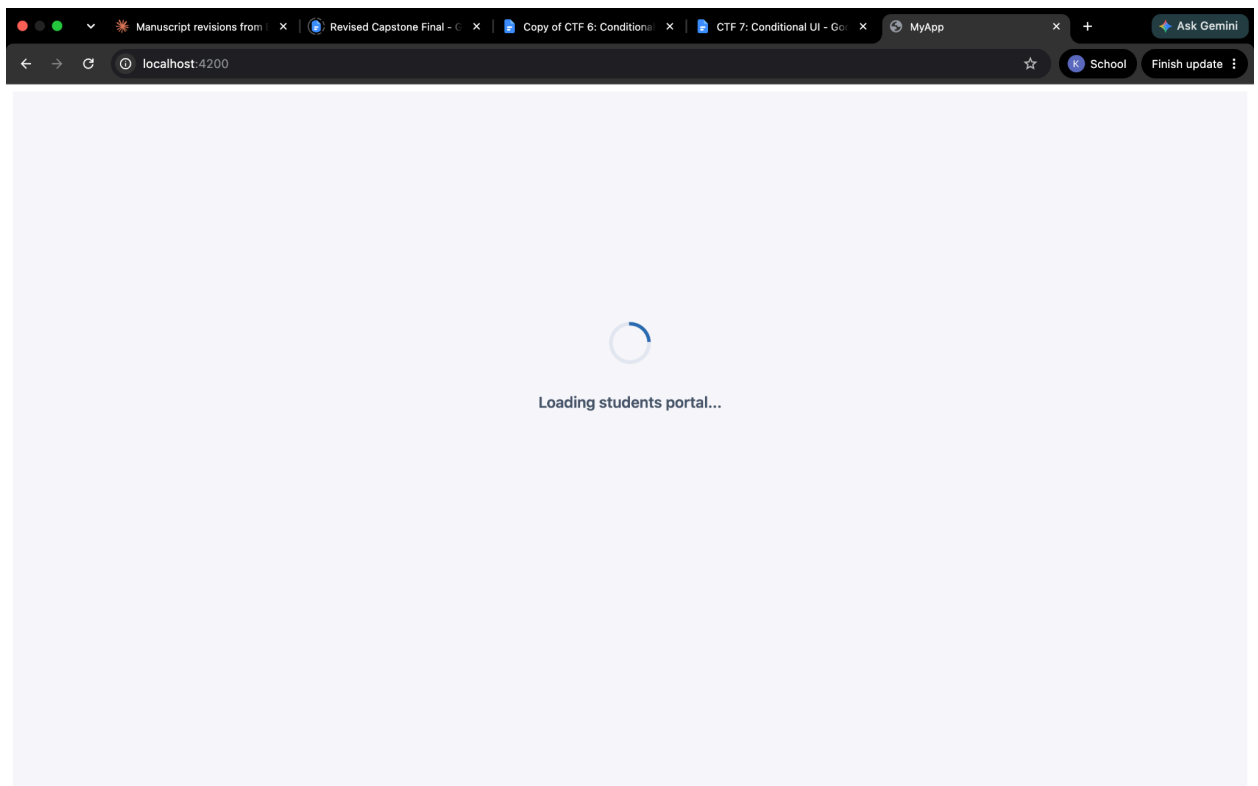

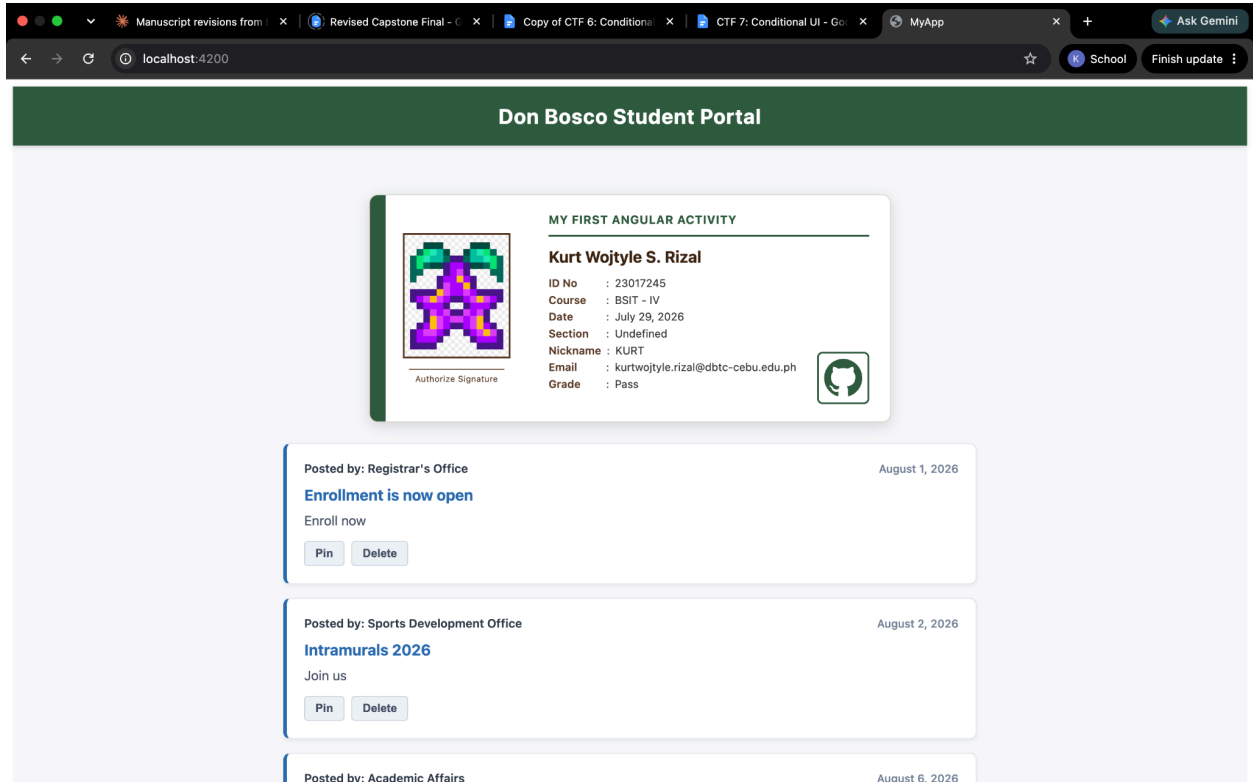

Flag 8 — Mission Complete


Objective: Your Student Portal should now display different UI depending on its current state.

Checklist

- Students have an **active** property.
- Active students display an Active badge.
- Inactive students display an Inactive badge.
- At least one action changes based on student status.
- An empty-state message appears when no students exist.
- A loading screen appears before the student list.

Screenshot:

- Your completed Student Portal showing active and inactive students, conditional badges, loading state, and empty state working correctly.



Authorize Signature

MY FIRST ANGULAR ACTIVITY

Kurt Wojtyle S. Rizal

ID No : 23017245
Course : BSIT - IV
Date : July 29, 2026
Section : Undefined
Nickname : KURT
Email : kurtwojtyle.rizal@dbtc-cebu.edu.ph
Grade : Pass



Posted by: Registrar's Office

August 1, 2026

Enrollment is now open

Enroll now

Pin

Delete

Posted by: Sports Development Office

August 2, 2026

Intramurals 2026

Join us

Pin

Delete

Posted by: Academic Affairs

August 6, 2026

School Orientation

8:00 AM

Pin

Delete

Student List

#1 Juan Dela Cruz

[Active]

BSIT • 2nd Year

☆ Favorite

Edit

Delete

#2 Maria Santos

[Inactive]

BSIT • 3rd Year

☆ Favorite

Delete

#3 Pedro Garcia

[Active]

BSCS • 1st Year

☆ Favorite

Edit

Delete

#4 Ana Reyes

[Inactive]

BSIS • 4th Year

☆ Favorite

Delete

Flag 9 — Commit Your Progress

Final Flag Screenshot

- Successful push to `feature/conditional-ui`