

CTF 7 — Stop Putting Everything on One Screen

Goal: Introduce Angular routing and separate the Student Portal into dedicated pages.

School Request

"Each student deserves a dedicated page."

Today's mission introduces **Angular Router**. Instead of keeping the entire Student Portal on one screen, you'll create separate pages for the student list, student details, and adding a new student.

You'll also practice navigating between pages using Angular routes.

Flag 1 — Prepare Your Mission

Objective: Create a new branch for today's challenge.

Create and switch to a new Git branch.

Branch name:

feature/routing



Screenshot:

- The command used to create and switch to the new branch.

```
woj@192 my-app % git checkout -b "feature/routing"  
Switched to a new branch 'feature/routing'  
woj@192 my-app % █
```

Flag 2 — Build the Student List Page

Objective: Create a dedicated page for the student list.

Move your existing student list UI into a separate component/page.

Your page should display:


- Student cards
- Student information
- Active/Inactive status
- Existing actions

The Student List page will become the **main page** of the Student Portal.



Screenshot:

- Your Student List page displayed in the browser.

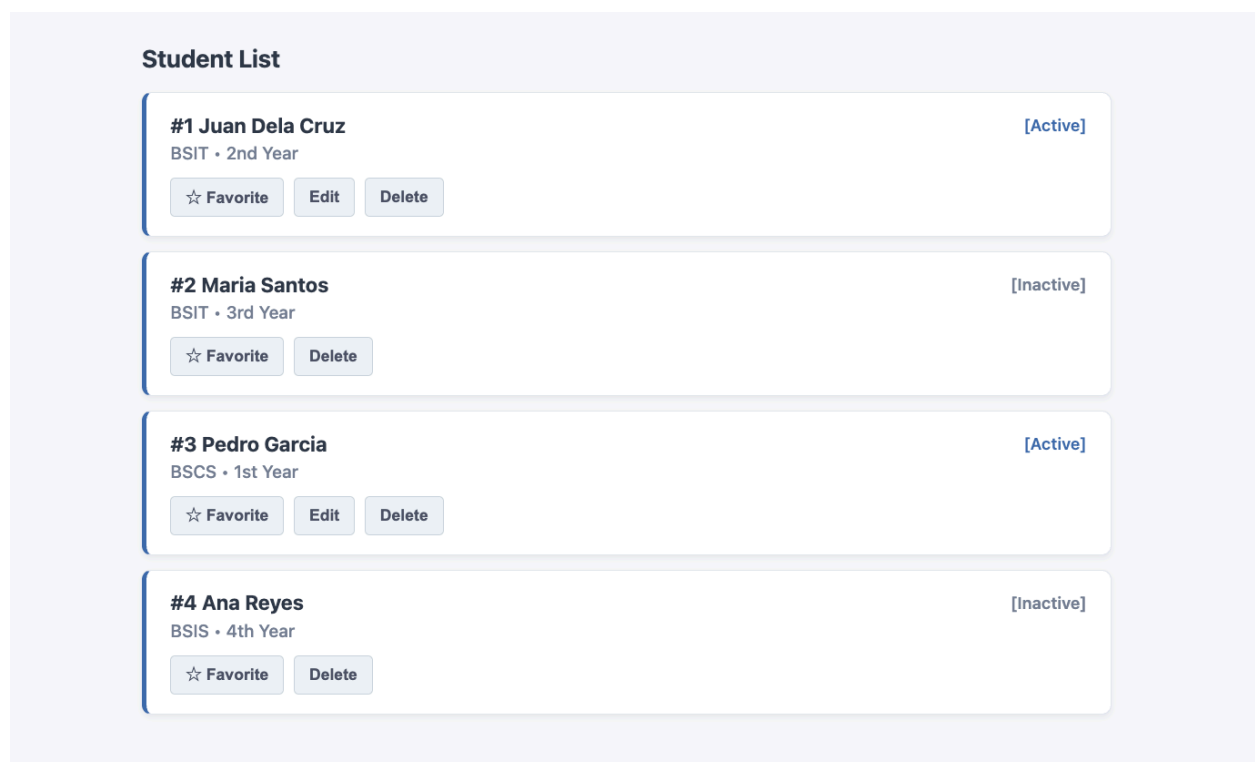

Flag 3 — Create the Student Detail Page

Objective: Create a separate page for viewing a student.

Create a new component for the Student Detail page.

For now, the page can display information such as:

- Student name
- Student ID
- Course
- Year level
- Status

You will later connect this page to a specific student.



Screenshot:

- Your Student Detail page displayed separately from the Student List.

Student Information

Student ID:	23017245
Full Name:	Juan Dela Cruz
Course:	BSIT
Year Level:	2nd Year
Status:	[Active]

← Back to Student List

Flag 4 — Create the Add Student Page

Objective: Create a dedicated page for adding students.

Create another component for:

Add Student

For this challenge, **do not create any form fields yet.**

The page can simply display:

Add Student


or

Add Student Page



Screenshot:

- The blank Add Student page displayed in the browser.

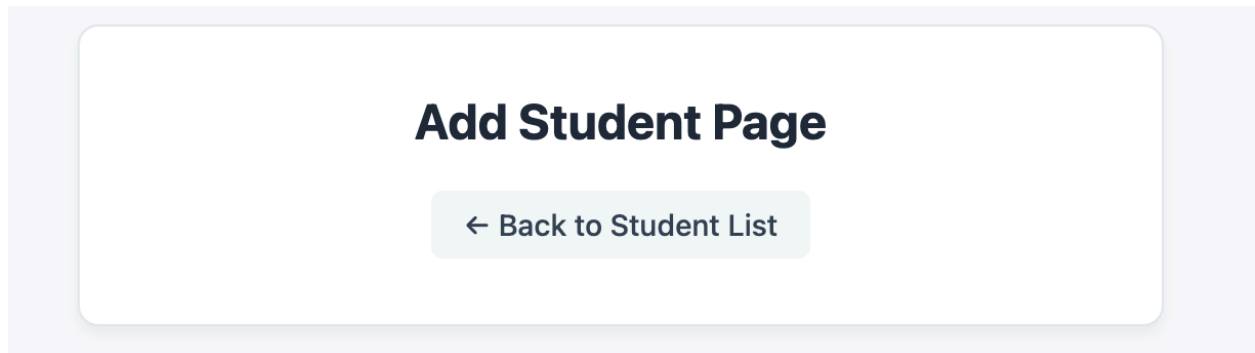

Flag 5 — Open the Portal Gate

Objective: Configure Angular Router.

Add routes for your three pages.

Your application should have routes similar to:

/students

/students/:id

/students/add

The exact route configuration may vary depending on your project structure.



Screenshot:

- Your route configuration showing the three routes.

```
import { Routes } from '@angular/router';
import { StudentListComponent } from './components/student-list/student-list';
import { StudentDetailComponent } from './components/student-detail/student-detail';
import { AddStudentComponent } from './components/add-student/add-student';

export const routes: Routes = [
  { path: '', redirectTo: 'students', pathMatch: 'full' },
  { path: 'students', component: StudentListComponent },
  { path: 'students/add', component: AddStudentComponent },
  { path: 'students/:id', component: StudentDetailComponent },
  { path: '**', redirectTo: 'students' }
```

Flag 6 — Navigate Without Reloading

Objective: Add navigation between pages.

Create navigation links or buttons that allow the user to move between:

- Student List
- Add Student
- Student Detail

Use Angular's router navigation instead of manually changing the browser URL.

Hint:

`routerLink`



Screenshot:

- Your navigation menu/buttons.
- The browser changing between pages without a full page reload.

A green rectangular button with rounded corners and a white border. It contains the text "+ Add New Student" in white, bold, sans-serif font.

+ Add New Student

A blue rectangular button with rounded corners and a white border. It contains the text "View Details" in white, bold, sans-serif font.

View Details

A light blue rectangular button with rounded corners and a white border. It contains the text "← Back to Student List" in dark blue, bold, sans-serif font.

← Back to Student List

Flag 7 — Give Every Student a Page

Objective: Navigate from a student card to its detail page.

Add a button or link to each student card.

Example:

View Student

When clicked, it should navigate to that student's detail route.

Example:

/students/1

/students/2

/students/3

You don't need to load different student data yet. The goal is to successfully navigate using a route parameter.

Hint:

:id



Screenshot:

- A student card with the View Student button.
- The resulting Student Detail URL/page.

Student Information

Student ID: 1

Full Name: Juan Dela Cruz

Course: BSIT

Year Level: 2nd Year

Status: [Active]

[← Back to Student List](#)



localhost:4200/students/1

Flag 8 — Build the Portal Navigation

Objective: Make the Student Portal feel like a multi-page application.

Your final navigation should allow users to move between:

Student List



Student Detail

Student List




Add Student

The Student List should remain accessible after navigating to other pages.



Screenshot:

- Your complete navigation working between all three pages.

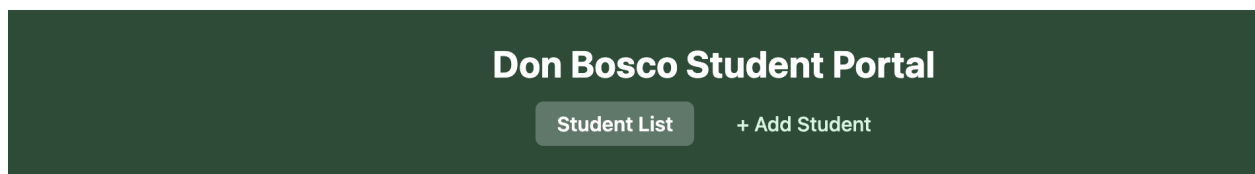

Flag 9 — Commit Your Progress



Final Flag Screenshot

- Successful push to `feature/routing`.

```
woj@192 my-app % git add .
woj@192 my-app % git commit -m "CTF 7:Conditional UI"
[feature/routing 74d8469] CTF 7:Conditional UI
21 files changed, 881 insertions(+), 158 deletions(-)
create mode 100644 Copy of CTF 6_ Conditional UI.pdf
create mode 100644 my-app/src/app/components/add-student/add-student.css
create mode 100644 my-app/src/app/components/add-student/add-student.html
create mode 100644 my-app/src/app/components/add-student/add-student.spec.ts
create mode 100644 my-app/src/app/components/add-student/add-student.ts
create mode 100644 my-app/src/app/components/student-detail/student-detail.css
create mode 100644 my-app/src/app/components/student-detail/student-detail.html
create mode 100644 my-app/src/app/components/student-detail/student-detail.spec.ts
create mode 100644 my-app/src/app/components/student-detail/student-detail.ts
create mode 100644 my-app/src/app/components/student-list/student-list.css
create mode 100644 my-app/src/app/components/student-list/student-list.html
create mode 100644 my-app/src/app/components/student-list/student-list.spec.ts
create mode 100644 my-app/src/app/components/student-list/student-list.ts
woj@192 my-app % git push -u origin feature/routing
Enumerating objects: 45, done.
Counting objects: 100% (45/45), done.
Delta compression using up to 8 threads
Compressing objects: 100% (31/31), done.
Writing objects: 100% (31/31), 584.95 KiB | 16.71 MiB/s, done.
Total 31 (delta 11), reused 0 (delta 0), pack-reused 0 (from 0)
remote: Resolving deltas: 100% (11/11), completed with 6 local objects.
remote: This repository moved. Please use the new location:
remote:   https://github.com/W0jkurt/ITE403A_RIZAL.git
remote:
remote: Create a pull request for 'feature/routing' on GitHub by visiting:
remote:   https://github.com/W0jkurt/ITE403A_RIZAL/pull/new/feature/routing
remote:
To https://github.com/W0jkurt/ITE403A_RIZAL.git
 * [new branch]      feature/routing -> feature/routing
branch 'feature/routing' set up to track 'origin/feature/routing'.
woj@192 my-app %
```