

See discussions, stats, and author profiles for this publication at: <https://www.researchgate.net/publication/311251764>

# Image upscaling based convolutional neural network for better reconstruction quality

Conference Paper · April 2016

DOI: 10.1109/ICCSP.2016.7754236

---

CITATION

1

---

READS

1,768

2 authors, including:



Leon MEGALAN Leo

Sathyabama Institute of Science and Technology

15 PUBLICATIONS 12 CITATIONS

SEE PROFILE

Some of the authors of this publication are also working on these related projects:



Network Weight Updating Method for Intrusion Detection Using Artificial Neural Networks [View project](#)

# Image Upscaling based Convolutional Neural Network for Better Reconstruction Quality

T. Sharmila    L. Megalan Leo

**Abstract**—Excellent Resolution(ER) is kinds of technical that enhance the resolve of an imaging system, while improving image quality and the spatial resolution of the image. The image resolution is converted into low or high representation using upscaling factor. The sparse technic used to generate individual excellent resolution image. The complete image pixels should be good combination of spare elements with fixed lexical. Exceptional the Spare signal with combination of coefficient to produce the excellent output images. A sparse lexical (SL) pair [22] containing low resolution and high resolution patches pairs and then using the representation of each low resolution patch via the low resolution lexical to predict the corresponding high resolution patch. It has faster lexical training than existing once and at the same time has better PSNR as well. It achieves [21] significantly better PSNR than bicubic interpolation.

**Index Terms**—Excellent Resolution(ER), Sparse Lexical (SL), Spare signal (SS),

## I. INTRODUCTION

The processing of image can be generate various pattern like image recognition, measurement of pattern, Image retrieval, Image sharpening , restoration and visualization a pattern to modulate a picture into digitalize form and execute. The image processing performs a various dimension such as one dimensional, two dimensional and so on. In normally which, inputs (video or photo) are apply for processing, at the same time to got the expecting outputs from it. The main objective is to produce poor resolution image to excellent resolution image from low resolution input, the real shot required to generate high performance output image. In many applications are used to great such as model identification, medical science and diagnosis the diseases[1-6].

T. Sharmila is with Electronics and Telecommunication Engineering Department, [12] Joseph, Minnu, and M.S. Godwin Premi. Sathyabama University Chennai, India (e-mail: [sharmila1sharme@gmail.com](mailto:sharmila1sharme@gmail.com))

L. Megalan Leo is with [12] Electronics and Telecommunication Engineering Department, Sathyabama University Chennai, India (e-mail: [megalanleo@gmail.com](mailto:megalanleo@gmail.com))

The particular part of zooming is involve more necessary good resolution, for example closed observation of a person, Used in public debate and satellite imaging applications[4-8]. The aim is then to find the good resolution image which as soon as resampled to determined the correct the pixel pattern such as a formally good resolution. Pictures are get from a single or many from the cameras otherwise videos by procedure. Required images are framed in general mapping to maintain good resolution images[9-11]. This process involves hundred percent alignments at which desired and perfection of a model image. The related works are discussed as below, Rujul and Nita [12-19], proposed a technique to reconstruct the image obtained from same scene based on Iterative back projection algorithm to overcome the limitation. Cui and Shan [3], proposed a low resolution image to deep network cascade to increase gradually. Glasner and Bagon [8], proposed a technique to combine two classified pattern. In this paper, the design of convolutional neural networks in Section II to XI, the image scaling and PSNR value output in sections IV and XII, and the conclusion of the paper in Section XIV.

## II. SUPER-RESOLUTION

The low-resolution image is view as down sampled version of a high-resolution image, whose area are undetermined to have a sparse illustration with respect to an over-complete lexical of prototype indication atoms. The standard of condensed sensing make sure that under mild situation, the sparse illustration can be properly recovered from the along sampled signal. We will exhibit the achievement of sparsity as a previous for regularizing the or else ill-pose super-resolution problem. We promote illustrate that a little set of accidentally chosen raw area as of training descriptions of associated statistical character to the input image regularly serve as a fine lexical, in the logic that the calculate illustration is sparse and the enhanced elevated-declaration picture is destructive or level enhanced in quality to descriptions produced by additional Spare indication.

## III. CONVOLUTIONAL NEURAL NETWORKS

Convolution is a general image processing technique that alterations the strengths of a pixel to reverberate the intensities of the circumference pixels. Convolution neural networks stands for an interesting procedure for adjustive image processing [16] and like a connect between common fed forward neural networks and adaptive filters.

Two dimensional CNNs are organized by one or many layers of two dimensional filters, on possible non-linear activation purpose and/or down-sampling, Conventional neural network mistake minimization functions may be access to optimize convolutional networks in order to apply rather almighty image transformations. The identical attribute of transformation of invariability particular CNNs. CNN are an occupy alternative allotted, and the selected output of a system may be determined. Network construction performed infusion applicable characteristics, confining neural weights of one layer to a relating to perceptive field in past layer. Hence, characteristics map find in second layer. The degree of change over and aberration variance is reached by reduction the special resolution is the lineament mapping.

Fig. 1 Structural diagram of CNN of an individual neuron network with convolution in dual layers.

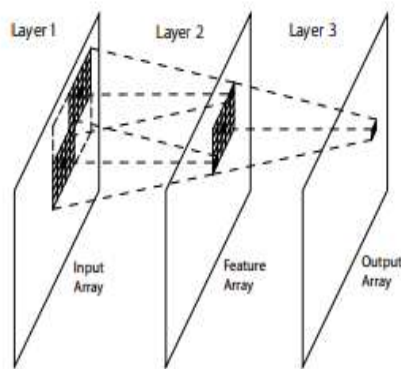


Fig. 1. Structural diagram of CNN of an individual neuron network with convolution in dual layers.

A 5x5 mapping filter at couple unusual displacements is exhibit images in the beginning lineament queue. Shadow images in change are portion of the specific lineament data which is represent to the final (or uphold characteristics) queue by a back 5x5 filter.

#### IV. IMAGE SCALING

The process of reshape is a digital image scaling. Grading is a non-trial procedure that implies a trade-off among efficient, rough and edges. On bitmap graphical, as the shape of an image is decreased or expanded, the pixels that kind the image become progressively visible, devising the image seem “delicate if pixels are averaged, or scraggy if not. On vector on writing the trade-off might be in action power for re-rendering the image, which may be noticeable as slow re-translating with even graphics, or slower shape grade and frame pass over in computer animation.

#### V. EXISTING SYSTEM

A general application happens when we need to grow the resolution of an image as magnify it exploitation digital image software. To shorten the reaction time of reading superficially such net pages, images are frequently shown in low-resolution kind.

Image interpolation of an event in all digital photos any level may such follow in bayer demosaicing or in photo expansion. It happens anytime you reshape or remap (twist)

your image from one pixel grid to other. Nearest neighbor Interpolation, the uncomplicated method, finds the grey level value from the immediate pixel to the nominative input coordinator, and assignee that esteem to the output coordinator. It should be famed that this does not truly alter values, it merely copies present values. Because it does not change values, it is represent it easiest variation, in the grey level worth requirement to be maintained. Ajeeshvali, N., and B. Rajasekar [1] In image processing, bicubic interpolation is often elect over bilinear interpolation either nearest neighbor in image corresponding, when expedition is nope release. Which only starve 4 pixels (2x2) intra account, bicubic interpolation considers 16 pixels (4x4). Image correspond with bicubic interpolation are smoother and refuse fewer interpolation distortion. The bicubic interpolation is uttermost broadly utilized algorithm in more of the image processing purpose.

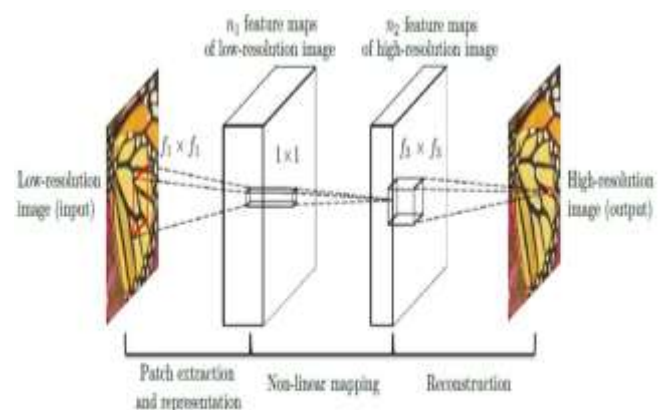


Fig. 2. Flowchart of Learning CNN for ER

#### VI. PATCH EXTRACTION AND REPRESENTATION

This process infusion (coincide) flecks from the lower-resolution pixel and signify every fleck as a high-dimensional vector. These vectors consist of characteristics functions are the figure equality to the dimensional of the vectors.

So we can find that how to evoke image low-level visible characteristics and what form of characteristics will be pull out play an important role in different jobs of image processing. In common, there are three characteristics representation steps, which are globalize, bar-based, and part-based characteristics. Exhibit an image assortment access through a tree-structured characteristics position, in which the origin point refers the whole image characteristics while the kid nodes correspond the relating part-based characteristics. Compare different combinations of image characteristics representation imply the global, local bar-based and part-based.

When features are distinct in conditions of locally neighborhood operations given to an image, a process generally advert to as feature *origin*, one can difference between characteristics detection approaches that generate local determination whether there is a characteristics of a given type at a applied image point or non, and those who generate non-binary information as output. The distinction gets applicable when the resulting noticed characteristics are comparatively sparse. While local determinations are get, the output from a characteristics detection measure does not involve to be a binary image. The result is frequently

represented in footings sets of (connected or unconnected) organizes of the image points where characteristics have been detected, few times with sub pixel exactly.

When characteristics extraction is done among local determine doing, the result is frequently mentioned to as a *characteristics picture*. Accordingly, a characteristics image can be view as an image in the sense that it is a role of the like spatial (or secular) variables as the master image, but where the pixel points maintain data about image characteristics rather of volume or color. This substance that a characteristics image can be produced in a same way as a master image produced by an image sensor.

## VII. NON-LINEAR MAPPING

This function designating map every elevated-dimensional vector into other elevated-dimensional vector. Every map Vector is barely delegacy of a elevated-resolution territory. These vectors consist of other group characteristics map. The Basic layer infusion an  $n_1$ -dimensional characteristic for every patch. In the next sequence, we represent all of these  $n_1$ -dimensional vectors hooked on an  $n_2$ -dimensional. This is tantamount near giving  $n_2$  filters which get a unimportant spatial backup  $1 \times 1$ . This version is simply accurate for  $1 \times 1$  filters. In that occurrence, the designating mapping is nope on a patch the input image; rather, it is on a  $3 \times 3$  otherwise  $5 \times 5$  "patch" of the characteristics graph. Every of output  $n_2$ -dimensional vectors are barely a symbol of a elevated decision area to resolve be access for rebuilt. It is achievable to join many convolutional layer to raise the non-linearity. But this be able to raise the difficulty of the pixel, and thus requests mightily training time.

## VIII. RECONSTRUCTION

This procedure totally the over elevated-resolution piece-wise delegacy to produce the final elevated-resolution image. This picture is required to be same to the view fact X Dong, Chao [5] In the conventional types, the anticipate overlapping high-resolution pixels are frequently ordinary to generate the closing full image. The median can be believed as a pre-distinct filter on a specify of characteristics map. Actuated by this, we specify convolution level to generate the ending elevated-resolution pixel. The existing method output image is shown in Fig.5

## IX. PROPOSED SYSTEM

Signs take around overtake measure of information in which applicable data is frequently many complicate to seek than a Sharpe in a hayrick.

Procedure is quickly and same in a sparse representation where some constant numbers bring out the data we are grander for. These representations can be building by break down signs above simple waveforms selected in a category called a lexical. Sparse representations in similar dictionaries can develop pixel recognition, compact and sound decrease, but also the resolution of fresh inverse troubles. This includes super resolution, origin break up, and squeeze sensing. The picture super-resolution rebuilt based on sparse representation algorithm basic purpose an image training library to become over-complete lexical of sparse representation. The grooming of hyper-complete lexical require near squeeze the data of

high, small declaration picture a blocks near string the elevated-declaration picture block for determine elevated declaration lexical of sparse representation, then calculated the wanted high-resolution images by sparse representing and rebuilt the high-resolution image prepared from the known low-resolution image. Fig.3 shows the flowchart of the proposed system. A fresh attack to the image super resolution, supported on sparse signal representation. A sparse representation for every pixel of the low-resolution input, and then uses the cofactors of this representation to procedure the high-resolution output. The sparse symbol be able to perfectly recollected since the along sample signal.

Along collectively preparation two lexical in favor of the short and elevated-resolution image pixels, we be able to impose the resemblance of sparse representations among the low-resolution and elevated -resolution image pixel couple among regard to their lexical. Hence, the sparse illustration of a less-resolution image pixel be able to be given by the elevated-resolution picture pixel lexical to produce a elevated -resolution picture pixel. It can be considered by the PSNR value.

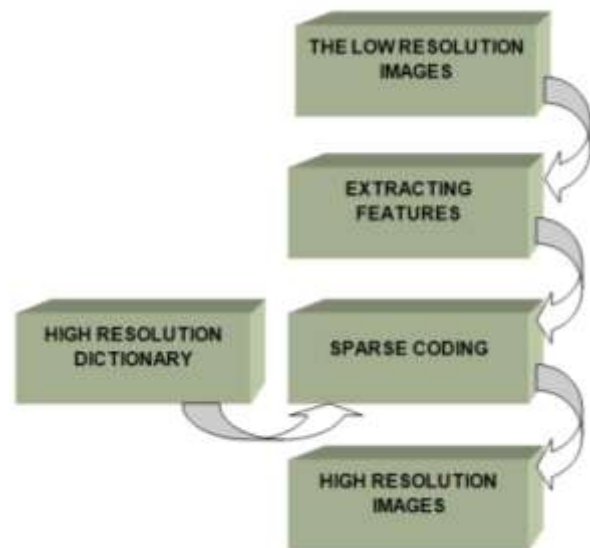


Fig. 3. Flow chart for proposed system

The education of higher-complete lexical required to evoke the data of high, less declaration image pulley toward prepare the elevated-declaration picture block in favor of obtaining high resolution lexical of sparse representation, then approximated the wanted high-resolution images by sparse representing and reconstructing the high-declaration picture drilled since the familiar less-declaration picture. The enter image shown in fig: 4 shows the preparation and alteration procedure of the elevated-declaration figure of Excellent-declaration figure rebuilt base on sparse illustration algorithm.

## X. CHARACTERISTICS EXTRACTION

In machine studying, form pixel recognition and in image processing, **characteristics removal** begins from an early set of calculated information and constructs resultant standards. Characteristics removal is linked to dimensionality decrease. while the input information to an algorithm is also big to be process and it is supposed to be superfluous , or the sameness of images obtainable as pixels), next it can be distorted into a synopsis location of characteristics (also name a "characteristics vector").This procedure is called *characteristics origin*. The extract characteristics are



projected to hold the compact representation in place of the total original information.

## XI. SPARSE CODING

Sparse coding is a group of unsupervised category for education raff of hyper-completes basis to stand for information competently. The plan of sparse coding is to get a set of base vectors  $\phi_i$  such that we can stand for an input vector  $\mathbf{X}$  as a linear mixture of these base vectors:

$$\mathbf{X} = \sum_{i=1}^k a_i \phi_i$$

Whereas technique such as Major Component Analysis (MCA) permit us to study a whole set of base vectors professionally, we desire to study a hyper-complete set of base vectors to signify input vectors  $\mathbf{X} \in \mathbb{R}^n$  (i.e. such that  $k > n$ ). The benefit of having a hyper-complete source is that our origin vectors are improved capable to arrest construction and models inbuilt in the input information. Though, with an hyper-complete source, the coefficients  $a_i$  are refusal longer exclusively resolute by the input vector  $\mathbf{X}$ . Hence, in sparse coding, we introduce the additional measure of sparsity to determination the immorality introduce by hyper-completeness.



Fig. 4. Input image (size 128x128x3)

At this time, we describe sparsity as have a small number of non-zero components or *having* a tiny digit of components not secure to nil. The condition that our coefficients  $a_i$  be sparse resources that specified a input vector, we would similar to as a tiny digit of our coefficients to be distant from zero as likely. These option of sparsity as a preferred characteristic of our illustration of the input information can be provoked by the supervision that a large amount sensory information such while usual picture can be determine as the excellent position of a little number of atomic elements such as surface or edge. Further vindicate such as equality to the belongings of the essential visual cortex have also been further.



Fig. 5. Existing Output image (size 256x256x3)

## XII. PSNR ANALYSIS

- The standard gain on top of Peak Signal Noise Ratio attain with bicubic be 32.794678 dB.
- The standard gain on top of Peak Signal Noise Ratio attain with sparse coding are 35.036804 dB.

## XIII. PROPOSED SYSTEM OUTPUT



Fig. 6. Output image (size 256x256x3)

## XIV. CONCLUSION

In this article, we future sparse convention based CNN intended for image great decision here the in the meantime; small-level constraint on top of coefficient matrix be able to disclose added accurate subspaces all through sparse illustration. Among these constraints, our move toward be capable of obtain a additional delegate and high resolution. It was functional to different application such as figure wonderful-declaration, picture denoising and capture recoloring. We evaluate our come near through balance to bicubic process on top of different information's.

## REFERENCES

- [1] Ajeeshvali,N., and B. Rajasekar."Steganography Based on Integer Wavelet Transform and Bicubic interpolation" Internatinal journal of Image Graphics and Signal Processing, 2012.
- [2] Bevilacqua, M., Roumy, A., Guillemot, C., Morel, M.L.A.: Low complexity single-image super-resolution based on nonnegative neighbor embedding. In: British Machine Vision Conference (2012)
- [3] Cui, Z., Chang, H., Shan, S., Zhong, B., Chen, X.: Deep network cascade for image super-resolution In: European Conference on Computer Vision, pp. 49–64 (2014)
- [4] Dai, S., Han, M., Xu, W., Wu, Y., Gong, Y., Katsaggelos, A.K.: Softcuts: a soft edge smoothness prior for color image superresolution IEEE Transactions on Image Processing 18(5), 969–981 (2009)
- [5] Dong, Chao, Chen change Loy, Kaiming He, and Xiaou Tang. "Image Super-Resolution Using Deep Convolutional Networks", IEEE Transactions on Pattern Analysis and Machine Intelligence, 2015.
- [6] Denton,E.,Zaremba,W., Bruna,J., LeCun, Y., Fergus, R.: Exploiting linear structure within convolutional networks for efficient evaluation. In: Advances in Neural Information Processing Systems (2014)
- [7] D. Datsenko and M. Elad, "Example-based single image Superresolution: a global MAP approach with outlier rejection," Journal of Multidimensional System and Signal Processing, vol. 18, no. 2–3, pp. 103–121, 2007
- [8] Glasner, D., Bagon, S., Irani, M.: Super-resolution from a single image. In: IEEE International Conference on Computer Vision. pp. 349–356 (2009) He, K., Zhang, X., Ren, S., Sun, J.: Spatial pyramid pooling in deep convolution networks for visual recognition. In: European Conference on Computer Vision, pp. 346–361 (2014)
- [9] Jaderberg, M., Vedaldi, A., Zisserman, A.: Speeding up convolutional neural networks with low rank expansions. In: British Machine Vision Conference (2014)
- [10] Jianchao Yang, John Wright, Thomas Huang, and Yi Ma, "Image super-resolution via sparse representation.", IEEE Transactions on Image Processing, vol. 19, no. 11, pp. 2861–2873, Nov. 2010.
- [11] Joseph, Minnu, and M.S. Godwin Premi. "Contextual feature discovery and image ranking for image object retrieval and Tag refinement", 2014 International conference on communication and signal processing, 2014
- [12] Khatri, N., Joshi, M.V.: Image super-resolution: use of self learning and gabor prior. In: IEEE Asian Conference on ComputerVision, pp. 413–424 (2013)
- [13] Kim, K.I., Kwon, Y.: Single-image super-resolution using sparse regression and natural image prior. IEEE Transactions on Pattern Analysis and Machine Intelligence 32(6), 1127–1133 (2010)
- [14] Krizhevsky, A., Sutskever, I., Hinton, G.: Image Net classification with deep convolutional neural networks. In: Advances in Neural Information Processing Systems. pp. 1097–1105 (2012)
- [15] Matthew Browne. "convolutional Neural Networks for Image Processing with Applications in Mobile Robotics", Studies in Computational Intelligence, 2008
- [16] Ma, Li Yong, Xi Li He, and Zi Shen Huang."Sidescan sonar image super resolution based on sparse representation", Applied Mechanics and Materials, 2011.
- [17] Naveen Kulkarni, Pradeep Nagesh, Rahul Gowda, and Baoxin Li, "Understanding compressive sensing and sparse representation-based super-resolution", IEEE Transactions on Circuits and Systems for Video Technology, vol. 22, no. 5, pp. 778–789, May 2012.
- [18] Rujul R. Makwana and Nita D. Mehta, Survey on single image Super resolution techniques, IOSR-JECE,e-ISSN :2278-2834, p-ISSN:2278-8735,Vol.5, Issue 5(Mar-Apr, 2013) pp.22-33
- [19] M, Sushma, Malaya Kumar Nath, Lokeshwari R, Premalatha T, and Santhini J V. "Wavelet-NARM Based sparse representation for Bio" Medical Images", International journal of image graphics and signal processing, 2015.
- [20] Sudarshan,S., and R. Venkatesh Babu."Super resolution via sparse representation in <i> <sub>1</sub> framework", Proceedings of the Eighth Indian Conference on Computer Vision Graphics and Image Processing-ICVGIP 12 ICVGIP 12, 2012.
- [21] Zhu, Kunpeng and Feng Lin"Image Super-resolution reconstruction by sparse decomposition and scale invariant feature retrieval in micro-UAV stereo vision", 11<sup>th</sup> IEEE International Conference on Control & Automation (ICCA), 2014.