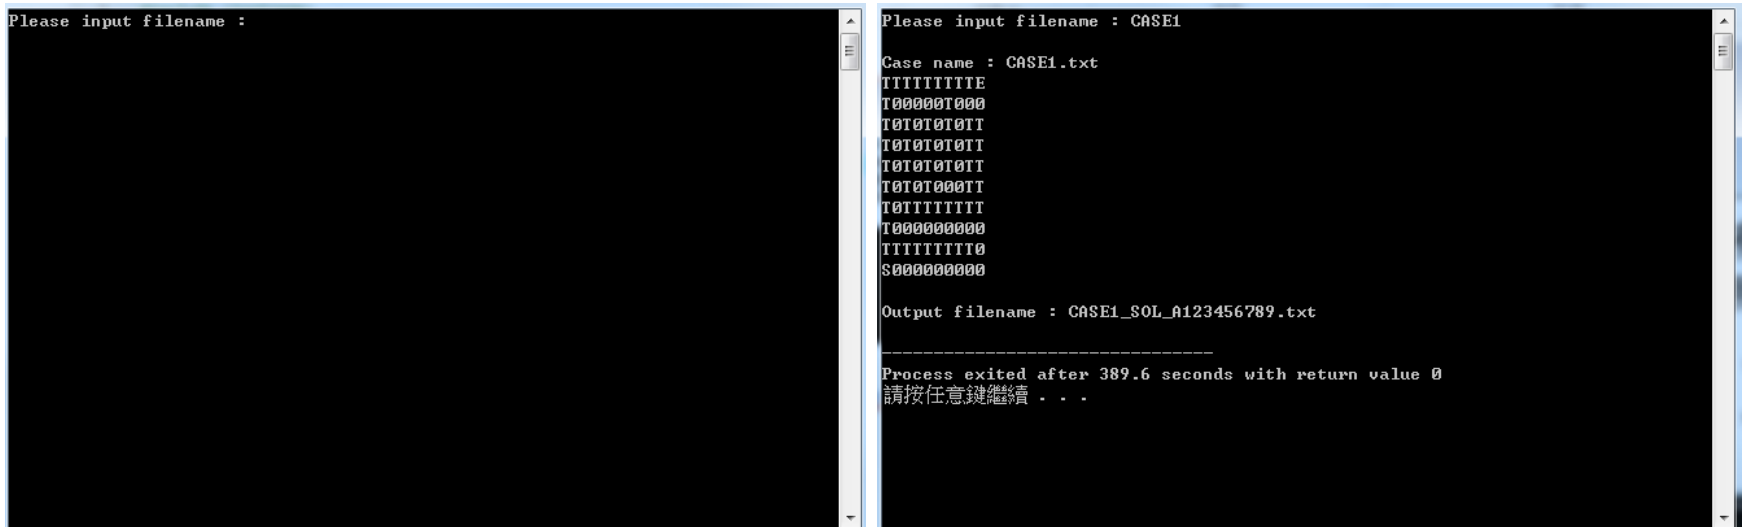


作業一讀檔補充說明

- ◆ 鑒於有同學不太清楚讀檔的部分，在此做補充說明。程式要可以依照使用者的輸入，來判斷要採用哪個檔案來執行程式產生結果，這裡提供兩種讀檔方法：分別為使用cin或是使用argv argc，以下為使用cin示意圖

Two terminal window screenshots are shown side-by-side. The left window shows a prompt 'Please input filename :'. The right window shows the same prompt with 'CASE1' entered. Below the prompt, it displays 'Case name : CASE1.txt' followed by a series of test patterns (TTTTTTTTT, T00000T000, T0T0T0T0TT, T0T0T0T0TT, T0T0T0T0TT, T0T0T0T0TT, T0T0T000TT, T0TTTTTTTT, T000000000, TTTTTTTTT0, S000000000). It then shows 'Output filename : CASE1_SOL_A123456789.txt' and a separator line. At the bottom, it says 'Process exited after 389.6 seconds with return value 0' and '請按任意鍵繼續 . . .'.

```
Please input filename :  
  
Please input filename : CASE1  
Case name : CASE1.txt  
TTTTTTTTT  
T00000T000  
T0T0T0T0TT  
T0T0T0T0TT  
T0T0T0T0TT  
T0T0T0T0TT  
T0T0T000TT  
T0TTTTTTTT  
T000000000  
TTTTTTTTT0  
S000000000  
  
Output filename : CASE1_SOL_A123456789.txt  
-----  
Process exited after 389.6 seconds with return value 0  
請按任意鍵繼續 . . .
```