


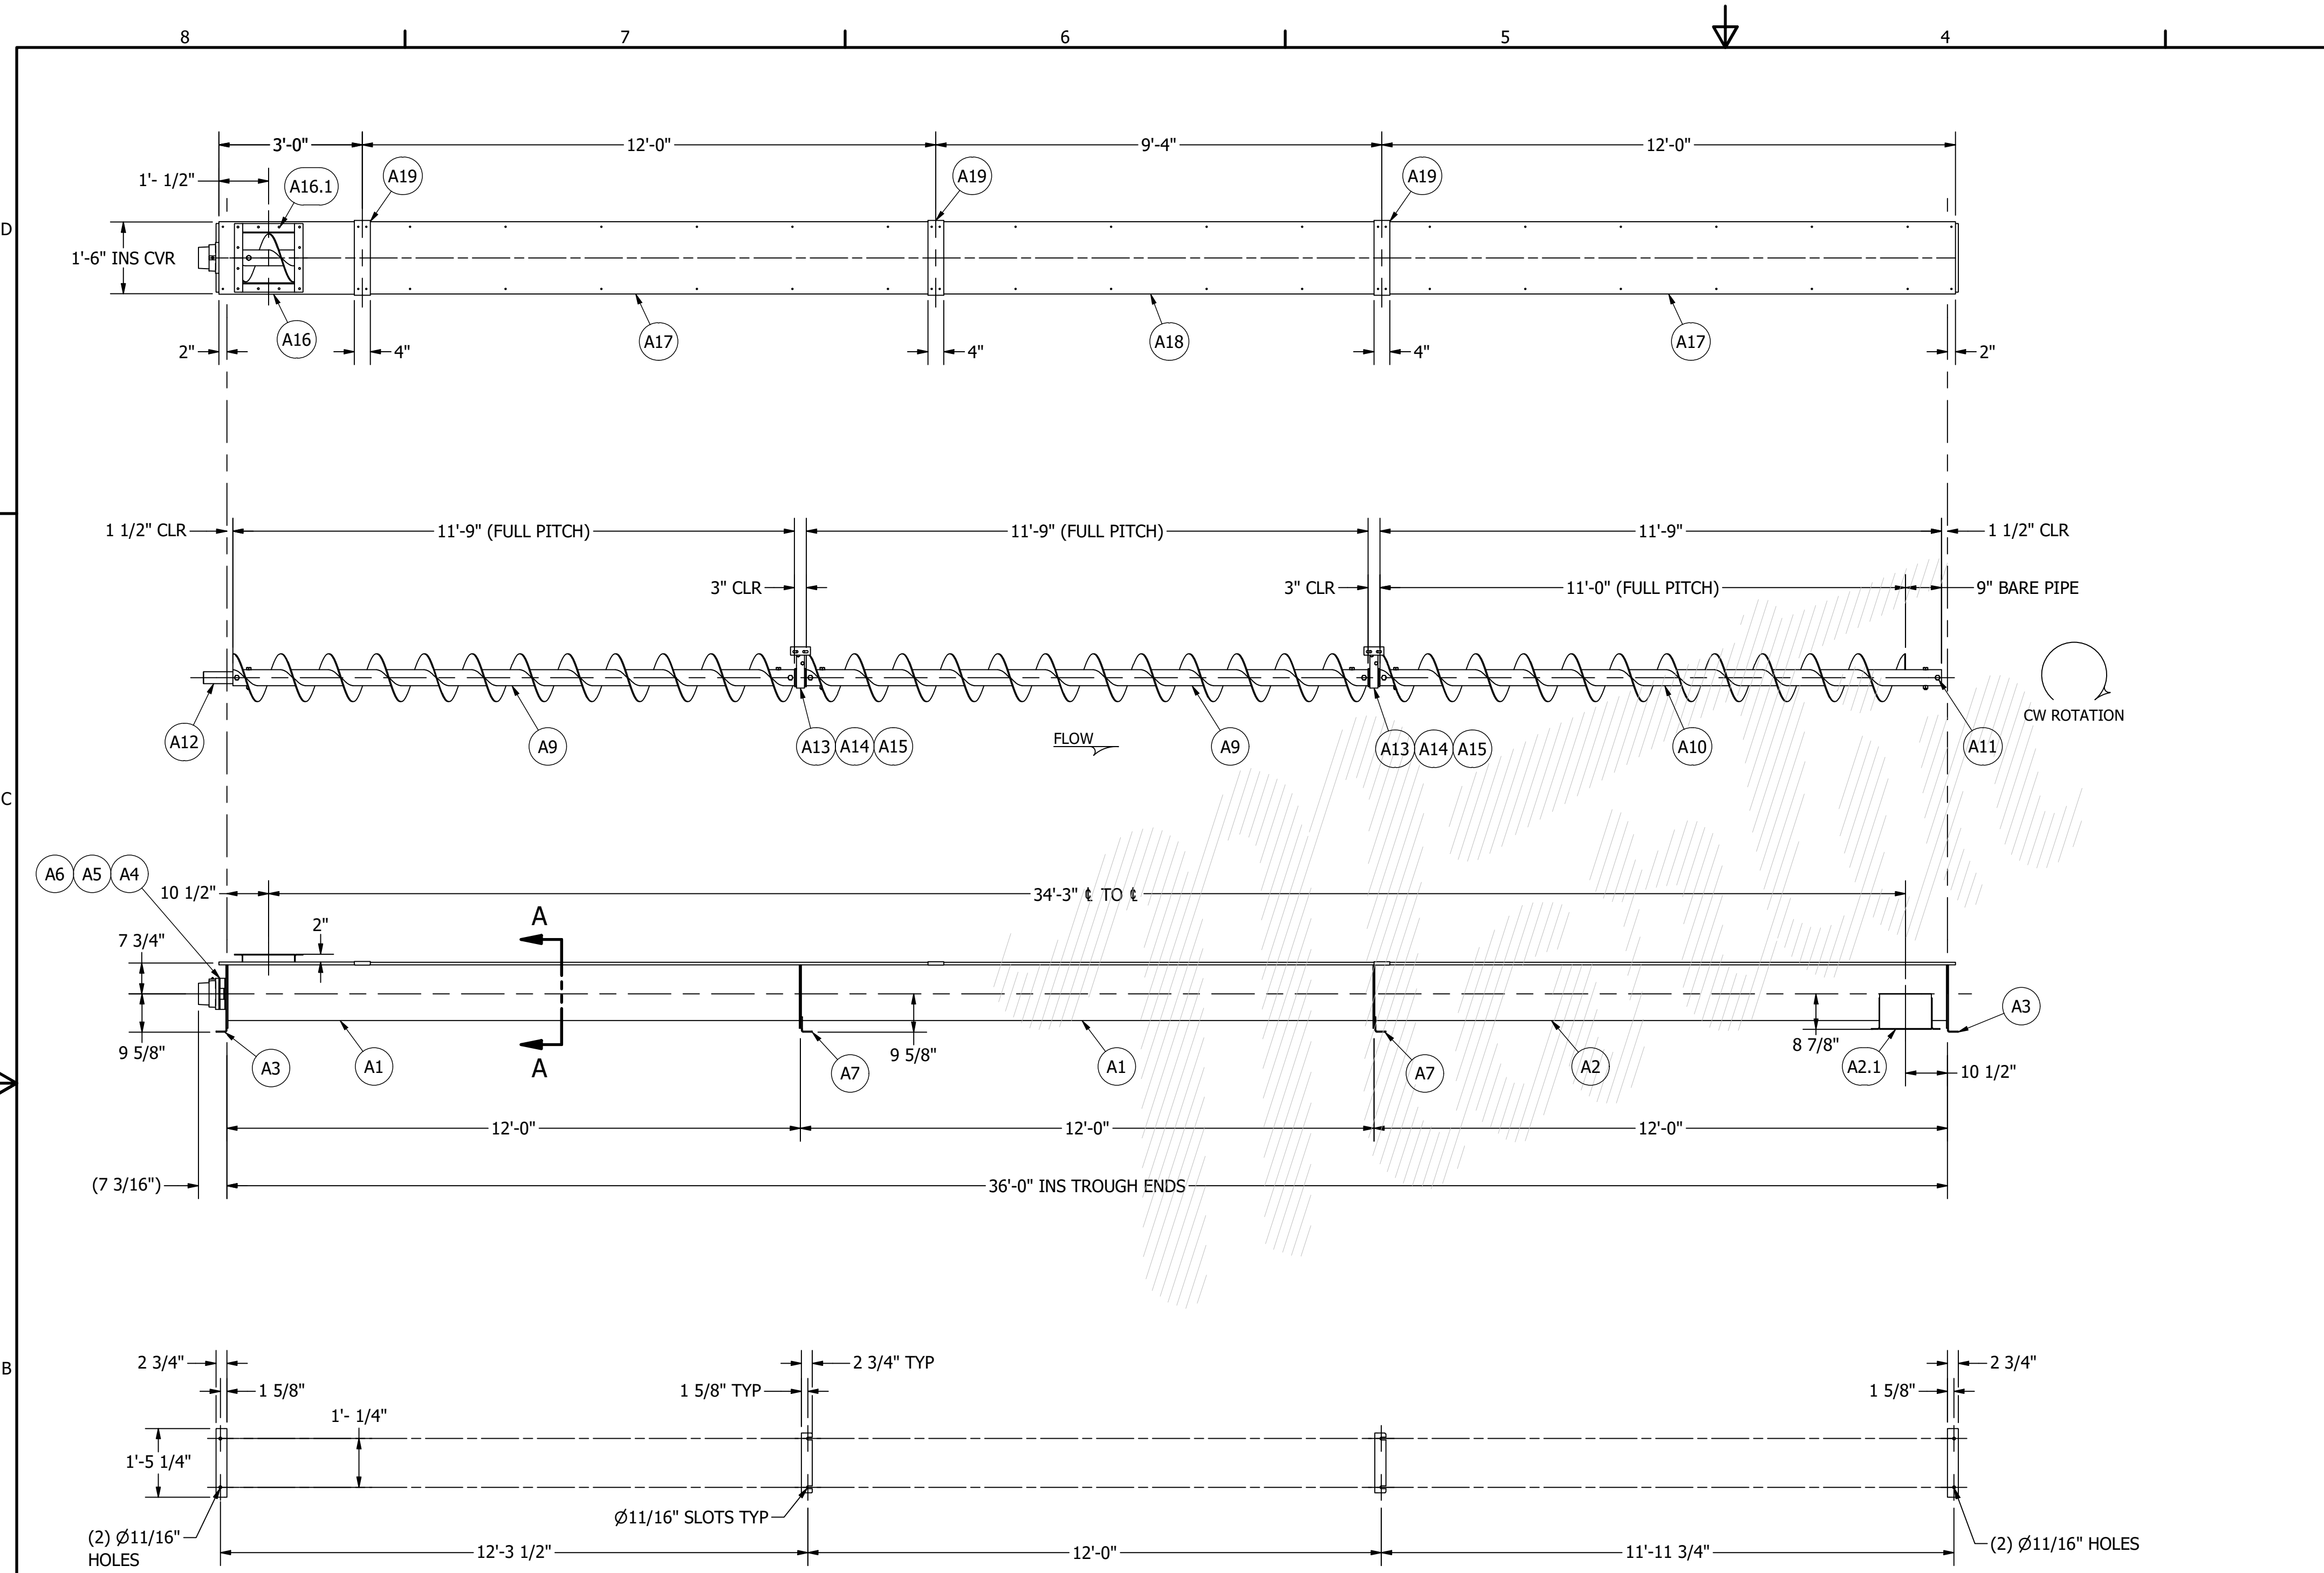

NOTES:

- FOR SAFETY STICKER LOCATIONS, REFER TO CEMA SAFETY LABELS PLACEMENT GUIDE #SC-2
- STAINLESS STEEL CLEAN ONLY
- SHOP TO ASSEMBLE CONVEYOR WITH NO DRIVE INCLUDED

LUBRICATION LEVELS IN THE DRIVE REDUCER AND BEARINGS MUST BE VERIFIED PRIOR TO OPERATION

FOR APPROVAL
CONSTRUCTION IS BEING HELD

☐ APPROVED AS SUBMITTED
PROCEED WITH MANUFACTURING

☐ REVISE AND RESUBMIT FOR APPROVAL
DO NOT PROCEED WITH MANUFACTURING

PRINT NAME: _____
SIGNATURE: _____
COMPANY: _____
DATE: _____

PLEASE NOTE:
PRICING IS SUBJECT TO CHANGE DUE TO DESIGN CHANGES
OR MATERIAL VOLATILITY. THIRD-PARTY SUPPLIED ITEMS
ARE QUOTED BASED ON CURRENT AVAILABILITY, AND
MAY BE SUBJECT TO CHANGE BEFORE SHIPMENT

ALL SCREW DIAMETERS AND PITCH TOLERANCES
PER CEMA STANDARDS (ACCORDING TO SIZE).
ALL TOLERANCES TO CONFORM TO PUBLISHED
MARTIN OR CEMA STANDARDS. ALL OTHERS
AS FOLLOWS:

- ANGULAR: +/- 1°
- HOLE DIAMETERS: +/- .132"
- DECIMAL: TWO PLACES +/- .06"
- THREE PLACES +/- .005"
- FRACTIONAL: UNDER 12" +/- 1/16"
12" TO 120" +/- 1/8"
120 AND OVER +/- 1/4"

MACHINED SURFACES: 125√

A	ISSUED FOR APPROVAL	IJP	6/13/2025
REV	DESCRIPTION	APPR	DATE

REVISION HISTORY

THIS DRAWING AND DESIGN IS CONFIDENTIAL. THE RETURN OF THIS DRAWING MAY BE REQUIRED UPON DEMAND. NEITHER THIS DRAWING NOR DESIGN MAY BE COPIED WITHOUT EXPRESSED AUTHORIZATION FROM *Martin* SPROCKET & GEAR, INC.

BILL OF MATERIALS						
RSP	ITEM	ITEM QTY	PART NUMBER	MATERIAL	DESCRIPTION	DETAIL
	A	1	SC-12SS		12" X 36' LONG 304 STAINLESS STEEL CLEAN ONLY SCREW CONVEYOR, CONVEYOR IS SHOP ASSEMBLED WITH NO DRIVE INCLUDED CONSISTING OF THE FOLLOWING:	
	A1	2	0932420M-TRGH1	304SS	12" U-SHAPE TROUGH, 12' O.A.L., CONSTRUCTED FROM 3/16" THK 304 STAINLESS STEEL MATERIAL FITTED WITH 1/4" THICK AR235 TROUGH LINER, LINER TO BE 1" ABOVE CENTERLINE AND STITCH WELDED IN PLACE	
	A2	1	0932420M-TRGH2	304SS	12" U-SHAPE TROUGH, 12' O.A.L., CONSTRUCTED FROM 3/16" THK 304 STAINLESS STEEL MATERIAL FITTED WITH STD 12TSD7-SS, 3/16" THK DISCHARGE, LOCATED 10 1/2" ON CENTER FROM DISCHARGE END. FITTED WITH 1/4" THICK AR235 TROUGH LINER, LINER TO BE 1" ABOVE CENTERLINE AND STITCH WELDED IN PLACE	
	A2.1	1	12TSD7-SS	304SS	12" X 3/16" THK. DISCHARGE SPOUT;304SS	
	A3	2	12TEF6-BB-P-SS	304SS	12" X 3" TROUGH END;304SS	
**	A4	1	TEB6BB		3" FLANGE BALL BEARING (#126197)	
	A5	1	EC-216		3" DODGE CLOSED END CLOSURE SNAP-ON END COVER (#128222)	
**	A6	1	CSW6	Steel, Mild	3" WASTE PACK SEAL W/ PACKING	
	A7	2	12TFF-SS	304SS	12" FLANGE FOOT;304SS	
	A8	1	CAULK SILICN FG		FOOD GRADE HIGH TEMP SILICONE	
	A9	2	0932420M-SCREW1	Steel, Mild	12" O.D. X 12" PITCH X 1/4" THK RIGHT HAND AR235 CARBON STEEL SECTIONAL FLIGHTS SKIP WELDED WITH A CEMA II WELD FINISH TO A 3 1/2" CARBON STEEL SCH. 40 PIPE BOTH ENDS BUSHED & 2-BOLT DRILLED FOR A 3" COUPLING 11' 9" O.A.L.	
	A10	1	0932420M-SCREW2	Steel, Mild	STARTING AT INLET END 1ST 11' TO BE 12" O.D. X 12" PITCH X 1/4" THK RIGHT HAND AR235 CARBON STEEL SECTIONAL FLIGHTS LAST 9" TO BE BARE PIPE SKIP WELDED WITH A CEMA II WELD FINISH TO A 3 1/2" CARBON STEEL SCH. 40 PIPE BOTH ENDS BUSHED & 2-BOLT DRILLED FOR A 3" COUPLING 11' 9" O.A.L.	
**	A11	12	CCB6	Steel, Mild	Ø3/4" X 5" GRADE 2 COUPLING BOLT W/ LOCKNUT	
	A12	1	CE6BB-W	Steel, Mild	3" DIA X 12 3/8" LG. END SHAFT, 2-BOLT	
**	A13	2	CC6	Steel, Mild	3" DIA COUPLING SHAFT, 2-BOLT	
	A14	2	12CH2266-SS	304SS	12" X 3" STYLE #226 HANGER ASSEMBLY, WITH;304SS	
**	A15	2	CHB2206N	NYLON	3" DIA HANGER BEARING W/ OIL	
	A16	1	0932420M-CVR1	304SS	NOM 12" FLANGED TROUGH COVER X 3' O.A.L. 18" WIDE TO FIT OVER STD TROUGH TOP RAILS, CONSTRUCTED FROM 12GA THK 304 STAINLESS STEEL MATERIAL, BOLTED ON 2'-0" CENTERS, FITTED WITH STD 12CIF-SS, 3/16" THK INLET, LOCATED 12 1/2" ON CENTER FROM COVER EDGE.	
	A16.1	1	12CIF-SS	Steel, Mild	12" FIXED INLET;304SS	
	A17	2	12TCF14-12-H-SS	304SS	12" X 14GA X 12' LG FLANGED COVER, BOLTED ON 2'-0" CENTERS; 304SS	
	A18	1	0932420M-CVR2	304SS	NOM 12" FLANGED TROUGH COVER X 9' 4" O.A.L. 18" WIDE TO FIT OVER STD TROUGH TOP RAILS, CONSTRUCTED FROM 14GA THK 304 STAINLESS STEEL MATERIAL, BOLTED ON 2'-0" CENTERS	
	A19	3	12BLF10-SS	304SS	12" X 4" FORMED FLANGED U-TROUGH BUTT STRAP, 304SS	
	A20	78'	WN200		1/8 X 2" WHITE NITRILE FDA GASKET1/8" THK X 2" WIDE WHITE NITRILE FDA GASKET STRIP	
	A21	9'	WN400		1/8 X 4" WHITE FDA GASKET	
	A22	A/R	ASSEMBLY BOLTS	18-8SS	LOT OF ASSEMBLY BOLTS	
	A23	1	MH-TAG	ALUMINUM	MH NAME PLATE 2" X 3" ALUMINUM NAME PLATE I.D. TAGS FOR MH ASSEMBLIES	

**RECOMMENDED SPARE PARTS