In [1]:
```
import pandas as pd
import seaborn as sns
import matplotlib.pyplot as plt
from matplotlib.lines import Line2D
from matplotlib.patches import Patch

sns.set_theme(rc={'figure.figsize': (16, 9)})
```

In [2]:
```
age_gander = pd.read_csv('Age-Gender.csv')
countries = pd.read_csv('Countries.csv')
placement = pd.read_csv('Placement.csv')
```

DF_age_gander

In [3]:
```
sorted_ads = sorted(
    age_gander['Ad-name'].dropna().unique(),
    key=lambda x: (x.split(' - ')[0], int(x.split(' - ')[1]))
)

for i in sorted_ads:
    print(i)
```

```
FB – 1
FB – 2
FB – 3
FB – 4
FB – 5
FB – 6
FB – 7
FB – 8
FB – 9
FB – 10
FB – 11
FB – 12
FB – 13
FB – 14
FB – 15
FB – 16
FB – 17
FB – 18
FB – 19
FB – 20
FB – 21
FB – 22
FB – 23
INST – 1
INST – 2
INST – 3
INST – 4
INST – 5
INST – 6
INST – 7
INST – 8
INST – 9
INST – 10
INST – 11
INST – 12
INST – 13
INST – 14
INST – 15
INST – 16
INST – 17
INST – 18
INST – 19
INST – 20
INST – 21
INST – 22
INST – 23
INST – 24
INST – 25
INST – 26
INST – 27
INST – 28
```

In [4]:
```
age_gander['Impressions'] = age_gander['Impressions'].fillna(0).astype(in
```

In [5]:
```
age_gander['Clicks'] = age_gander['Clicks'].fillna(0).astype(int)
```

In [6]:
```
age_gander['Leads'] = age_gander['Leads'].fillna(0).astype(int)
```

In [7]:
```
age_gander['CPL'] = age_gander['Spent'] / age_gander['Leads']
```

In [8]:
```
age_gander['CTR'] = age_gander['CTR'].str.replace('%', '').astype(float)
```

In [9]:
```
age_gander.info()
age_gander.head()
```

```
<class 'pandas.DataFrame'>
RangeIndex: 545 entries, 0 to 544
Data columns (total 12 columns):
 #   Column            Non-Null Count  Dtype
---  ------            --------------  -----
 0   Reporting-starts  544 non-null    str
 1   Reporting-ends    544 non-null    str
 2   Ad-name           544 non-null    str
 3   Age               544 non-null    str
 4   Gender            544 non-null    str
 5   Impressions       545 non-null    int64
 6   Clicks            545 non-null    int64
 7   CPC               544 non-null    float64
 8   CTR               544 non-null    float64
 9   Leads             545 non-null    int64
 10  CPL               482 non-null    float64
 11  Spent             544 non-null    float64
dtypes: float64(4), int64(3), str(5)
memory usage: 51.2 KB
```

Out[9]:

	Reporting-starts	Reporting-ends	Ad-name	Age	Gender	Impressions	Clicks	CPC	CTR	I
0	2025-01-01	2026-01-01	INST — 1	18-24	female	58	1	0.42	1.72	
1	2025-01-01	2026-01-01	INST — 1	18-24	male	318	16	0.06	5.03	
2	2025-01-01	2026-01-01	INST — 1	18-24	unknown	9	0	0.00	0.00	
3	2025-01-01	2026-01-01	INST — 1	25-34	female	49	4	0.08	8.16	
4	2025-01-01	2026-01-01	INST — 1	25-34	male	341	20	0.05	5.87	

DF_countries

In [10]:
```
countries['Impressions'] = countries['Impressions'].fillna(0).astype(int)
```

In [11]:
```
countries['Clicks'] = countries['Clicks'].fillna(0).astype(int)
```

In [12]:
```
countries['CTR'] = countries['CTR'].str.replace('%', '').astype(float)
```

In [13]:
```
countries['Leads'] = countries['Leads'].fillna(0).astype(int)
```

In [14]:
```
countries['CPL'] = countries['Spent'] / countries['Leads']
```

In [15]:
```
countries.info()
```

```
countries.head()
```

```
<class 'pandas.DataFrame'>
RangeIndex: 644 entries, 0 to 643
Data columns (total 11 columns):
 #   Column            Non-Null Count  Dtype
---  ------            --------------  -----
 0   Reporting-starts  643 non-null    str
 1   Reporting-ends    643 non-null    str
 2   Ad-name           643 non-null    str
 3   Country           643 non-null    str
 4   Impressions       644 non-null    int64
 5   Clicks            644 non-null    int64
 6   CPC               643 non-null    float64
 7   CTR               643 non-null    float64
 8   Leads             644 non-null    int64
 9   CPL               586 non-null    float64
 10  Spent             643 non-null    float64
dtypes: float64(4), int64(3), str(4)
memory usage: 55.5 KB
```

Out[15]:

	Reporting-starts	Reporting-ends	Ad-name	Country	Impressions	Clicks	CPC	CTR	Leads
0	2025-01-01	2026-01-01	FB — 1	AL	18670	1541	0.02	8.25	89
1	2025-01-01	2026-01-01	FB — 1	AR	27945	466	0.04	1.67	10
2	2025-01-01	2026-01-01	FB — 1	AU	352	1	0.24	0.28	0
3	2025-01-01	2026-01-01	FB — 1	AT	166	1	0.08	0.60	0
4	2025-01-01	2026-01-01	FB — 1	BE	280	1	0.16	0.36	0

DF_placement

In [16]:
```
placement['Impressions'] = placement['Impressions'].fillna(0).astype(int)
```

In [17]:
```
placement['Clicks'] = placement['Clicks'].str.replace(',', '').fillna(0).
```

In [18]:
```
placement['CTR'] = placement['CTR'].str.replace('%', '').astype(float)
```

In [19]:
```
placement['Leads'] = placement['Leads'].fillna(0).astype(int)
```

In [20]:
```
placement['CPL'] = placement['Spent'] / placement['Leads']
```

In [21]:
```
placement.info()
placement.head()
```

```
<class 'pandas.DataFrame'>
RangeIndex: 432 entries, 0 to 431
Data columns (total 12 columns):
 #   Column            Non-Null Count  Dtype
---  ------            --------------  -----
 0   Reporting-starts  431 non-null    str
 1   Reporting-ends    431 non-null    str
 2   Ad-name           431 non-null    str
 3   Platform          431 non-null    str
 4   Placement         431 non-null    str
 5   Impressions       432 non-null    int64
 6   Clicks            432 non-null    int64
 7   CPC               431 non-null    float64
 8   CTR               431 non-null    float64
 9   Leads             432 non-null    int64
 10  CPL               324 non-null    float64
 11  Spent             431 non-null    float64
dtypes: float64(4), int64(3), str(5)
memory usage: 40.6 KB
```

Out[21]:

	Reporting-starts	Reporting-ends	Ad-name	Platform	Placement	Impressions	Clicks	CPC
0	2025-01-01	2026-01-01	INST — 1	Instagram	Feed	15	0	0.00
1	2025-01-01	2026-01-01	INST — 1	Instagram	Feed	1423	132	0.03
2	2025-01-01	2026-01-01	INST — 1	Instagram	Feed	19	3	0.01
3	2025-01-01	2026-01-01	INST — 1	Instagram	Explore	69	2	0.07
4	2025-01-01	2026-01-01	INST — 1	Instagram	Profile feed	1	0	0.00

Marketing_Analisis

Age & Gender

In [22]:
```
AGL = age_gander.groupby('Ad-name')['Leads'].sum().sort_values(ascending=
```

In [23]:
```
plt.figure(figsize=(12, 6))

ax = sns.barplot(data=AGL[0:15], y='Leads', x='Ad-name')

for i in ax.containers:
    ax.bar_label(i)

plt.xticks(rotation=45)
plt.show()
```

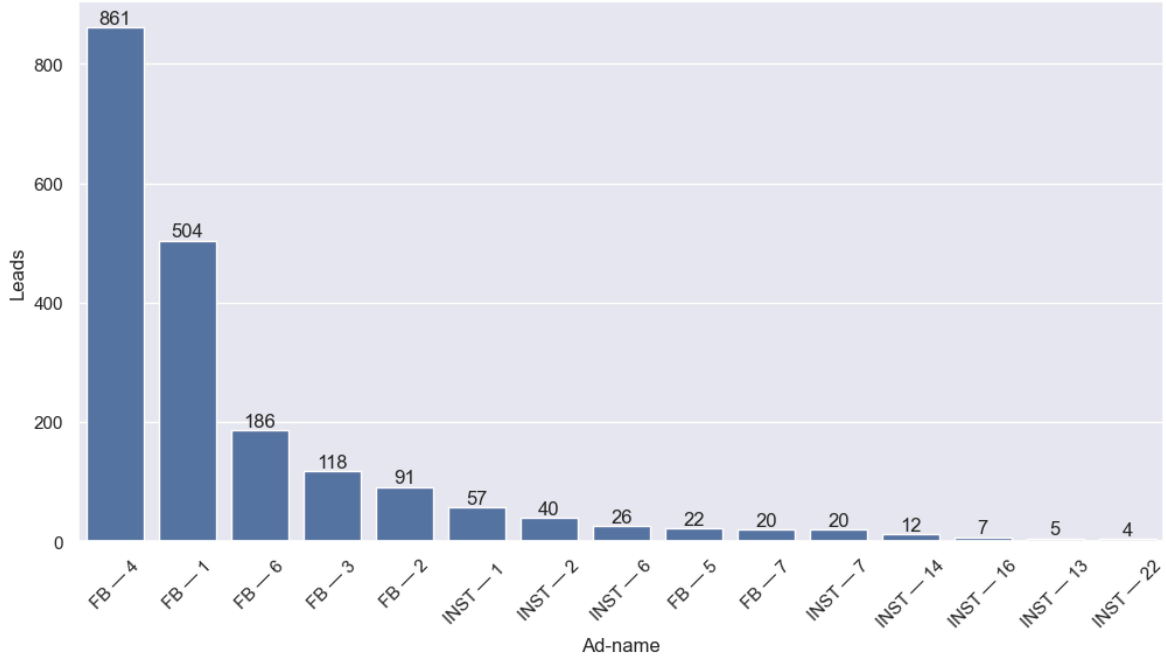

In [24]:
```
AGA = age_gander.groupby('Age')['Leads'].sum().sort_values(ascending=Fals
```

In [25]:
```
plt.figure(figsize=(12, 6))

ax = sns.barplot(data=AGA[0:15], y='Leads', x='Age')

for i in ax.containers:
    ax.bar_label(i)

plt.xticks(rotation=45)
plt.show()
```

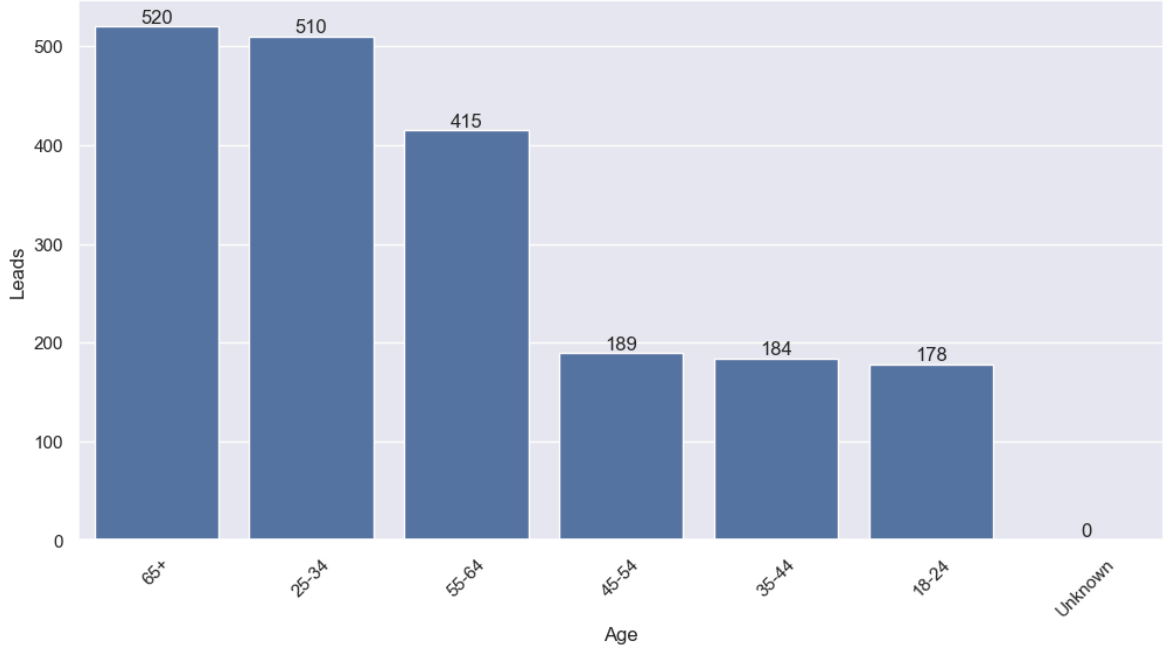

In [26]:
```
AGG = age_gander.groupby('Gender')['Leads'].sum().sort_values(ascending=F
```

In [27]:
```
plt.figure(figsize=(12, 6))

ax = sns.barplot(data=AGG[0:15], y='Leads', x='Gender')
```

```
for i in ax.containers:
    ax.bar_label(i)

plt.xticks(rotation=45)
plt.show()
```

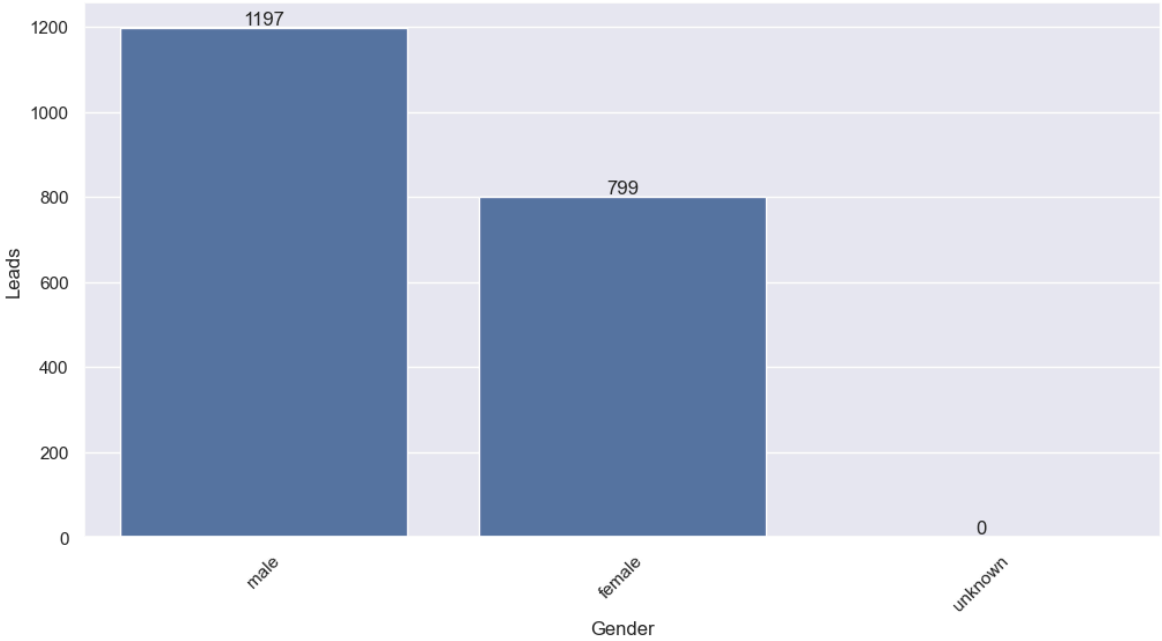

In [28]:
```
AGCTR = age_gander[age_gander['Leads'] > 0][['Ad-name', 'Age', 'Gender',
print(AGCTR)
```

```
     Ad-name    Age  Gender  Leads    CTR
217  INST - 9  35-44  female      1   1.34
218  INST - 9  45-54  female      1   2.32
213  INST - 8    65+    male      1   7.09
196  INST - 7  55-64    male      1  10.74
191  INST - 7  35-44    male      1   7.29
..        ...    ...     ...    ...    ...
33     FB - 1    65+  female     56   1.45
31     FB - 1  55-64    male     98   5.29
25     FB - 1  35-44    male     26   1.22
28     FB - 1  45-54    male     76   2.96
544       NaN    NaN     NaN   1996    NaN

[113 rows x 5 columns]
```

In [29]:
```
AGCTR['Age'].value_counts()
```

Out[29]:
```
Age
18-24    24
25-34    23
65+      17
35-44    16
45-54    16
55-64    16
Name: count, dtype: int64
```

In [30]:
```
AGCTR['Gender'].value_counts()
```

Out[30]:
```
Gender
female    58
male      54
Name: count, dtype: int64
```

In [31]:
```
AG_TOP = (age_gander.groupby('Ad-name')['Leads'].sum().loc[lambda x: x >=
```

In [32]:
```
CTRTOP =  (age_gander[age_gander['Ad-name'].isin(AG_TOP)].groupby(['Ad-na
```

In [33]:
```
plt.figure(figsize=(12, 6))

sns.barplot(data=CTRTOP[CTRTOP['Gender'] != 'unknown'],x='Ad-name',y='CTR

plt.xticks(rotation=45, ha='right')
plt.title('CTR by Campaign and Gender (Top Campaigns by Leads)')
plt.show()
```

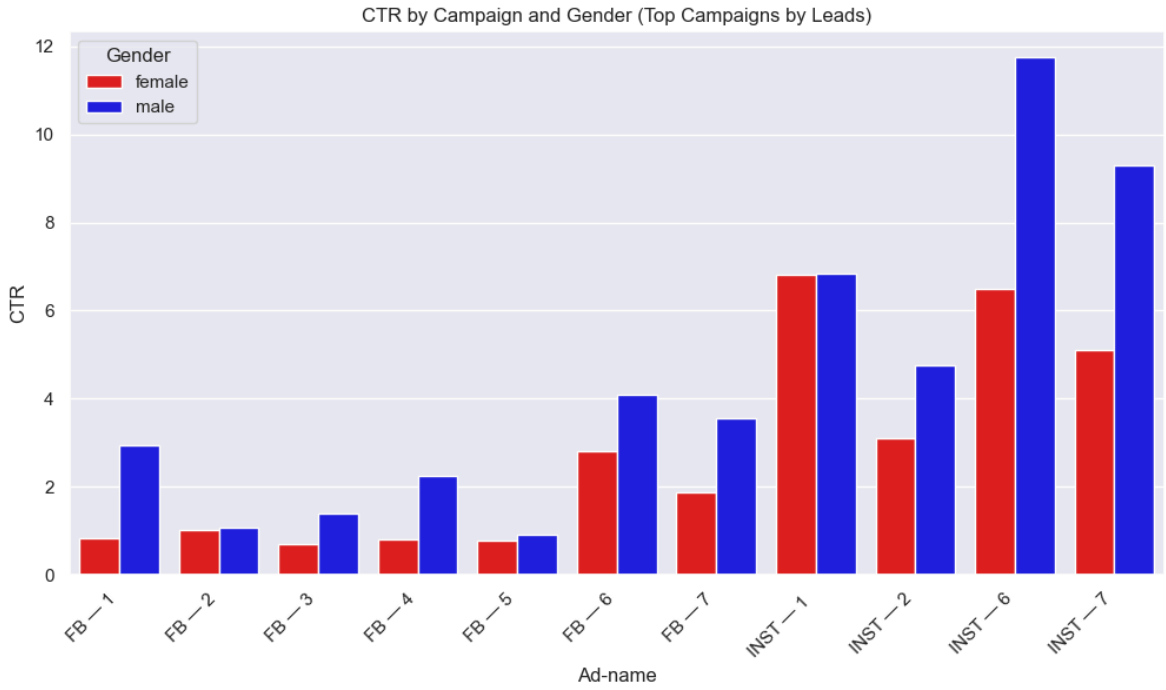

In [34]:
```
AGCPL = age_gander[age_gander['Leads'] > 0][['Ad-name', 'CPL', 'Leads']].
print(AGCPL)
```

```
      Ad-name        CPL  Leads
16   INST – 1   0.160588     17
13   INST – 1   0.195714     21
325  INST – 21  0.200000      1
252  INST – 16  0.200000      4
33      FB – 1  0.207143     56
..         ...       ...    ...
342  INST – 24 11.040000      1
339  INST – 23 12.420000      1
390    FB – 11 13.333333      3
83      FB – 4 19.710000      1
544        NaN       NaN   1996

[113 rows x 3 columns]
```

In [35]:
```
AGL = age_gander[age_gander['Leads'] > 0][['Ad-name', 'CPL', 'Leads', 'Ag
print(AGL)
```

```
       Ad-name       CPL  Leads    Age  Gender
544        NaN       NaN   1996    NaN     NaN
90      FB - 4  0.994008    247    65+    male
87      FB - 4  1.054828    203  55-64    male
77      FB - 4  1.591100    100  25-34  female
31      FB - 1  1.256429     98  55-64    male
..         ...       ...    ...    ...     ...
172   INST - 6  2.160000      1  25-34    male
100     FB - 5  2.070000      1  35-44    male
102     FB - 5  1.600000      1  45-54  female
217   INST - 9  1.650000      1  35-44  female
260  INST - 13  6.910000      1  35-44  female

[113 rows x 5 columns]
```

In [36]:

```
agg = AGL.groupby('Ad-name', as_index=False).agg({'Leads': 'sum','CPL': '

agg = agg.sort_values(by='CPL')

fig, ax1 = plt.subplots(figsize=(14, 7))

sns.barplot(data=agg, x='Ad-name', y='Leads', ax=ax1, color='skyblue')
ax1.set_ylabel('Leads')

for container in ax1.containers:
    ax1.bar_label(container, fmt='%.0f', padding=3)

ax1.set_xticklabels(ax1.get_xticklabels(), rotation=45, ha='right')

ax2 = ax1.twinx()
sns.lineplot(data=agg, x='Ad-name', y='CPL', ax=ax2, color='red', marker=
ax2.set_ylabel('CPL')

legend_elements = [Patch(facecolor='skyblue', label='Leads'),Line2D([0],

ax1.legend(handles=legend_elements, loc='upper left')
plt.title('Campaign Performance: Leads vs CPL')
fig.tight_layout()
plt.show()
```

```
/var/folders/cv/b1w8syyx55v6x9ttzq6gbh0c0000gn/T/ipykernel_2494/424831106
1.py:13: UserWarning: set_ticklabels() should only be used with a fixed nu
mber of ticks, i.e. after set_ticks() or using a FixedLocator.
  ax1.set_xticklabels(ax1.get_xticklabels(), rotation=45, ha='right')
```

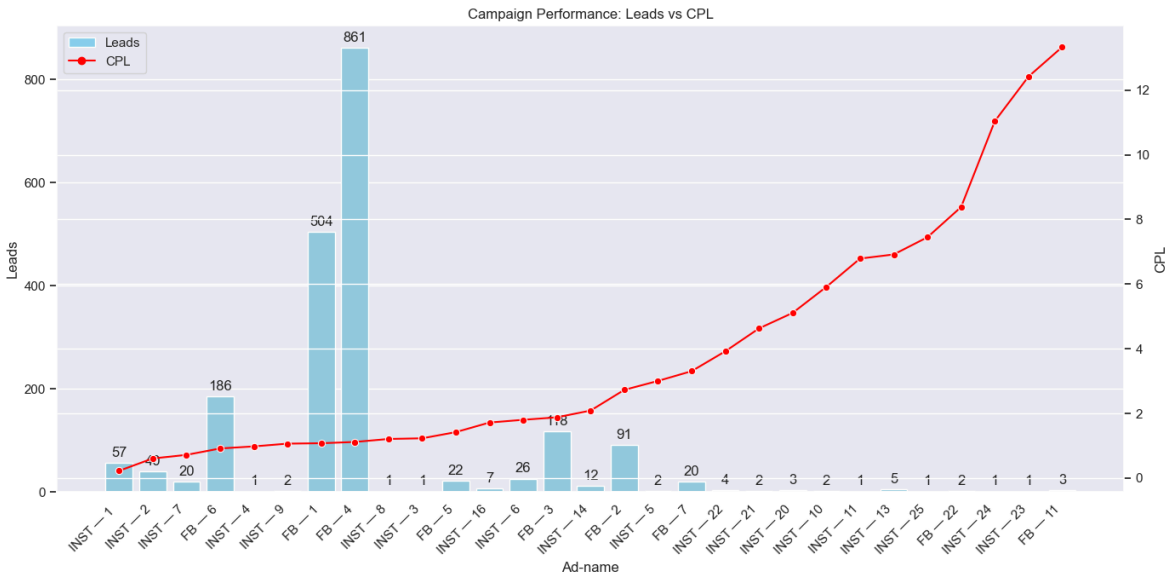

In [37]:
```
agg = AGL.groupby('Age', as_index=False).agg({'Leads': 'sum','CPL': 'medi

agg = agg.sort_values(by='CPL')

fig, ax1 = plt.subplots(figsize=(14, 7))

sns.barplot(data=agg, x='Age', y='Leads', ax=ax1, color='skyblue')
ax1.set_ylabel('Leads')

for container in ax1.containers:
    ax1.bar_label(container, fmt='%.0f', padding=3)

ax1.set_xticklabels(ax1.get_xticklabels(), rotation=45, ha='right')

ax2 = ax1.twinx()
sns.lineplot(data=agg, x='Age', y='CPL', ax=ax2, color='red', marker='o')
ax2.set_ylabel('CPL')

legend_elements = [Patch(facecolor='skyblue', label='Leads'),Line2D([0],

ax1.legend(handles=legend_elements, loc='upper left')
plt.title('Campaign Performance: Leads vs CPL')
fig.tight_layout()
plt.show()
```

```
/var/folders/cv/b1w8syyx55v6x9ttzq6gbh0c0000gn/T/ipykernel_2494/472898280.
py:13: UserWarning: set_ticklabels() should only be used with a fixed numb
er of ticks, i.e. after set_ticks() or using a FixedLocator.
  ax1.set_xticklabels(ax1.get_xticklabels(), rotation=45, ha='right')
```

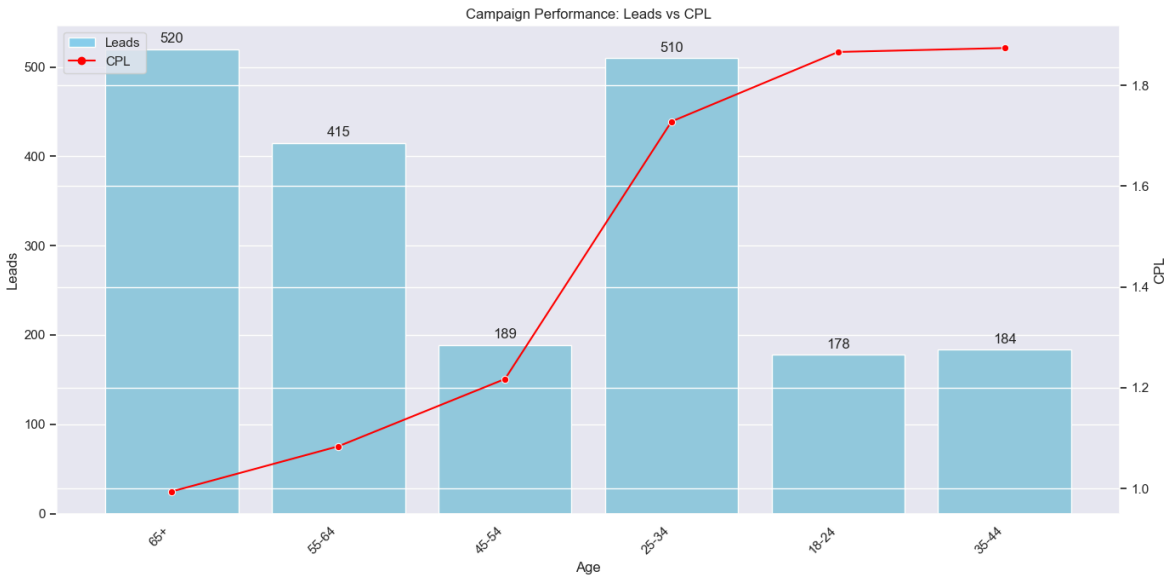

In [38]:
```
plt.figure(figsize=(14, 6))

sns.heatmap(AGL.groupby(['Age', 'Ad-name'])['Leads'].sum().unstack(fill_v
    annot=True,
    fmt='.0f',
    cmap='Blues'
)

plt.title('Leads by Age and Campaign')
plt.xlabel('Ad-name')
plt.ylabel('Age')

plt.show()
```

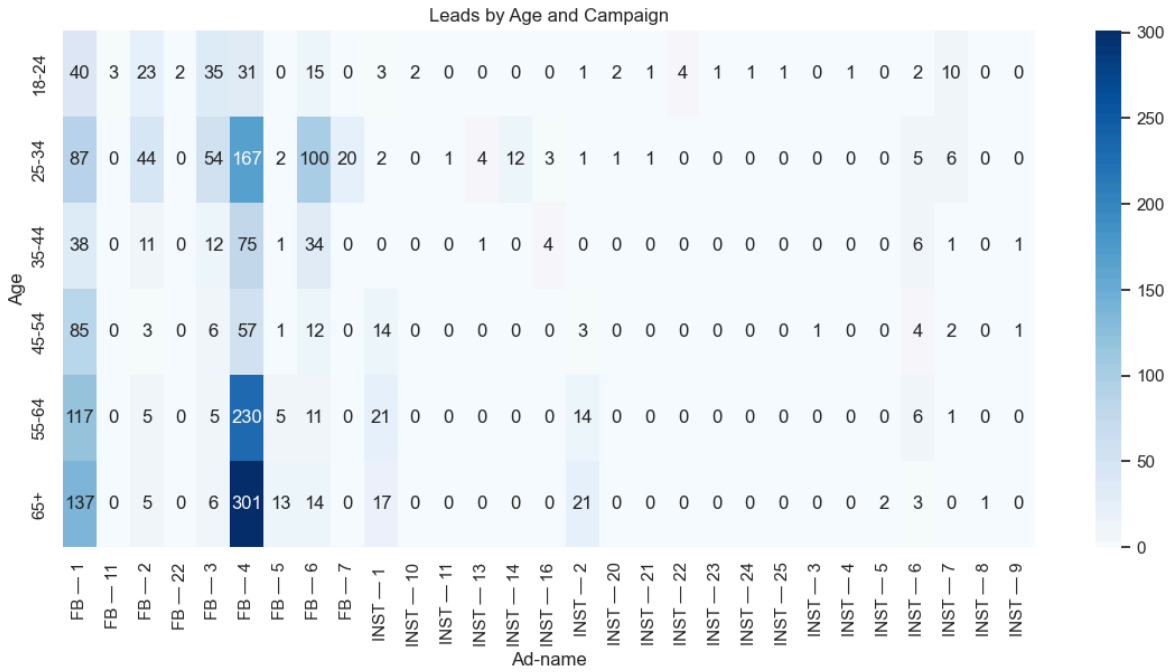

In [39]:
```
agg = AGL.groupby('Gender', as_index=False).agg({'Leads': 'sum','CPL': 'm

agg = agg.sort_values(by='CPL')

fig, ax1 = plt.subplots(figsize=(14, 7))

sns.barplot(data=agg, x='Gender', y='Leads', ax=ax1, color='skyblue')
```

```
ax1.set_ylabel('Leads')

for container in ax1.containers:
    ax1.bar_label(container, fmt='%.0f', padding=3)

ax1.set_xticklabels(ax1.get_xticklabels(), rotation=45, ha='right')

ax2 = ax1.twinx()
sns.lineplot(data=agg, x='Gender', y='CPL', ax=ax2, color='red', marker='
ax2.set_ylabel('CPL')

legend_elements = [Patch(facecolor='skyblue', label='Leads'),Line2D([0],

ax1.legend(handles=legend_elements, loc='upper left')
plt.title('Campaign Performance: Leads vs CPL')
fig.tight_layout()
plt.show()
```

```
/var/folders/cv/b1w8syyx55v6x9ttzq6gbh0c0000gn/T/ipykernel_2494/309137800
9.py:13: UserWarning: set_ticklabels() should only be used with a fixed nu
mber of ticks, i.e. after set_ticks() or using a FixedLocator.
  ax1.set_xticklabels(ax1.get_xticklabels(), rotation=45, ha='right')
```

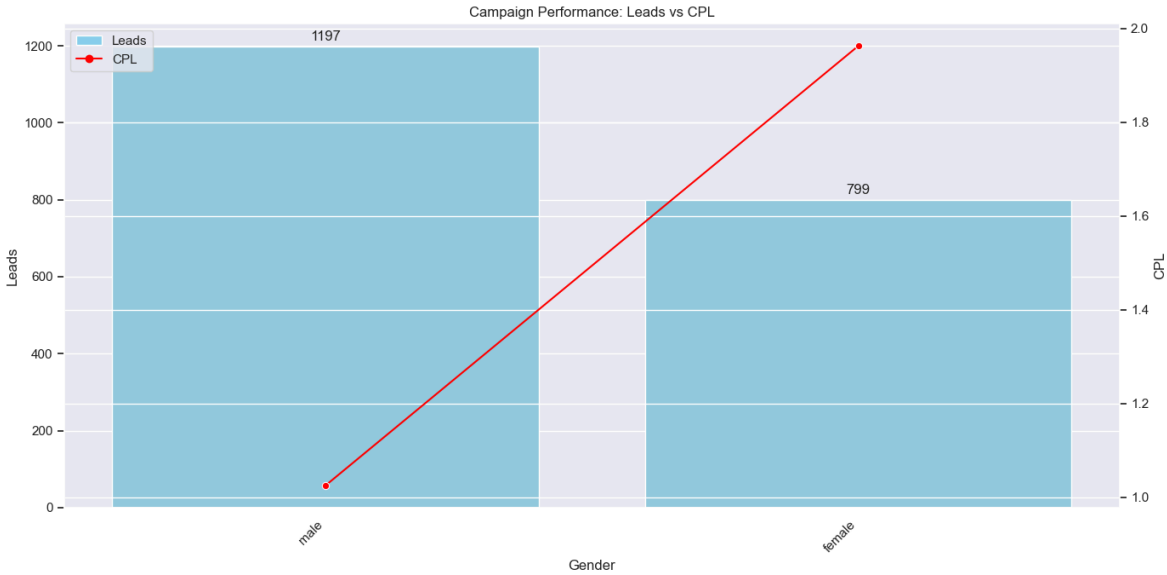

In [40]:
```
plt.figure(figsize=(14, 6))

sns.heatmap(AGL.groupby(['Gender', 'Ad-name'])['Leads'].sum().unstack(fil
    annot=True,
    fmt='.0f',
    cmap='Blues'
)

plt.title('Leads by Gender and Campaign')
plt.xlabel('Ad-name')
plt.ylabel('Gender')

plt.show()
```

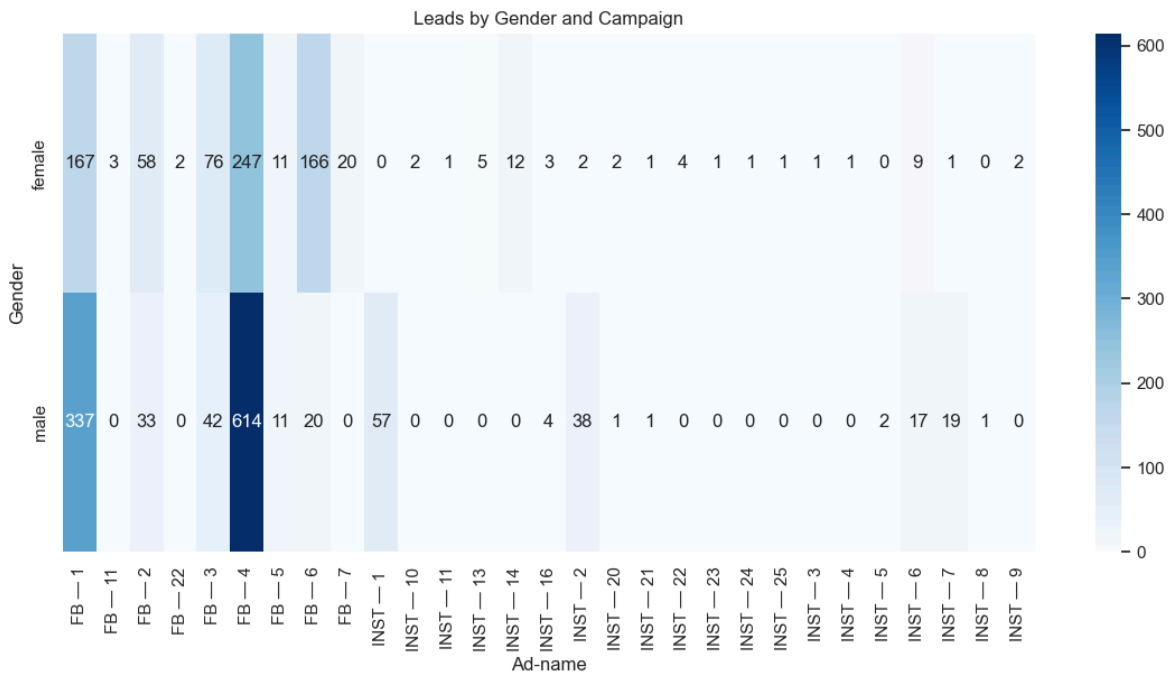

Countries

In [41]:
```
C_TOP = (countries.groupby('Ad-name')['Leads'].sum().loc[lambda x: x>=20]
print(C_TOP)
```

```
Index(['FB – 1', 'FB – 2', 'FB – 3', 'FB – 4', 'FB – 5', 'FB – 6', 'FB –
7',
       'INST – 1 ', 'INST – 2', 'INST – 6', 'INST – 7'],
      dtype='str', name='Ad-name')
```

In [42]:
```
CL = (countries[countries['Ad-name'].isin(C_TOP)].groupby('Country')['Lea
print(CL)
```

```
    Country  Leads
0        CO    469
1        CV    331
2        AL    192
3        MX    177
4        UA    132
..      ...    ...
58       LV      0
59       LU      0
60       IS      0
61       LI      0
62  unknown      0

[63 rows x 2 columns]
```

In [43]:
```
plt.figure(figsize=(12, 6))

ax = sns.barplot(data=CL[0:15], y='Leads', x='Country', errorbar=None)

for i in ax.containers:
    ax.bar_label(i)

plt.xticks(rotation=45)
plt.show()
```

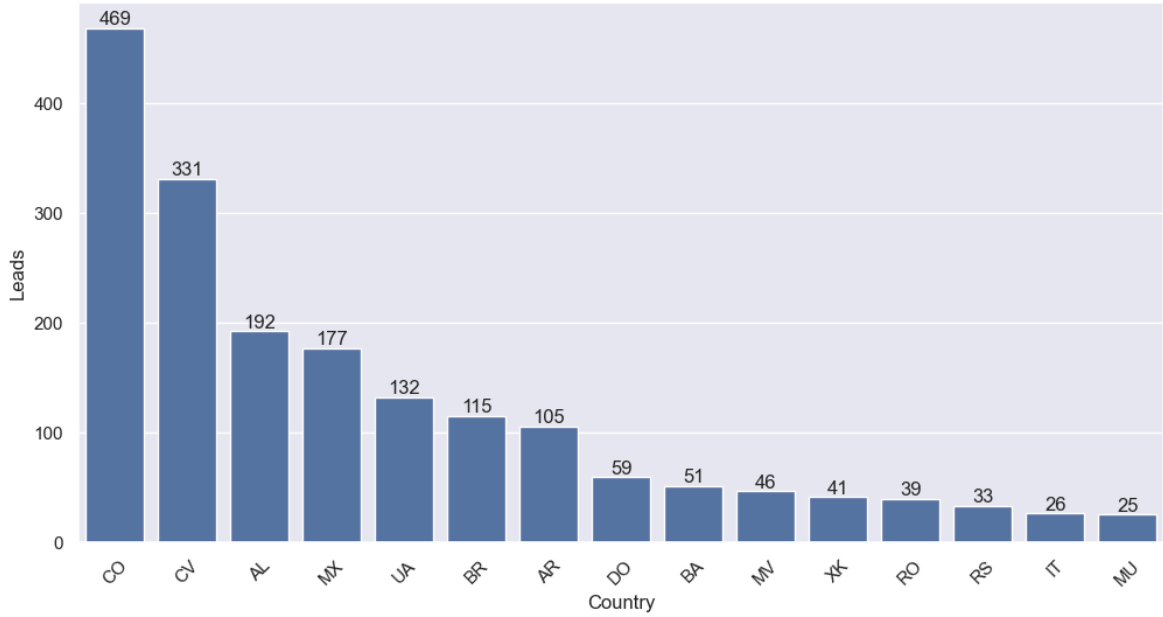

In [44]:
```
CCTR = (countries[countries['Ad-name'].isin(C_TOP)][['Ad-name', 'Country'
```

In [45]:
```
CCTR['Country'].value_counts()
```

Out[45]:
```
Country
IT         10
PT         10
US         10
CA         10
GB         10
           ..
unknown     3
PE          2
LI          2
TR          1
PA          1
Name: count, Length: 63, dtype: int64
```

In [46]:
```
CCTR_mean = CCTR.groupby('Country')['CTR'].mean().reset_index()
print(CCTR_mean)
```

```
    Country        CTR
0        AL   5.178571
1        AR   2.281429
2        AT   0.904000
3        AU   2.862000
4        BA   4.868571
..      ...        ...
58       TR   5.700000
59       UA   4.401111
60       US   2.726000
61       XK   6.330000
62  unknown  16.666667

[63 rows x 2 columns]
```

In [47]:
```
ax = sns.barplot(data=CCTR_mean.sort_values(by='CTR', ascending=False)[0:
for i in ax.containers:
    ax.bar_label(i, fmt='%.2f')
```

```
plt.xticks(rotation=45)
plt.show()
```

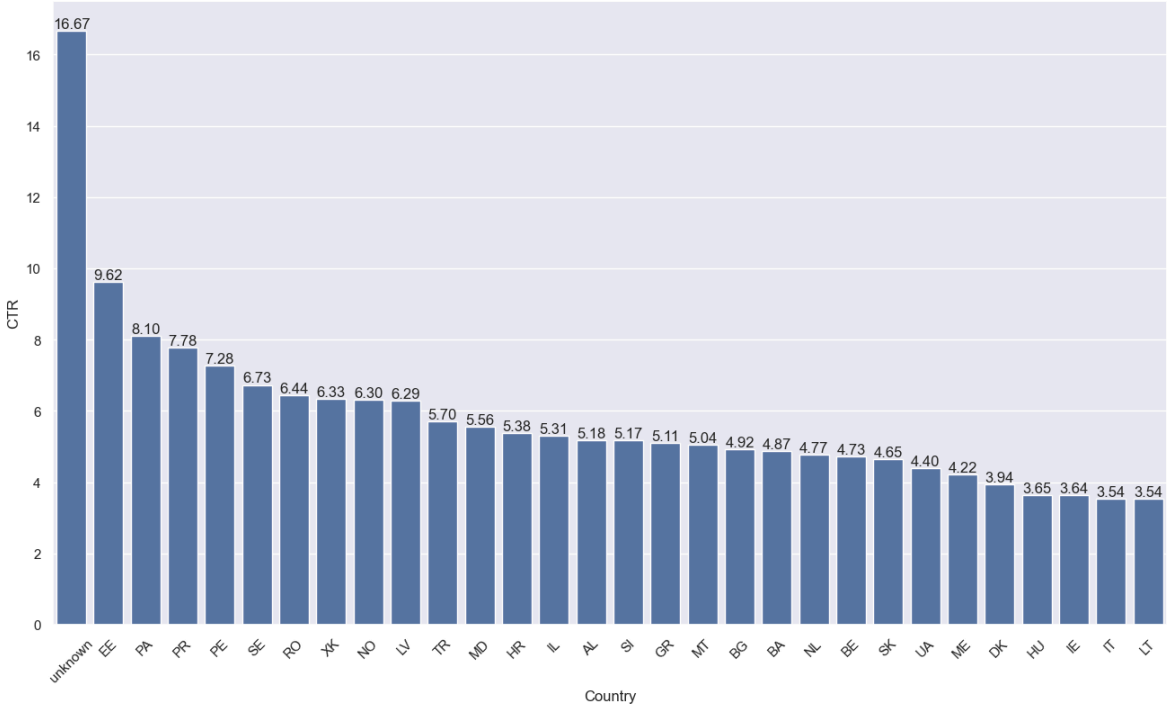

In [48]:

```
agg = CCTR.groupby('Country', as_index=False).agg({'Leads': 'sum','Spent'

agg = agg[agg['Leads'] > 0]
agg['CPL'] = agg['Spent'] / agg['Leads']

agg = agg.sort_values(by='CPL')

fig, ax1 = plt.subplots(figsize=(14, 7))

sns.barplot(data=agg, x='Country', y='Leads', ax=ax1, color='skyblue')
ax1.set_ylabel('Leads')

for container in ax1.containers:
    ax1.bar_label(container, fmt='%.0f', padding=3)

ax1.set_xticklabels(ax1.get_xticklabels(), rotation=45, ha='right')

ax2 = ax1.twinx()
sns.lineplot(data=agg, x='Country', y='CPL', ax=ax2, color='red', marker=
ax2.set_ylabel('CPL')

legend_elements = [Patch(facecolor='skyblue', label='Leads'),Line2D([0],

ax1.legend(handles=legend_elements, loc='upper left')
plt.title('Campaign Performance: Leads vs CPL')
fig.tight_layout()
plt.show()
```

```
/var/folders/cv/b1w8syyx55v6x9ttzq6gbh0c0000gn/T/ipykernel_2494/227219853
5.py:16: UserWarning: set_ticklabels() should only be used with a fixed nu
mber of ticks, i.e. after set_ticks() or using a FixedLocator.
  ax1.set_xticklabels(ax1.get_xticklabels(), rotation=45, ha='right')
```

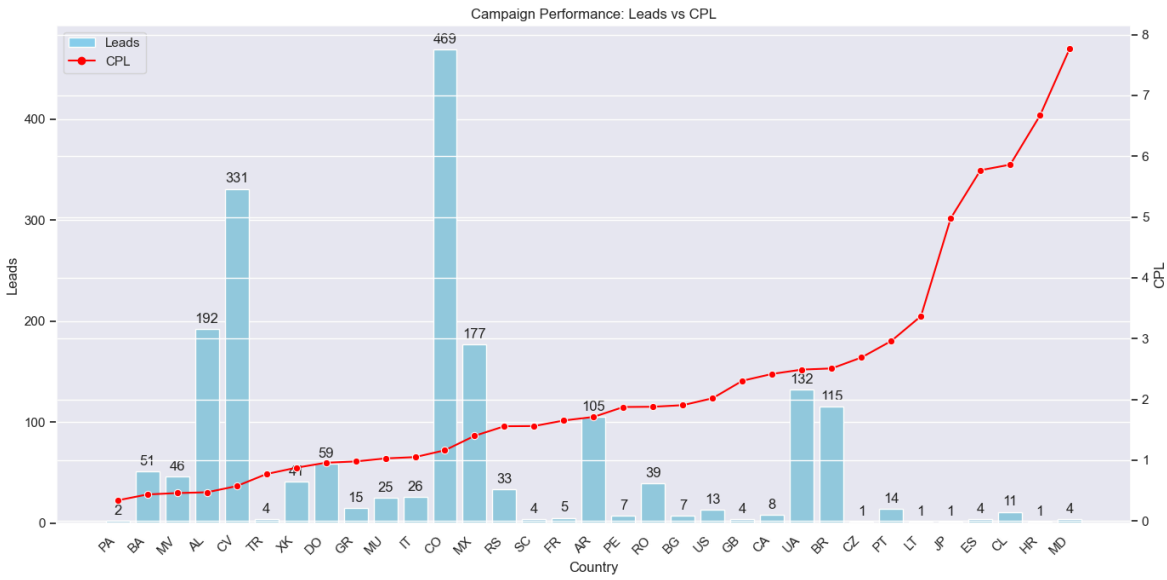

In [49]:
```
pivot = (CCTR.groupby(['Country', 'Ad-name'])['Leads'].sum().unstack())
pivot = pivot[pivot.sum(axis=1) > 0]


plt.figure(figsize=(14, 8))

sns.heatmap(
    pivot,
    annot=True,
    fmt='.0f',
    cmap='Blues',
    mask=(pivot == 0)
)

plt.title('Leads by Country and Campaign')
plt.xlabel('Ad-name')
plt.ylabel('Country')

plt.show()
```

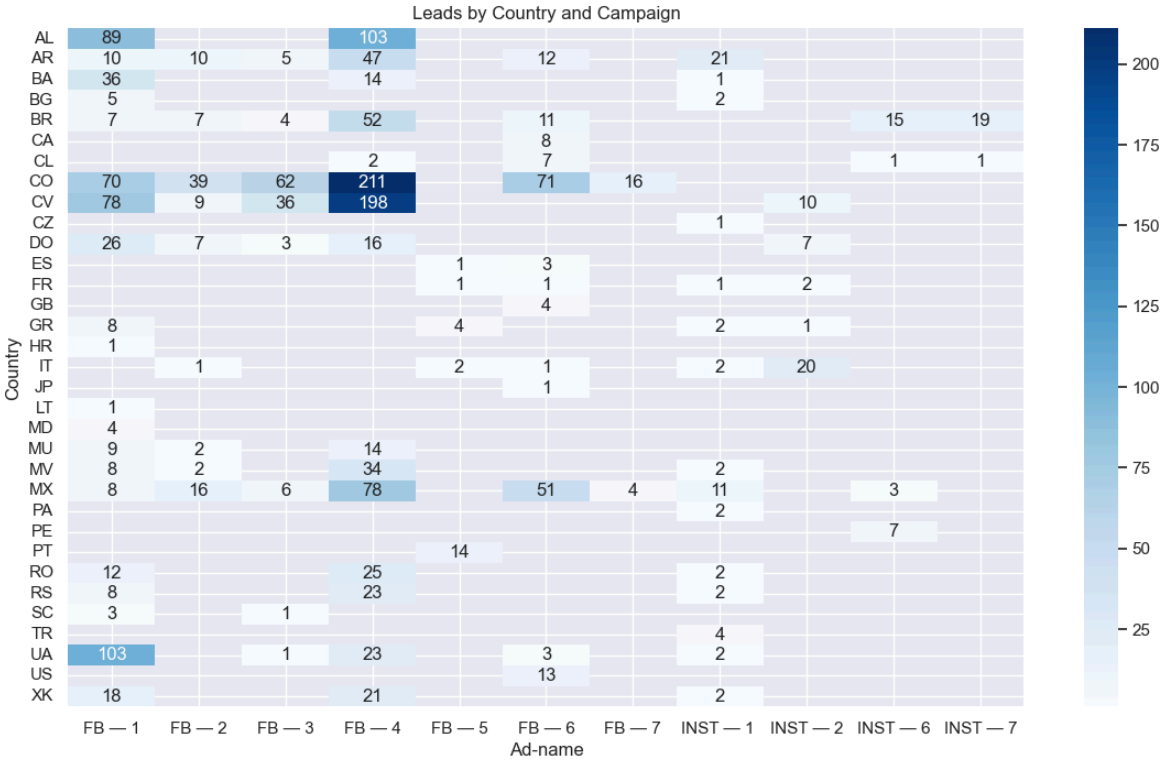

Platform and Placement

In [87]:
```
PL = (placement[placement['Ad-name'].isin(C_TOP)][['Ad-name', 'Platform',
print(PL)
```

```
   Ad-name   Platform          Placement  Leads   CTR   Spent       CPL
89  FB — 4   Facebook               Feed    354  4.49  393.63  1.111949
14  FB — 1   Facebook               Feed    201  6.67  267.72  1.331940
94  FB — 4   Facebook        Marketplace    188  3.21  273.24  1.453404
92  FB — 4   Facebook    In-stream reels    133  1.09  123.15  0.925940
17  FB — 1   Facebook    In-stream reels     98  1.07   65.73  0.670714
..     ...        ...                ...    ...   ...     ...       ...
76  FB — 3  Instagram       Explore home      0  0.00    0.00       NaN
75  FB — 3  Instagram            Explore      0  0.00    0.01       inf
74  FB — 3  Instagram               Feed      0  0.00    0.00       NaN
71  FB — 3   Facebook  Feed: video feeds      0  0.00    0.00       NaN
96  FB — 4   Facebook     Search results      0  0.44    0.48       inf

[193 rows x 7 columns]
```

In [83]:
```
PL_sum = PL.groupby('Platform')['Leads'].sum().reset_index()
PL_sum = PL_sum[PL_sum ['Leads'] != 0]
print(PL_sum)
```

```
   Platform  Leads
1  Facebook   1695
2 Instagram    227
3 Messenger     23
```

In [84]:
```
plt.figure(figsize=(12, 6))

ax = sns.barplot(data=PL_sum, y='Leads', x='Platform', errorbar = None)

for i in ax.containers:
    ax.bar_label(i)
```

```
plt.xticks(rotation=45)
plt.show()
```

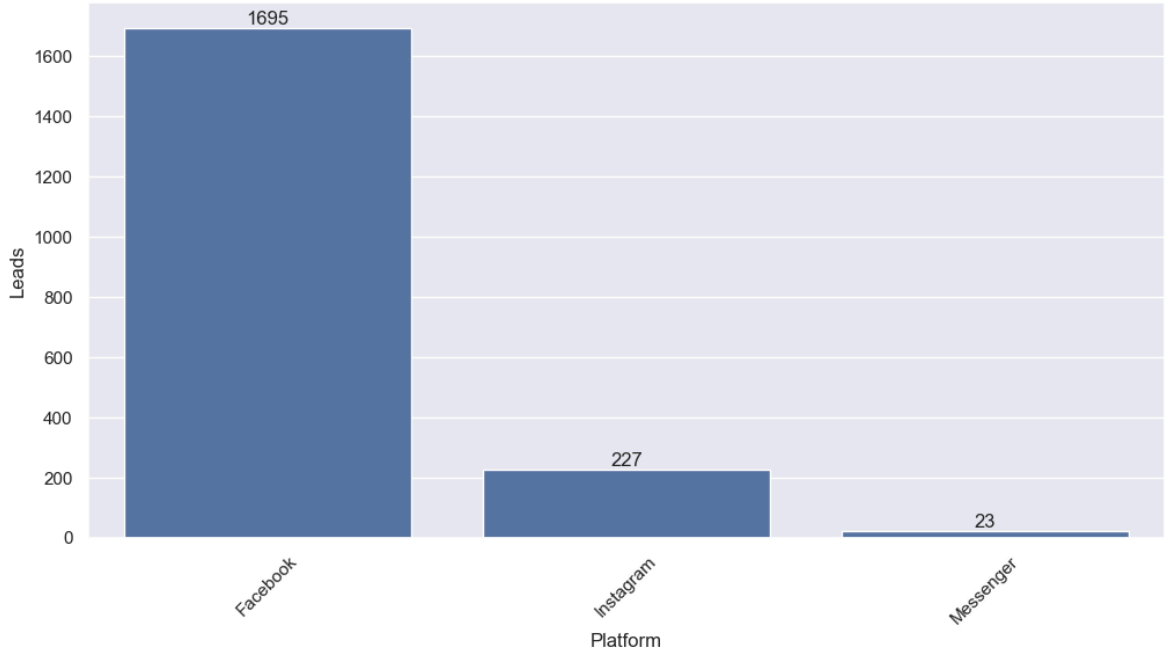

In [85]:
```
PL_sum_placement = PL.groupby('Placement')['Leads'].sum().reset_index()
PL_sum_placement = PL_sum_placement[PL_sum_placement['Leads'] != 0]
```

In [86]:
```
plt.figure(figsize=(12, 6))

ax = sns.barplot(data=PL_sum_placement.sort_values(by='Leads', ascending=

for i in ax.containers:
    ax.bar_label(i)

plt.xticks(rotation=45)
plt.show()
```

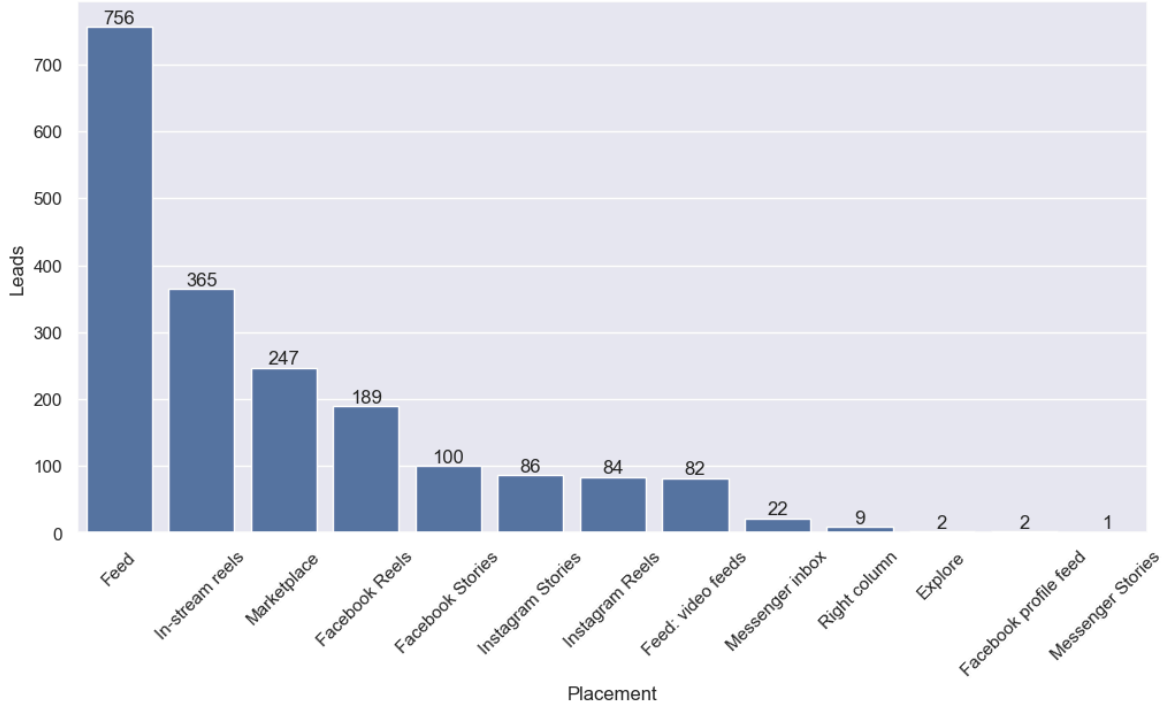

In [55]:
```
PL_mean = PL.groupby('Placement')['CTR'].mean().sort_values(ascending=Fal
print(PL_mean)
```

```
                Placement       CTR
0       Feed: video feeds  4.867500
1                    Feed  3.690000
2         Instagram Reels  3.519286
3        Facebook Stories  3.311667
4                 Explore  2.900000
5             Marketplace  2.083333
6         In-stream reels  1.951429
7       Instagram Stories  1.888750
8          Facebook Reels  1.815714
9   Facebook profile feed  1.475000
10      Messenger Stories  0.330000
11           Right column  0.293333
12        Messenger inbox  0.126667
```

In [56]:
```
ax = sns.barplot(data=PL_mean, x='Placement', y='CTR', errorbar=None)
for i in ax.containers:
    ax.bar_label(i, fmt='%.2f')
plt.xticks(rotation=45)
plt.show()
```

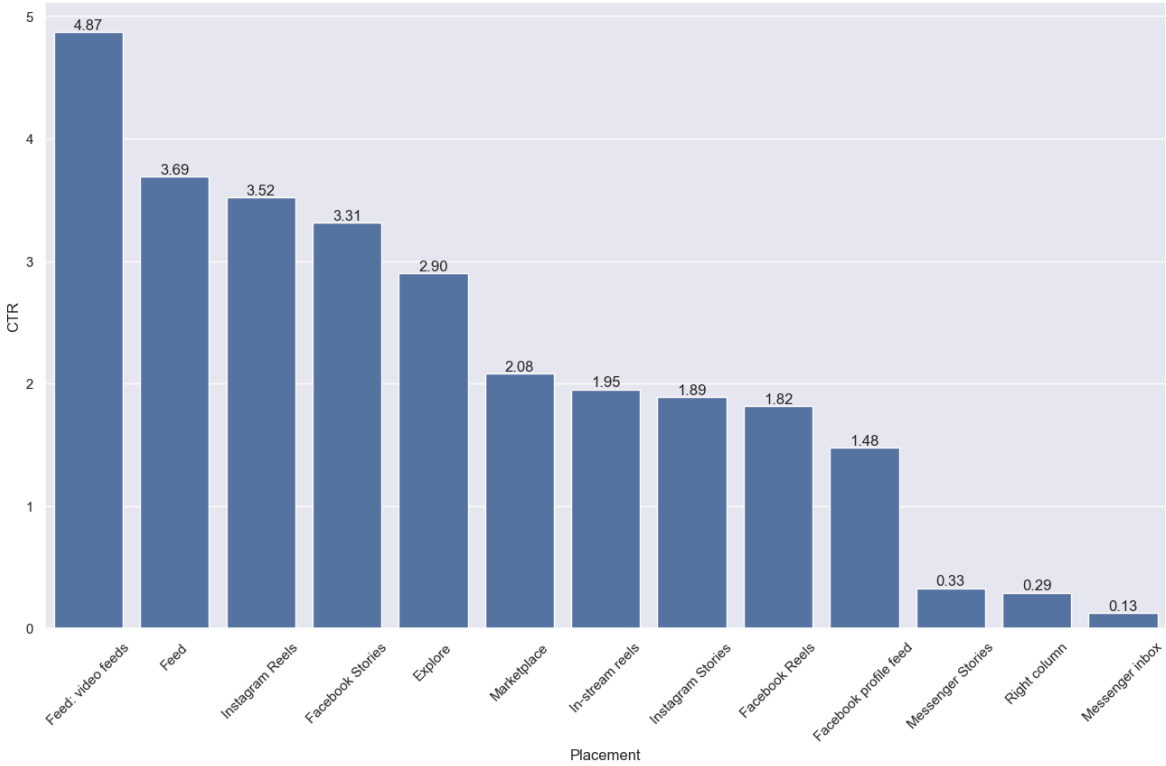

In [88]:
```
agg = (PL.groupby('Placement', as_index=False).agg({'Leads': 'sum','Spent

agg = agg[agg['Leads'] > 0]
agg['CPL'] = agg['Spent'] / agg['Leads']
agg = agg.sort_values(by='CPL')

fig, ax1 = plt.subplots(figsize=(14, 7))

sns.barplot(data=agg, x='Placement', y='Leads', ax=ax1, color='skyblue')
ax1.set_ylabel('Leads')

for container in ax1.containers:
```

```
    ax1.bar_label(container, fmt='%.0f', padding=3)

plt.setp(ax1.get_xticklabels(), rotation=45, ha='right')

ax2 = ax1.twinx()
sns.lineplot(data=agg, x='Placement', y='CPL', ax=ax2, color='red', marke
ax2.set_ylabel('CPL')

legend_elements = [
    Patch(facecolor='skyblue', label='Leads'),
    Line2D([0], [0], color='red', marker='o', label='CPL')
]

ax1.legend(handles=legend_elements, loc='upper left')
plt.title('Placement Performance: Leads vs CPL')
fig.tight_layout()
plt.show()
```

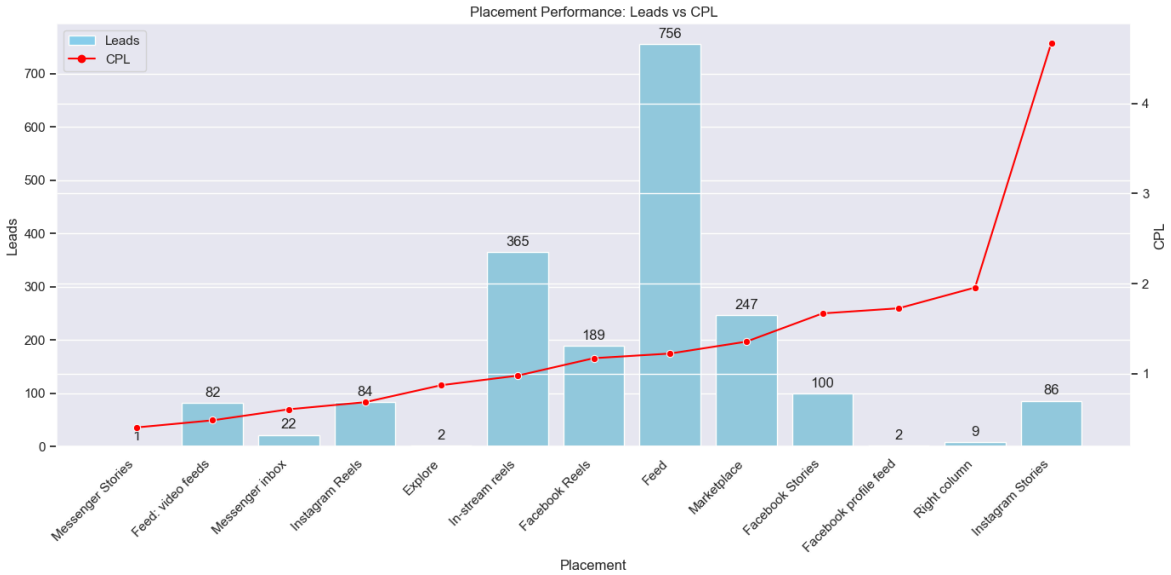

In [90]:

```
plt.figure(figsize=(12, 8))

sns.heatmap(PL.groupby(['Placement', 'Ad-name'])['Leads'].sum().unstack(f
    annot=True,
    fmt='.0f',
    cmap='Blues'
)

plt.title('Leads by Placement and Campaign')
plt.xlabel('Ad-name')
plt.ylabel('Placement')

plt.show()
```

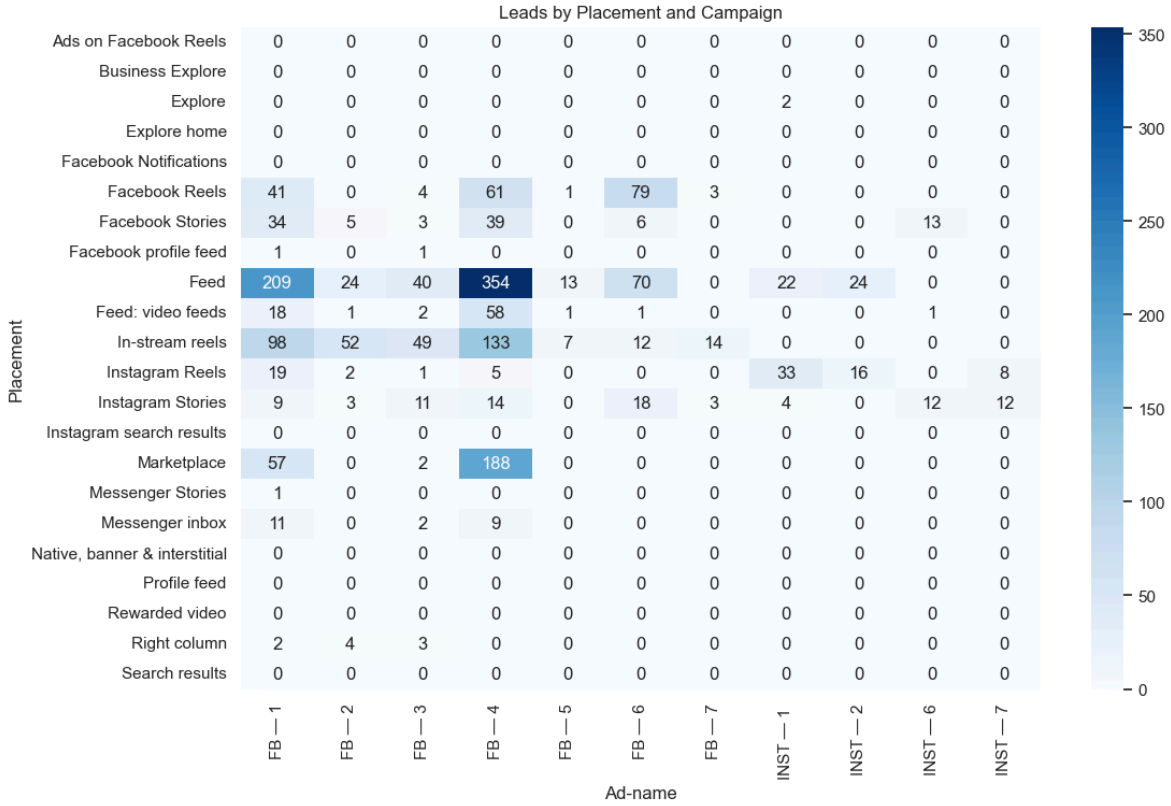
Leads by Placement and Campaign
Placement
Ad-name
Ads on Facebook Reels 0 0 0 0 0 0 0 0 0 0 0
Business Explore 0 0 0 0 0 0 0 0 0 0 0
Explore 0 0 0 0 0 0 0 2 0 0 0
Explore home 0 0 0 0 0 0 0 0 0 0 0
Facebook Notifications 0 0 0 0 0 0 0 0 0 0 0
Facebook Reels 41 0 4 61 1 79 3 0 0 0 0
Facebook Stories 34 5 3 39 0 6 0 0 0 13 0
Facebook profile feed 1 0 1 0 0 0 0 0 0 0 0
Feed 209 24 40 354 13 70 0 22 24 0 0
Feed: video feeds 18 1 2 58 1 1 0 0 0 1 0
In-stream reels 98 52 49 133 7 12 14 0 0 0 0
Instagram Reels 19 2 1 5 0 0 0 33 16 0 8
Instagram Stories 9 3 11 14 0 18 3 4 0 12 12
Instagram search results 0 0 0 0 0 0 0 0 0 0 0
Marketplace 57 0 2 188 0 0 0 0 0 0 0
Messenger Stories 1 0 0 0 0 0 0 0 0 0 0
Messenger inbox 11 0 2 9 0 0 0 0 0 0 0
Native, banner & interstitial 0 0 0 0 0 0 0 0 0 0 0
Profile feed 0 0 0 0 0 0 0 0 0 0 0
Rewarded video 0 0 0 0 0 0 0 0 0 0 0
Right column 2 4 3 0 0 0 0 0 0 0 0
Search results 0 0 0 0 0 0 0 0 0 0 0
FB — 1
FB — 2
FB — 3
FB — 4
FB — 5
FB — 6
FB — 7
INST — 1
INST — 2
INST — 6
INST — 7
350
300
250
200
150
100
50
0