



1download git and setup

2search for GitHub

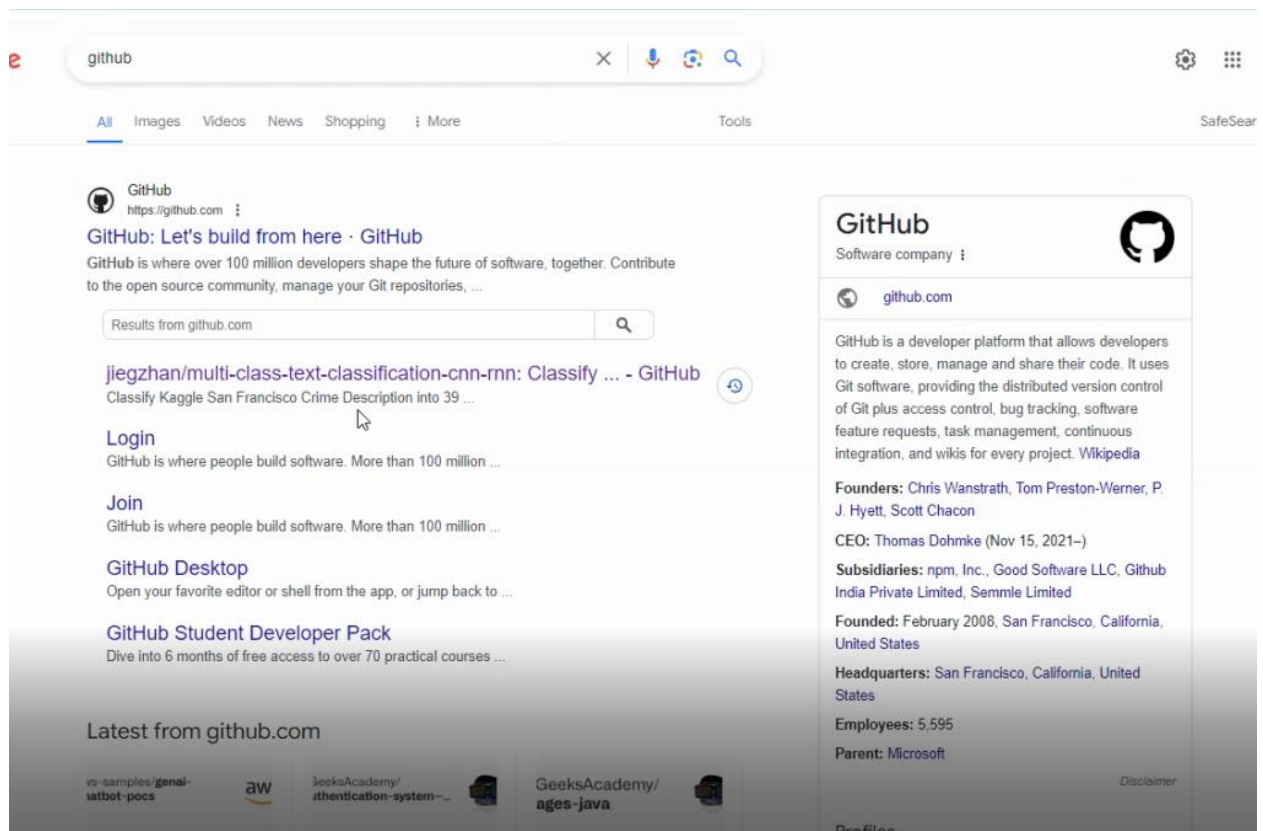

3login /signup with google

4 create new repository

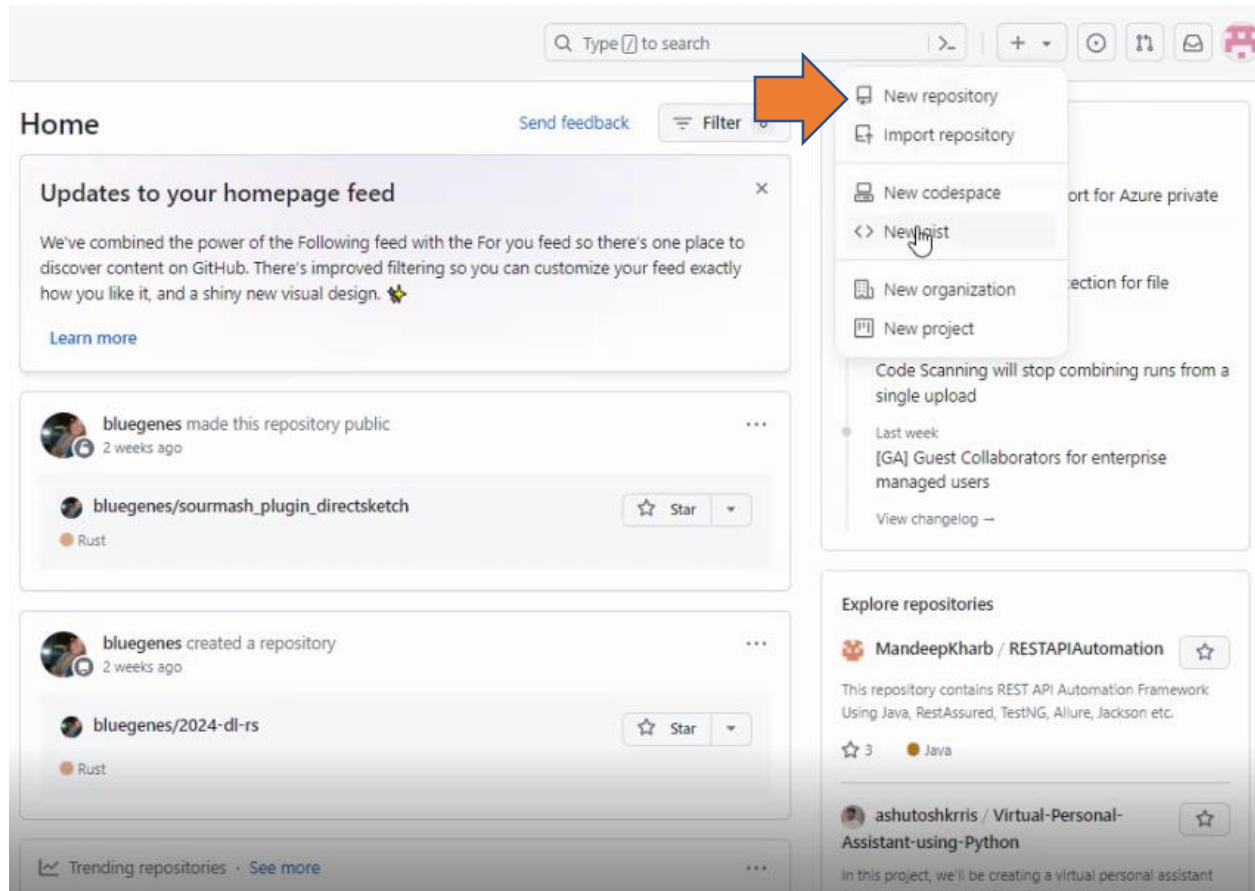

5 enter name of it ,choose to make it public ,add Readme file

Q Type [?](#) to search




Create a new repository

A repository contains all project files, including the revision history. Already have a project repository elsewhere? [Import a repository.](#)

Required fields are marked with an asterisk (*).

Owner *

 norayehia ▾

Repository name *

/

Great repository names are short and memorable. Need inspiration? How about [upgraded-guacamole](#) ?

Description (optional)

☒  **Public**

Anyone on the internet can see this repository. You choose who can commit.

☐  **Private**

You choose who can see and commit to this repository.

Initialize this repository with:

☐ **Add a README file**

This is where you can write a long description for your project. [Learn more about READMEs.](#)

Add .gitignore


.gitignore template: **None** ▾

Choose which files not to track from a list of templates. [Learn more about ignoring files.](#)

Choose a license

License: **None** ▾

A license tells others what they can and can't do with your code. [Learn more about licenses.](#)

 You are creating a public repository in your personal account.

Create repository

Required fields are marked with an asterisk (*).

Owner * norayehia / Repository name * githubintro
githubintro is available.

Great repository names are short and memorable. Need inspiration? How about [upgraded-guacamole](#) ?

Description (optional)

☒ **Public**
Anyone on the Internet can see this repository. You choose who can commit.

☐ **Private**
You choose who can see and commit to this repository.

Initialize this repository with:

☒ **Add a README file**
This is where you can write a long description for your project. [Learn more about READMEs.](#)

Add .gitignore
.gitignore template: None

Choose which files not to track from a list of templates. [Learn more about ignoring files.](#)

Choose a license
License: None

A license tells others what they can and can't do with your code. [Learn more about licenses.](#)



This will set **main** as the default branch. Change the default name in your [settings](#).

You are creating a public repository in your personal account.


[Create repository](#)


Output

You can also newfile,newfolder to upload online

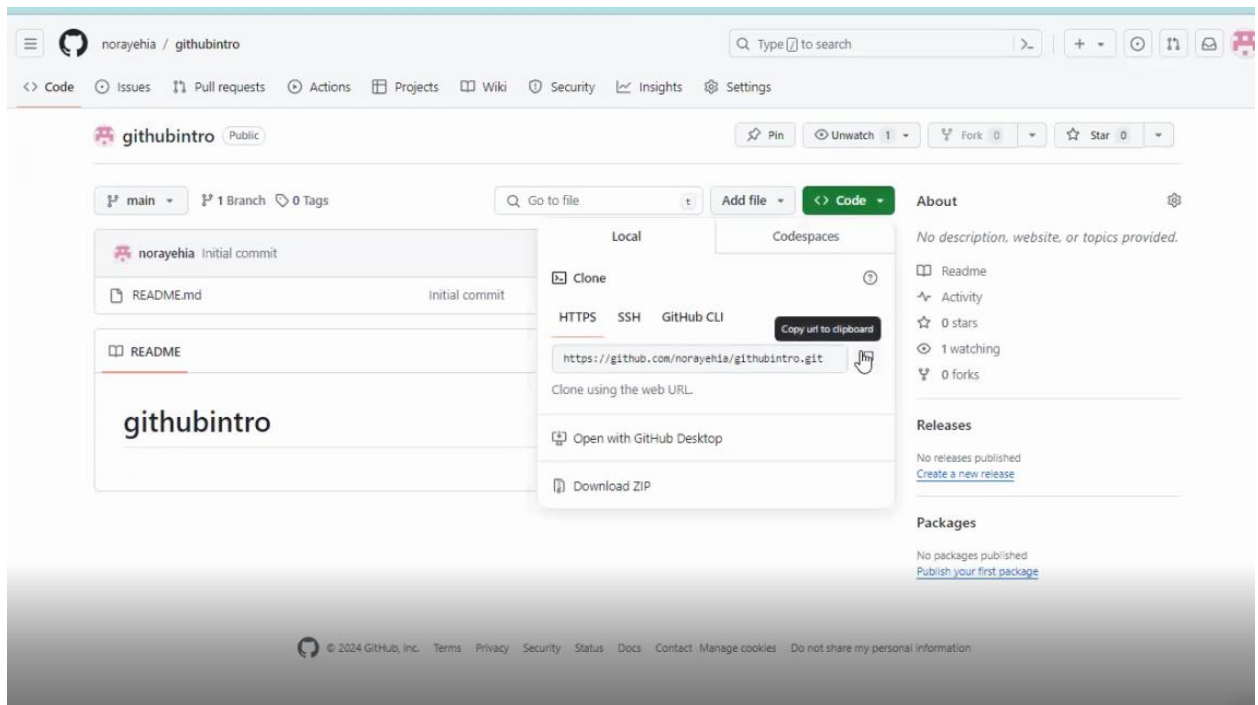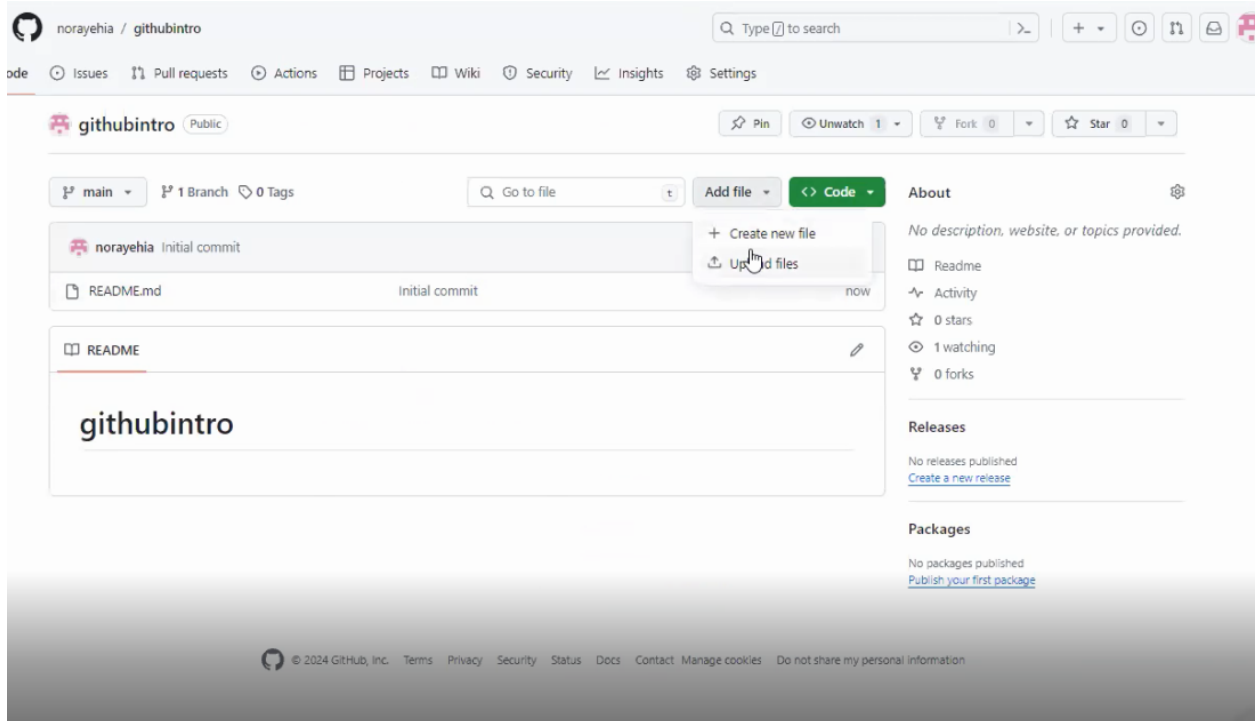


.....the above is online, then we want to make the above in our device offline عايزين نخطه عندنا, **make folder in download** or any other location to put our file in it

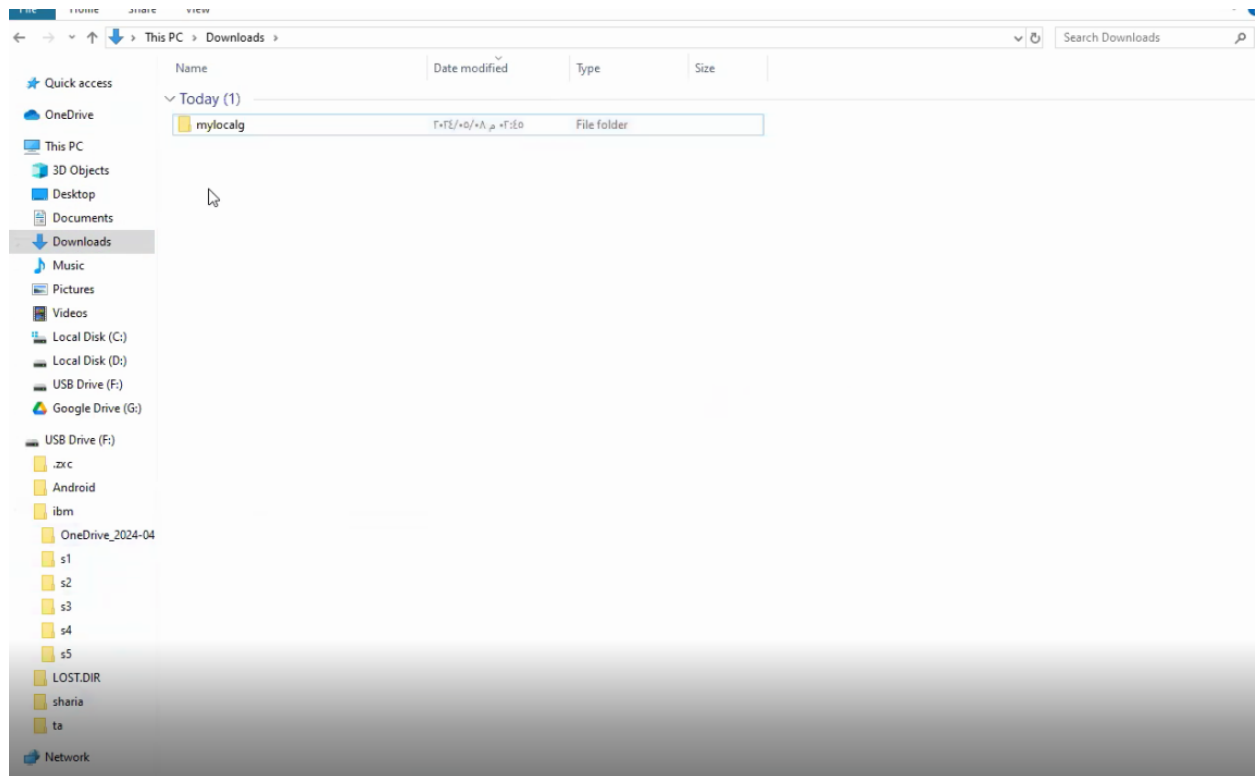

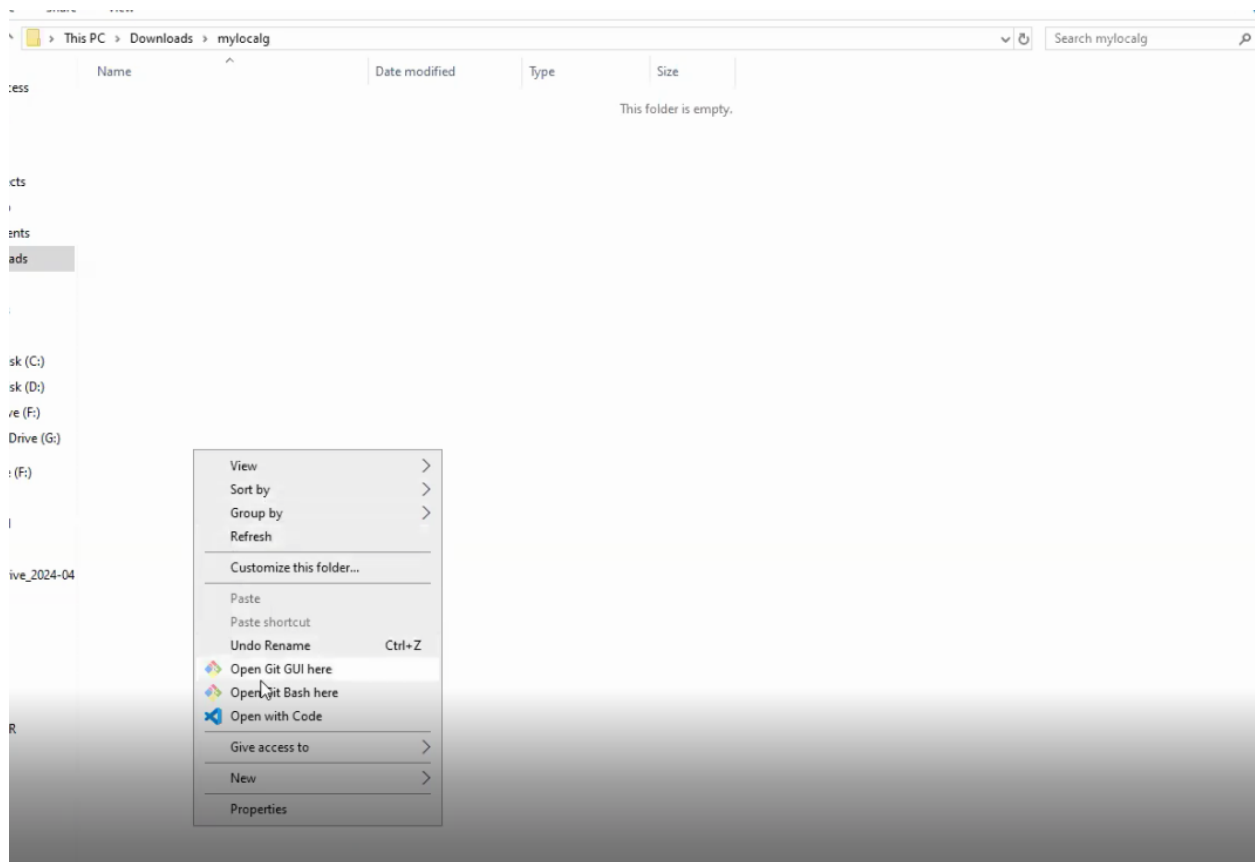


Then clone the link of

`git clone https://github.com/norayehia/githubintro.git`

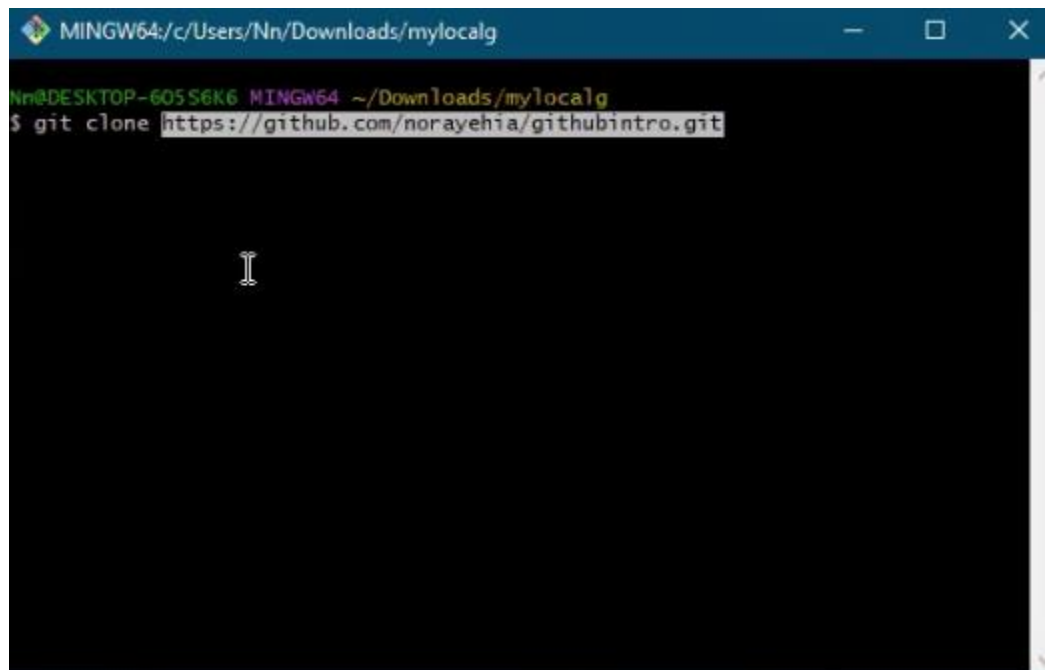
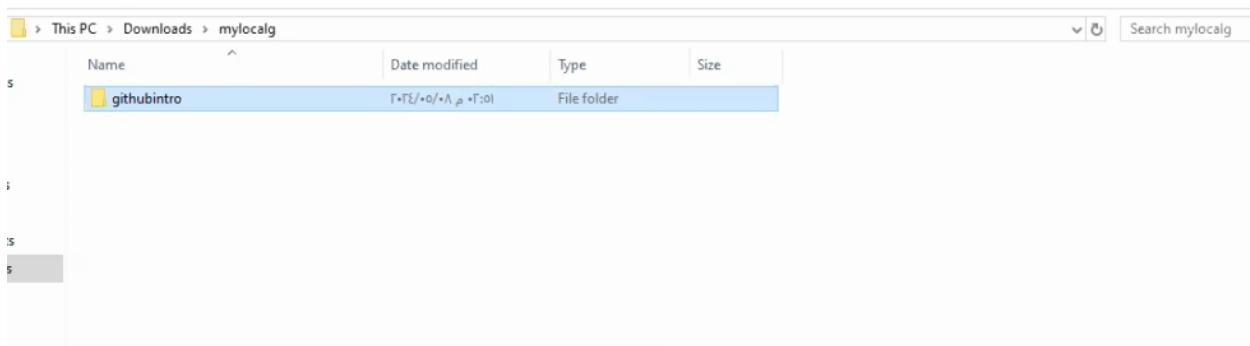


The output

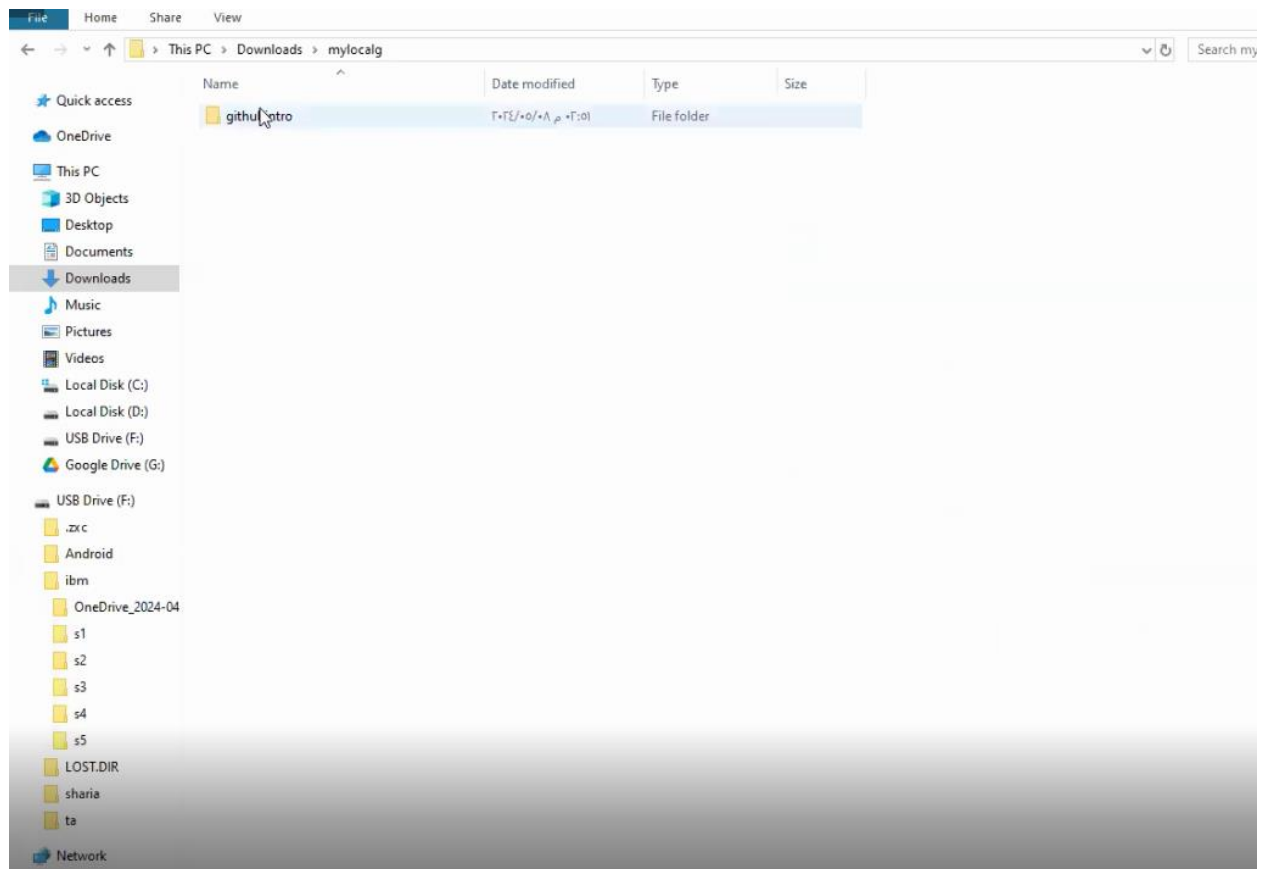

```
cd githubintro
```


```
git status
```

```
MINGW64/c/Users/Nn/Downloads/mylocalg/githubintro
Nn@DESKTOP-60556K6 MINGW64 ~/Downloads/mylocalg
$ git clone https://github.com/norayehia/githubintro.git
Cloning into 'githubintro'...
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
Receiving objects: 100% (3/3), done.
Nn@DESKTOP-60556K6 MINGW64 ~/Downloads/mylocalg
$ cd githubintro
Nn@DESKTOP-60556K6 MINGW64 ~/Downloads/mylocalg/githubintro (main)
$
```


```
MINGW64/c/Users/Nn/Downloads/mylocalg/githubintro
Nn@DESKTOP-60556K6 MINGW64 ~/Downloads/mylocalg
$ git clone https://github.com/norayehia/githubintro.git
Cloning into 'githubintro'...
remote: Enumerating objects: 3, done.
remote: Counting objects: 100% (3/3), done.
remote: Total 3 (delta 0), reused 0 (delta 0), pack-reused 0
Receiving objects: 100% (3/3), done.
Nn@DESKTOP-60556K6 MINGW64 ~/Downloads/mylocalg
$ cd githubintro
Nn@DESKTOP-60556K6 MINGW64 ~/Downloads/mylocalg/githubintro (main)
$ git status
On branch main
Your branch is up to date with 'origin/main'.

nothing to commit, working tree clean
Nn@DESKTOP-60556K6 MINGW64 ~/Downloads/mylocalg/githubintro (main)
$ |
```

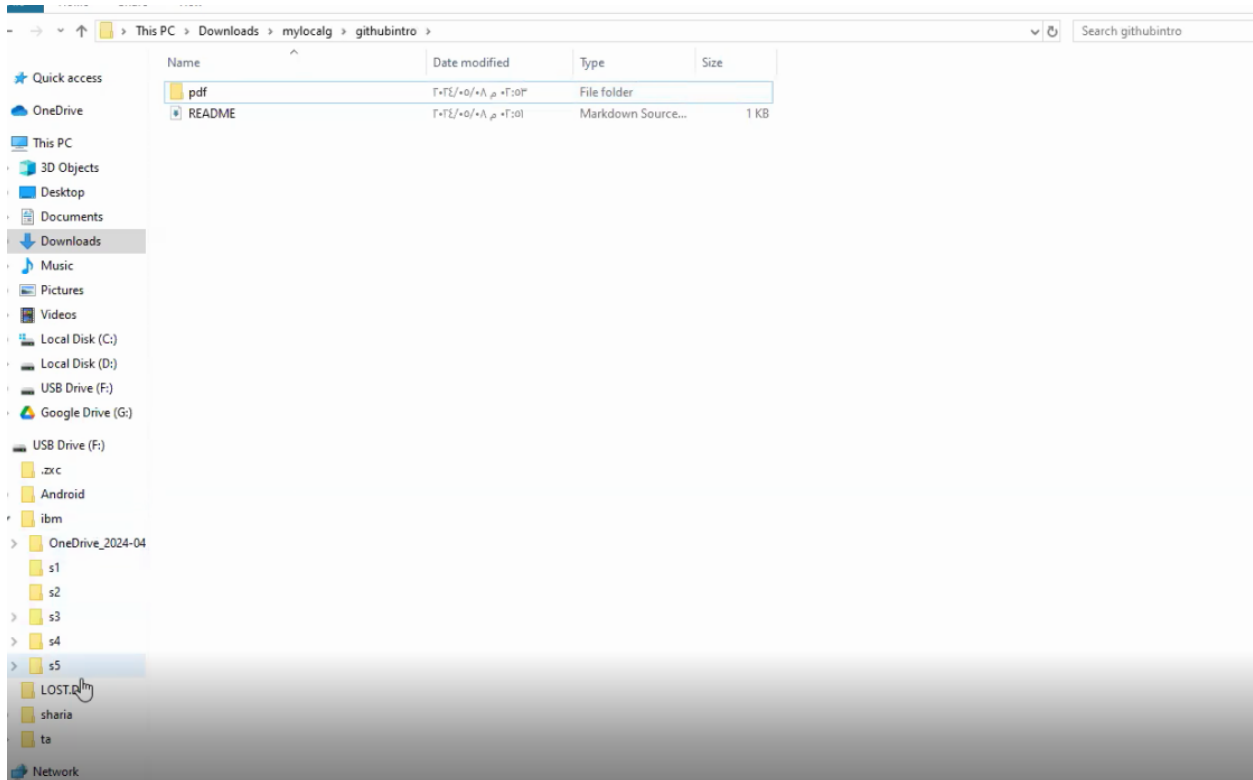


بعد ما عملته اكتب الامر ده عايزه اضيف فولدر فيه احط فايلاتي


git add pdf

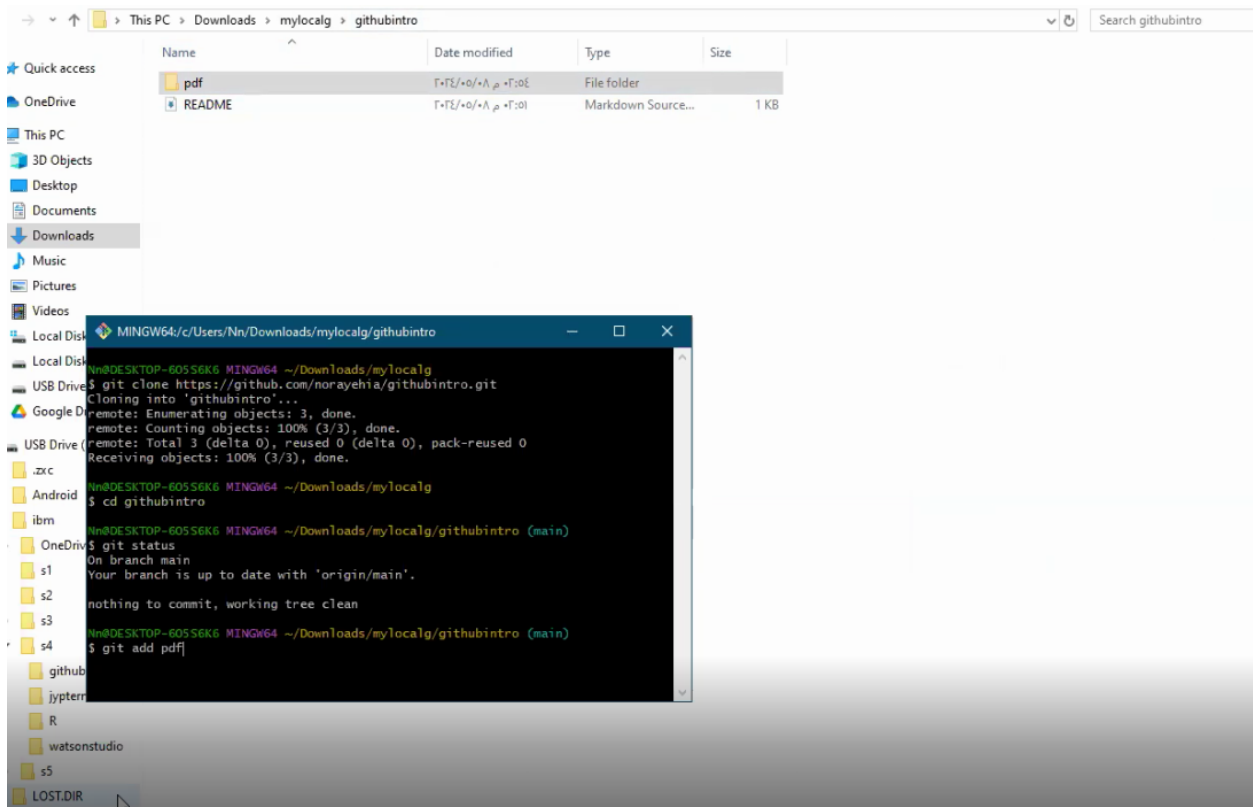


git add pdf/gethubintro.pdf

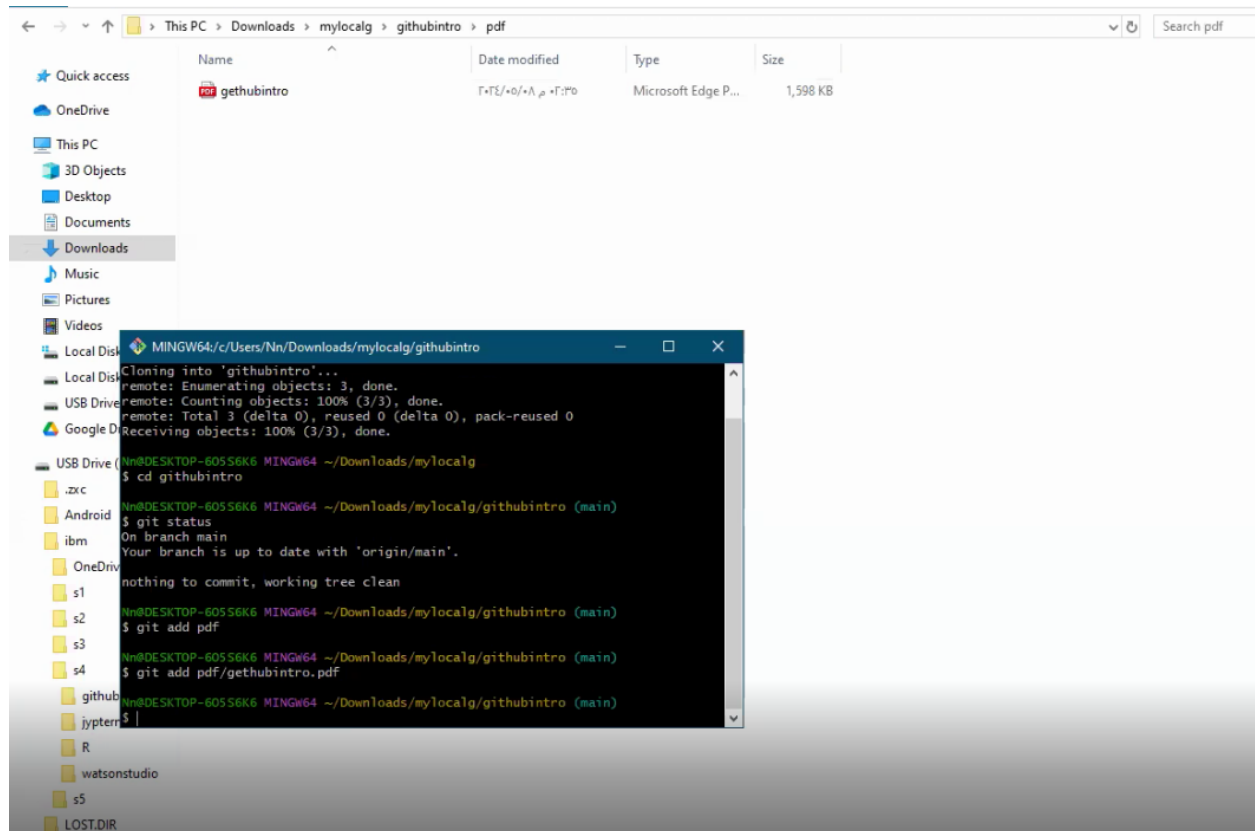

git commit -m "firstchange"

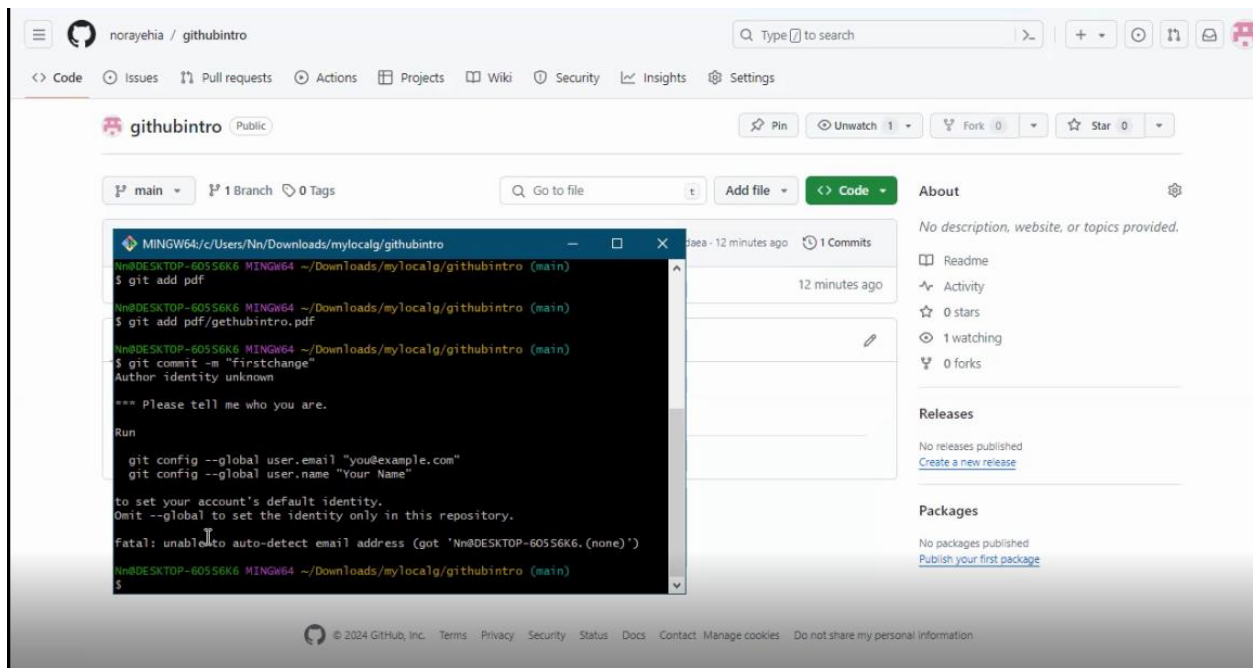

git config --global user.email you@example.com

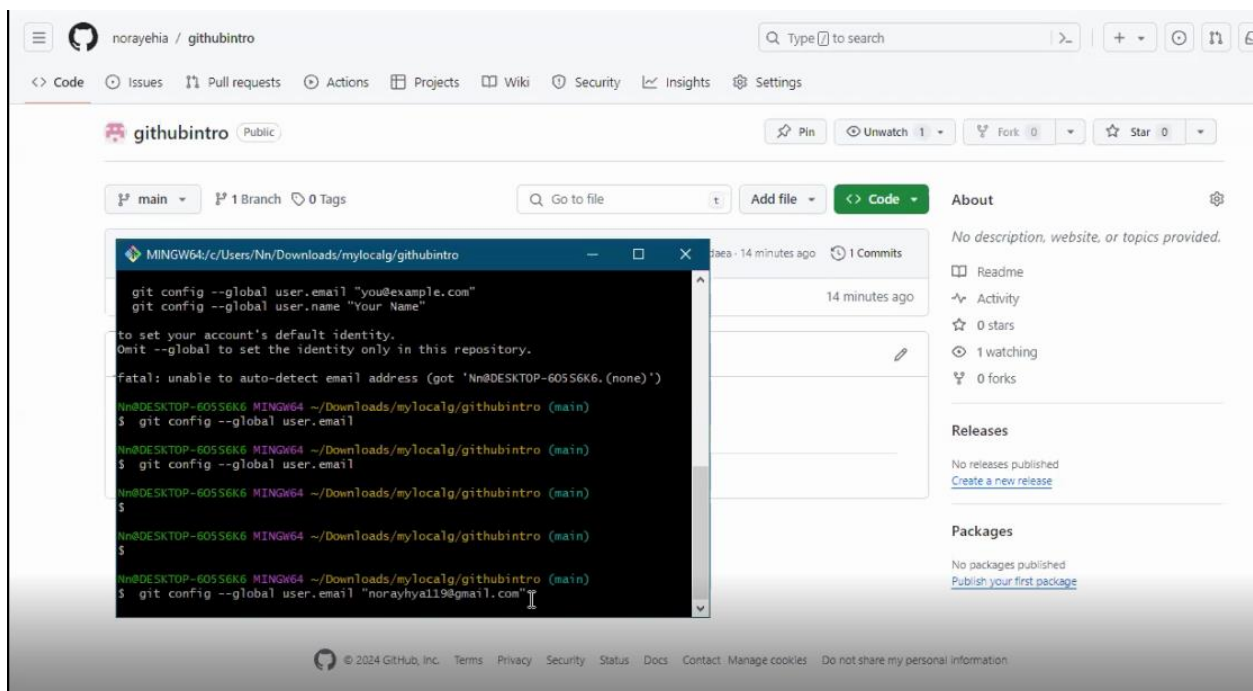

git config --global user.name "Your Name"

git config --global user.email " @gmail.com"

git config --global user.name "nora"

git commit -m "firstchange"

The screenshot shows the GitHub interface for the repository 'norayehia / githubintro'. The repository is public and has 1 branch (main) and 0 tags. A terminal window is open, displaying the following commands and output:

```
MINGW64/c/Users/Nn/Downloads/mylocalg/githubintro
$ git config --global user.email
$
$
$ git config --global user.email "norayhiall9@gmail.com"
$ git config --global user.name "norayehia"
$ git commit -m "firstchange"
[main ea5433e] firstchange
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 pdf/gethubintro.pdf
$
```


The terminal output shows the commit message "firstchange" and the file "pdf/gethubintro.pdf" being added. The repository page also shows the commit history, including the commit "16 minutes ago" with the message "firstchange".

git push هيتطلب تسجيل دخول

The screenshot shows the GitHub interface for the repository 'norayehia / githubintro'. The repository is public and has 1 branch (main) and 0 tags. A terminal window is open, displaying the following commands and output:


```
MINGW64/c/Users/Nn/Downloads/mylocalg/githubintro
$ git config --global user.email
$
$
$ git config --global user.email "norayhiall9@gmail.com"
$ git config --global user.name "norayehia"
$ git commit -m "firstchange"
[main ea5433e] firstchange
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 pdf/gethubintro.pdf
$ git push
```

The terminal output shows the commit message "firstchange" and the file "pdf/gethubintro.pdf" being added. The repository page also shows the commit history, including the commit "16 minutes ago" with the message "firstchange".

norayehia / githubintro

Type to search

odeIssuesPull requestsActionsProjectsWikiSecurityInsightsSettings

githubintroPublic

PinUnwatch1Fork0Star0

main1 Branch0 Tags

Go to fileAdd fileCode

Connect to GitHub

GitHub

Sign in

Browser/DeviceToken

Sign in with your browser

Sign in with a code

Don't have an account? Sign up

mits

es ago

About

No description, website, or topics provided.

Readme

Activity

0 stars

1 watching

0 forks

Releases

No releases published

Create a new release


Packages



No packages published

Publish your first package

MINGW64/c:/Users/Nn/Downloads/mylocalg/githubintro


```
Nn@DESKTOP-60556K6 MINGW64 ~/Downloads/mylocalg/githubintro
$
$ git config --global user.email "norayhya119@protonmail.com"
$ git config --global user.name "norayehia"
$ git commit -m "firstchange"
[main ea5433e] firstchange
1 file changed, 0 insertions(+), 0 deletions(-)
create mode 100644 pdf/gethubintro.pdf
$ git push
fatal: unable to access 'https://github.com/norayehia/githubintro/': Connection was reset
$ git push
```

 © 2024 GitHub, Inc. Terms Privacy Security Status Docs Contact Manage cookies Do not share my personal information

 + 


Authentication Succeeded


You may now close this tab and return to the application.

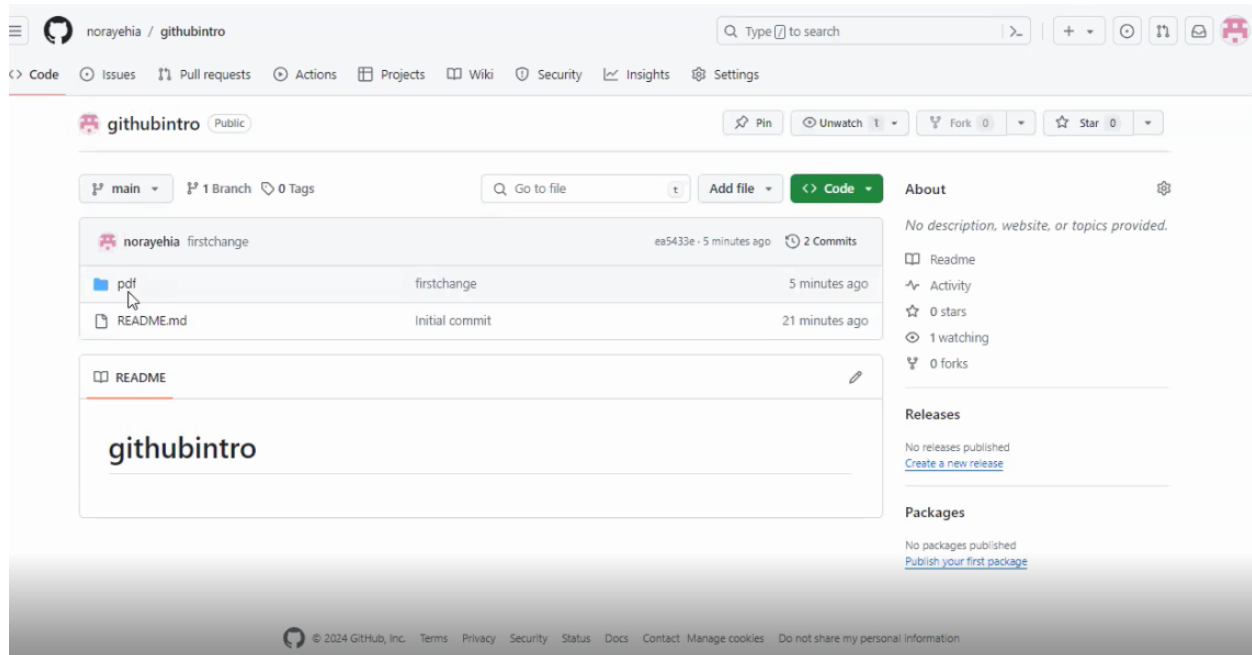


.....delete

تحذف فولدر من نسخه اونلاين ثم عندك تكتب

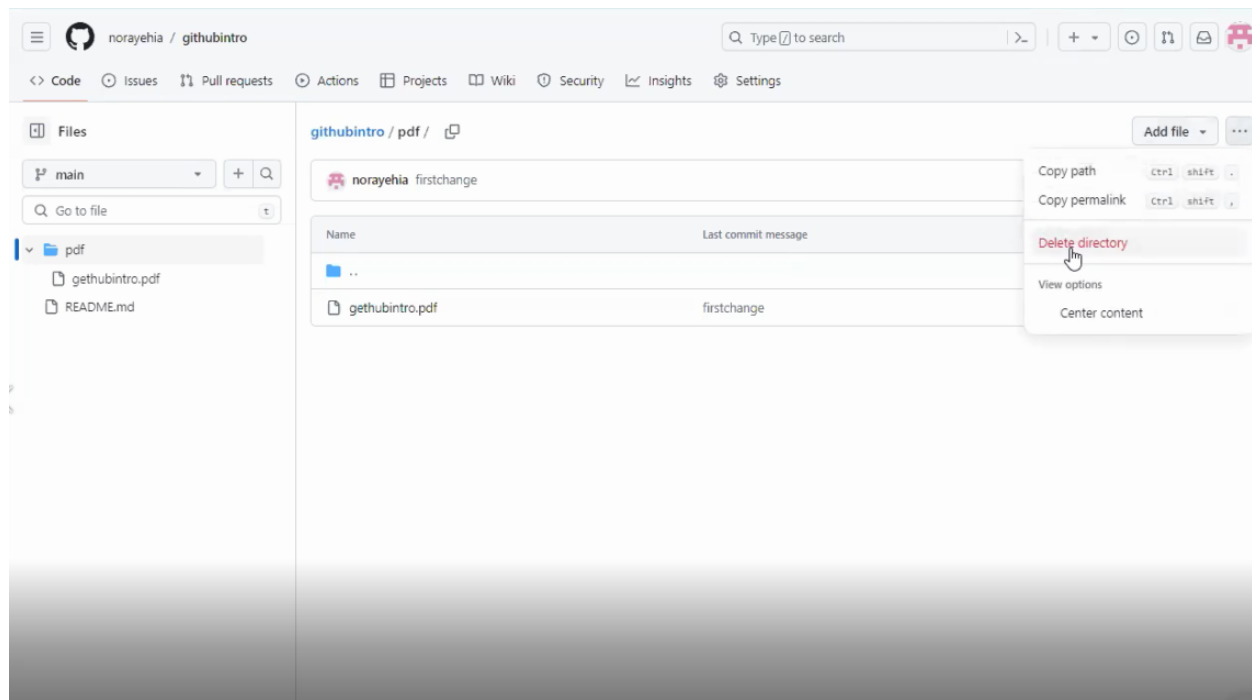

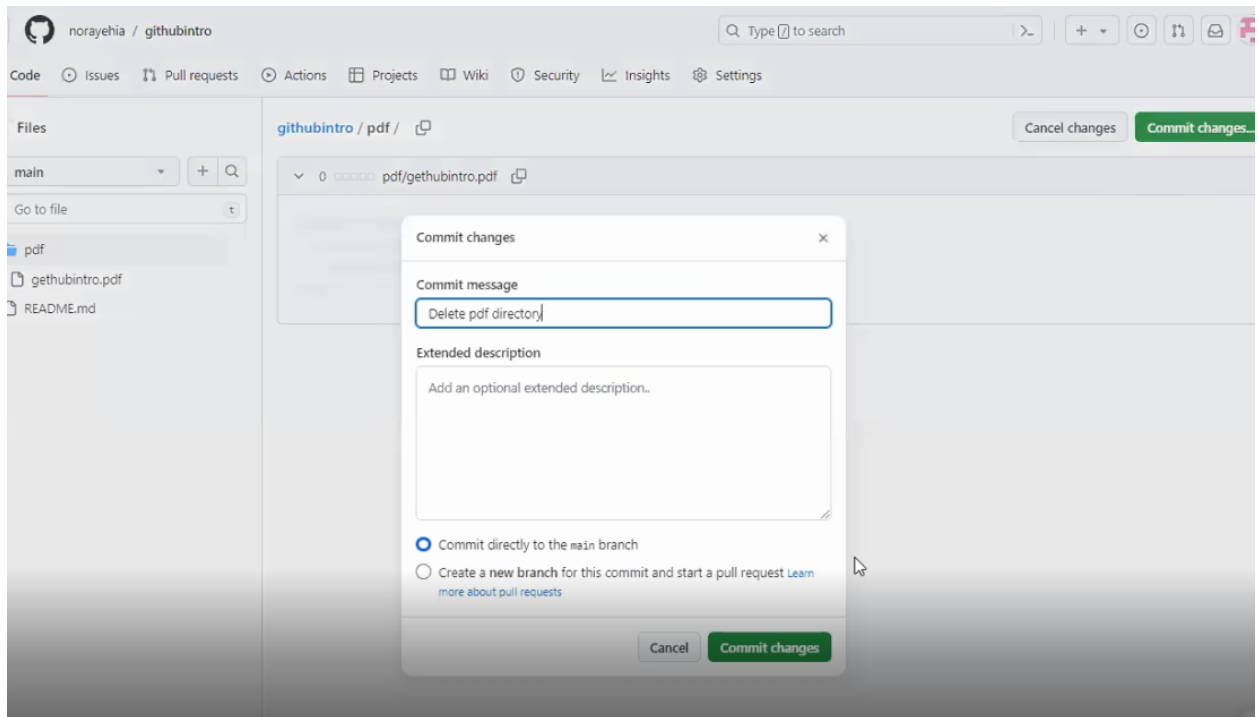


عایزین نحذف من عندنا علي جهاز

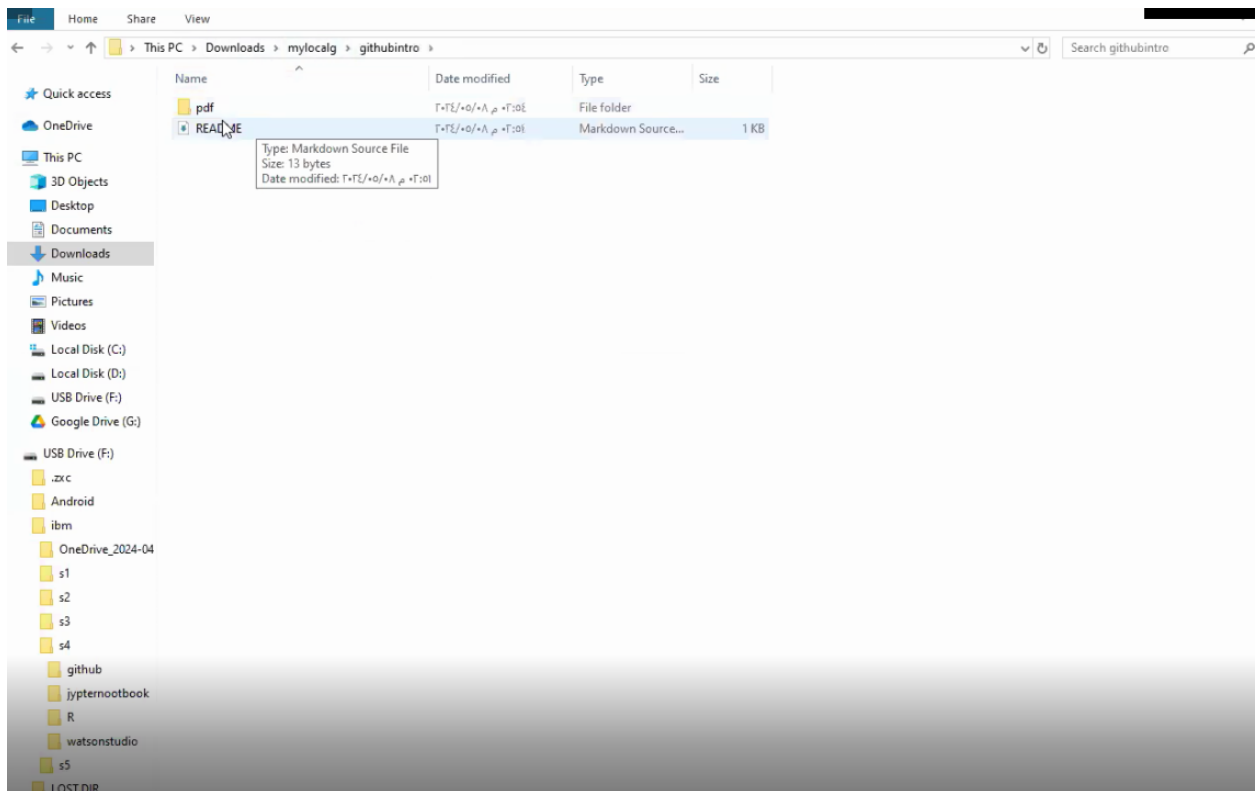

git status

git pull

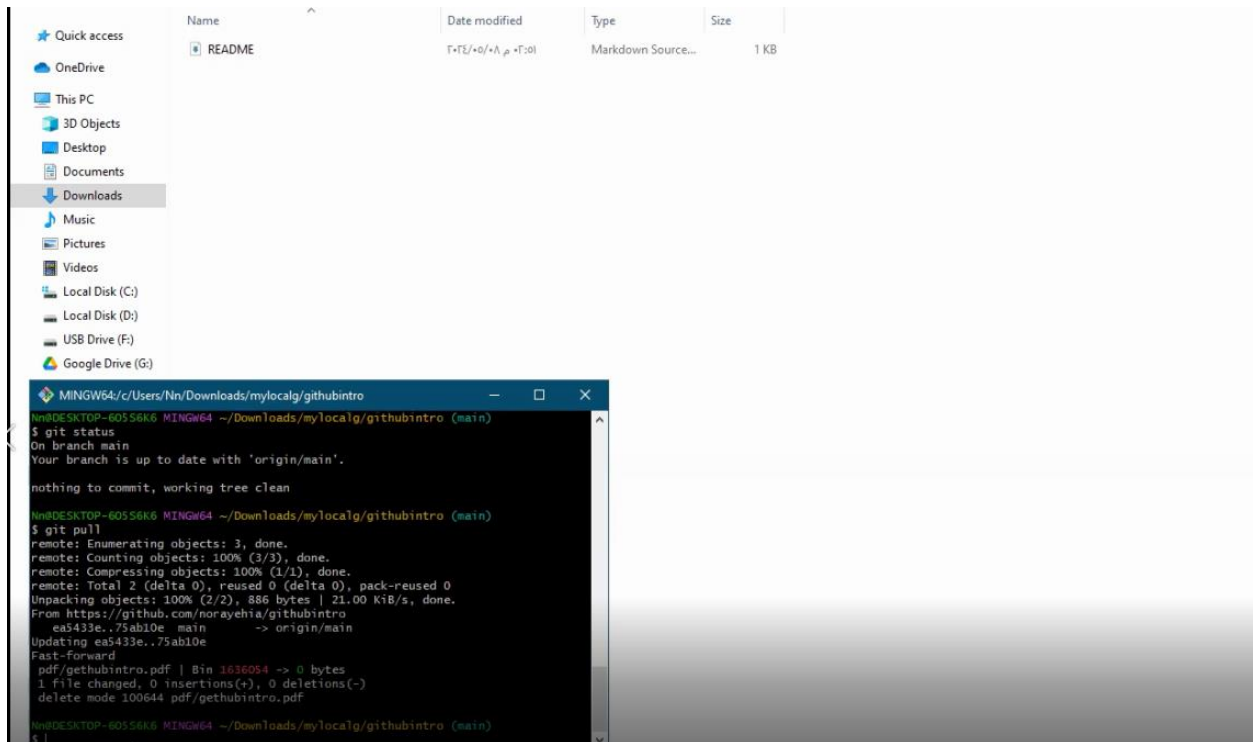

git status pop

output

pdf folder deleted

