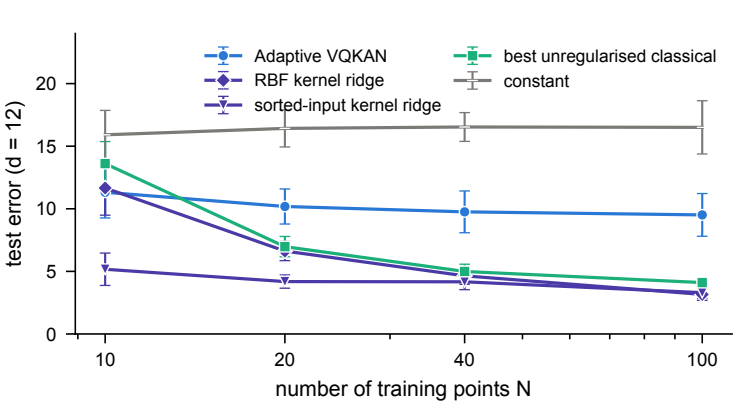
Adaptive VQKAN
RBF kernel ridge
sorted-input kernel ridge
best unregularised classical
constant
test error (d = 12)
0
5
10
15
20
10
20
40
100
number of training points N

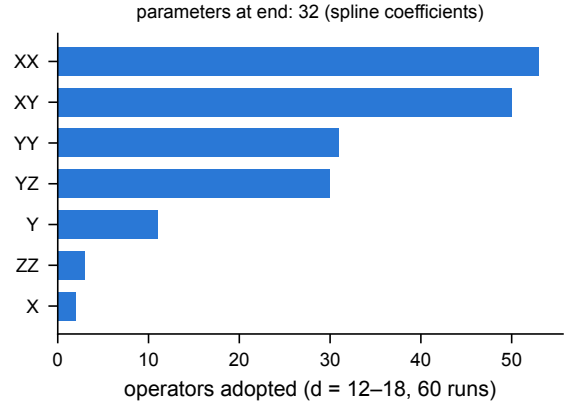
parameters at end: 32 (spline coefficients)
XX
XY
YY
YZ
Y
ZZ
X
0
10
20
30
40
50
operators adopted (d = 12–18, 60 runs)