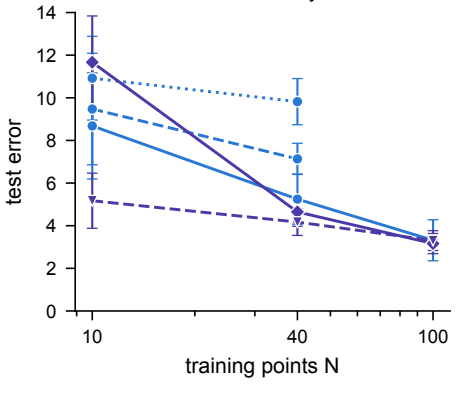
standardised family, d = 12
test error
training points N
0
2
4
6
8
10
12
14
10
40
100

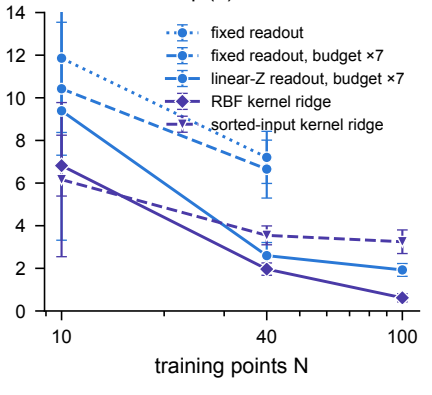
Eq. (1), d = 4
fixed readout
fixed readout, budget ×7
linear-Z readout, budget ×7
RBF kernel ridge
sorted-input kernel ridge
training points N
0
2
4
6
8
10
12
14
10
40
100

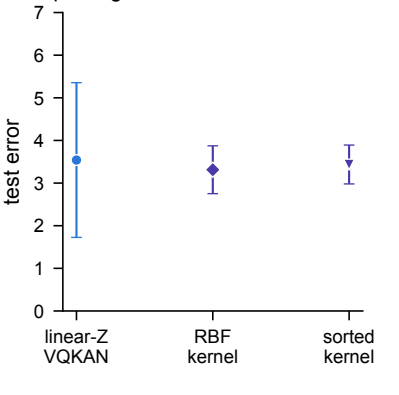
pre-registered, N = 100, 20 seeds
test error
0
1
2
3
4
5
6
7
linear-Z
VQKAN
RBF
kernel
sorted
kernel