

Microsoft Azure

Pesquisar recursos, serviços e documentos (G+/I)

Copilot

walisom.souza@aluno.c...
CENTRO PAULA SOUZA (CENTRO...

Página inicial > Infraestrutura de computação > Máquinas virtuais > mymachine | Balanceamento de carga > mymachine768-c841270b

mymachine768-c841270b | Propriedades

Adaptador de rede

Pesquisar

Endereço MAC

Visão geral

7C-ED-8D-E7-74-02

Log de atividade

Anexado a

mymachine

IAM (Controle de acesso)

Balanceadores de carga

-

Marçações

Balanceadores de carga

-

Visualizador de recursos

-

Configurações

Configurações de IP

Rede acelerada

Servidores DNS

Desativado

Grupo de segurança de rede

ID do Recurso

/subscriptions/2c1d860a-7a27-4c32-882e-236329293afe/resourceGroups/myVm_group/providers/Microsoft.Network/networkInterfaces/mymachine768-c841270b

Propriedades

Localização

Mexico Central

Bloqueios

Grupo de recursos

myVm_group

Monitoramento

Nome da assinatura

Azure for Students

Alterar assinatura

Automação

ID da Assinatura

2c1d860a-7a27-4c32-882e-236329293afe

Ajuda

Adicione ou remova ícones reconfigurando

Editar configuração de IP



mymachine768-c841270b

 Já existe uma configuração de IP primário. Quaisquer configurações de IP adicionais serão secundárias. A rede virtual à qual este adaptador de rede está anexado dá suporte apenas a IPv4. [Saiba mais](#) 

Nome * mymachine768-defaultIpConfiguration

versão do IP IPv4

Tipo Primary

Configurações de endereço IP privado

Alocação ☒ Dinâmico ☐ Estático

Configurações de endereço IP público

Associar endereço IP público ☒

Endereço IP público * mymachine-ip-c841270b (158.23.56.235) 

[Criar um endereço IP público](#)

Grupo de segurança de rede **mymachine-nsg** (anexado à networkInterface: mymachine768-c841270b)

Impacta 0 sub-redes, 1 interfaces de rede

+ Criar regra de portas

Pesquisar regras

Fonte == todosDestino == todosProtocolo == todosAção == todosPorta == todos

Prioridade	Nome	Porta	Protocolo	Fonte	Destino	Ação
Regras de porta de entrada (4)						
65001	AllowAzureLoadBalancerInBound	Qualquer	Qualquer	AzureLoadBalancer	Qualquer	Allow
65000	AllowVnetInBound	Qualquer	Qualquer	VirtualNetwork	VirtualNetwork	Allow
65500	DenyAllInBound	Qualquer	Qualquer	Qualquer	Qualquer	Deny
300	RDP	3389	TCP	Qualquer	Qualquer	Allow
Regras de porta de saída (3)						

Create or Update Network Interface

Tue Aug 18 2026 09:27:45 GMT-0300 (Horário Padrão de Brasília)

+ Nova regra de alerta

Resumo

JSON

Alterar histórico (Versão Prévia)

Recurso

/subscriptions/2c1d860a-7a27-4c32-882e-236329293afe/resourcegroups/myVm_group/providers/Microsoft.Network/networkInterfaces/mymac c841270b

Nome da operação

Create or Update Network Interface

Carimbo de data/hora

Tue Aug 18 2026 09:27:45 GMT-0300 (Horário Padrão de Brasília)

Evento iniciado por

Azure Traffic Manager and DNS

```
JSON rede virtual: {
  "name": "Mymachine",
  "id":
"/subscriptions/2c1d860a-7a27-4c32-882e-236329293afe/resourceGroups/myVm_group/pro
viders/Microsoft.Network/virtualNetworks/Mymachine",
  "etag": "W/\"28decaf5-9d16-4244-9eb3-3d6b4ac9a836\"",
  "type": "Microsoft.Network/virtualNetworks",
  "location": "mexicocentral",
  "tags": {},
  "properties": {
    "provisioningState": "Succeeded",
    "resourceGuid": "64be5c19-5219-4a78-9bd0-112dbdef0f4f",
    "addressSpace": {
      "addressPrefixes": [
        "10.0.0.0/16"
      ]
    }
  },
}
```

```

"encryption": {
  "enabled": false,
  "enforcement": "AllowUnencrypted"
},
"privateEndpointVNetPolicies": "Disabled",
"subnets": [
  {
    "name": "default",
    "id":
"/subscriptions/2c1d860a-7a27-4c32-882e-236329293afe/resourceGroups/myVm_group/pro
viders/Microsoft.Network/virtualNetworks/Mymachine/subnets/default",
    "etag": "W/\"28decaf5-9d16-4244-9eb3-3d6b4ac9a836\"\"",
    "properties": {
      "provisioningState": "Succeeded",
      "addressPrefixes": [
        "10.0.0.0/24"
      ],
      "delegations": [],
      "privateEndpointNetworkPolicies": "Disabled",
      "privateLinkServiceNetworkPolicies": "Enabled",
      "defaultOutboundAccess": false
    },
    "type": "Microsoft.Network/virtualNetworks/subnets"
  }
],
"virtualNetworkPeerings": [],
"enableDdosProtection": false
}
}

```

Ajuda

Grupo de recursos

InDungeon_group

Nome da assinatura

Azure for Students


Alterar assinatura

ID da Assinatura

07e7d864-e4e7-4ba9-8ecb-b54e2882a9c9

Adicione ou remova fontes pressionando

Ctrl+Shift+F

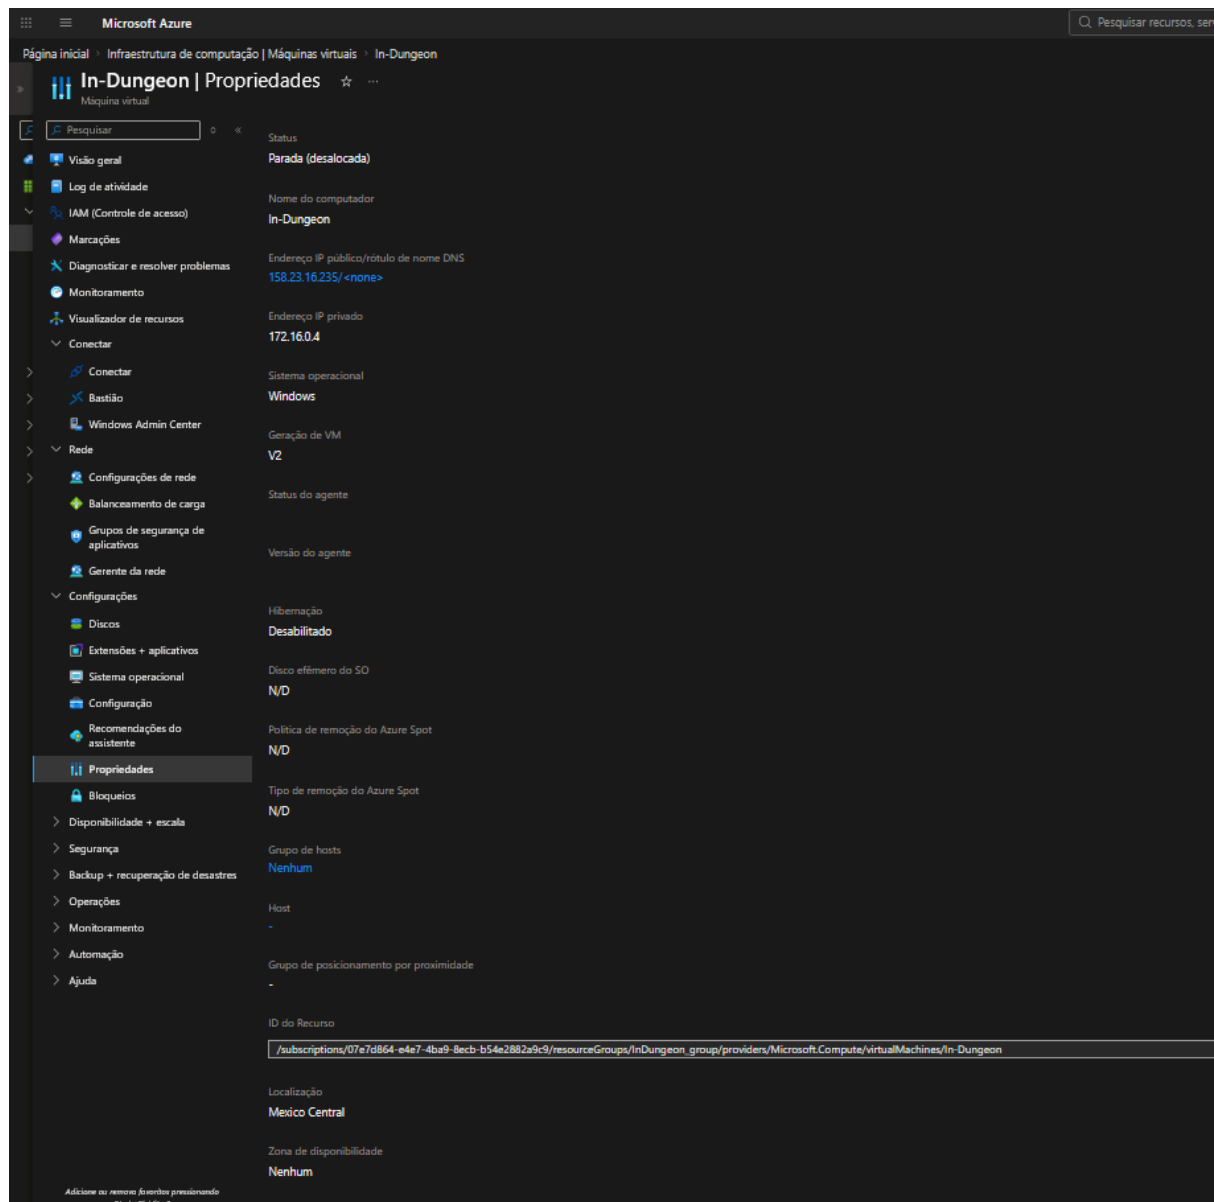


```
{
  "name": "In-Dungeon",
  "id":
"/subscriptions/07e7d864-e4e7-4ba9-8ecb-b54e2882a9c9/resourceGroups/InD
ungeon_group/providers/Microsoft.Compute/virtualMachines/In-Dungeon",
  "type": "Microsoft.Compute/virtualMachines",
  "location": "mexicocentral",
  "properties": {
    "hardwareProfile": {
      "vmSize": "Standard_B2as_v2"
    },
    "provisioningState": "Succeeded",
    "vmId": "c08c47cd-3e93-48a5-b466-3de4007e8020",
    "additionalCapabilities": {
      "hibernationEnabled": false
    },
  },
}
```

```

    "storageProfile": {
      "imageReference": {
        "publisher": "MicrosoftWindowsServer",
        "offer": "WindowsServer",
        "sku": "2025-datacenter-core-g2",
        "version": "latest",
        "exactVersion": "26100.33296.260809"
      },
      "osDisk": {
        "osType": "Windows",
        "name":
"In-Dungeon_OsDisk_1_d59fa8ca05da4ed885784c13a538882c",
        "createOption": "FromImage",
        "caching": "ReadWrite",
        "managedDisk": {
          "id":
"/subscriptions/07e7d864-e4e7-4ba9-8ecb-b54e2882a9c9/resourceGroups/InD
ungeon_group/providers/Microsoft.Compute/disks/In-Dungeon_OsDisk_1_d59f
a8ca05da4ed885784c13a538882c"
        },
        "deleteOption": "Delete"
      },
      "dataDisks": []
    },
    "osProfile": {
      "computerName": "In-Dungeon",
      "windowsConfiguration": {
        "provisionVMAgent": true,
        "enableAutomaticUpdates": true,
        "patchSettings": {
          "patchMode": "AutomaticByOS",
          "assessmentMode": "ImageDefault",
          "enableHotpatching": false
        }
      },
      "secrets": [],
      "allowExtensionOperations": true,
      "requireGuestProvisionSignal": true,
      "adminUsername": "ElmaMaria"
    },
    "networkProfile": {
      "networkInterfaces": [
        {
          "id":
"/subscriptions/07e7d864-e4e7-4ba9-8ecb-b54e2882a9c9/resourceGroups/InD
ungeon_group/providers/Microsoft.Network/networkInterfaces/in-dungeon46
8",
          "properties": {
            "deleteOption": "Detach"
          }
        }
      ]
    }
  }

```

```
    ]  
  },  
  "diagnosticsProfile": {  
    "bootDiagnostics": {  
      "enabled": true  
    }  
  }  
}  
}
```

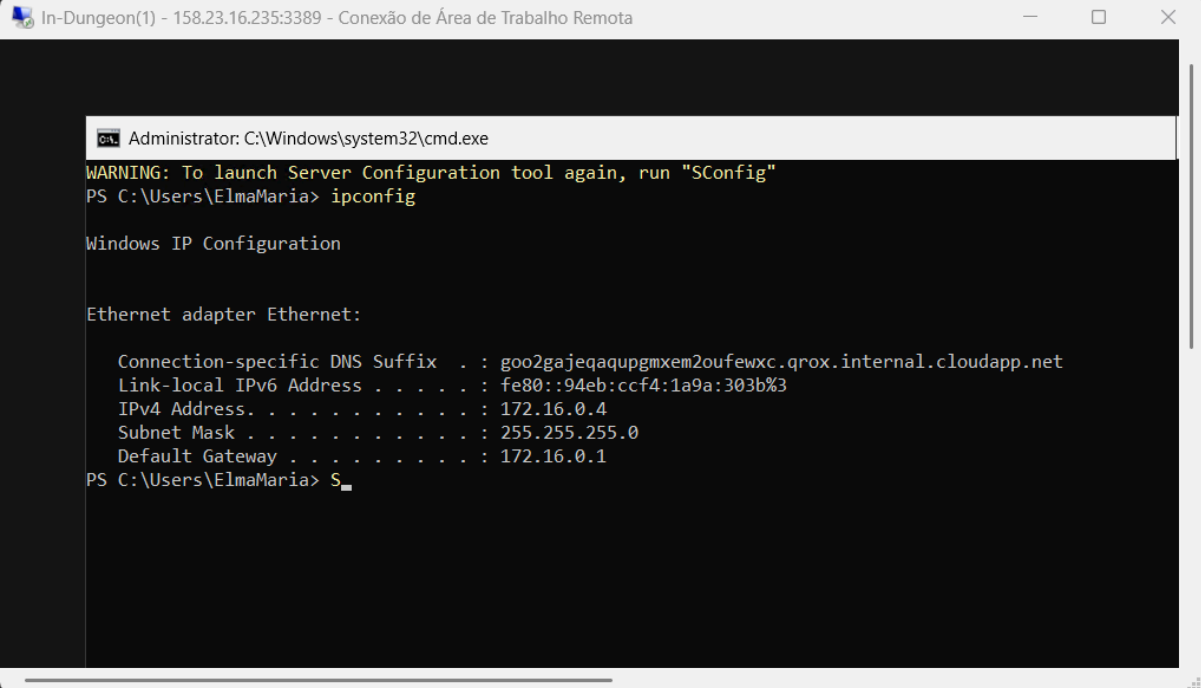

```
Administrator: C:\Windows\system32\cmd.exe  
WARNING: To launch Server Configuration tool again, run "SConfig"  
PS C:\Users\ElmaMaria> ipconfig  
  
Windows IP Configuration  
  
Ethernet adapter Ethernet:  
  
    Connection-specific DNS Suffix  . : goo2gajeqaqupgmxem2oufewxc.qrox.internal.cloudapp.net  
    Link-local IPv6 Address . . . . . : fe80::94eb:ccf4:1a9a:303b%3  
    IPv4 Address. . . . . : 172.16.0.4  
    Subnet Mask . . . . . : 255.255.255.0  
    Default Gateway . . . . . : 172.16.0.1  
PS C:\Users\ElmaMaria> S_
```

```
In-Dungeon(1) - 158.23.16.235:3389 - Conexão de Área de Trabalho Remota

Administrator: C:\Windows\system32\cmd.exe

Link-local IPv6 Address . . . . . : fe80::94eb:ccf4:1a9a:303b%3
IPv4 Address. . . . . : 172.16.0.4
Subnet Mask . . . . . : 255.255.255.0
Default Gateway . . . . . : 172.16.0.1
PS C:\Users\ElmaMaria> arp

Displays and modifies the IP-to-Physical address translation tables used by
address resolution protocol (ARP).

ARP -s inet_addr eth_addr [if_addr]
ARP -d inet_addr [if_addr]
ARP -a [inet_addr] [-N if_addr] [-v]

-a          Displays current ARP entries by interrogating the current
            protocol data. If inet_addr is specified, the IP and Physical
            addresses for only the specified computer are displayed. If
            more than one network interface uses ARP, entries for each ARP
            table are displayed.

-g          Same as -a.

-v          Displays current ARP entries in verbose mode. All invalid
            entries and entries on the loop-back interface will be shown.

inet_addr  Specifies an internet address.
-N if_addr Displays the ARP entries for the network interface specified
            by if_addr.

-d          Deletes the host specified by inet_addr. inet_addr may be
            wildcarded with * to delete all hosts.

-s          Adds the host and associates the Internet address inet_addr
            with the Physical address eth_addr. The Physical address is
            given as 6 hexadecimal bytes separated by hyphens. The entry
            is permanent.

eth_addr   Specifies a physical address.
if_addr    If present, this specifies the Internet address of the
            interface whose address translation table should be modified.
            If not present, the first applicable interface will be used.

Example:
> arp -s 157.55.85.212 00-aa-00-62-c6-09 .... Adds a static entry.
> arp -a          .... Displays the arp table.
PS C:\Users\ElmaMaria>
```

```
In-Dungeon(1) - 158.23.16.235:3389 - Conexão de Área de Trabalho Remota

Administrator: C:\Windows\system32\cmd.exe

If not present, the first applicable interface will be used.

Example:
> arp -s 157.55.85.212 00-aa-00-62-c6-09 .... Adds a static entry.
> arp -a          .... Displays the arp table.
PS C:\Users\ElmaMaria> ping

Usage: ping [-t] [-a] [-n count] [-l size] [-f] [-i TTL] [-v TOS]
          [-r count] [-s count] [[-j host-list] | [-k host-list]]
          [-w timeout] [-R] [-S srcaddr] [-c compartment] [-p]
          [-4] [-6] target_name

Options:
-t          Ping the specified host until stopped.
            To see statistics and continue - type Control-Break;
            To stop - type Control-C.

-a          Resolve addresses to hostnames.

-n count   Number of echo requests to send.

-l size     Send buffer size.

-f          Set Don't Fragment flag in packet (IPv4-only).

-i TTL     Time To Live.

-v TOS     Type Of Service (IPv4-only. This setting has been deprecated
            and has no effect on the type of service field in the IP
            Header).

-r count   Record route for count hops (IPv4-only).

-s count   Timestamp for count hops (IPv4-only).

-j host-list Loose source route along host-list (IPv4-only).

-k host-list Strict source route along host-list (IPv4-only).

-w timeout Timeout in milliseconds to wait for each reply.

-R          Use routing header to test reverse route also (IPv6-only).
            Per RFC 5095 the use of this routing header has been
            deprecated. Some systems may drop echo requests if
            this header is used.

-S srcaddr Source address to use.

-c compartment Routing compartment identifier.

-p          Ping a Hyper-V Network Virtualization provider address.

-4          Force using IPv4.

-6          Force using IPv6.

PS C:\Users\ElmaMaria>
```