



DESIGN SYSTEM · VOLUME 01

Design System

Foundations, tokens, and UI components for building calm, accessible Prrrfct experiences — sourced from code, not demo templates.

- 01 About
- 02 Foundations
- 03 Color
- 04 Typography
- 05 Spacing & layout
- 06 Token map
- 07 Components
- 08 Rules
- 09 Implementation

2025

Source of truth · globals.css + tailwind.config.ts

Companion to the Brand Book



Foundations + tokens + components.

The Prrrfct Design System is the working layer between brand expression and product UI. It keeps every screen calm, consistent, and accessible — without inventing styles on the fly.

Code is the source of truth. Tokens live in `globals.css` and `tailwind.config.ts`. Components live in `components/ui/**`. Documentation follows those files — never ACME demo data.

Operating principle · PROJECT_CONTEXT.md

FOUNDATIONS

Primitives that do not drift

Color, type, spacing, radius, and breakpoints. Defined once as CSS custom properties, consumed through semantic aliases and Tailwind theme keys.

DESIGN TOKENS

Decisions as variables

Self-contained design decisions — a color, a size, a type scale — mapped from primitive → semantic → utility class so product code stays intentional.

COMPONENTS

Interactive building blocks

Button, Text, Input, Card, Logo, links, care and social cards — adapted shadcn/ui patterns locked to Prrrfct tokens and WCAG 2.2 AA.

BRAND BOOK

Expression, not implementation

The Brand Book covers personality, logo, imagery, and voice. This Design System covers how those values become measurable UI tokens and components.

Structure note. Documentation IA (About → Foundations → Design tokens → Components → Rules) was inspired by the Specify/Notion Design System template. All actual values in this document come from the live Prrrfct repo — coral brand, Plus Jakarta Sans, and mono scale — not the ACME violet/Inter demo content in that template.

The shared visual grammar.

Foundations are the non-negotiable building materials. Product features compose with them; they do not redefine them.

COLOR

Brand · Mono · Feedback

Three brand corals, a 16-step mono scale, and four feedback hues. Semantics map fills, text, and strokes onto those primitives.

TYPOGRAPHY

Plus Jakarta Sans

One family. Ten roles from H1-caption. Mobile-first sizes step up at the 1g (1280px) breakpoint.

SPACING

4 → 64px scale

Named steps 2xs through 5xl, plus layout aliases for page padding, container padding, and section margin.

SHAPE & LAYOUT

Radius · breakpoints · widths

Interactive and container radii, full-pill buttons, screens at 768 / 1280 / 1440, and responsive max-widths for page and form.

Layer model

LAYER	WHERE	ROLE
1 · Primitives	globals.css :root	--primitive-*, --space-primitive-*, radii
2 · Semantic aliases	globals.css :root	--color-*, --space-*, layout vars
3 · Tailwind theme	tailwind.config.ts	brand-primary, text-*, spacing keys, screens
4 · Components	components/ui/**	Consume theme keys only — no default utilities


Coral warmth, quiet neutrals.

Brand coral is the accent. Mono carries structure and type. Feedback colors are reserved for status — never decoration.

Brand primitives



Monochrome scale

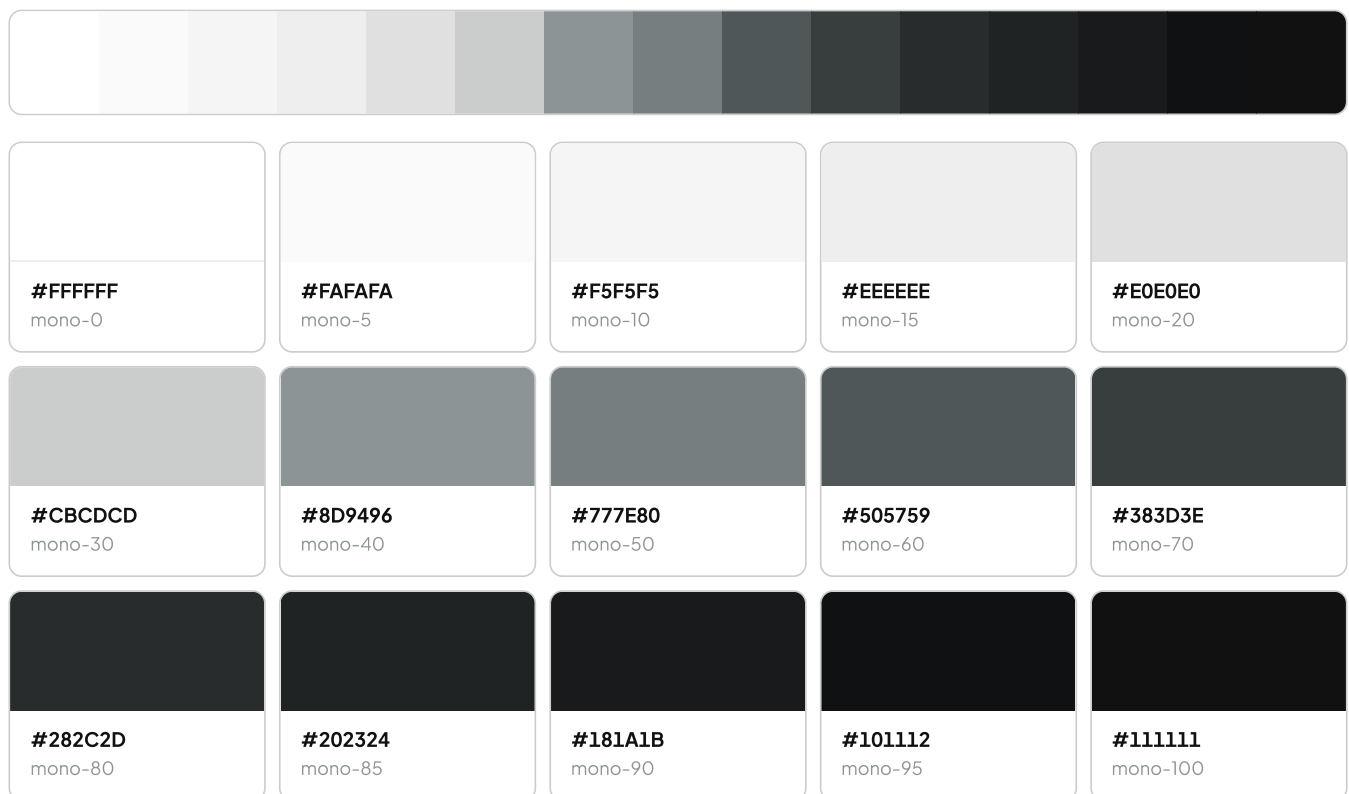

Feedback primitives



Semantic aliases

Brand & fills

	brand-primary	#FF5733
	brand-secondary	#CD4224
	section-primary	#FFFFFF
	section-secondary	#FAFAFA
	container-primary	#FFFFFF
	container-secondary	#F5F5F5
	container-tertiary	#EEEEEE

Text, stroke & feedback

	text primary	#101112
	text secondary	#8D9496
	text tertiary	#505759
	text disabled	#777E80
	text inverse	#FFFFFF
	stroke-container-primary	#CBCDCD
	success / warning / error / info	feedback

Do not use default Tailwind colors. Utilities like `text-gray-500`, `bg-red-500`, or arbitrary hex in product code bypass the system. Prefer semantic keys: `text-primary`, `bg-brand-primary`, `border-stroke-container-primary`.

One family. Clear hierarchy.

Plus Jakarta Sans carries every UI surface. Scales are mobile-first and lift at the desktop (lg) breakpoint.

Plus Jakarta Sans

Aa Bb Cc Dd Ee Ff Gg Hh Ii Jj Kk Ll Mm
0123456789 · The quiet joy of daily care.

Family	--font-family-sans
Weights	400 · 500 · 600 · 700
Roles	H1-H6 · body-lg/md · caption-md/sm
Component	Text · variants + colors

H1 text-h1 · 700 · -0.02em

MOBILE

40 / 48

DESKTOP ≥1280

64 / 72

H2 text-h2 · 700 · -0.015em

MOBILE

32 / 40

DESKTOP ≥1280

48 / 56

H3 text-h3 · 700 · -0.01em

MOBILE

28 / 36

DESKTOP ≥1280

40 / 48

H4 text-h4 · 700 · -0.005em

MOBILE

24 / 32

DESKTOP ≥1280

32 / 40

H5 text-h5 · 600

MOBILE

20 / 28

DESKTOP ≥1280

24 / 32

H6

text-h6 · 600

MOBILE

18 / 24

DESKTOP ≥1280

20 / 28

BODY LG

text-body-lg · 18 / 28 (both)

Caring for your AI-powered furry friend brings a relaxing moment of joy to your day.

BODY MD

text-body-md · 16 / 24 (both)

Default UI copy. Used in buttons, inputs, care items, and most paragraphs.

CAPTION MD

text-caption-md · 14 / 20

Footer links, helper text, secondary labels.

CAPTION SM

text-caption-sm · 12 / 16

Input labels, micro-meta, overlines.

Rhythm without default utilities.

Spacing and radius come only from Prrrft tokens. Default Tailwind steps like `p-4` or `rounded-xl` are forbidden.

Spacing scale

4px	2xs	
8px	xs	
12px	sm	
16px	md	
20px	lg	
24px	xl	
32px	2xl	
40px	3xl	
48px	4xl	
64px	5xl*	

* --space-primitive-5xl exists in `globals.css`. Tailwind spacing keys currently expose 2xs-4xl plus `page/container/section-gap` aliases.

Border radius

8 sm interactive	16 md container	24 lg container	28 button interactive- lg	∞ full buttons
-------------------------------------	------------------------------------	------------------------------------	--	-----------------------------------

Buttons use `rounded-full` in code. Token `rounded-button` maps to `interactive-lg` (28px) if needed.

Breakpoints

md 768px	lg 1280px	xl 1440px
----------	-----------	-----------

Layout aliases & max-widths

TOKEN	MOBILE	MD ≥768	LG ≥1280
<code>padding-page</code>	16px (md)	20px (lg)	48px (4xl)
<code>padding-container</code>	16px	20px	32px (2xl)
<code>margin-section</code>	16px	20px	32px
<code>max-width-page</code>	100%	928px	1312px
<code>max-width-form</code>	100%	560px	740px
<code>max-w-2xl(TW)</code>	592px fixed		
<code>stroke-container-sm</code>	1px · color <code>stroke-container-primary</code>		

Primitive → semantic → Tailwind.

Every utility class traces back to a CSS variable. Prefer the semantic Tailwind name in product code.

Color tokens

PRIMITIVE	HEX	SEMANTIC CSS	TAILWIND
 brand-50	#FF5733	<code>--color-brand-primary</code>	<code>brand-primary</code>
 brand-60	#CD4224	<code>--color-brand-secondary</code>	<code>brand-secondary</code>
 mono-0	#FFFFFF	<code>--color-fill-section-primary</code>	<code>section-primary</code>
 mono-5	#FAFAFA	<code>--color-fill-section-secondary</code>	<code>section-secondary</code>
 mono-10	#F5F5F5	<code>--color-fill-container-secondary</code>	<code>container-secondary</code>
 mono-15	#EEEEEE	<code>--color-fill-container-tertiary</code>	<code>container-tertiary</code>
 mono-95	#101112	<code>--color-text-primary</code>	<code>primary (text)</code>
 mono-40	#8D9496	<code>--color-text-secondary</code>	<code>secondary</code>
 mono-60	#505759	<code>--color-text-tertiary</code>	<code>tertiary</code>
 mono-50	#777E80	<code>--color-text-disabled</code>	<code>disabled</code>
 mono-0	#FFFFFF	<code>--color-text-primary-inverse</code>	<code>inverse</code>
 mono-30	#CBCDCD	<code>--color-stroke-container-primary</code>	<code>stroke-container-primary</code>
 success-50	#008035	<code>--color-feedback-success</code>	<code>success</code>
 warning-50	#B65116	<code>--color-feedback-warning</code>	<code>warning</code>
 error-50	#B80015	<code>--color-feedback-error</code>	<code>error</code>
 info-50	#15498B	<code>--color-feedback-info</code>	<code>info</code>

Measurement tokens

PRIMITIVE	VALUE	ALIAS / TW KEY	USAGE
<code>--space-primitive-2xs ... 5xl</code>	4-64px	<code>2xs ... 4xl</code> , <code>page</code> , <code>container</code> , <code>section-gap</code>	padding, gap, margin
<code>--radius-interactive-sm</code>	8px	<code>rounded-sm</code>	inputs, footer links
<code>--radius-interactive-lg</code>	28px	<code>rounded-button</code>	interactive large
<code>--radius-container-md / lg</code>	16 / 24px	<code>rounded-md</code> / <code>rounded-lg</code>	cards, panels
— (full pill)	9999px	<code>rounded-full</code>	buttons, social card

PRIMITIVE	VALUE	ALIAS / TW KEY	USAGE
--stroke-container-sm	1px	border-container-sm	EmailCard border

Sync model. Unlike the Specify ACME template (Figma → Notion), Prrfct tokens sync from code outward. Change `globals.css` first, keep `tailwind.config.ts` aligned, then update this document.

UI catalog from `components/ui.`

Specimens below mirror live props and token classes. Do not casually restyle these files — they are locked foundation.

Button

Primary CTAs and secondary actions. Pill shape, bold body-md type, focus ring.

`Button.tsx``variants ×6``fullWidth`

PRIMARY

Get early access

SECONDARY

Learn more

TERTIARY

Ghost action

QUATERNARY

Quiet action

INVERSE

On dark

BRAND-PRIMARY · FOCUS

Focused

VARIANTS / PROPS

- `variant`: `primary` · `secondary` · `tertiary` · `quaternary` · `inverse` · `brand-primary`
- `fullWidth`: `boolean` · Native button attrs forwarded
- Size locked: `px-sm` `py-xs` `text-body-md` · `rounded-full`

TOKEN CLASSES

`bg-brand-primary` `text-inverse`
`hover:bg-brand-secondary` `border-brand-primary`
`text-primary` `text-brand-primary` `text-secondary`
`bg-inverse` `focus:ring-2`

Ally · Real `<button>`. Focus: `focus:outline-none` `focus:ring-2` `focus:ring-offset-2`. Disabled uses `opacity + cursor-not-allowed`.

Text

Polymorphic typography primitive. Maps variant → type scale and color → semantic text tokens.

Text.tsx

as prop

10 variants

Heading sample · text-h5

Body MD primary — default paragraph role.

Body MD secondary

Caption MD tertiary

Brand color

Error color

VARIANTS / PROPS

- variant: h1-h6 · body-lg · body-md · caption-md · caption-sm
- color: primary · secondary · tertiary · brand · inverse · error · success
- as: any element (default p) — use real headings for hierarchy

TOKEN CLASSES

text-h1 ... text-caption-sm text-primary
text-secondary text-tertiary text-brand-primary
text-inverse text-error text-success

Ally · Keep semantic heading order. Prefer as="h2" over styling a p to look like a heading.

Input

Labeled text field with error state and branded focus ring.

Input.tsx

label

error

Email

you@example.com

Focused

typing...

Email

not-an-email

Enter a valid email address

PROPS

- `label?` — associated via `htmlFor` + `useId`
- `error?` — sets error border + message
- All native input attributes

TOKEN CLASSES

`bg-container-primary` `text-primary`
`placeholder:text-disabled` `rounded-sm` `p-sm`
`text-body-md` `border-disabled` `border-error`
`focus:ring-brand-primary` `text-caption-sm`

Ally • Always pass `label` (or `aria-label`). Focus ring is 2px brand-primary. Pair errors with `aria-invalid` / `aria-describedby` when wiring forms.

Card

Simple elevated container for grouped content.

Card.tsx

Daily care

Feed, groom, pet, and play — framed as connection, not chores.

Open care loop

PROPS

- `children`, optional `className`
- No variants — compose content inside

TOKEN CLASSES

`bg-container-primary` `rounded-lg` `p-xl` `space-y-sm`
`shadow-sm`

Logo

Responsive wordmark: mobile SVG below md, desktop SVG from md up.

Logo.tsx

assets/logo-*.svg

The logo 'Prfffct' is displayed in a white, cursive script font against a light gray background.

Light · desktop asset

The logo 'Prfffct' is displayed in a white, cursive script font against a dark gray background.

Dark · inverted for contrast demo

BEHAVIOR

- `/logo-mobile.svg · block md:hidden`
- `/logo-desktop.svg · hidden md:block`
- Default size class `h-8 w-auto`

AI1Y

- Both images share `alt="Prfffct Logo"`
- Prefer a single landmark link wrapping Logo in nav

StandaloneLink

Text link with size, selection, disabled, and optional icon slots.

StandaloneLink.tsx

xs · sm · md

Default link

Hover / emphasis

Selected

Disabled

PROPS

- `href, selected, disabled`
- `size: xs · sm · md`
- `icon + iconPosition: none · left · right`

TOKEN CLASSES

`text-caption-sm` `text-body-md` `text-body-lg`
`text-primary` `text-brand-primary`
`text-brand-secondary` `text-disabled` `py-sm` `py-xl`
`py-2xl`

AI1y · Disabled removes `href` and sets `pointer-events - none`. Active press uses brand-70 (#A6351D).

FooterLink

Compact underlined caption link with reserved focus border (no layout jump).

FooterLink.tsx

[Privacy policy](#)

[Terms of use](#)

[Focus visible](#)

TOKEN CLASSES

p-1 rounded-sm text-caption-md text-tertiary
hover:text-primary focus-visible:border-primary

A11Y

- 3px transparent border reserves space for focus
- focus-visible only — mouse users avoid sticky ring

CareItem

Care-loop row: circular image + bold title + description, vertically centered.

CareItem.tsx



Feed Share a quiet meal together.



Groom A gentle brush, a calmer day.

PROPS

- title, description, imageSrc
- Avatar 60 → 80px at md; gap-sm (12px)

TOKEN / A11Y

gap-sm bg-container-secondary text-primary
text-body-md md:text-body-lg

Image is decorative: alt="" + aria-hidden.

EmailCard

Early-access signup panel composing Text + EmailSignupForm.

EmailCard.tsx

composition

Get early access—and extra treats!

[Join waitlist](#)

Prrrfct is launching in December 2025.

Sign up early to reserve your spot—and get **5 free Cat toys and treats** when we go live!

STRUCTURE

- Width full / lg:w- [596px]
- H3 headline via Text · form via EmailSignupForm

TOKEN CLASSES

bg-section-primary rounded-lg border-container-sm
border-container-primary py-xl px-2xl shadow-sm
mb-lg

SocialCard

Pill card promoting Gingerbread follows; embeds SocialLinksColor.

SocialCard.tsx



Follow our mascot Gingerbread



TOKEN CLASSES

max-w- [363px] gap-sm p-sm rounded-full
bg-section-primary border-container-tertiary
gap-xs

A11Y

- Avatar has meaningful alt text
- Social links provide platform aria-labels

SocialIcons · SocialLinksColor

Two icon sets for the same platforms: gray (footer/chrome) and full-color (promo).

`SocialIcons.tsx`

`SocialLinksColor.tsx`

SOCIALICONS (GRAY)



SOCIALLINKSCOLOR



VISIBLE PLATFORMS

- instagram · tiktok · facebook (x/reddit/youtube reserved)
- Icons decorative (alt="" + aria-hidden)
- Links: target="_blank" + rel="noopener noreferrer"

SIZES / TOKENS

`gap-md` `w-[18px]` `h-[18px]` `md:w-xl` `md:h-xl`

`w-xl` `h-xl` `gap-xs`

SocialLinksColor aria-label: "Follow Gingerbread on {platform}".

Do & don't — from PROJECT_CONTEXT.

These rules are non-negotiable. If an instruction conflicts with them, the rule wins.

Do

Use only Prrrct tokens

Classes from `tailwind.config.ts`: `p-md`, `text-primary`, `bg-brand-primary`.

Semantic HTML

Real buttons, links, inputs, and heading hierarchy — no div soup.

WCAG 2.2 AA

Keyboard access, logical focus order, focus rings, labeled fields.

Ask before foundation changes

`globals.css`, `tailwind.config.ts`, and `components/ui` are locked.

Check existing tokens first

Reuse before inventing.

Don't

Default Tailwind utilities

Forbidden: `p-4`, `mt-2`, `text-gray-500`, stock color/spacing scales.

Invent tokens casually

No one-off CSS vars or arbitrary palette expansions.

Restyle components/ui

Don't fork Button/Input styles in feature code.

Skip accessibility

No unlabeled icons, trapped focus without escape, or mouse-only affordances.

Copy ACME / Specify demo values

Violet #624de3, Inter, and template measurements are not Prrrct.

Accessibility baseline

KEYBOARD

Mandatory

All interactive elements reachable and operable. Focus order matches visual order.

MODALS

Trap · lock · restore

Focus trap, background scroll lock, restore focus on close.

ICONS

Decorative vs labeled

Decorative icons: `aria-hidden`. Meaningful controls need accessible names.

LIVE REGIONS

aria-live sparingly

Only when necessary for status updates users can't otherwise perceive.

Where to edit — and what stays locked.

Shared foundation must remain consistent across branches. Change it deliberately, then merge intentionally.

LOCKED

Read-only by default

globals.css
tailwind.config.ts
components/ui/**
lib/**
postcss.config.mjs
tsconfig.json ·
next.config.mjs
package.json + lockfile
PROJECT_CONTEXT.md ·
.cursorrules

CONTROLLED

Change with care

app/layout.tsx
components/layout/*
EmailSignupForm.tsx
Providers / auth wiring

FLEXIBLE

Branch-specific OK

Marketing sections
app/page.tsx content
Feature routes (care, store, onboarding)
Copy & visual content

Stack (fixed)

Next.js 14 App Router · TypeScript · Tailwind (custom tokens only)
shadcn/ui adapted to Prrrct · Framer Motion (minimal) · Firebase · Netlify

How to extend safely

1. Read PROJECT_CONTEXT.md and classify the target file
2. Inspect existing patterns in components/ui before writing new UI
3. Prefer semantic tokens over new primitives
4. If a foundation change is required – ask, then update docs

Changelog practice. When tokens or locked components change, note foundations impacted (color, type, spacing, component name) in the PR. This Design System document should be regenerated from code after intentional foundation merges.



Foundations, tokens, and components — kept
calm, coral, and code-true.

PRRRFCT DESIGN SYSTEM · 2025