Replit Proof of Use

SURPrice is developed in a Replit workspace imported from the team's GitHub repository and hosted with Replit Deployments. Replit Secrets hold the RunPod credentials, and the Replit Shell was used to pull code and run the benchmark against the live RunPod endpoint.

Repl	replit.com/@whafiz012/SURPrice (imported from github.com/WanHafizuddin/SURPrice)
Live app	https://surprice.replit.app
Hosting	Replit Deployments; .replit installs requirements.txt, then runs python src/main.py
Secrets	RUNPOD_API_KEY and RUNPOD_ENDPOINT_ID stored in Replit Secrets, never in the code
Stack	Python 3.11, FastAPI, Jinja2 templates, SQLite


Replit Shell: benchmark run against the RunPod endpoint (output copied as text)

```
~/workspace$ python scripts/benchmark.py
SURPrice benchmark, run 2026-10-24 14:48

Planted rule breaches (breaches.json): 13/13 intercepted (100%)

Invoice reading on 1 fixture invoice(s), source runpod:
  8/8 lines exactly right (100%)
```

1. The SURPrice Repl with the Agent history showing the app published, and the publishing pane

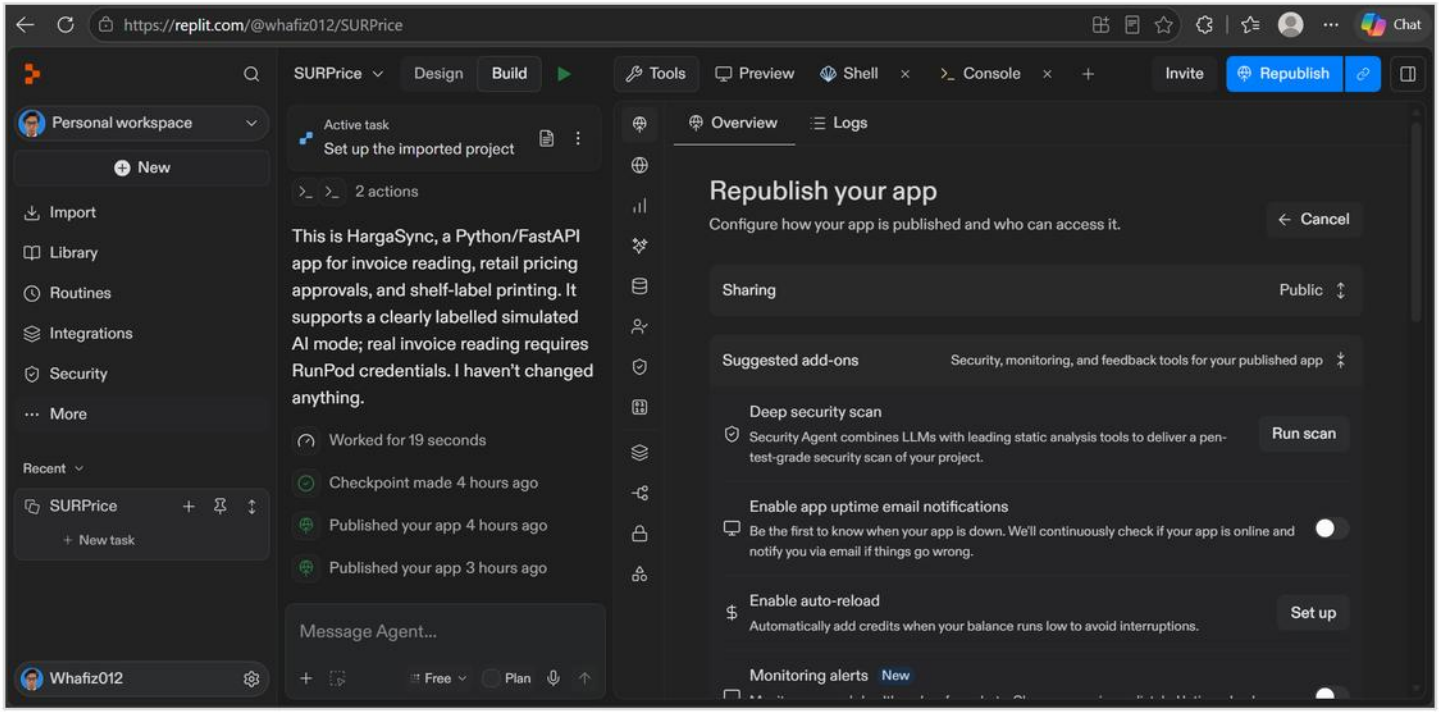

2. Publishing > Domains (taken before the address was renamed from harga-sync to surprice)

