RunPod Proof of Use

SURPrice uses a RunPod Serverless GPU endpoint to read supplier invoice photos. The SURPrice web app on Replit sends each photo to the endpoint, where the Qwen2.5-VL-7B-Instruct vision-language model transcribes supplier, items, units, quantities and unit costs into JSON. The app validates that JSON; prices are then worked out by fixed rules, never by the model.

Endpoint	SURPrice, queue-based RunPod Serverless endpoint
Endpoint ID	opdzmifqcyfxio
API	https://api.runpod.ai/v2/opdzmifqcyfxio/runsync
Built from	github.com/WanHafizuddin/SURPrice, branch main, runpod/Dockerfile (worker: runpod/handler.py)
Model	Qwen/Qwen2.5-VL-7B-Instruct (Hugging Face)
GPU	24 GB, 0 active workers and 1 max worker (billed only while reading)
Called by	SURPrice on Replit, using RUNPOD_API_KEY and RUNPOD_ENDPOINT_ID from Replit Secrets
Created	24 October 2026


Measured result: the benchmark run in the Replit Shell against this endpoint (output copied as text). "source runpod" means the invoice was read on RunPod.

```
~/workspace$ python scripts/benchmark.py
SURPrice benchmark, run 2026-10-24 14:48


Planted rule breaches (breaches.json): 13/13 intercepted (100%)

Invoice reading on 1 fixture invoice(s), source runpod:
  8/8 lines exactly right (100%)
```

1. The SURPrice endpoint on RunPod: Ready, endpoint ID opdzmifqcyfxio

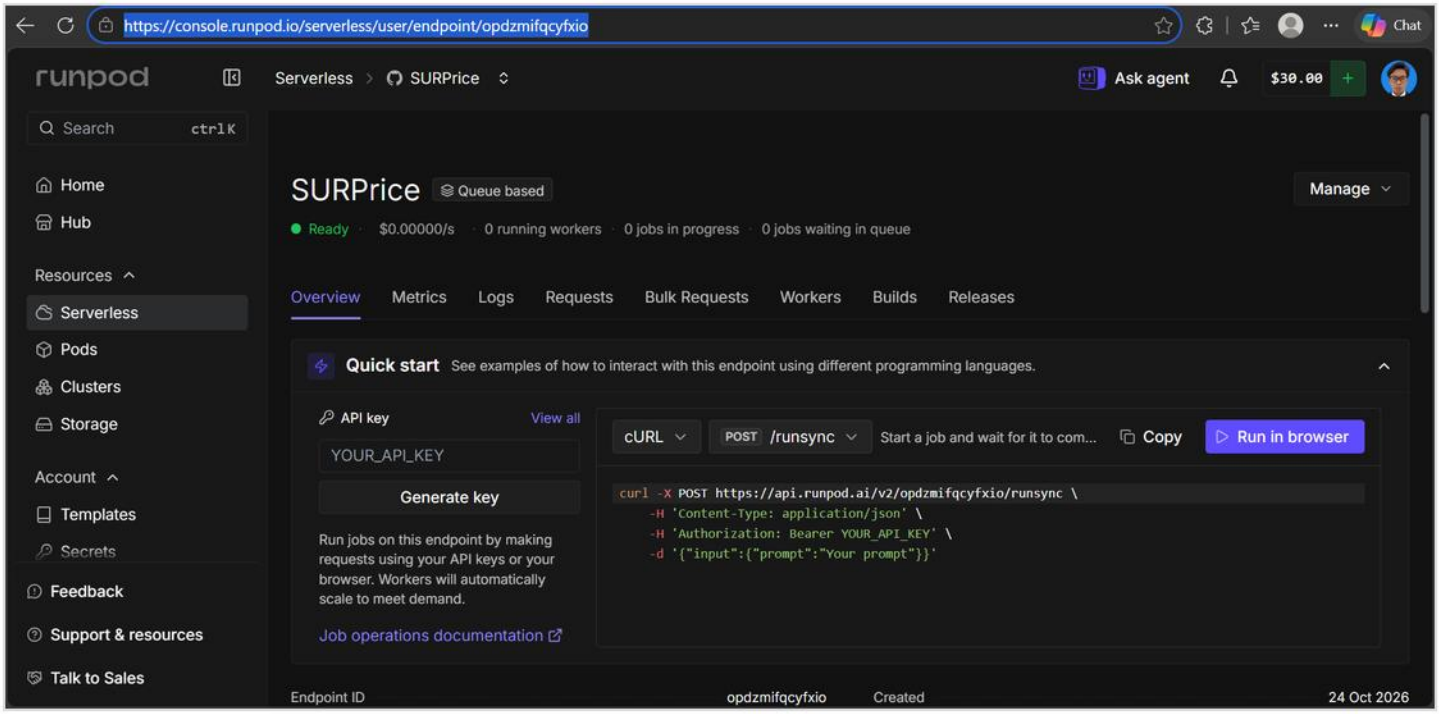

2. Serverless endpoints list: SURPrice, queue based, 24 GB GPU

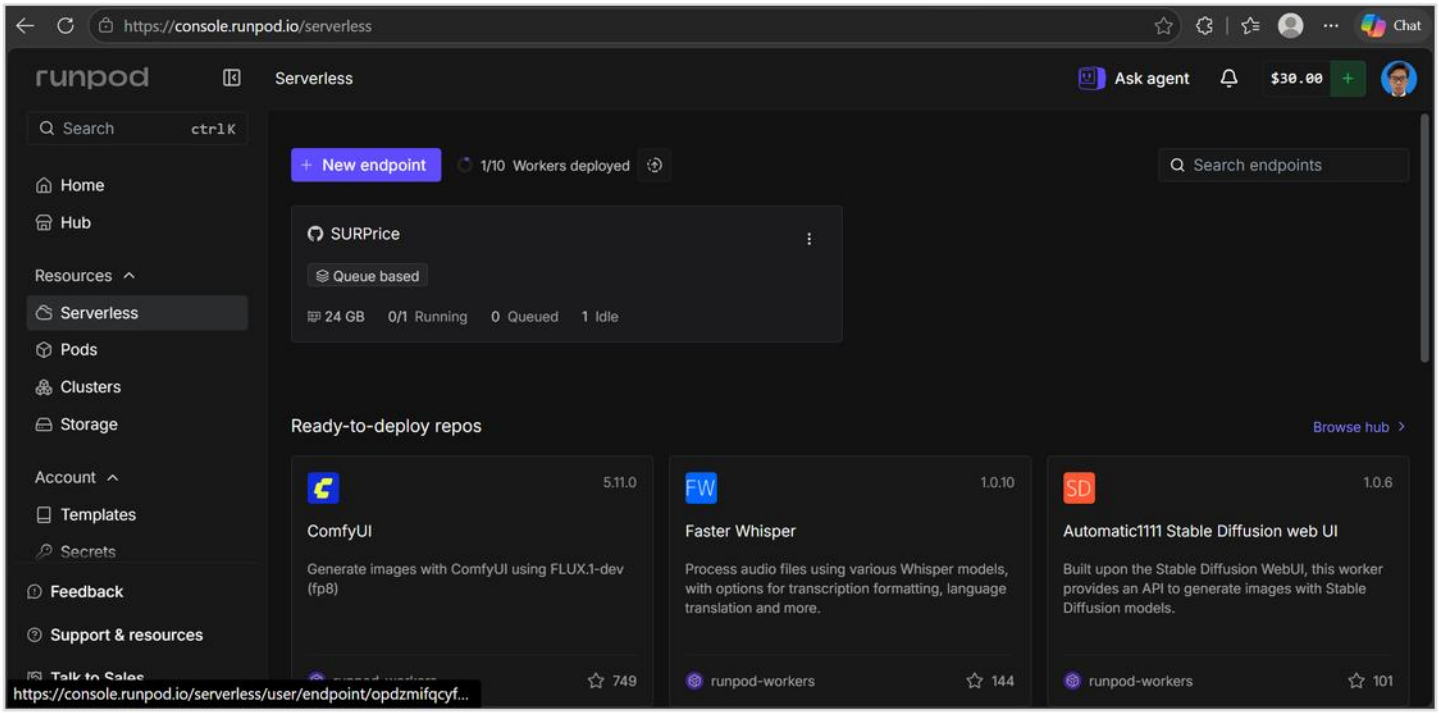

3. Creating the endpoint from the team's GitHub repository WanHafizuddin/SURPrice

