


Figure 3. Behavior: zero reorder, O(1) ordered retrieve, deterministic memory

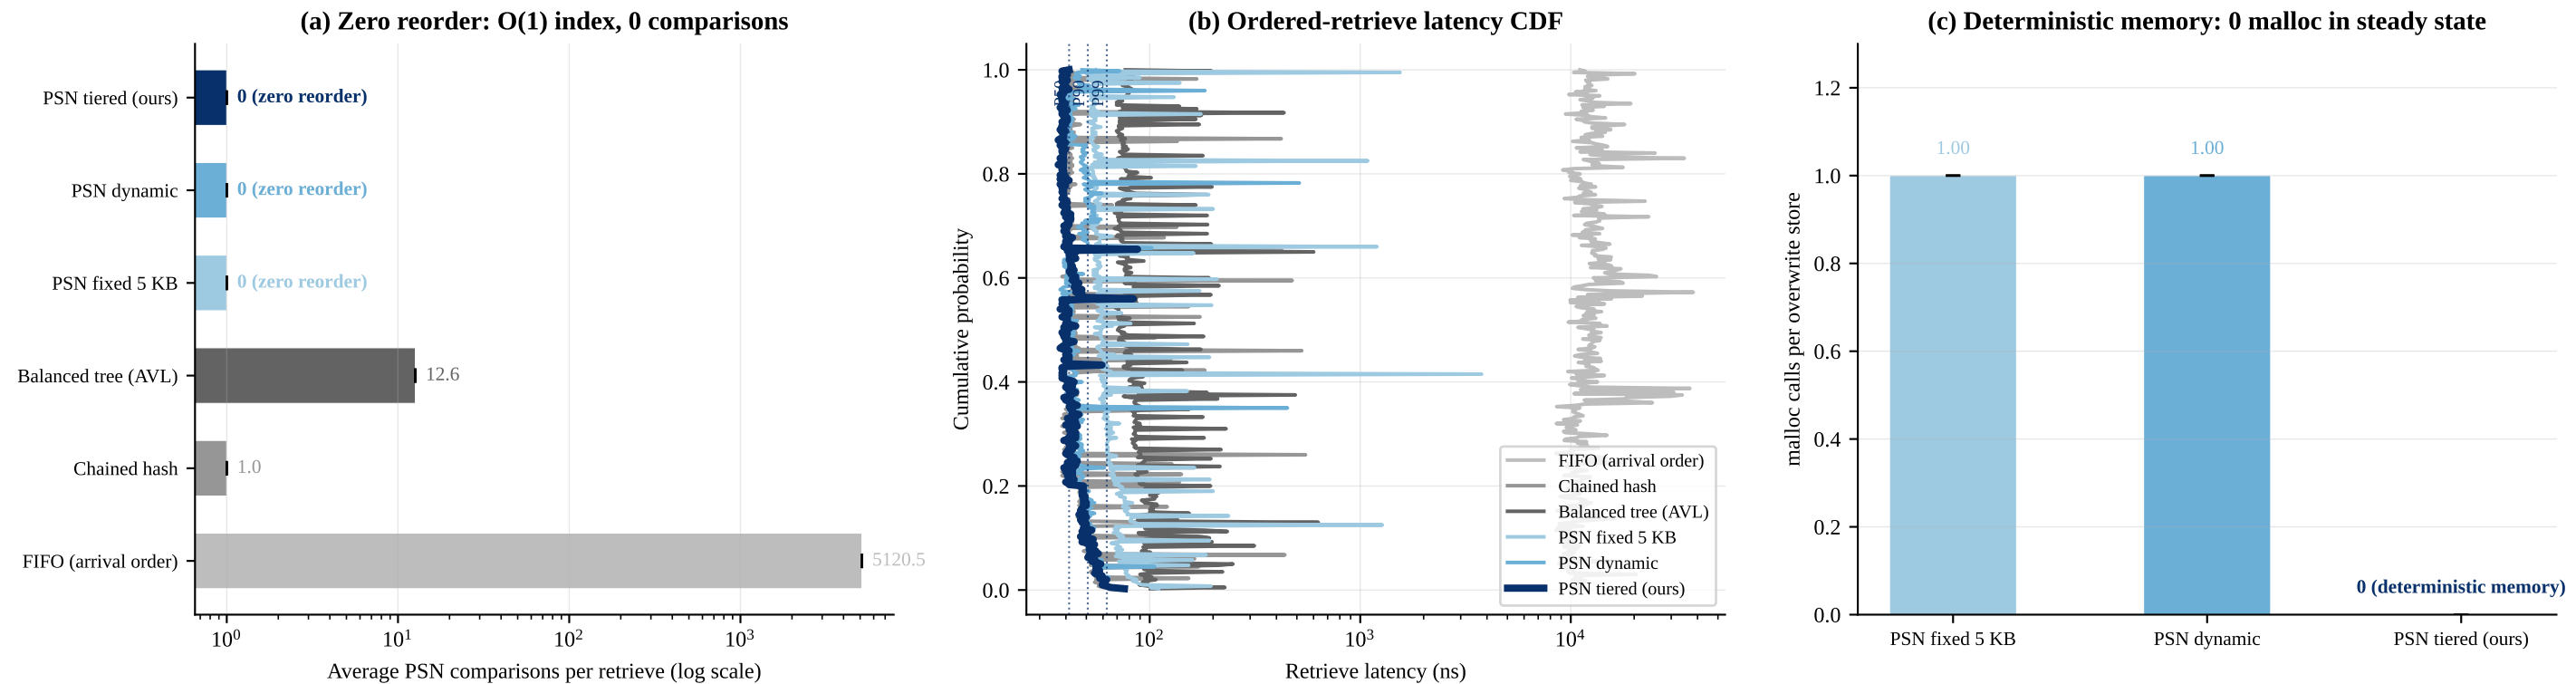

Conditions: $N=10240$ out-of-order store, ordered retrieve; seed=42; 5 repeats; $N*10$ overwrite stores for (c)