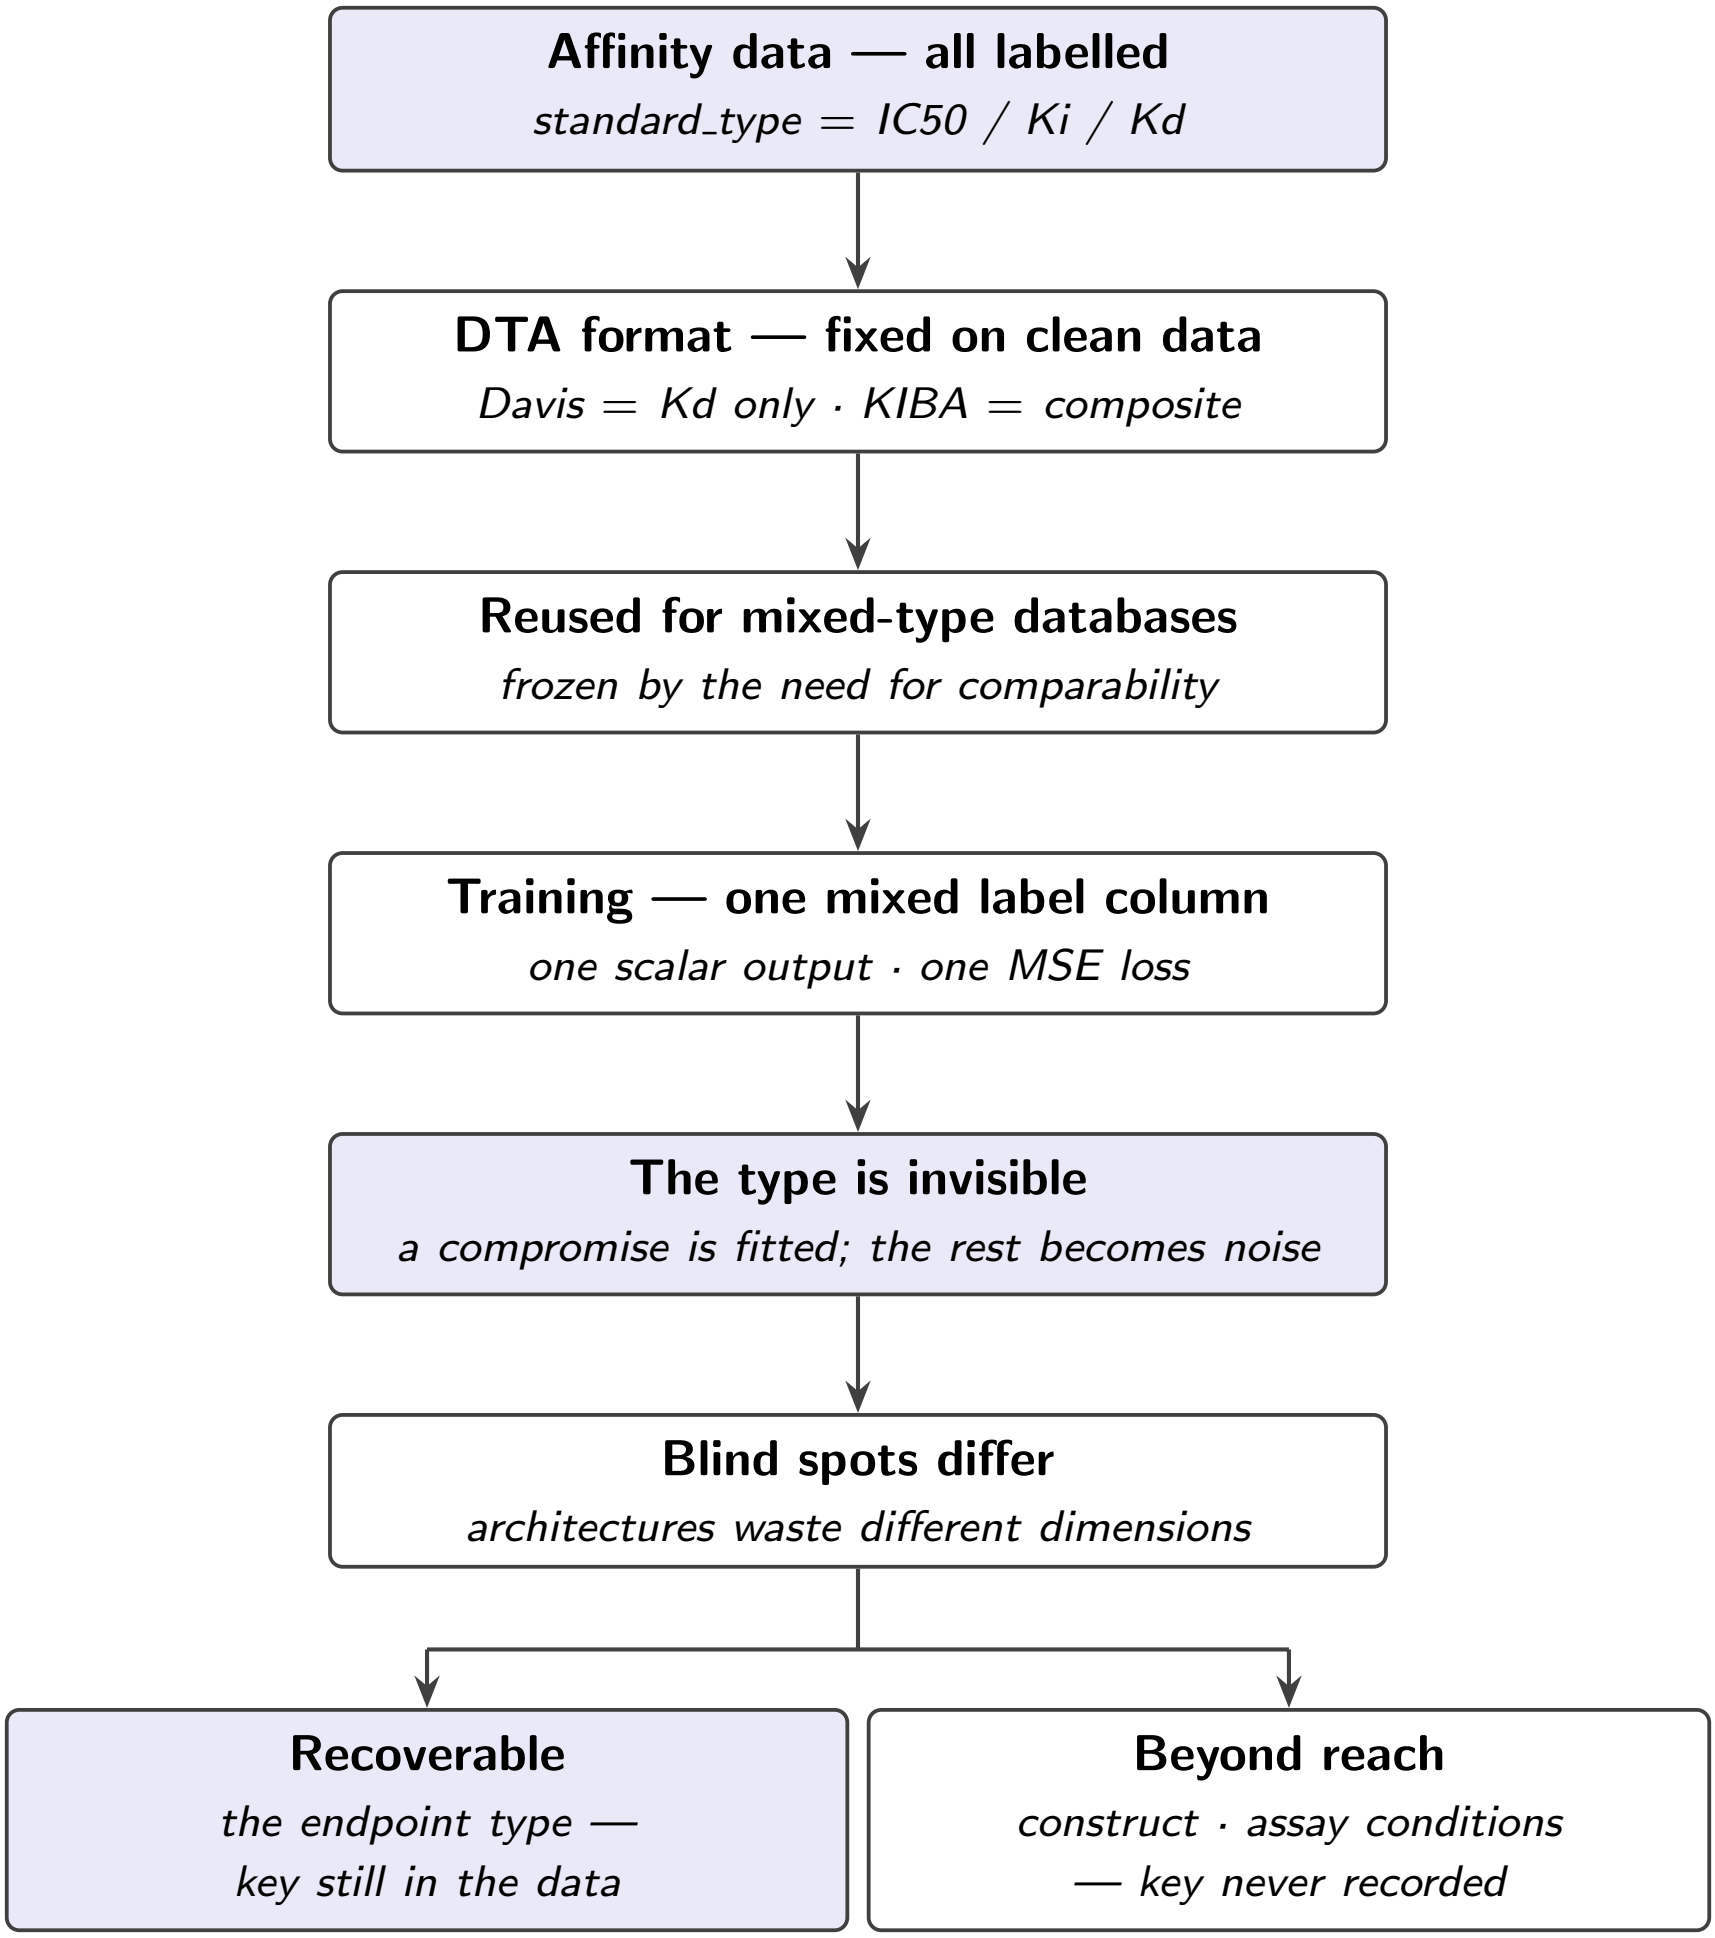
Affinity data — all labelled
standard_type = IC50 / Ki / Kd
DTA format — fixed on clean data
Davis = Kd only · KIBA = composite
Reused for mixed-type databases
frozen by the need for comparability
Training — one mixed label column
one scalar output · one MSE loss
The type is invisible
a compromise is fitted; the rest becomes noise
Blind spots differ
architectures waste different dimensions
Recoverable
the endpoint type —
key still in the data
Beyond reach
construct · assay conditions
— key never recorded