# **ML Homework1**

## **Description:**

## Part 1

- Please write down the mathematical derivation of the following methods:
  - 1. Closed-form LSE approach
  - 2. Steepest descent method
  - 3. Newton's method

## NOTE:

During the demo, we will ask you about which parts of the code correspond to the sections in the mathematical derivations.

## Part2

Please write a program that can do **regularized linear model regression** (polynomial basis) and **visualization**.

You should do it by closed-form LSE approach, Steepest descent, and Newton's method.

- Input parameters:
  - 1. The path and name of a file which consists of data points (comma seperated: x,y):

```
1,12
122,34
-12,323
...
```

- 2. The number of polynomial bases n.  $\phi_0(x) = x^0, \phi_1(x) = x^1, \phi_2(x) = x^2. .. \phi_{n-1}(x) = x^{n-1},$
- 3.  $lambda^{\lambda}$  (only for LSE case)
- Program Behavior: For example, if the number of bases is set to 3, it means that the program is going to find a curve that best fits the data points by  $ax^2 + bx^1 + cx^0 = y$
- Required functions:
  - o a. For closed-form LSE approach:
    - 1. Use LU decomposition to find the inverse of  $(A^TA + \lambda I)$ , Gauss-Jordan elimination will also be accepted.(A is the design matrix).
    - 2. Print out the equation of the best fitting line and the error.
  - b. For steepest descent method:
    - 1. Use steepest descent with LSE and L1 norm to find the best fitting line.
    - 2. Print out the equation of the best fitting line and the error.
    - 3. <u>reference</u> (hint : Consider using a smaller learning rate.)
  - o c. For Newton's method:
    - 1. Please use the method mentioned in the lesson.
    - 2. Print out the equation of the best fitting line and the error, and compare to LSE.
  - o d. For visualization:
    - 1. Please visualize the data points which are the input of program, and the best fitting curve.
    - 2. It's free to use any existing package.

#### NOTE:

- O Use whatever programming language you prefer.
- You should use as few functions from any library as possible. That would be great if you implement all detail operations (like matrix operations) by yourself.
- O Time complexity is not what we care for now, but if you like to improve it in that regard,

it is always good for you.

- Grading policy
- You **must** implement matrix inverse operation by yourself. Please do not use the built in package or you'll not get 100.
- Sample input & output (for reference only, please note that it doesn't include results from the steepest descent method)
  - Input: A file (here shows the content of the file)


```
$ cat testfile.txt
-5.0,51.76405234596766
-4.795918367346939,45.42306433039972
-4.591836734693878,41.274448104888755
-3.979591836734694,26.636216497466364
-3.571428571428571,20.256806057008426
-2.9591836734693877,11.618429243797276
-2.7551020408163263,10.450525068812203
-1.7346938775510203,1.8480982318414874
-1.3265306122448979, -1.0405349639051173
-0.9183673469387754, -4.614630798757861
-0.7142857142857144, -1.3871977310902517
-0.3061224489795915, -1.9916444039966117
0.1020408163265305,-0.912924608376358
0.7142857142857144,6.63482003068499
1.1224489795918373, 9.546867459016372
1.7346938775510203,15.72016146597016
1.9387755102040813,20.62251683859554
2.5510204081632653,33.48059725819715
2.959183673469388,40.76391965675495
3.979591836734695,66.8997605629381
4.387755102040817,78.44316465660981
4.591836734693878,86.99156782355371
5.0,99.78725971978604
```

#### Output

• Case 1: n = 2,  $\lambda = 0$ 

```
LSE:
Fitting line: 4.43295031008X^1 + 29.3064047061
Total error: 16335.123165

Newton's Method:
Fitting line: 4.43295031008X^1 + 29.3064047061
Total error: 16335.123165
```

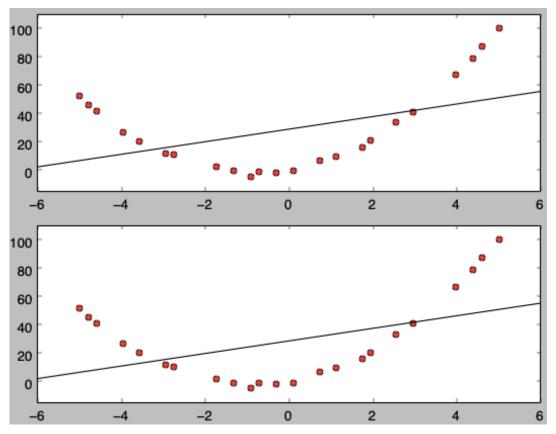

### • Case 2: $n = 3, \lambda = 0$

#### LSE:

Fitting line:  $3.02385339349X^2 + 4.90619026386X^1$ 

-0.231401756088


Total error: 26.5599594993

#### Newton's Method:

Fitting line:  $3.02385339349X^2 + 4.90619026386X^1$ 

-0.231401756088

Total error: 26.5599594993

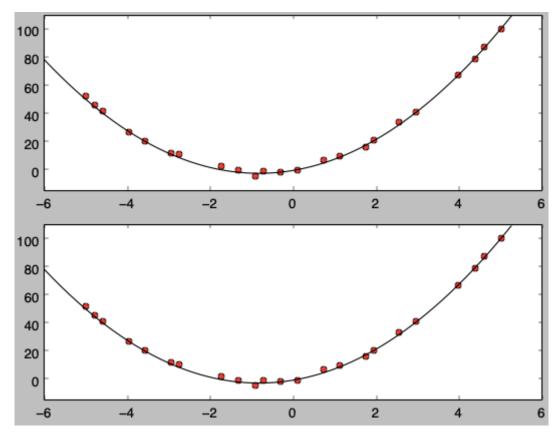

## • Case 3: n = 3, $\lambda = 10000$

LSE:

Fitting line:  $0.8345332827X^2 + 0.0931481983192X^1$ 

+ 0.0469506992735

Total error: 22649.738493

Newton's Method:

Fitting line:  $3.02385339349X^2 + 4.90619026386X^1$ 

-0.231401756088

Total error: 26.5599594993

