



a One revised programme improves the whole relation by giving up a locally exact component

Same coordinate, same r , u , target and z_{before} in P00_s0_W1

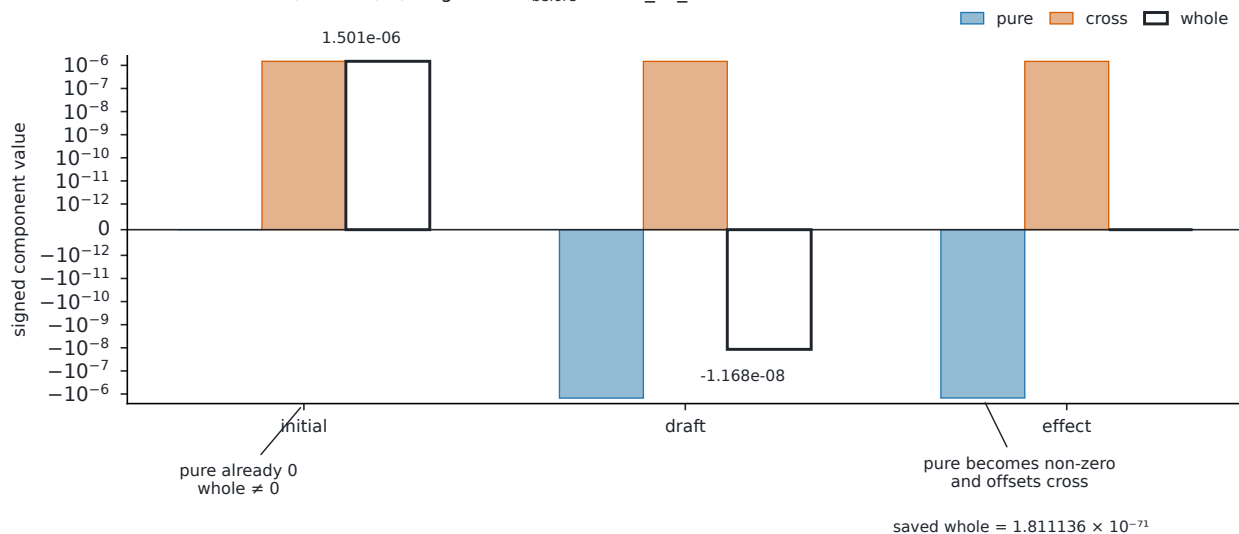


b Actual feedback, parent-state inheritance and changed-target reuse

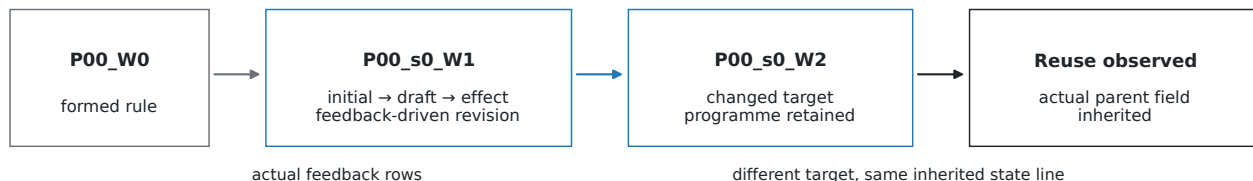

$$B_0 = -1/[2(1 + \sqrt{1+r})^2], C_0 = 0$$

final C = smooth secant expression; B retained

c Further revision is compared within, not across, duties

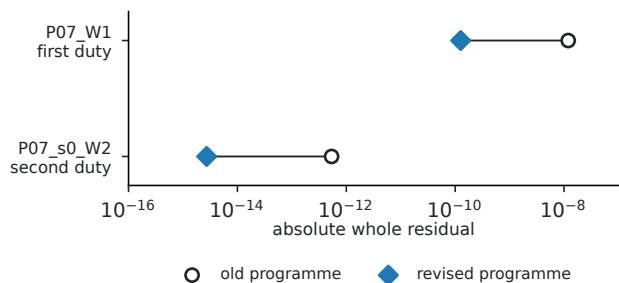

52 recorded stages • 104 complete returns

7/8 adoption pairs kept identical code
• 5 empty final programmes

P07 points are post-selected explanatory traces;
they do not establish an average gain.

Do not join different targets into one learning curve.
The two duties use different inherited states and targets.

40 parent-state links were checked byte-for-byte.
Unchanged versions, failures and the supplementary
observation remain in Source Data.