


# Assignment IV: Ray Tracing :)

Prepared by: Siddhartha Shankar Das

Submission Deadline: 22 July, 11.00am

In this assignment you will have to generate realistic image for common shapes like the picture below.

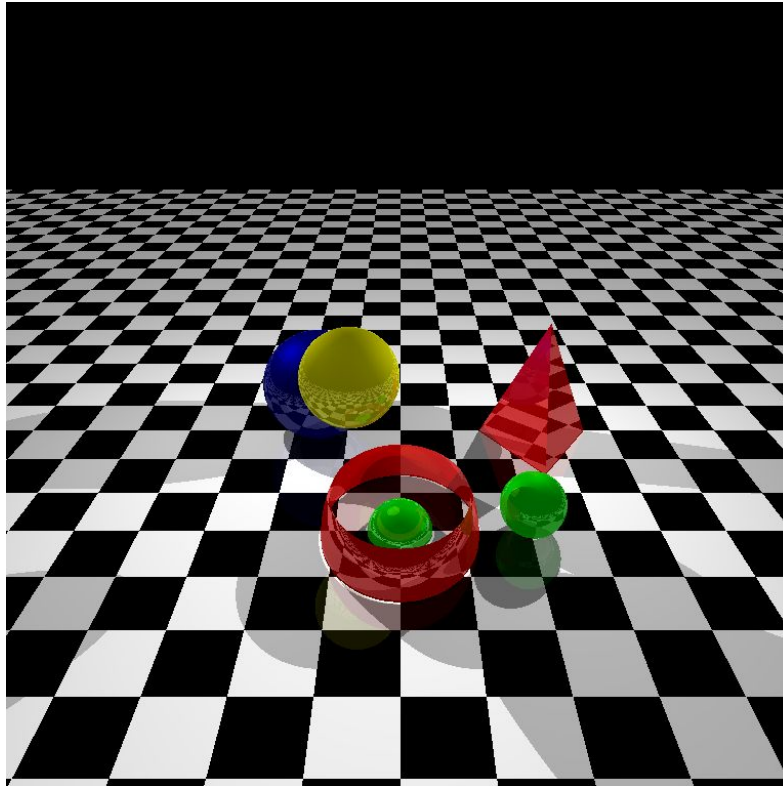

Please check the attached **OpenGL.exe** and **scene.txt** file for better understanding of the mechanism.

<https://drive.google.com/open?id=1nV3nJvYxaHfR73FBE21-JIN-W7cnw0QE>

The scene.txt file contains the configuration and also the explanation of each values. [Read that at first].


**Mark Distribution:** As I have mentioned in the class, no partial marking will be given for written code that doesn't work for this assignment.

[https://docs.google.com/spreadsheets/d/15Ak1ou\\_XWf7CZHWt14U7ktPMcGmFo-GhA6s20jkrV1l/edit?usp=drive\\_web&ouid=112792618929603996297](https://docs.google.com/spreadsheets/d/15Ak1ou_XWf7CZHWt14U7ktPMcGmFo-GhA6s20jkrV1l/edit?usp=drive_web&ouid=112792618929603996297)

## Procedure:

### Task 1: Control Over Scene

1. First, it is important to make sure that your camera rotation code from assignment1 is fully working.
  - a) So check it again and make sure you are able to navigate in any position freely.
  - b) Set your eye, look, up such that you are looking at x-y-z like the following (preferable for testing)
  - c) `cam.set(Point3(0, -200, 10), Point3(0, 0, 0), Vector3(0, 0, 1))` something like this
  - d) `#define your Window_width, Window_height, 500x500` for test case

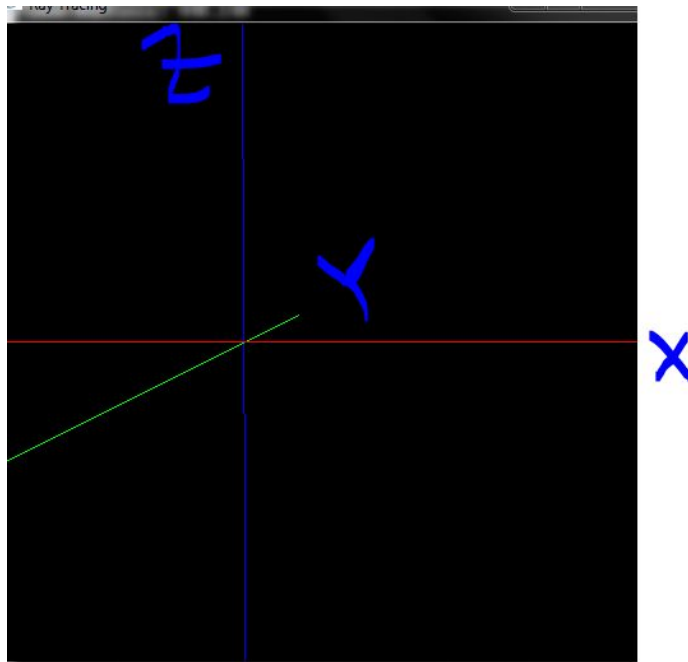

e)

### Task 2: Creating Environment

1. In your main function refer to a function `loadTestData()`

```
Void loadTestData(){ }
```

```
main(){
```

```

        loadTestData();
        //others
    }

```

We will customize the different shape and configuration here for test purposes. Later you have to create a function loadActualData() which will read from the scene.txt file.

2. Create a separate header file/src file with preferable name. Here we will create most of the classes. (You can do everything in same file, but better approach is to module your codes for simplicity). Say here the filename is FILE2, and we have main codes in MAIN\_FILE

In FILE2 we will create a Base Class Object with following methods and properties initially. Later you should add and refactor

```

Object{
    Vector3 reference_point;
    Double height, width, length;
    Int Shine;
    Double color[3];
    Double co_efficients[4];

    Object(){ }
    Virtual void draw(){}
    Void setColor
    Void setShine
    Void setCoEfficients
}

```

And a derived class

```

Sphere: Object{
    Sphere(Center, Radius){
        reference_point=Center;
        length=Radius;
    }

    Void draw(){
        //write codes for drawing sphere
    }
}

```

3. a) In MAIN\_FILE Keep two vectors one for objects and another one for lights and make it accessible to FILE2 too. (just use extern)

```
Vector <Object>  objects;  
Vector <Vector3> lights;  // or you could just typedef Vector3 to Light for  
clarity
```

b) In your loadTestData() function

```
Object *temp;  
  
temp=new Sphere(Center, Radius); // Center(0,0,10), Radius 10  
temp->setColor(1,0,0)  
temp->setCoEfficients(0.4,0.2,0.2,0.2)  
temp->setShine(1)  
  
objects.push_back(temp);  
  
Vector3 light1(-50,50,50);  
lights.push_back(light1);
```

c) in you display method where

- i) Loop over the objects and call draw method
- ii) Loop over the lights object and draw Point for each light souce to visualize position

d) Test it.

4. Create a derived class Floor

```
Floor: Object{  
    Floor(FloorWidth, TileWidth){  
        reference_point=(-FloorWidth/2, -FloorWidth/2,0);  
        length=TileWidth;  
    }  
  
    void draw(){
```

```

        //write codes for drawing black and white floor
    }
}

```

Now write your draw methods such that it creates a checkerboard of black and white with alternating color on each tileWidth.

Add,


```

temp=new Floor(1000, 20);
temp->setCoEfficients(0.4,0.2,0.2,0.2)
temp->setShine(1)
objects.push_back(temp)

```

Test it;

Check it should look Something like the followings

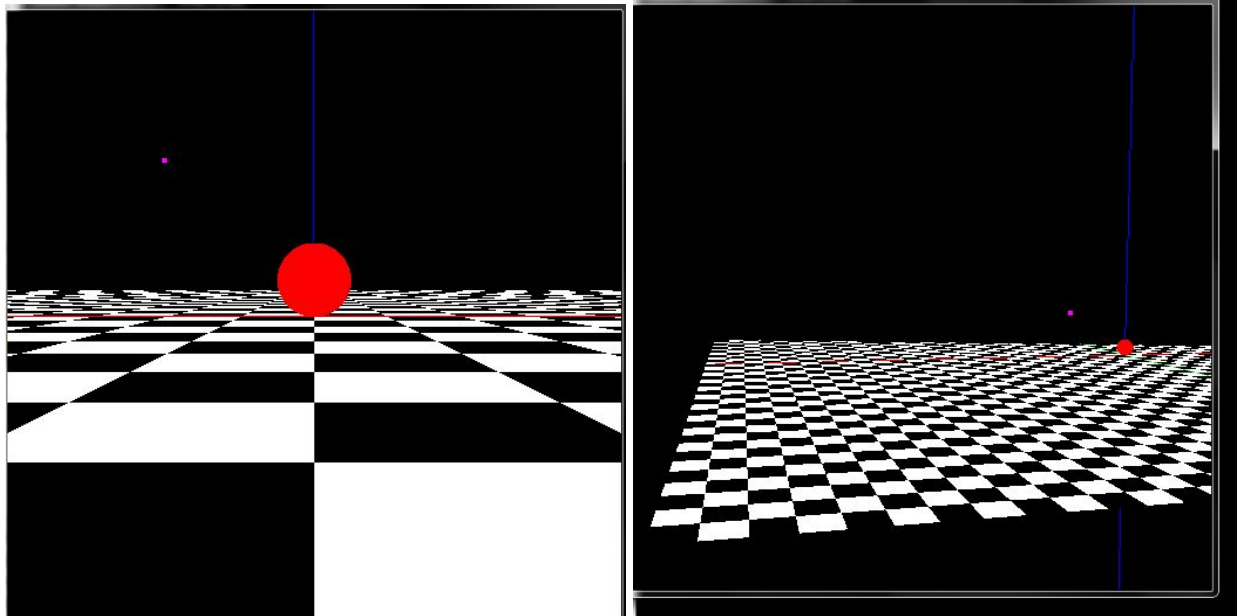


## Task 3: Hidden Surface Removal

1. Create a method Capture() in MAIN\_FILE which will be called when you press 0
2. In loadTestData() set global variable values for image\_width, 768 for test case

3. In FILE2 create a class

```
Ray{  
    Vector3 start;  
    Vector3 dir;  
  
    //write appropriate constructor  
}
```

4. Now the pseudocode for intersecting checkings are

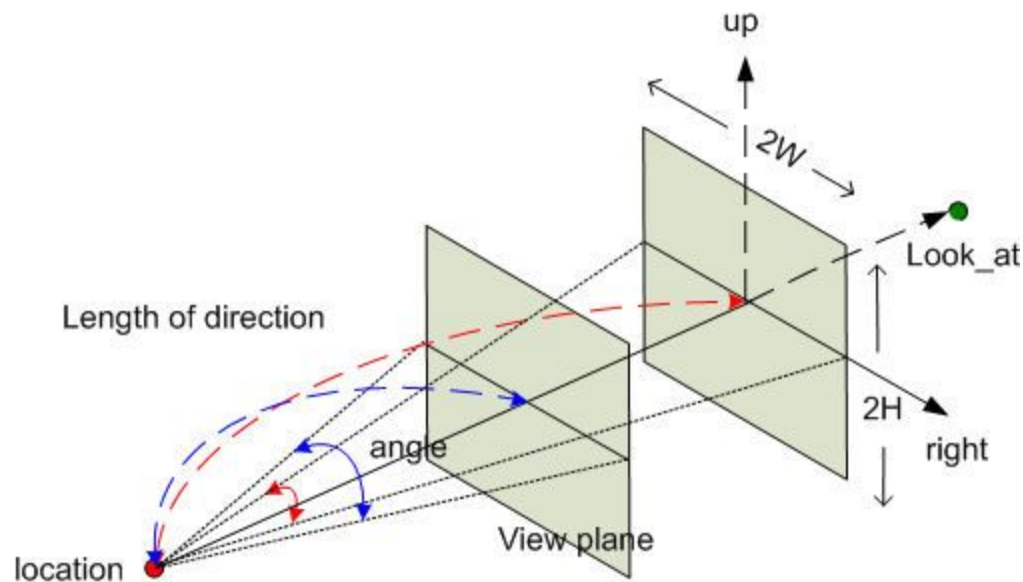

- a) capture():

Initialize bitmap\_image of image\_width x image\_height to black

plane\_distance = (window\_height/2)/tan(VIEW\_ANGLE/2)

**VIEW\_ANGLE is your fovy in gluPerspective**

//here l, r, u direction of camera depends on your implementation so  
use +/- correctly

```

topleft= eye - l*plane_distance-r*WINDOW_WIDTH/2+u*WINDOW_HEIGHT/2);

du=window_width/image_width;
dv=window_height/image_height;

For i=1:image_width
    For j=1:image_width
        corner=Find corner point for i, j th pixel using eye
        similar to topleft above
        Create a Ray using (eye, (corner-eye)) //always normalize
direction

        nearest=-1;

        For each object k
            t =object[k]->intersect(ray, dummyColorAt, 0)
            //dummyColorAt is the color array where pixel value
            will be stored in return time. As this is only for nearest
            object detection dummy should be sufficient. Level is 0
            here

            if(t<=0) continue;

            Update t, nearest if t<t_min
        End

        if(nearest!=-1)
            t =object[nearest]->intersect(ray, colorAt, 1)

            //in this case we know nearest object so level should
be set to 1

            //we will deal with this later

            Update_image_i_j pixel value
        end

    End
End

save_image

```

b) In Object base class create a virtual method intersect

```

Virtual double intersect(Ray *r, double *current_color, int level){

    Return -1;
}

```

c) Now in Sphere Derived Class override this function

In this function you have to calculate the sphere ray intersection:

Please refer to your ray\_casting Slide Page no 31, 32

Here you will find necessary calculation for calculating t

### Ray-Sphere Intersection

- Quadratic:  $at^2 + bt + c = 0$ 
  - $a = 1$  (remember,  $\|R_d\| = 1$ )
  - $b = 2R_d \cdot R_o$
  - $c = R_o \cdot R_o - r^2$
- with discriminant  $d = \sqrt{b^2 - 4ac}$
- and solutions  $t_{\pm} = \frac{-b \pm d}{2a}$

A= dot(ray->dir, ray->dir)

B= from equation

C= from equation

D=B^2-4ac

If D<0 return -1;

Otherwise Calculate t1, t2

Update current\_color=color // for the time being testing purpose

Return the minimum t



d) Now test it, Make sure everything working

If everything works then you should see an image with only a circle in it

If it does not work, then in capture function


Set  $i, j$  to a specific pixel and check for intersection

Or in intersect function, Set custom Ray  $\rightarrow$  start(0,100,10) and Ray  $\rightarrow$  direction (0, 1, 0)

So for a sphere centered at 0,0,10 with radius 10.

You should get two intersecting point 0,-10,10 and 0,10,10

If works add more sphere and test it, it should work as hidden surface removal procedure

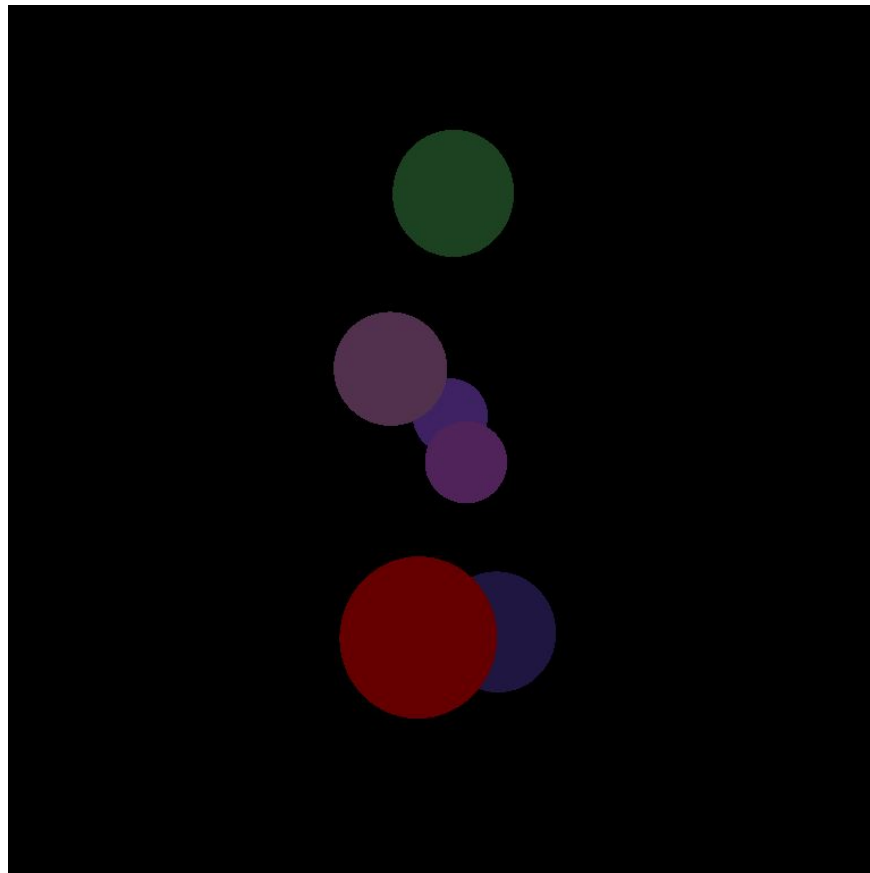

## Task 4: Illumination

- a) Your hidden surface procedure should be working by now. The next step is to add some lighting. If you look closely, the purpose of level variable in intersecting method is to determine the nearest object. So no color computation actually necessary here.

So after computation of intersecting t in do a simple check like following

```
If (level==0){
    Return t;
}
```

b) Now if level is not 0 (here 1) then add some lighting codes, and regroup functions like following

So skeleton of your function should look like this

```
double intersect(Ray *r, double *current_color, int level){
    t= getIntersectingT(Ray *r) //perform computation of intersection
    here

    If t<=0 return -1
    if(level=0)return t;

    intersectionPoint = r->start+ r->direction*t;

    colorAt=getColorAt(intersectionPoint)
    // generally this function should return single color but for
    checkerboard like plane color depends on intersectionPoint

    setColorAt(current_color, colorAt)


    Return t;
}
```

At setColorAt function multiply each colorAt color value with ambient coefficient

```
current_color=colorAt*co_efficient[AMBIENT];
```

Because AMBIENT means how normally illuminated an object is

Test it. You would a an Object getting dimmer shade.

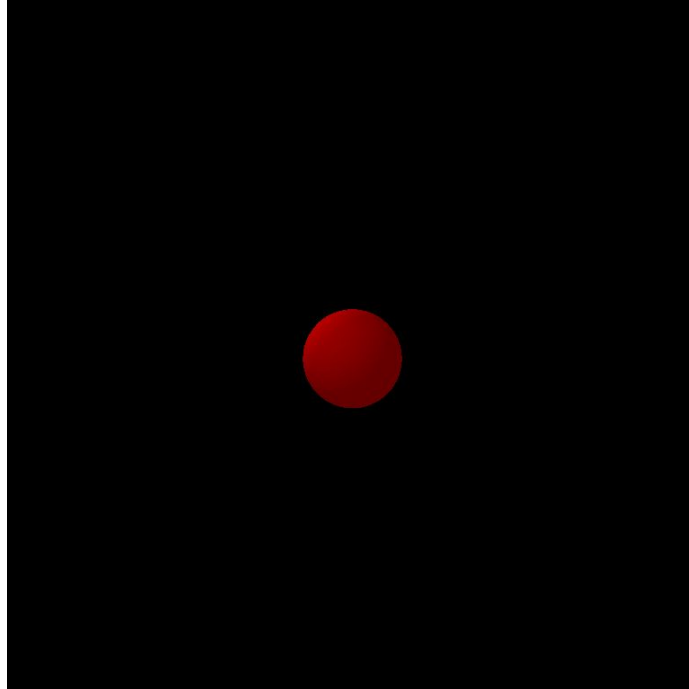

c) After the above step, add the following codes after setColorAt()

```
normal=getNormal(intersectionPoint);
reflection=getReflection(ray, intersectionPoint);
```


\*\*to calculate reflection from incident ray at intersectionPoint check the formula  

$$\text{reflection} = 2 (\text{ray} \rightarrow \text{direction} \cdot \text{normal}) \text{normal} - \text{ray} \rightarrow \text{reccion} //$$
 may be different for you  
 Normalize it

[http://asawicki.info/news\\_1301\\_reflect\\_and\\_refract\\_functions.html](http://asawicki.info/news_1301_reflect_and_refract_functions.html)

d) Now you have to check whether the intersecting point is obscured by any objects from the light

Because if light source is obscured by an object then no impact of light will be applicable on the intersecting pixel

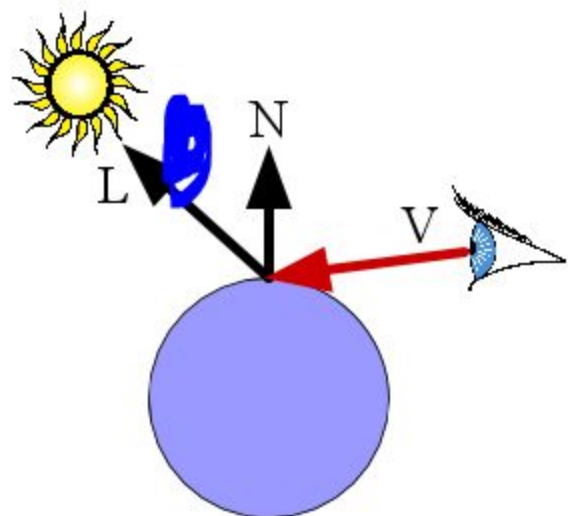

So after the above part do the following

For each light source

```
Construct L ray like in the picture
direction= (lightSource-intersectionPoint) //normalize it
start= intersection + direction*1 //1 is for taking slightly above the
point so it doesn't again intersect with same object due to precision
```

```
Ray L(start, direction)
```

For each object now check whether this L ray obscured by any object or not.

If it is not obscured that means light falls onto the intersection point so you have update current\_color,


```
Calculate lambert value,
Calculate phong value
//check the illumination slide for formula
```

Now update each pixel value of Current\_Color by following

```
current_color+=source_factor*lambert*co_efficient[DIFFIUSE]*color
At
current_color+=source_factor*pow(phong,shine)*co_efficient[SPECUL
AR]*colorAt
end
```

end

\*\*\*\* IF YOU COMPLETE THE ABOVE PART by then you have completed the illumination PART  
:D So your output should look like following

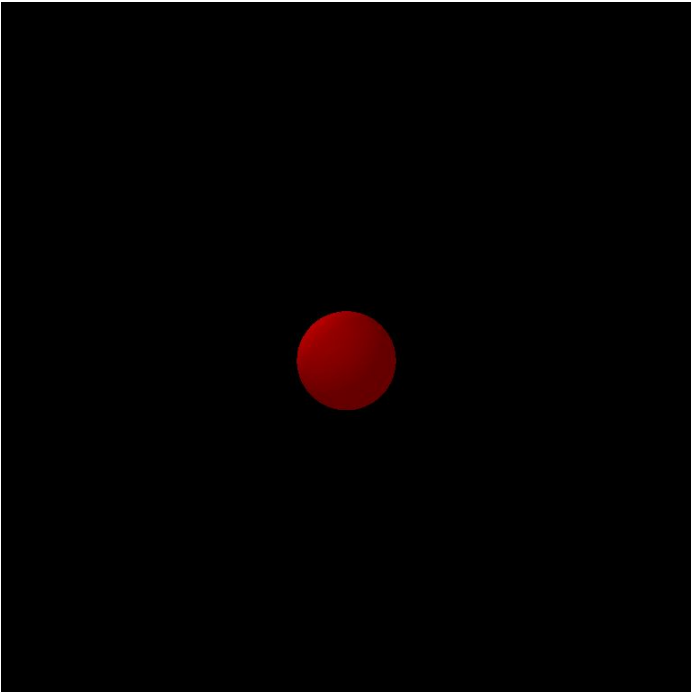

## Task 5: Reflection

- a) Reflection means using the reflected ray you do the same as before and how many times you reflect is your Recursion\_Level
- b) So in MAIN FILE declare global variable recursion\_level, make it available in FILE2 via extern operator and in loadTestData set it as 3 or 4
- c) Now after the above code do the following

```
if(level<recursion_level)

    start=intersectionPoint+reflection*1 //slight up to avoid own
intersection

    Ray reflectionRay(start, reflection)

    Like capture method, find the nearest intersecting object, using
intersect function

    If found
        objects[nearest]->intersect(reflectionRay, reflected_color,
level+1);


        //update currenrt_color using reflected_color
        current_color+=reflected_color*co_efficient[REFLECTION];

    End

End

Check whether all current_color pixel value is within 1 or 0 if not set
it
```

\*\*\*\*\* If you complete the above step then for multiple sphere you output should look like the following

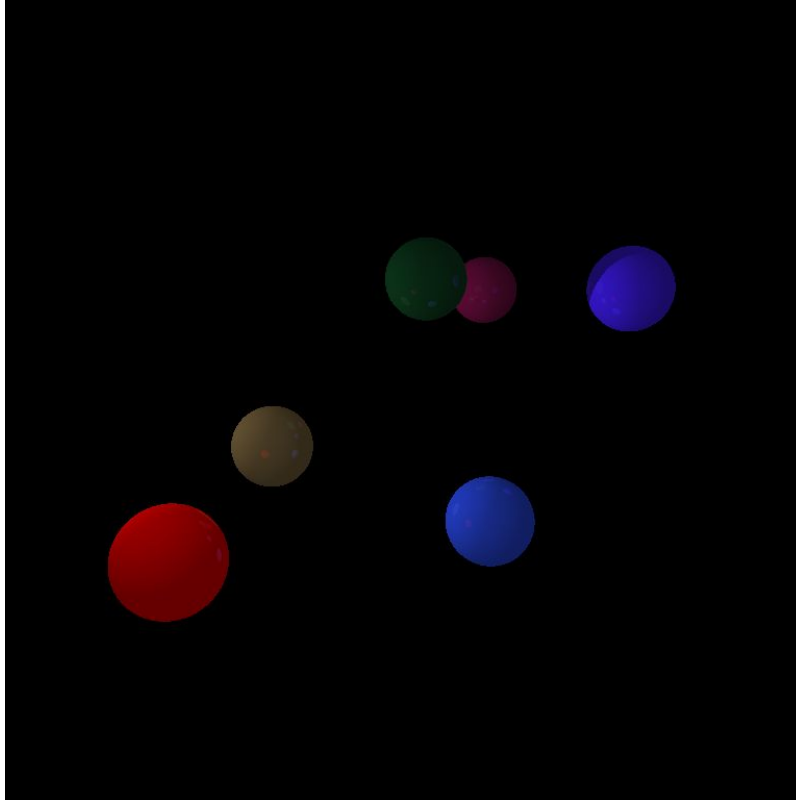

## Task 6: Floor , Triangle

Ok now, if you complete up to this part, clearly you can now see that the differences between Sphere, FLOOR, Triangle are

`getNormal()`, `getColorAt()`, `getIntersectingT()` these functions.

So, You Should make appropriate virtual functions and derived methods for handling these

a) For FLOOR,

- i) the normal will be always 0,0,1
- ii) For t calculation of plane, you can use the equation from slide or other ways.  
After finding t, calculate the intersectingPoint  
If the point is not within the floor then return -1

iii) At getColorAt(intersection) check on which tile the intersection point belongs and return color accordingly

b) For triangle normal calculation

normal= (b-a) X (c-a)

Intersection formula, you can use slides formula or from the following link

[https://en.wikipedia.org/wiki/M%C3%B6ller%E2%80%93Trumbore\\_intersection\\_algorithm](https://en.wikipedia.org/wiki/M%C3%B6ller%E2%80%93Trumbore_intersection_algorithm)

If you complete this then you have Basic RayTracing

## Task 7: General Quadratic

a) If you check the following Link

<http://tutorial.math.lamar.edu/Classes/CalcIII/QuadricSurfaces.aspx>

general Quadratics have following form

$$Ax^2 + By^2 + Cz^2 + Dxy + Exz + Fyz + Gx + Hy + Iz + J = 0$$

b) If you done everything, then you know

The only change is getIntersectingT() and getNormal()

[https://drive.google.com/drive/folders/12ura3BBQ8Rerl0E-ZXtqLgifs\\_mHWrt1](https://drive.google.com/drive/folders/12ura3BBQ8Rerl0E-ZXtqLgifs_mHWrt1)

### Class lecture

i) First, getNormal(intersectionPoint)

Normal vector for the above form will be

$$(dF/dx, dF/dy, dF/dz)$$

So find each of them, substitute x, y, z values of intersectionPoint to get Normal



ii) forGetIntersectionT (Ray \*r)

You have  $x = x_0 + tx_1$ ,  $y = y_0 + ty_1$ ,  $z = z_0 + tz_1$

Therefore, if you substitute these then you will find  
Equation of form

$$At^2 + Bt + C = 0$$

Like sphere now you can calculate  $t_1$  and  $t_2$

c) Clipping :

Now from the  $t_1$  and  $t_2$

Calculate intersecting\_point1 and intersecting\_point2


If both point within volume return smallest  $t$

If only one then return that

If none return -1

## Task 8 : LoadActualData

- a) load Actual information from scene.txt file
- b) display

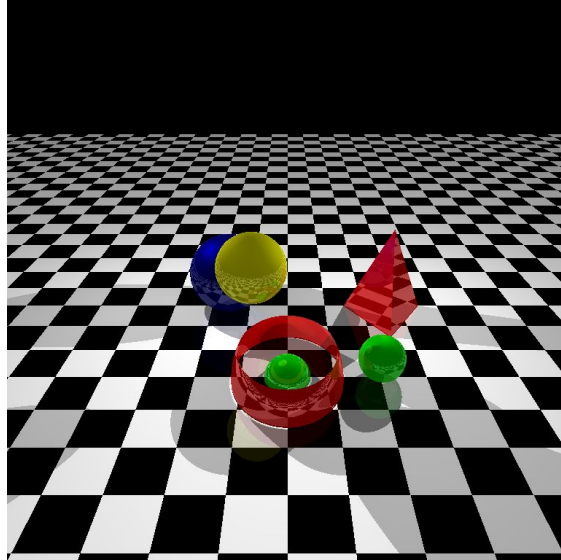

## Task 9: Refraction

Do refraction only for one or two sphere objects.  
Set eta or refraction index according to your preference.

Some, Ray calculation and other related calculation can be found here  
[https://drive.google.com/drive/folders/12ura3BBQ8Rerl0E-ZXtqLgjfs\\_mHWrt1](https://drive.google.com/drive/folders/12ura3BBQ8Rerl0E-ZXtqLgjfs_mHWrt1)  
[http://asawicki.info/news\\_1301\\_reflect\\_and\\_refract\\_functions.html](http://asawicki.info/news_1301_reflect_and_refract_functions.html)

The calculations and after processing are quite similar to reflection, therefore you should be able to do that by some searching.

## Task 10: Simple texture at floor

Load any picture of any suitable dimension ( Eg. 500 x 500).  
Map this picture to the floor dimension.  
Multiply the floor pixel color with image pixel color to view the texture image combined with the floor.

In this assignment, you will have to handle texture for floor and a rectangle image ( :D ).

## Task 11: Clear Memory

- a) Free objects, images, lights and other memories

## Do's and Don'ts:

- Think yourself twice about the problems first then contact me if requires
- Do not copy codes, not from your friends, previous years or online. Write it yourself
- Start couple of days earlier because there are many things that can go wrong
- Test your code, and do program incrementally
- I will be very busy in the following couple of weeks, thus look up on the internet first for any issues.

### Marks Distribution:

<https://docs.google.com/document/d/1AvSleilJT9Gac1Izj6UxHhULInLfG5snto6bo7tzEkQ/edit?usp=sharing>

[illegible]