





IDE Net Beans + Código

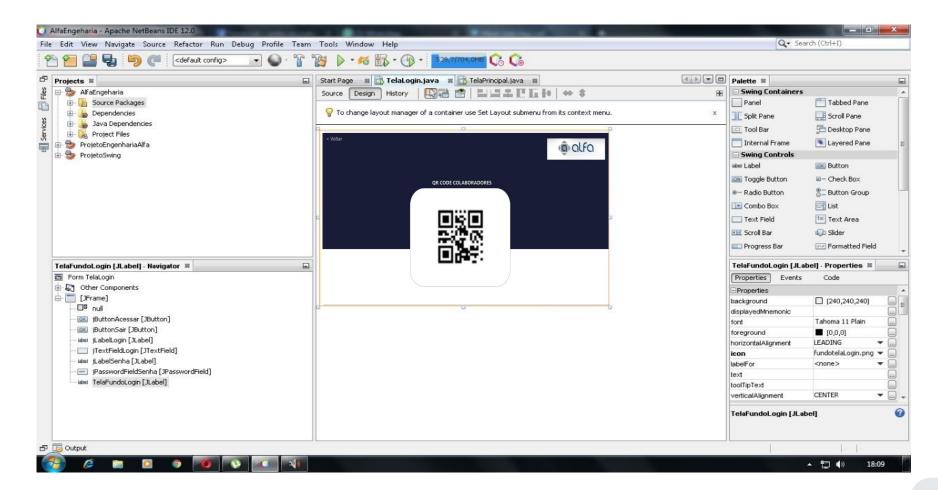

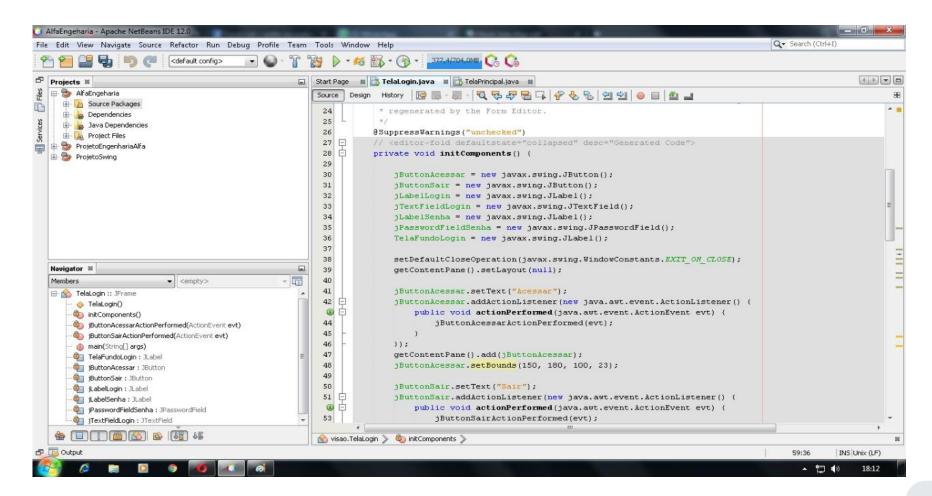

## Código

```
@SuppressWarnings("unchecked")
 // <editor-fold defaultstate="collapsed" desc="Generated Code">
 private void initComponents() {
   jButtonAcessar = new javax.swing.JButton();
   ¡ButtonSair = new javax.swing.JButton();
   jLabelLogin = new javax.swing.JLabel();
   ¡TextFieldLogin = new javax.swing.JTextField();
   iLabelSenha = new javax.swing.JLabel();
    jPasswordFieldSenha = new javax.swing.JPasswordField();
   TelaFundoLogin = new javax.swing.JLabel();
   setDefaultCloseOperation(javax.swing.WindowCons-
tants.EXIT ON CLOSE);
   getContentPane().setLayout(null);
```

```
iButtonAcessar.setText("Acessar");
    ¡ButtonAcessar.addActionListener(new java.awt.event.Action-
Listener() {
      public void actionPerformed(java.awt.event.ActionEvent evt)
        ¡ButtonAcessarActionPerformed(evt);
    getContentPane().add(iButtonAcessar);
    ¡ButtonAcessar.setBounds(150, 180, 100, 23);
    jButtonSair.setText("Sair");
    jButtonSair.addActionListener(new java.awt.event.ActionListe-
ner() {
```

```
public void actionPerformed(java.awt.event.ActionEvent evt)
                                                                         getContentPane().add(jLabelSenha);
                                                                         ¡LabelSenha.setBounds(100, 130, 34, 20);
    iButtonSairActionPerformed(evt):
                                                                         getContentPane().add(jPasswordFieldSenha);
                                                                         ¡PasswordFieldSenha.setBounds(140, 130, 220, 20);
getContentPane().add(jButtonSair);
                                                                         TelaFundoLogin.setIcon(new javax.swing.ImageIcon(get-
                                                                    Class().getResource("/imagens/fundotelaLogin.png"))); // NOI18N
¡ButtonSair.setBounds(260, 180, 100, 23);
                                                                         getContentPane().add(TelaFundoLogin);
                                                                         TelaFundoLogin.setBounds(-10, -6, 450, 300);
jLabelLogin.setText("Login:");
getContentPane().add(jLabelLogin);
                                                                         setSize(new java.awt.Dimension(454, 329));
¡LabelLogin.setBounds(100, 90, 29, 20);
getContentPane().add(iTextFieldLogin);
                                                                         setLocationRelativeTo(null);
¡TextFieldLogin.setBounds(140, 90, 220, 20);
                                                                       }// </editor-fold>
jLabelSenha.setText("Senha:");
                                                                       private void jButtonAcessarActionPerformed(java.awt.event.Ac-
                                                                    tionEvent evt) {
```

## Código

```
TelaPrincipal tela= new TelaPrincipal():
                                                                              /* If Nimbus (introduced in Java SE 6) is not available, stay with
                                                                          the default look and feel
   tela.setVisible(true);
                                                                               * For details see http://download.oracle.com/javase/tuto-
                                                                          rial/uiswing/lookandfeel/plaf.html
  private void jButtonSairActionPerformed(java.awt.event.ActionE-
                                                                             try {
vent evt) {
                                                                                for (javax.swing.UIManager.LookAndFeelInfo info : ja-
   // TODO add your handling code here:
                                                                         vax.swing.UIManager.getInstalledLookAndFeels()) {
                                                                                   if ("Nimbus".equals(info.getName())) {
                                                                                    javax.swing.UIManager.setLookAndFeel(info.getClass-
                                                                          Name());
  * @param args the command line arguments
                                                                                    break;
  public static void main(String args[]) {
   /* Set the Nimbus look and feel */
                                                                              } catch (ClassNotFoundException ex) {
   //<editor-fold defaultstate="collapsed" desc=" Look and feel
setting code (optional) ">
```

```
} catch (InstantiationException ex) {
      java.util.logging.Logger.getLogger(TelaLogin.class.get-
Name()).log(java.util.logging.Level.SEVERE, null, ex);
    } catch (IllegalAccessException ex) {
      java.util.logging.Logger.getLogger(TelaLogin.class.get-
Name()).log(java.util.logging.Level.SEVERE, null, ex);
    } catch (javax.swing.UnsupportedLookAndFeelException ex) {
      java.util.logging.Logger.getLogger(TelaLogin.class.get-
Name()).log(java.util.logging.Level.SEVERE, null, ex);
    //</editor-fold>
    /* Create and display the form */
    java.awt.EventQueue.invokeLater(new Runnable() {
```

java.util.logging.Logger.getLogger(TelaLogin.class.get-

Name()).log(java.util.logging.Level.SEVERE, null, ex);

```
public void run() {
      new TelaLogin().setVisible(true);
// Variables declaration - do not modify
private javax.swing.JLabel TelaFundoLogin;
private javax.swing.JButton jButtonAcessar;
private javax.swing.JButton jButtonSair;
private javax.swing.JLabel jLabelLogin;
private javax.swing.JLabel jLabelSenha;
private javax.swing.JPasswordField jPasswordFieldSenha;
private javax.swing.JTextField jTextFieldLogin;
// End of variables declaration
```