



MONGO RELATIONSHIPS

ONE TO FEW


Embed the data directly in the document!



```
{
  name: 'Tommy Cash',
  savedAddresses : [
    { street: 'Rahukohtu 3', city: 'Tallinn ', country: 'Estonia' },
    { street: 'Rävala 5', city: 'Tallinn ', country: 'Estonia' }
  ]
}
```

ONE TO MANY


One option is to store your data separately, but then store references to document ID's somewhere inside the parent:

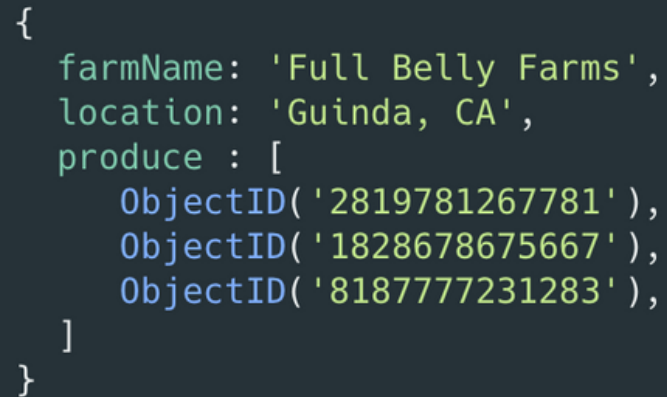

```
{
  farmName: 'Full Belly Farms',
  location: 'Guinda, CA',
  produce : [
    ObjectID('2819781267781'),
    ObjectID('1828678675667'),
    ObjectID('8187777231283'),
  ]
}
```

ONE TO BAJILLIONS

With thousands or more documents, it's more efficient to store a reference to the parent on the child document.

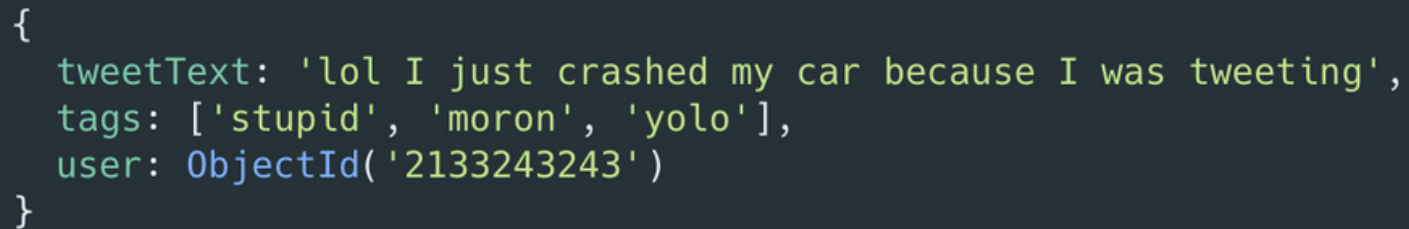

```
{  
  tweetText: 'lol I just crashed my car because I was tweeting',  
  tags: ['stupid', 'moron', 'yolo'],  
  user: ObjectId('2133243243')  
}
```