
WATER HYDRAULIC VALVES / PRODUCT INFORMATION

DN16 Directional Valves

Review the directional function, pressure drop and actuation arrangement at the actual circuit flow. Coordinate mounting, connections and the return path before ordering.

Oil-pilot versions use dual seals and an air vent to reduce cross-contamination risk.

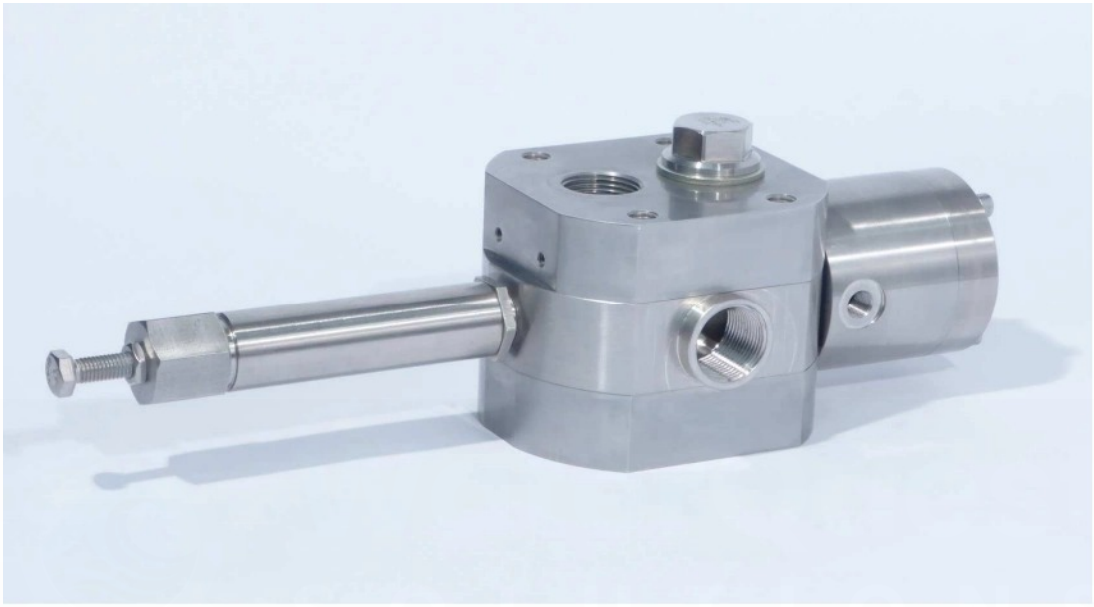

DN16 Directional Valves - Product view

Key operating parameters

Parameter	Published value
Maximum inlet pressure	160 bar (2,321 psi)
Operating pressure	0-100 bar (0-1,450 psi)
Flow range	0-140 L/min (0-37 US gpm)
Flow coefficient	Cv 5.0 / Kv 4.26
Feed gallery	18 mm (0.709 in)

Selection basis

Match the selected configuration to the working water, pressure, flow, temperature and duty. Maximum ratings and separate curve points do not establish one simultaneous operating point. Confirm installation and supplied configuration with WaterQuest Solutions.

Technical data

Parameter	Published value
Maximum inlet pressure	160 bar (2,321 psi)
Operating pressure	0-100 bar (0-1,450 psi)
Flow range	0-140 L/min (0-37 US gpm)
Flow coefficient	Cv 5.0 / Kv 4.26
Feed gallery	18 mm (0.709 in)
Main ports	¾" BSPP
Materials	AISI 316, polymer and martensitic stainless steel
Pilot media	Water, air or oil
Pilot actuation range	2-80 bar (29-1,160 psi) by configuration
Standard external pilot actuator	Designed for 40 bar (580 psi)
Return	Spring; detent and pilot-return options

DN16 Directional Valves - options

Function	Water pilot	Oil pilot	Air pilot
4/2	201EJSW	201ELSW	201EFSW
3/2 - spring opens P	208EJSW	208ELSW	208EFSW
3/2 - spring closes P	203EJSW	203ELSW	203EFSW


Selection and integration

Selection considerations Confirm pilot pressure and available flow for the selected actuator. Direct solenoid actuation is not offered for this valve size; use the specified pilot arrangement. Discuss your application


Drawings and reference visuals

Dimensions, ports and curves are reproduced from the webpage visuals. Use the original drawing units and confirm the current approved drawing before fabrication or installation.


DN16 Directional Valves - Integral pilot dimensions

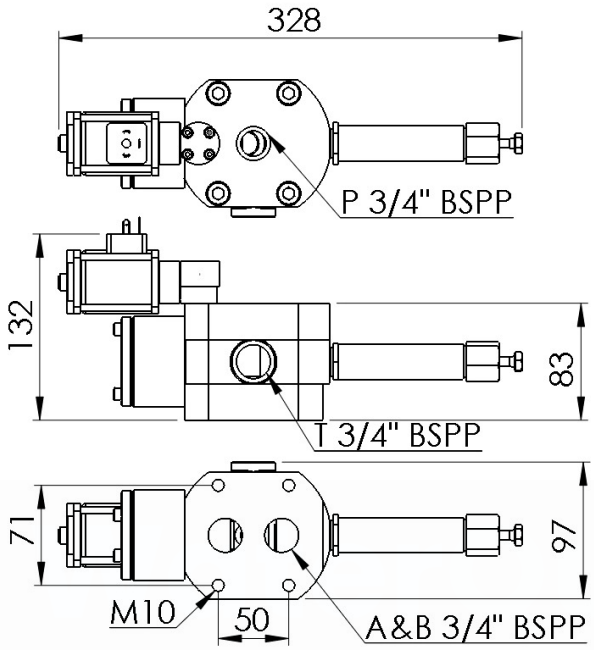

DN16 Directional Valves - External pilot dimensions

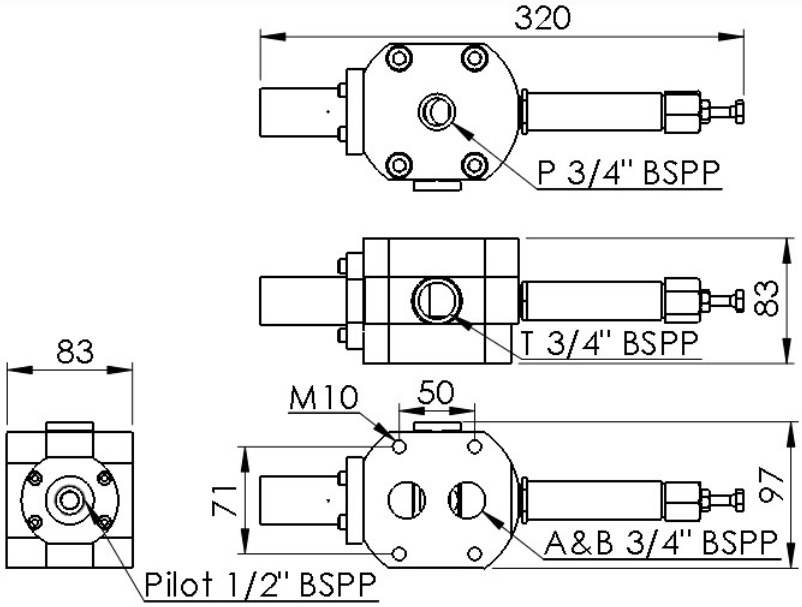

DN16 Directional Valves - 3/2 closed dimensions

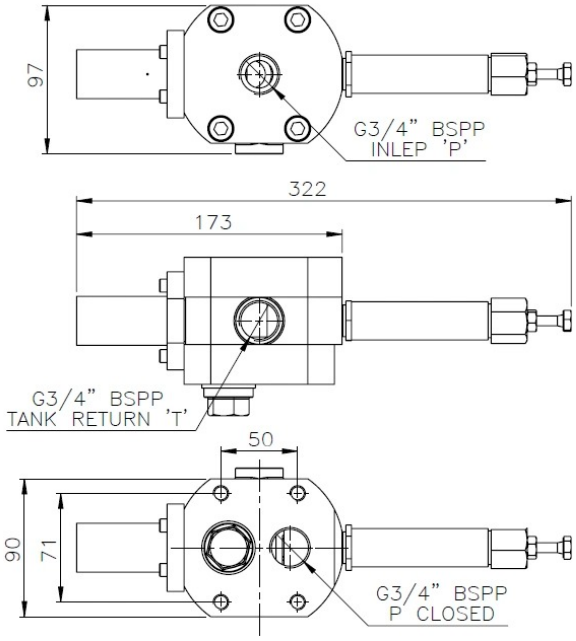

DN16 Directional Valves - 3/2 open dimensions

