

Lab2 solution

Watin Alsukaity | 432205182

CS471 | 5527

Part 1: Capturing HTTP Traffic

Task 1: install Django.

```
Microsoft Windows [Version 10.0.26200.9457]
(c) Microsoft Corporation. All rights reserved.

C:\Users\HUAWEI>cd C:\Users\HUAWEI\djangoenv

C:\Users\HUAWEI\djangoenv>Scripts\activate

(djangoenv) C:\Users\HUAWEI\djangoenv>pip install django
Collecting django
  Downloading django-6.1.1-py3-none-any.whl.metadata (3.9 kB)
Collecting asgiref>=3.9.1 (from django)
  Downloading asgiref-3.12.1-py3-none-any.whl.metadata (9.4 kB)
Collecting sqlparse>=0.5.0 (from django)
  Downloading sqlparse-0.6.0-py3-none-any.whl.metadata (6.0 kB)
Collecting tzdata (from django)
  Downloading tzdata-2026.4-py2.py3-none-any.whl.metadata (1.4 kB)
Downloading django-6.1.1-py3-none-any.whl (8.4 MB)
 8.4/8.4 MB 7.4 MB/s 0:00:01
Downloading asgiref-3.12.1-py3-none-any.whl (25 kB)
Downloading sqlparse-0.6.0-py3-none-any.whl (50 kB)
Downloading tzdata-2026.4-py2.py3-none-any.whl (347 kB)
Installing collected packages: tzdata, sqlparse, asgiref, django
Successfully installed asgiref-3.12.1 django-6.1.1 sqlparse-0.6.0 tzdata-2026.4

(djangoenv) C:\Users\HUAWEI\djangoenv>
```

Task 2: create, configure, and organize a new Django project

```
(djangoenv) C:\Users\HUAWEI>mkdir DjangoProjects

(djangoenv) C:\Users\HUAWEI>cd DjangoProjects

(djangoenv) C:\Users\HUAWEI\DjangoProjects>django-admin startproject libraryproject

(djangoenv) C:\Users\HUAWEI\DjangoProjects>python manage.py runserver
python: can't open file 'C:\\Users\\HUAWEI\\DjangoProjects\\manage.py': [Errno 2] No such file or directory

(djangoenv) C:\Users\HUAWEI\DjangoProjects>cd libraryproject

(djangoenv) C:\Users\HUAWEI\DjangoProjects\libraryproject>python manage.py runserver
Watching for file changes with StatReloader
Performing system checks...


System check identified no issues (0 silenced).

You have 18 unapplied migration(s). Your project may not work properly until you apply the migrations for app(s): admin,
auth, contenttypes, sessions.
Run 'python manage.py migrate' to apply them.
September 21, 2026 - 10:45:56
Django version 6.1.1, using settings 'libraryproject.settings'
Starting WSIG development server at http://127.0.0.1:8000/
Quit the server with CTRL-BREAK.

WARNING: This is a development server. Do not use it in a production setting. Use a production WSGI or ASGI server inste
ad.
For more information on production servers see: https://docs.djangoproject.com/en/6.1/howto/deployment/
```

Task 3: configure your Django application.

```
(djangoenv) C:\Users\HUAWEI\DjangoProjects\libraryproject>mkdir apps apps\template apps\static
(djangoenv) C:\Users\HUAWEI\DjangoProjects\libraryproject>cd apps
(djangoenv) C:\Users\HUAWEI\DjangoProjects\libraryproject\apps>python ../manage.py startapp bookmodule
(djangoenv) C:\Users\HUAWEI\DjangoProjects\libraryproject\apps>python ../manage.py startapp usermodule
```

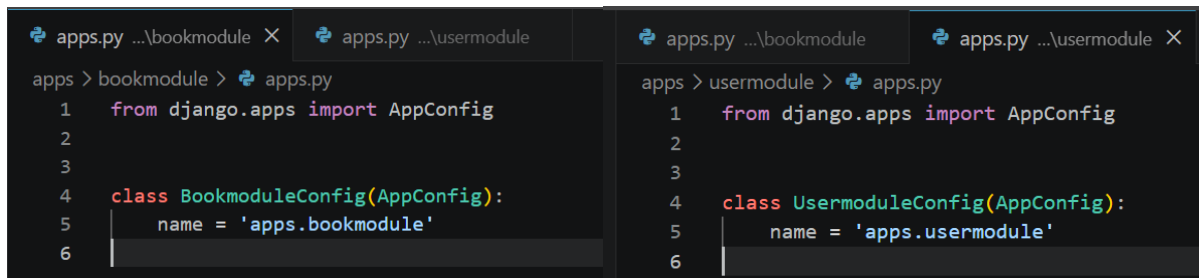


The image shows two side-by-side code editors. The left editor is titled 'apps.py ...\bookmodule' and shows the following code:

```
apps > bookmodule > apps.py
1 from django.apps import AppConfig
2
3
4 class BookmoduleConfig(AppConfig):
5     name = 'apps.bookmodule'
6
```

The right editor is titled 'apps.py ...\usermodule' and shows the following code:

```
apps > usermodule > apps.py
1 from django.apps import AppConfig
2
3
4 class UsermoduleConfig(AppConfig):
5     name = 'apps.usermodule'
6
```

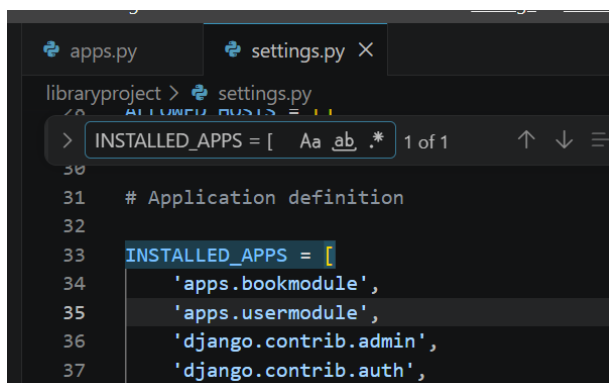

The image shows a code editor with the 'settings.py' file open. The 'INSTALLED_APPS' list is being edited, and the following code is visible:

```
libraryproject > settings.py
30 ALLOWED_HOSTS = []
31
32 # Application definition
33 INSTALLED_APPS = [
34     'apps.bookmodule',
35     'apps.usermodule',
36     'django.contrib.admin',
37     'django.contrib.auth',
```

```
(djangoenv) C:\Users\HUAWEI\DjangoProjects\libraryproject>python manage.py runserver
Watching for file changes with StatReloader
Performing system checks...

System check identified no issues (0 silenced).
```

Part 2: Git system and connect your online repo with a local repo

Task 1: Create a local git repo

```
(djangoenv) C:\Users\HUAWEI\DjangoProjects\libraryproject>git commit -m "add ignore file"
[master (root-commit) 91f2a14] add ignore file
 1 file changed, 26 insertions(+)
 create mode 100644 .gitignore
```

Task 2: connect your local repository with the remote repository you created in Lab 2

```
(djangoenv) C:\Users\HUAWEI\DjangoProjects\libraryproject>git config --global user.name "Watin Alsukaity"
(djangoenv) C:\Users\HUAWEI\DjangoProjects\libraryproject>git config --global user.email "Wateen.s.sk@gmail.com"
```

```
(djangoenv) C:\Users\HUAWEI\DjangoProjects\libraryproject>git fetch origin
remote: Enumerating objects: 16, done.
remote: Counting objects: 100% (16/16), done.
remote: Compressing objects: 100% (12/12), done.
remote: Total 16 (delta 2), reused 0 (delta 0), pack-reused 0 (from 0)
Unpacking objects: 100% (16/16), 1.08 MiB | 1.13 MiB/s, done.
From github.com:Watin-1st/CS471-432205182
 * [new branch]      main      -> origin/main
```

```
(djangoenv) C:\Users\HUAWEI\DjangoProjects\libraryproject>git pull origin main --allow-unrelated-histories
From github.com:Watin-1st/CS471-432205182
 * branch            main      -> FETCH_HEAD
Merge made by the 'ort' strategy.
 README.md           | 5 +++++
 book-library/.gitkeep | 1 +
 lab1-wireshark/.gitkeep | 1 +
 lab1-wireshark/Lab1.WatinAlsukaity.pdf | Bin 0 -> 1178939 bytes
4 files changed, 7 insertions(+)
 create mode 100644 README.md
 create mode 100644 book-library/.gitkeep
 create mode 100644 lab1-wireshark/.gitkeep
 create mode 100644 lab1-wireshark/Lab1.WatinAlsukaity.pdf
```

```
(djangoenv) C:\Users\HUAWEI\DjangoProjects\libraryproject>git push -u origin main
Enumerating objects: 6, done.
Counting objects: 100% (6/6), done.
Delta compression using up to 8 threads
Compressing objects: 100% (4/4), done.
Writing objects: 100% (5/5), 803 bytes | 401.00 KiB/s, done.
Total 5 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)
To github.com:Watin-1st/CS471-432205182.git
 4fd2f9f..3b16016  main -> main
branch 'main' set up to track 'origin/main'.
```