

Lab3 solution

Watin Alsukaity | 432205182

CS471 | 5527

Task 1: Build your first view function and corresponding URL mapping in the core/urls.py.

```
views.py X
bookmodule > views.py
1  from django.shortcuts import render
2
3  from django.http import HttpResponse
4  from django.shortcuts import render
5
6  def index(request):
7      return HttpResponse("Hello, world!")
8
9  def viewbook(request, bookId):
10     book1 = {'id':123, 'title':'Continuous Delivery', 'author':'J. Humble and D. Farley'}
11     book2 = {'id':456, 'title':'Secrets of Reverse Engineering', 'author':'E. Eilam'}
12     targetBook = None
13
14     if book1['id'] == bookId:
15         targetBook = book1
16     if book2['id'] == bookId:
17         targetBook = book2
18
19     context = {'book':targetBook}
20     return render(request, 'bookmodule/show.html', context)
```


```
15     2. Add a URL to urlpatterns: path('blog/',
16     """
17     from django.contrib import admin
18     from django.urls import path
19     import apps.bookmodule.views
20
21     urlpatterns = [
22         path('admin/', admin.site.urls),
23         path('', apps.bookmodule.views.index)
24     ]
25
```

```
(djanoenv) C:\Users\HUAWEI\DjangoProjects\libraryproject>python manage.py runserver
Watching for file changes with StatReloader
Performing system checks...





System check identified no issues (0 silenced).
```

127.0.0.1:8000
Hello, world!

Task 2: Add parameters with HTTP requests2

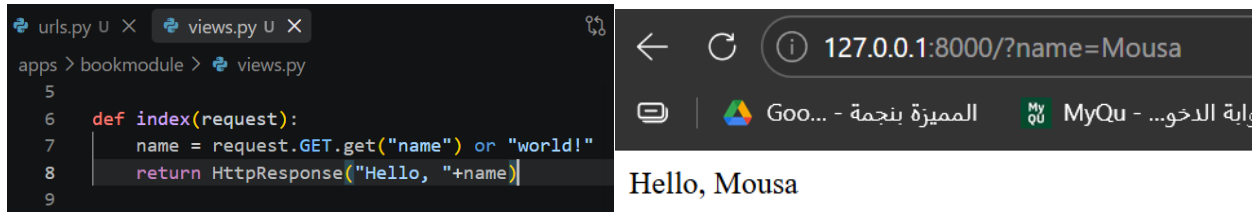

Task 3: Build your second view function and corresponding URL mapping with parameters within URL path

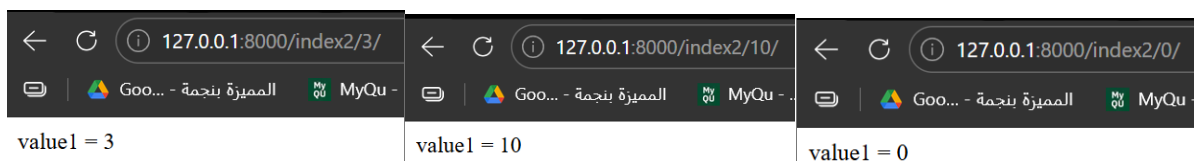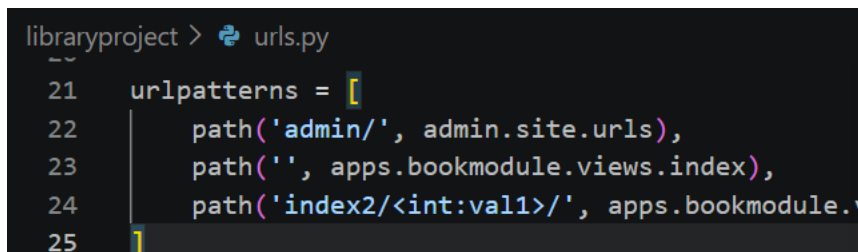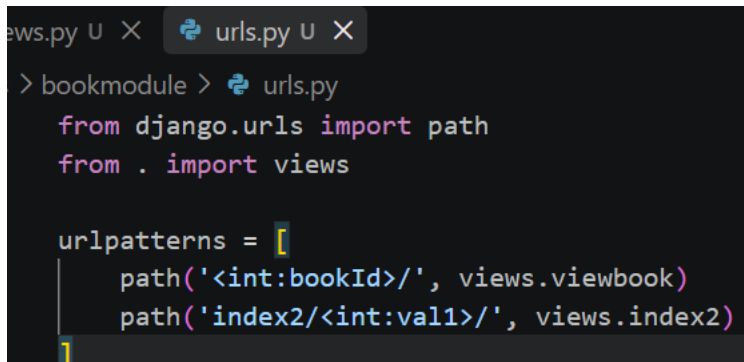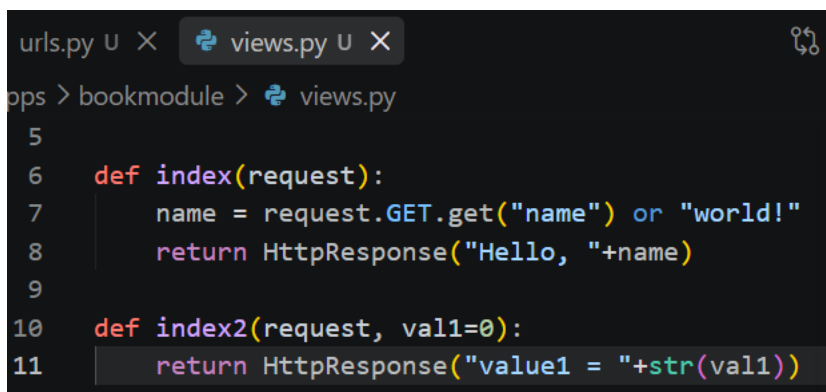

Task 4: Create a simple HTML template:

```
libraryproject > apps > template > bookmodule >
```

```
from pathlib import Path
import os

# Build paths inside the project like this: BASE_DIR / 'subdir'.
BASE_DIR = Path(__file__).resolve().parent.parent
TEMPLATE_DIR = os.path.join(BASE_DIR, "apps" + os.sep + "templates")
```

```
TEMPLATES = [
    {
        'BACKEND': 'django.template',
        'DIRS': [TEMPLATE_DIR],
```

```
urls.py U X  settings.py U X  index.html U X
apps > template > bookmodule > index.html > h1
1  <h1>Hello from a template!</h1>
```

Task 5: Rendering variables in the HTML template that processes a context:

```
apps > bookmodule > views.py
5
6  def index(request):
7      name = request.GET.get("name") or "world!"
8      return render(request, "bookmodule/index.html", {"name": name})
9
```

```
← ↻ ⓘ 127.0.0.1:8000/?name=Mousa
Goo... - الممييزة بنجمة - MyQu - ... الدخو...
```



Hello from Mousa!

Task 6: Define patterns globally (DjangoProjects/urls.py) with specific urls.py file for each app/module:

```
apps > bookmodule > urls.py
1  from django.urls import path
2  from . import views
3
4  urlpatterns = [
5      path('', views.index),
6      path('index2/<int:val1>/', views.index2)
7  ]
```

```
libraryproject > urls.py
3
4  urlpatterns = [
5      path('admin/', admin.site.urls),
6      path('books/', include("apps.bookmodule.urls")),
7      path('users/', include("apps.usermodule.urls"))
8  ]
```

```
apps > usermodule > urls.py
1  from django.urls import path
2
3  urlpatterns = [
4  ]
```

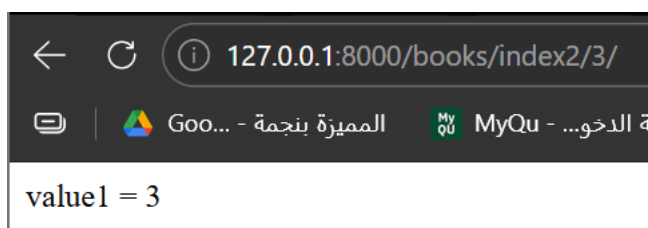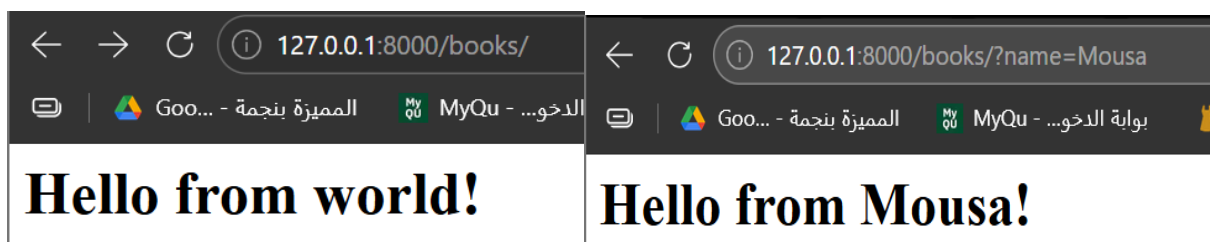

Task7: Create a URL, view, and HTML to display one book details:

```
apps > bookmodule > urls.py
1  from django.urls import path
2  from . import views
3
4  urlpatterns = [
5      path('', views.index),
6      path('index2/<int:val1>/', views.index2),
7      path('<int:bookId>/', views.viewbook)
8  ]
```

Explorer

bookmodule > show.html > ...

```
1  <h4>ID: {{ book.id }}</h4>
2
3  <h4>Title: {{ book.title }}</h4>
4
5  <h4>Authors</h4>
6
7  {{ book.author }}
8
9  <h4>Description</h4>
10
11  Description here
```

← 127.0.0.1:8000/books/123/ Goo... - المميّزة بنجمة - MyQu - ... ID: 123 Title: Continuous Delivery Authors J. Humble and D. Farley Description Description here	← 127.0.0.1:8000/books/456/ Goo... - المميّزة بنجمة - MyQu - ... ID: 456 Title: Secrets of Reverse Engineering Authors E. Eilam Description Description here
--	--

