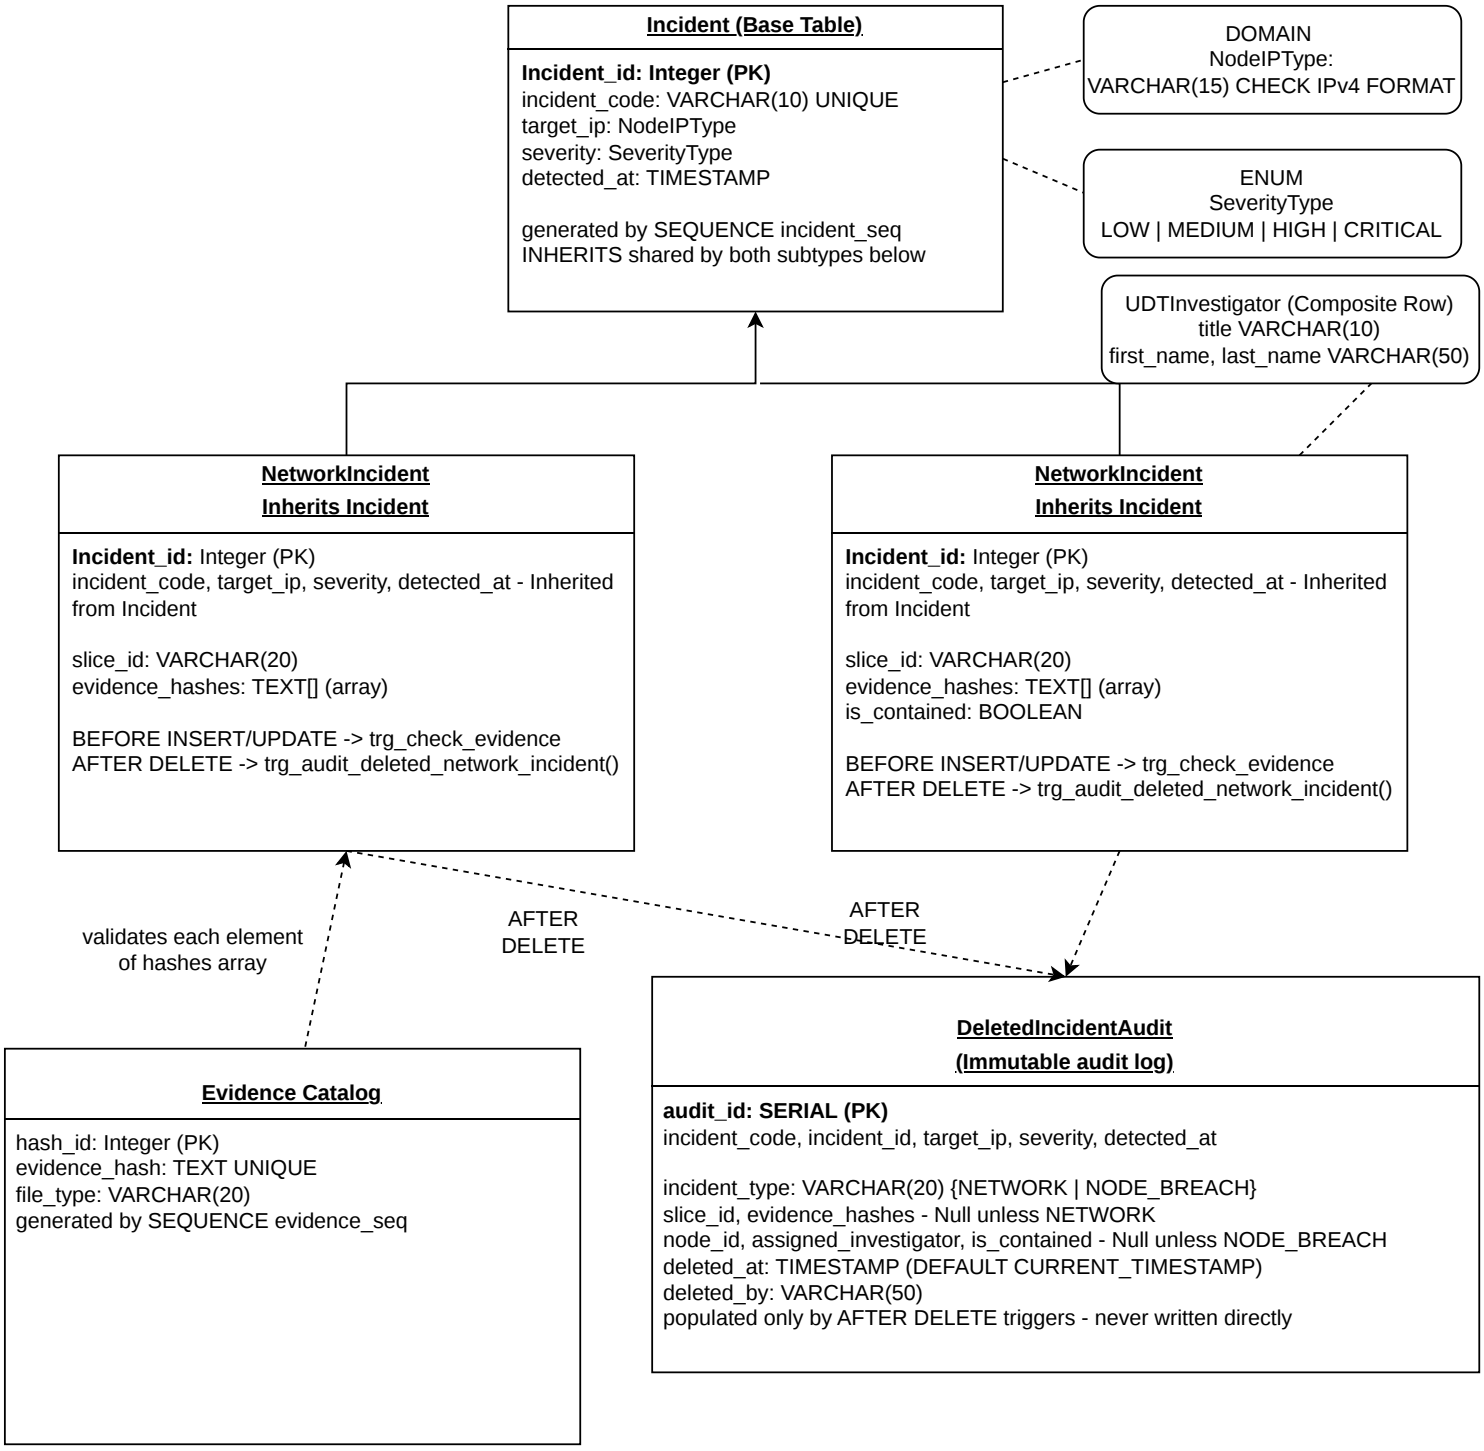
Incident (Base Table)
Incident_id: Integer (PK)
incident_code: VARCHAR(10) UNIQUE
target_ip: NodeIPType
severity: SeverityType
detected_at: TIMESTAMP
generated by SEQUENCE incident_seq
INHERITS shared by both subtypes below
DOMAIN
NodeIPType:
VARCHAR(15) CHECK IPv4 FORMAT
ENUM
SeverityType
LOW | MEDIUM | HIGH | CRITICAL
UDTInvestigator (Composite Row)
title VARCHAR(10)
first_name, last_name VARCHAR(50)
NetworkIncident
Inherits Incident
Incident_id: Integer (PK)
incident_code, target_ip, severity, detected_at - Inherited from Incident
slice_id: VARCHAR(20)
evidence_hashes: TEXT[] (array)
BEFORE INSERT/UPDATE -> trg_check_evidence
AFTER DELETE -> trg_audit_deleted_network_incident()
NetworkIncident
Inherits Incident
Incident_id: Integer (PK)
incident_code, target_ip, severity, detected_at - Inherited from Incident
slice_id: VARCHAR(20)
evidence_hashes: TEXT[] (array)
is_contained: BOOLEAN
BEFORE INSERT/UPDATE -> trg_check_evidence
AFTER DELETE -> trg_audit_deleted_network_incident()
validates each element of hashes array
AFTER DELETE
AFTER DELETE
Evidence Catalog
hash_id: Integer (PK)
evidence_hash: TEXT UNIQUE
file_type: VARCHAR(20)
generated by SEQUENCE evidence_seq
DeletedIncidentAudit
(Immutable audit log)
audit_id: SERIAL (PK)
incident_code, incident_id, target_ip, severity, detected_at
incident_type: VARCHAR(20) {NETWORK | NODE_BREACH}
slice_id, evidence_hashes - Null unless NETWORK
node_id, assigned_investigator, is_contained - Null unless NODE_BREACH
deleted_at: TIMESTAMP (DEFAULT CURRENT_TIMESTAMP)
deleted_by: VARCHAR(50)
populated only by AFTER DELETE triggers - never written directly