Disaster Recovery for the Azure Databricks Platform

Options, architecture impact and cost for Baytex's Databricks environments in Canada Central

Prepared for	Baytex: Infrastructure and BI teams
Prepared by	AMTRA
Date	7 October 2026
Version	1.0
Status	For discussion and decision
Classification	Internal

1. Summary

This document explains how the Azure Databricks platform that AMTRA built for Baytex behaves when part of Azure fails, the options for recovering from the loss of the whole Canada Central region, and what each option costs with the current architecture. The companion document, *Data Lake Storage Backup and Recovery*, covers mistakes inside the storage account, such as a faulty pipeline or an accidental delete.

Key points

- **Zone failures are covered today.** The platform keeps running through the loss of one availability zone in Canada Central: the data lake and workspace storage are zone-redundant, Databricks spreads its services across zones, and the two HAProxy VMs are in different zones.
- **Two zone gaps should be closed whatever is decided about DR:** the NAT Gateway is pinned to a single zone, and the zone setting of the HAProxy load balancer frontends needs confirming (section 4).
- **Regional failures are not covered today.** Nothing is copied outside Canada Central apart from the Terraform state, so a regional outage stops Databricks until the region recovers. No data is lost unless the region itself is destroyed.
- **There are three ways to add regional DR**: rebuild in Canada East when needed (A), Databricks managed DR, in public preview since June 2026 (B), or a warm standby that Baytex runs itself (C).
- **Every option depends on Baytex hub connectivity in Canada East** (firewall, VPN and DNS), which does not exist today. Without it a recovered platform cannot reach the on-premises databases.
- **Canada East has no availability zones**, so anything running there during a disaster is single-zone.

The options at a glance

Option	Data loss (RPO)	Time to recover (RTO)	Running cost, worked example	Maturity
A. Rebuild in Canada East when needed	About 15 minutes for files (GZRS, no SLA). Unity Catalog metadata is rebuilt.	2 to 5 business days	About CAD 64 a month	Generally available services
B. Databricks managed DR	Minutes: continuous replication	Under an hour once the Canada East network is in place	About CAD 1,411 a month, mostly the Mission Critical add-on	Public preview, by request
C. Warm standby run by Baytex	The copy schedule, for example 1 to 24 hours	4 to 8 hours	About CAD 362 a month, plus build and upkeep effort	Generally available services

Worked example: 2 TB of tables in the prod data lake, 200 GB written or changed a month, and 5,000 DBUs of prod compute a month. Replace these with Baytex's real figures (section 8). Recovery times are AMTRA estimates. The Baytex hub in Canada East is not included in any figure.

AMTRA recommendation


1. **Now:** close the two zone gaps (section 4) and apply the low-cost storage protections in the companion document. None of this depends on a DR decision.
2. **Decide the targets:** Baytex sets the RPO and RTO it needs for its Databricks workloads. If a regional outage of several days is acceptable, option A is enough and costs little.
3. **If recovery within hours is required:** plan for option B. Start the Canada East hub and metastore work now, ask the Databricks account team for managed DR access and the Mission Critical rate, and prove it in dev while it is in preview. Use option C only if managed DR cannot be used.

2. Terms used in this document

Term	Meaning
High availability (zone level)	Keeps running through the loss of one availability zone, a separate datacenter group inside the same region. Automatic, in seconds to minutes.
Disaster recovery (region level)	Restores service in another region after the whole region is lost. Started by people, following a runbook.
Backup	Point-in-time copies kept for a set period, used to go back to before a mistake. Covered in the companion storage document.
RPO (recovery point objective)	How much recent data the business can afford to lose, measured in time.
RTO (recovery time objective)	How long the business can be without the service.
Canada Central and Canada East	Azure's paired regions in Canada. Canada Central (Toronto) has three availability zones; Canada East (Quebec City) has none. Data stays in Canada either way.
NCC	Network Connectivity Configuration: the Databricks account-level object that holds the private endpoints serverless compute uses. An NCC can serve only workspaces in its own region.

3. Current architecture

Every environment (dev, test and prod) is a self-contained spoke in its own Azure subscription in Canada Central, connected to the existing Baytex hub. The diagram shows one environment; prod is used for the example address range. Numbered arrows are the traffic flows described in the table that follows.

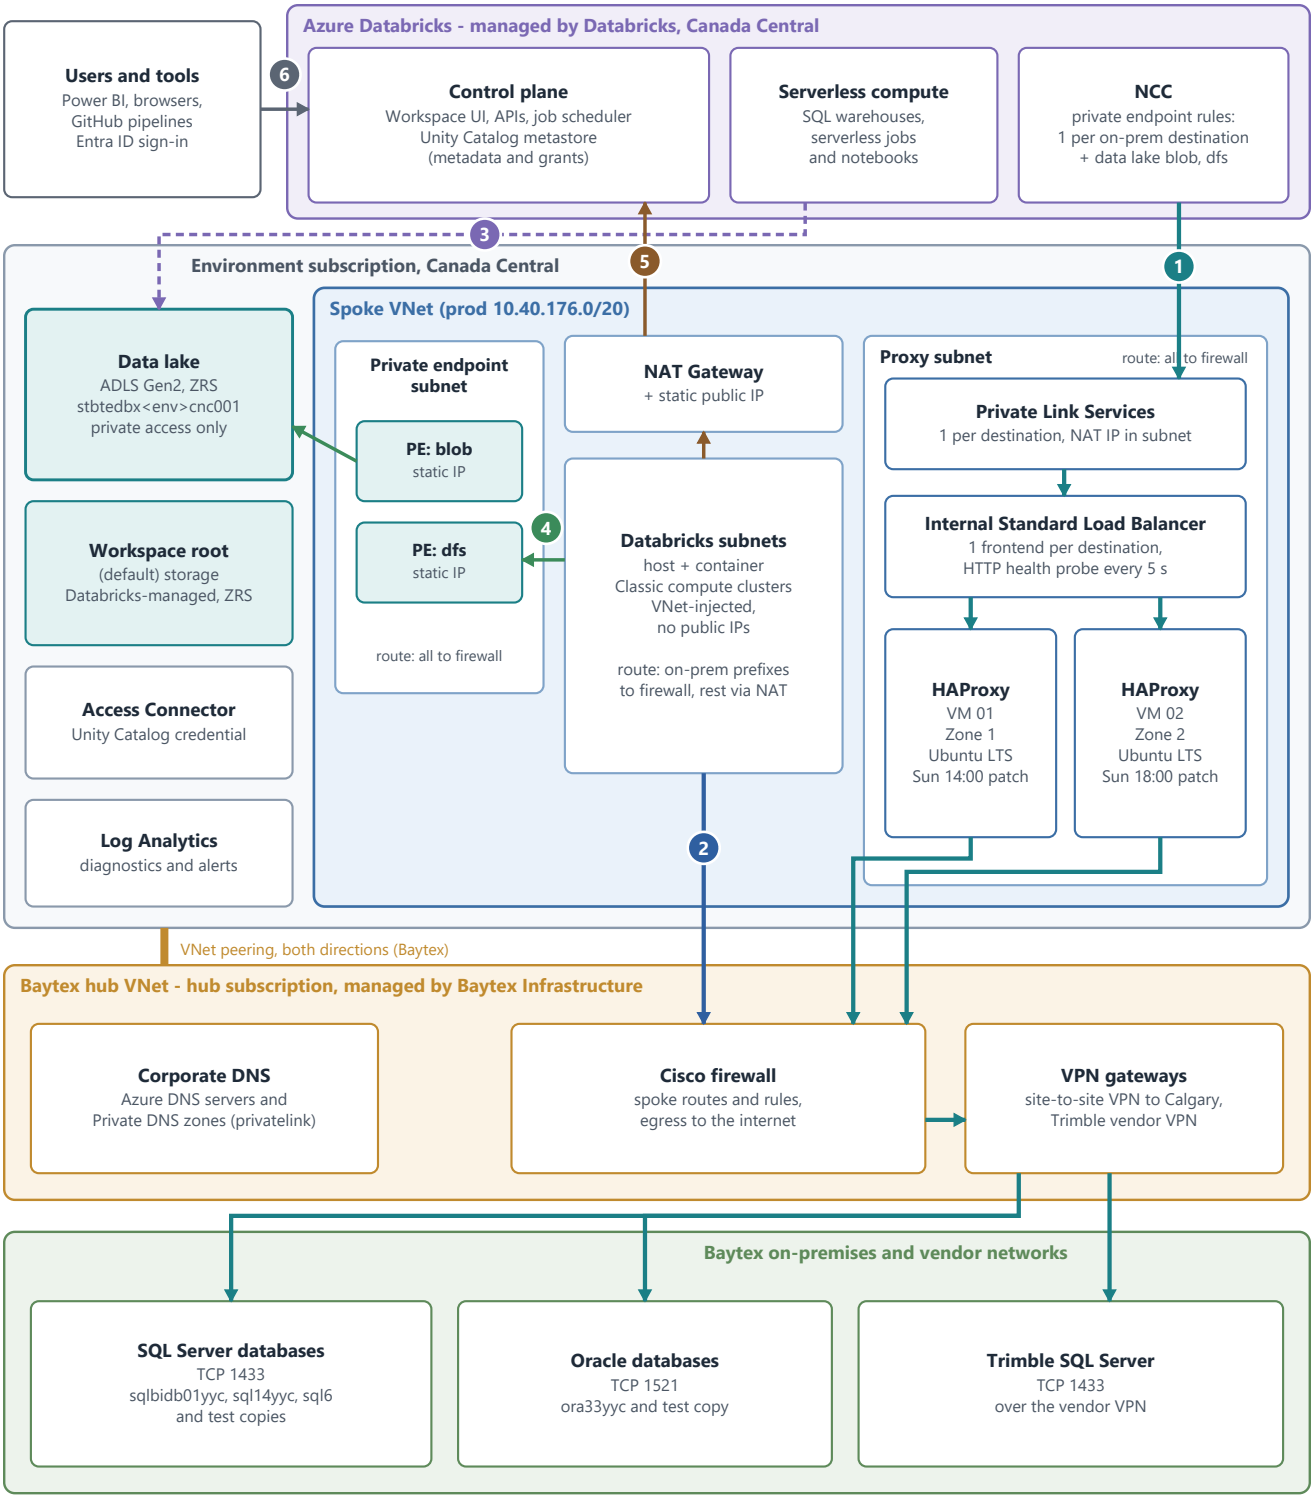

Traffic flows

#	From and to	Path
1	Serverless compute to on-premises databases	NCC private endpoint for the destination, then its Private Link Service, the internal load balancer frontend, either HAProxy VM (zone 1 or zone 2), the Cisco firewall and the VPN. HAProxy looks up each database name in corporate DNS when it connects, so a changed database address needs no platform change.
2	Classic compute to on-premises databases	Databricks subnets, whose route table sends the on-premises prefixes to the Cisco firewall, then the VPN.
3	Serverless compute to the data lake	NCC private endpoints on the data lake's blob and dfs endpoints.
4	Classic compute to the data lake	The blob and dfs private endpoints in the spoke, at fixed addresses.
5	Classic compute to the internet and the Databricks control plane	NAT Gateway with one static public IP. Everything else from the Databricks subnets that is not an on-premises prefix leaves this way.
6	Users, Power BI and pipelines to the workspace	Public workspace URL, signed in with Microsoft Entra ID. GitHub pipelines use short-lived OIDC tokens.

How the HAProxy tier keeps on-premises access available

- Two Ubuntu VMs run HAProxy, one in availability zone 1 and one in zone 2, behind an internal Standard Load Balancer. Each on-premises destination has its own load balancer frontend and its own Private Link Service, which is what the Databricks NCC connects to (seven destinations in prod).
- The load balancer probes each VM every five seconds and removes a VM after one failed probe, so either VM can carry all traffic while the other is restarting, being patched or lost with its zone.
- The VMs are patched by Azure Update Manager on Sundays, one after the other: zone 1 from 14:00 to 16:00 and zone 2 from 18:00 to 20:00 Mountain Time.
- The proxy subnet sends all traffic to the Cisco firewall, so the firewall rules and the VPN decide which on-premises hosts the platform can reach. Baytex adds the proxy subnet to its on-premises return routes.

4. How the platform copes with failures today

Component	How it is built	Loss of one zone	Loss of Canada Central
Databricks control plane and Unity Catalog metastore	Managed by Databricks, across zones	Automatic failover within about 15 minutes, no data loss	Unavailable
Serverless compute	Managed by Databricks, across zones	Databricks replaces lost capacity	Unavailable
Classic compute clusters	Nodes spread across zones automatically	Lost workers are replaced; losing the driver restarts the job	Unavailable
Data lake	ZRS: three synchronous copies, one per zone	No data loss and no downtime	Unavailable until the region recovers; no copy elsewhere
Workspace root (default) storage	ZRS	No impact	Unavailable
HAProxy tier	Two VMs in zones 1 and 2, health probe every 5 seconds	The other VM carries all traffic	Unavailable
HAProxy load balancer frontends	No zone set in Terraform	**To confirm:** zone-redundant or not	Unavailable
NAT Gateway	Standard SKU with no zone, so Azure places it in one zone	**Gap:** if that zone fails, classic compute loses internet and control-plane access	Unavailable
Private endpoints and Private Link Services	Regional services	No impact	Unavailable
NCC and its private endpoint rules	Databricks account level, regional	No impact	Unavailable
Terraform state	GRS with versioning	May be briefly unreachable	A copy exists in Canada East and can be failed over
Baytex hub: firewall, VPN, DNS	Owned by Baytex Infrastructure	Depends on the hub design	Unavailable unless Baytex has a hub in Canada East
Microsoft Entra ID and GitHub	Global services	No impact	No impact

Closing the two zone gaps

NAT Gateway. Microsoft no longer recommends a NAT Gateway with no zone, because one zone's failure can stop outbound traffic for every VM behind it. The StandardV2 SKU is zone-redundant and is Microsoft's recommendation. Moving to it needs a new StandardV2 public IP, so the platform's outbound address changes and any allow-list that names the current address must be updated. Microsoft lists no extra charge for zone support.

Load balancer frontends. Confirm their zone setting with the command below. A frontend with no zone is not zone-redundant. Changing it recreates the frontends and their Private Link Services, after which the Databricks private endpoint connections are approved again, so it is planned as a change.

```
az network lb frontend-ip list -g rg-bte-dbx-prod-connectivity-cnc-001 \
  --lb-name lb-bte-dbx-prod-cnc-001-proxy --query "[].{name:name, zones:zones}" -o table
```

What happens if Canada Central is lost

A full regional outage is rare. Microsoft's guidance is to plan for it when the business cannot wait for the region to recover. If it happens today:

- Users cannot open the workspace, and jobs, SQL warehouses and Power BI refreshes stop.
- Data in the data lake is safe in three zones but cannot be reached. It is lost only if the region itself is destroyed, because no copy exists outside it.
- The Unity Catalog metastore, which holds catalogs, schemas, tables, views and grants, is unavailable. Databricks offers no export of it outside managed DR.
- Notebooks and jobs deployed from Git can be redeployed anywhere. Anything created only in the workspace user interface cannot.
- The on-premises databases keep running, but nothing in Azure can reach them until a hub path exists.

5. Disaster recovery options

All three options recover into Canada East, the region Azure pairs with Canada Central, so data stays in Canada. Each needs the Canada East components described in section 6.

Option A: rebuild in Canada East when needed (cold standby)

Nothing runs in Canada East until a disaster is declared. The data lake keeps an asynchronous copy there (GZRS), and the platform is rebuilt from the same Terraform when needed.

Before a disaster

- Change the prod data lake from ZRS to GZRS (section 9).
- Make the Terraform region-ready: a Canada East environment root, a HAProxy variant without zones, and a state account in Canada East.
- Baytex BI creates an empty Unity Catalog metastore for Canada East and keeps its catalog, schema and grant definitions in scripts or code.
- Write and rehearse the runbook.

During a disaster

1. Declare the disaster and start a customer-managed failover of the prod data lake. It becomes a single-zone account in Canada East, with the same name and URL.
2. Deploy the Canada East environment with the pipelines: spoke, workspace, NCC, HAProxy tier, private endpoints to the failed-over data lake.
3. Baytex Infrastructure connects the new spoke to a Canada East hub: peering, firewall rules, routes and DNS records.
4. Baytex BI recreates catalogs, schemas and grants, and registers the tables from their storage paths. Managed tables cannot be attached to a new metastore as managed tables, so they are registered as external tables over the same files, or copied. This is the main reason the option takes days.
5. Redeploy notebooks and jobs from Git, validate, then point users and Power BI at the new workspace.

Strengths	Limitations
Very low running cost. Uses only generally available services. No change to how the platform runs day to day.	Recovery takes days, and depends on runbooks that are rarely exercised. Anything that exists only in the metastore or the workspace user interface must be rebuilt by hand. Failback needs a second failover.

Option B: Databricks managed disaster recovery

Managed DR entered public preview on 12 June 2026. Access is by request through the Databricks account team. It replicates a primary workspace and its Unity Catalog data to a secondary workspace in another region continuously, and fails over from the account console in minutes. An optional stable URL always points at the current primary, so users, Power BI, JDBC and ODBC clients keep working after a failover.

What it replicates

Replicated	Not replicated
Unity Catalog managed tables (data and metadata), views, functions and all grants. External tables and volumes: metadata only. Notebooks, jobs (schedules paused in the secondary), SQL warehouses and clusters (stopped), draft AI/BI dashboards, files and folders, with their permissions. Workspace object IDs are kept, so links still work.	Data of external tables and volumes; materialized views, streaming tables and Lakeflow pipelines; secrets; ML models and serving endpoints; vector search indexes; Delta Sharing shares; published dashboards. Storage credentials, external locations and all network objects must be created in the secondary by Baytex. Tables with row filters, column masks or tag-based policies fail to replicate and must be left out.

What it needs from Baytex's architecture

Requirement	What it means here	Owner
Premium workspaces in both regions with the Mission Critical add-on	A standby workspace in Canada East. Compute in both workspaces is billed at the Mission Critical rate while the add-on is on.	AMTRA, Databricks
A Unity Catalog metastore in each region	A new metastore for Canada East. It must not contain catalogs with the same names as the replicated ones.	Baytex BI
Serverless compute in both workspaces	Already used. Replication runs on serverless compute in the secondary.	AMTRA
Storage in the secondary region	A Canada East data lake, its Access Connector, storage credential and external location, mapped to the primary paths.	AMTRA
An NCC in the secondary region	NCCs are regional, so Canada East needs its own, with the same network policy.	AMTRA
Private endpoints to both storage accounts from both workspaces	The Canada Central NCC gains rules to the Canada East data lake, and the Canada East NCC has rules to both data lakes and to the Canada East Private Link Services.	AMTRA
On-premises access from the secondary	A HAProxy tier and Private Link Services in Canada East, behind a Baytex hub there.	AMTRA, Baytex Infrastructure
Identity	Account-level single sign-on and SCIM or automatic identity management, so users and groups exist in both workspaces.	Baytex
Stable URL (recommended)	A custom account URL from Databricks and account-level OAuth. Pipelines and Terraform must target the stable URL and stable workspace ID, which is a planned change for this repository's Databricks provider settings.	Databricks, AMTRA

Failover in practice

1. For a planned test: stop compute in the primary and wait until the replication point catches up.
2. In the account console, open Resilience, then the failover group, and select Fail over.
3. Start the clusters and SQL warehouses that were running, and resume the job schedules you need.
4. Clients on the stable URL continue. Anything still using the old workspace URL is repointed.
5. Fail back later by repeating the steps in the other direction.

Points to weigh before choosing option B

- It is a **preview**: access is gated and preview features are not covered by Azure SLAs. Plan to prove it in dev and to move production when it is generally available.
- The **Mission Critical rate applies to all compute** in both workspaces, not only to replication. It dominates the cost (section 8). It also brings the Enhanced Security and Compliance features.
- The secondary is **read-only for replicated catalogs, and its compute is unavailable** while replication runs. Databricks suggests a separate monitor workspace for checks.
- The **first copy of workspace assets can take up to two weeks**; after that replication is continuous.
- Data in **external tables** is not copied; use managed tables for anything that must fail over.

Option C: warm standby run by Baytex

The same Terraform deploys a standby environment in Canada East. Scheduled jobs copy managed tables there with Delta Deep Clone, which copies only what changed since the last run. Baytex BI keeps catalogs, schemas and grants in code and applies them to both metastores. Notebooks and jobs are deployed to both workspaces from Git, with schedules disabled in the standby.

Strengths	Limitations
Uses generally available services, with no Mission Critical uplift. Baytex chooses which tables to copy and how often. The standby can be used for testing between disasters.	Baytex builds and maintains the copy jobs, metadata scripts and runbook. Data loss equals the copy schedule. Failover switches users, jobs and connections by hand, and anything not in code drifts.

Comparison

	A. Rebuild	B. Managed DR	C. Warm standby
Data loss	About 15 minutes for files; metadata rebuilt	Minutes	The copy schedule
Time to recover	2 to 5 business days	Under an hour, once the network is ready	4 to 8 hours
Running cost (example)	CAD 64 a month	CAD 1,411 a month	CAD 362 a month
Build effort	Low	Medium	High
Ongoing effort	Low, plus rehearsals	Low: Databricks runs replication	High: jobs, scripts, drift
Status	Generally available	Public preview	Generally available
Canada East hub needed	At the time of disaster	Before go-live	Before go-live


6. What a Canada East deployment needs

The table lists every part of the current architecture and what its Canada East counterpart involves. Most of it is built by the same Terraform modules with a Canada East environment root.

Component	What is needed in Canada East	Owner
Address space	A new non-overlapping range (for example a /20), added to on-premises return routes and firewall rules	Baytex Infrastructure, AMTRA
Spoke VNet, subnets, network security groups, route tables	Same modules, new addresses. No charge.	AMTRA
NAT Gateway and public IP	New outbound address, to be added to any allow-lists	AMTRA
Databricks workspace	Premium, VNet-injected, root storage LRS (no zones in Canada East)	AMTRA
Unity Catalog metastore	One per region; created once in Canada East	Baytex BI
Data lake	A: the failed-over primary. B and C: a standby account, LRS	AMTRA
Access Connector, storage credential, external location	Created in Canada East; managed DR does not copy them	AMTRA
Spoke private endpoints (blob, dfs)	Fixed addresses and DNS records in the Baytex Private DNS zones	AMTRA, Baytex Infrastructure
NCC, private endpoint rules, network policy	A separate NCC, because NCCs are regional. Rules to the storage accounts and to each Private Link Service	AMTRA
HAProxy tier, load balancer, Private Link Services	Same design, but the module needs a variant without zones. The VMs can stay deallocated until failover	AMTRA
Baytex hub in Canada East	Firewall, VPN to Calgary and the Trimble vendor VPN, DNS. The longest-lead item	Baytex Infrastructure
Log Analytics and alerts	Same modules	AMTRA
Terraform state	A state account in Canada East, so recovery deploys do not depend on Canada Central	AMTRA
Pipelines	GitHub Environments and deployment identity for the Canada East root	AMTRA, Baytex
Clients	Stable URL (option B) or repointing Power BI and other connections	Baytex BI

Primary and secondary regions

Solid boxes exist today. Dashed boxes are added for options B and C; for option A they are created only when a disaster is declared.

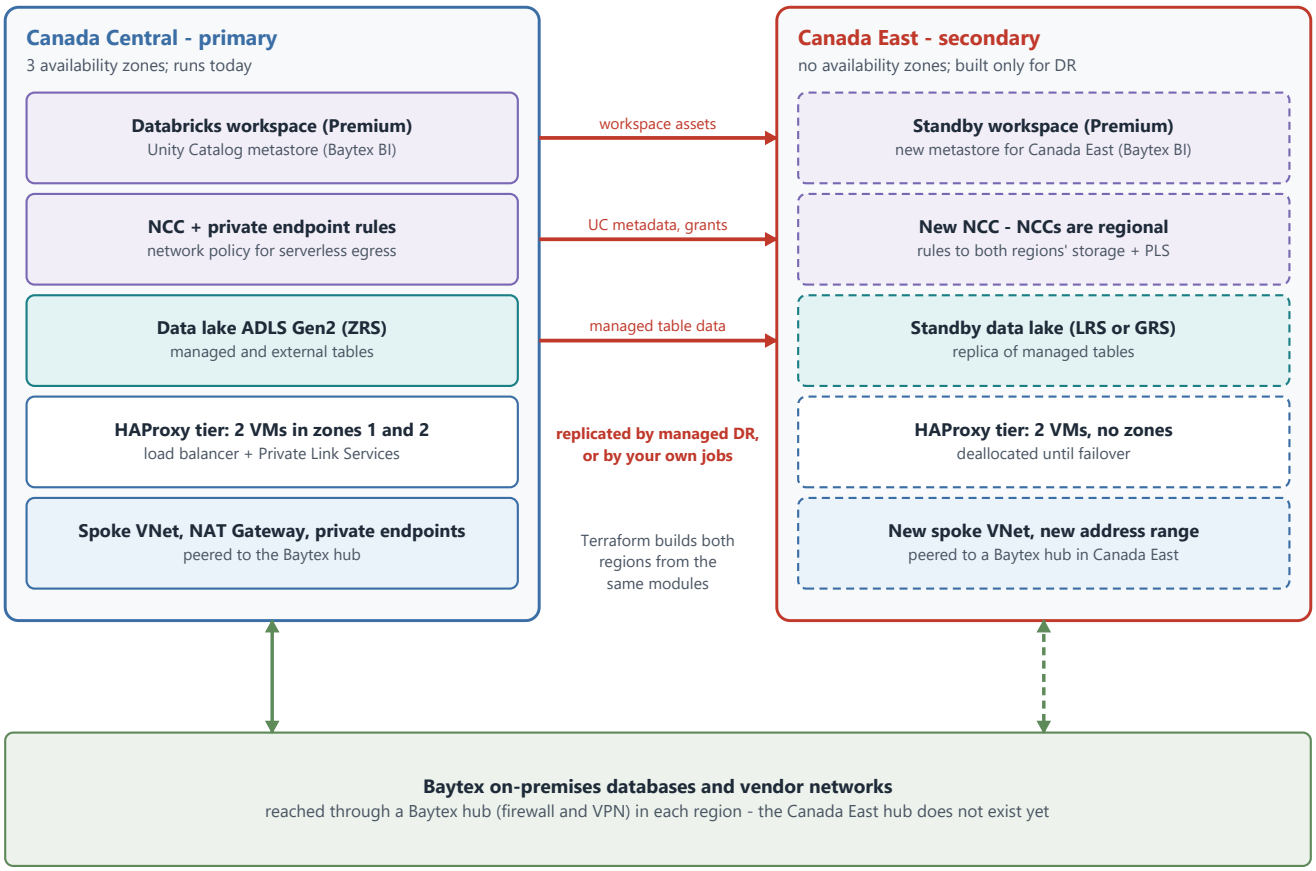

7. Testing and running DR

- **Test before relying on it.** Run a full failover test in dev before production depends on any option, then test production at least twice a year. Databricks suggests quarterly for managed DR.
- **Measure, do not assume.** Record the achieved RPO and RTO in each test and compare them with the targets Baytex sets.
- **Keep everything in code.** Notebooks, jobs, catalogs, schemas and grants that live in Git can be rebuilt in any region; objects created only in the user interface are the ones that get lost.
- **Own the runbook jointly.** AMTRA owns the platform steps, Baytex Infrastructure the hub and DNS steps, and Baytex BI the catalog and workload steps.
- **Decide who declares a disaster**, and how long to wait for Microsoft before failing over, because a storage failover is hard to reverse.

8. Cost

All prices are Azure list prices in Canadian dollars (pay-as-you-go), taken from the Azure Retail Prices API on 7 October 2026 for Canada Central and Canada East. Taxes and any Baytex discount agreement are not included. The Mission Critical rate is shown as listed; Microsoft's documentation asks customers to confirm the current rate with the Databricks account team.

Unit prices used

Item	Price (CAD)
HAProxy VM, Standard_D4s_v6 Linux	0.3187 per hour (232.65 per month running)
OS disk, Premium SSD P4	7.48 per month
Standard Load Balancer	0.0354 per hour for the first 5 rules, 0.0142 per extra rule per hour, 0.0071 per GB
NAT Gateway	0.0637 per hour and 0.0637 per GB processed
Standard public IP	0.0071 per hour
Private endpoint, including each NCC private endpoint rule	0.0142 per hour (10.37 per month). Databricks currently waives data processing for NCC rules.
Data lake storage, hot, per TB-month	LRS 28.98, ZRS 36.25, GZRS 65.23
Geo-replication or inter-region transfer	0.0283 per GB
Databricks managed DR replication	0.0314 per GB processed
Databricks Mission Critical add-on	0.2125 per DBU, on top of the normal rate (for example jobs compute 0.4250, serverless jobs 0.6658, serverless SQL 1.1191 per DBU)

Monthly cost of the Canada East components while idle

Component	A. Rebuild	B. Managed DR	C. Warm standby
NAT Gateway and public IP	0	51.68	51.68
Spoke private endpoints to the standby data lake (2)	0	20.73	20.73
Canada East NCC rules: 4 storage + 7 on-premises	0	114.03	114.03
Extra Canada Central NCC rules to the standby data lake (2)	0	20.73	0
HAProxy tier with VMs deallocated: load balancer (7 rules) and 2 OS disks	0	61.53	61.53
Workspace, metastore, VNet, subnets, Access Connector	0	0	0
Monitoring, state account and minor items (estimate)	0	10.00	10.00
Total while idle	**0**	**278.71**	**257.97**
Option: keep both HAProxy VMs running	-	+465.30	+465.30

Keeping the HAProxy VMs deallocated saves about CAD 465 a month; starting them adds a few minutes to failover. Option A pays for these components only while a recovery environment exists.

Worked example

Assumptions: 2 TB of tables in the prod data lake, 200 GB written or changed each month, 5,000 DBUs of prod compute a month, and 60 serverless DBUs a month for option C's copy jobs.

Monthly cost (CAD)	A. Rebuild	B. Managed DR	C. Warm standby
Canada East components while idle	0	278.71	257.97
Data lake geo-redundancy uplift, ZRS to GZRS	57.96	0	0
Standby data lake in Canada East (LRS)	0	57.96	57.96
Copying changed data to Canada East	5.66	5.66	5.66
Managed DR replication charge	0	6.28	0

Monthly cost (CAD)	A. Rebuild	B. Managed DR	C. Warm standby
Mission Critical add-on on prod compute	0	1,062.50	0
Copy jobs (Deep Clone)	0	0	39.95
Monthly total	**63.62**	**1,411.11**	**361.54**
One-time initial copy	Included in the conversion	122.27	57.96

Mission Critical sensitivity

Prod DBUs a month	2,000	5,000	10,000	25,000
Mission Critical add-on (CAD a month)	425.00	1,062.50	2,125.00	5,312.50

Baytex's actual DBU usage is in the system.billing.usage table in Databricks. The add-on applies to all DBUs used in each workspace where it is switched on, so the standby workspace adds very little.

Not included in any figure

- The Baytex hub in Canada East: firewall, VPN and DNS. Baytex Infrastructure to estimate.
- Effort to build and rehearse the chosen option (AMTRA, Baytex Infrastructure and Baytex BI).
- Compute used during DR tests and during a real failover.
- Data volumes above the example, and network traffic through the hub.

9. Storage redundancy recommendation

Each environment has two storage accounts that Databricks depends on: the **data lake** (stbtedbx<env>cnc001), which holds Unity Catalog tables and files, and the **workspace root (default) storage** (stbtedbx<env>root001), which Azure Databricks creates and manages for the workspace's own system data. A third account holds the Terraform state. The redundancy type decides which failures a storage account survives without anyone acting.

The options

Type	Copies of the data	Survives a zone loss	Survives a region loss	CAD per TB-month (hot)
LRS	3 copies in one datacenter	No	No	28.98
ZRS	3 copies, one in each of three zones	Yes, with no action	No	36.25
GRS	3 local copies + 3 in Canada East, copied asynchronously	No: the primary copy is single-zone	Yes, after a failover you start	58.06
GZRS	3 zonal copies + 3 in Canada East, copied asynchronously	Yes, with no action	Yes, after a failover you start	65.23
RA-GRS, RA-GZRS	As GRS or GZRS, plus a read-only endpoint in Canada East	As GRS or GZRS	As GRS or GZRS, and readable before failover	72.50, 81.61

Prices are list prices for Data Lake Storage (hierarchical namespace) hot data in Canada Central. Geo-copies trail the primary, typically by less than 15 minutes, although Microsoft gives no guarantee. Canada East has no availability zones, so ZRS and GZRS cannot be chosen for an account that lives there.

Recommendation

Storage account	Today	Recommended	Why
Data lake, dev and test	ZRS	**ZRS** (no change)	Keeps dev and test behaving like prod. LRS would save about CAD 7 per TB a month but would remove zone protection from the environments used to prove changes.
Data lake, prod	ZRS	**ZRS** now. Move to **GZRS** only if Baytex chooses regional DR option A (rebuild in Canada East)	ZRS already survives the loss of a zone with no data loss. GZRS adds an asynchronous copy in Canada East for about CAD 28.98 more per TB a month. With managed DR (option B) or a warm standby (option C) the copy is made by Databricks or by your own jobs, so the primary stays ZRS. GRS is not recommended because it gives up zone protection, and the read-access variants add cost without helping Databricks, whose table paths always use the primary endpoint.
Workspace root (default) storage, all environments	ZRS	**ZRS** (no change)	A workspace cannot fail over to another region, and a new workspace cannot reuse another workspace's root storage, so a geo-copy adds cost with little recovery value. ZRS gives zone protection. Azure's default for this account is GRS; the platform sets ZRS deliberately. Business data belongs in the data lake, not here.
Terraform state, all environments	GRS with versioning and 30-day soft delete	**GRS** (no change)	The copy in Canada East lets the pipelines deploy a recovery environment after a Canada Central outage. The account is tiny, so cost is negligible.
Backup vault, if vaulted backup is adopted	Not used	**ZRS** vault	Recovery points survive a zone loss. Restores go to an account in the same region, so a GRS vault adds little unless Baytex also wants the backups copied out of Canada Central.
Standby accounts in Canada East (DR options B and C)	Not used	**LRS**	Canada East offers no zones. GRS would copy the standby back to Canada Central, which the primary already covers.

Changing the prod data lake from ZRS to GZRS

Adding geo-redundancy to a ZRS account is an online change made by Azure. It is made through Terraform by changing the data lake's replication type and running a deploy. Before approving, confirm the plan shows the storage account being **updated in place**. A plan that says the account **must be replaced** would delete the data lake and must be rejected. A delete lock on the account (recommendation R1 of the storage backup document) is a second safeguard against that mistake.

10. Roadmap and decisions

Phase	Work	Owner
0. Now, no DR decision needed	Close the NAT Gateway and load balancer zone gaps. Apply the storage protections in the companion document. Keep catalog, schema and grant definitions in code.	AMTRA, Baytex BI
1. Decide	Set RPO and RTO per workload. Choose option A, B or C. Agree the budget. For option B, request managed DR access and the Mission Critical rate.	Baytex
2. Foundations, any option	Canada East address range and hub design. Canada East metastore. Region-ready Terraform: Canada East root, HAProxy variant without zones, state account, pipeline environments.	Baytex Infrastructure, Baytex BI, AMTRA
3. Build	Build the chosen option in dev, test the failover, then build it for prod.	AMTRA, Baytex BI
4. Operate	Failover test at least twice a year; review RPO, RTO and cost after each.	AMTRA, Baytex

Decisions needed from Baytex

Decision	Who	Why it matters
RPO and RTO for the Databricks workloads	Baytex business and BI owners	Decides which option is needed
Which option to pursue, and the budget	Baytex IT leadership	Drives all further work
A hub presence in Canada East	Baytex Infrastructure	Every option needs it to reach on-premises data
Use of a preview service for production	Baytex IT leadership	Option B is in public preview
Which catalogs must fail over	Baytex BI	Sets the replication scope and the standby storage size

11. Sources

Microsoft and Databricks documentation, read on 7 October 2026.

- Managed disaster recovery, Azure Databricks: learn.microsoft.com/azure/databricks/admin/managed-disaster-recovery
- Disaster recovery, Azure Databricks: learn.microsoft.com/azure/databricks/admin/disaster-recovery
- Reliability in Azure Databricks: learn.microsoft.com/azure/reliability/reliability-databricks
- Azure Databricks release notes, June 2026: learn.microsoft.com/azure/databricks/release-notes/product/2026/june
- Reliability in Azure NAT Gateway: learn.microsoft.com/azure/reliability/reliability-nat-gateway
- Blob Storage feature support (hierarchical namespace): learn.microsoft.com/azure/storage/blobs/storage-feature-support-in-storage-accounts
- Azure Retail Prices API (list prices, CAD): prices.azure.com/api/retail/prices