# LABCOL-2010

## Streamline Contact Center Operations with Webex Contact Center and the New Salesforce CRM Connector

*Anuj Bhatia*

*Copyright © 2025 Cisco*

# Table of contents


1. Lab 3
   - 1.1 Overview 3
   - 1.2 Task 1 - Integrate Webex Contact Center with Saleforce Using the New CRM Connector 4
   - 1.3 Task 2 - Integrate Saleforce Connector with WebRTC 14
   - 1.4 Task 3 - Presence Synchronization Between Salesforce and Webex Contact Center 24
   - 1.5 Task 4 - Data Lookup Using CAD Variables 35
   - 1.6 Task 5 - Case Lookup Using Custom CAD Variables and Agent Desktop Screen Pop 48
   - 1.7 Task 6 - Automatic New Case Creation Using Custom CAD Variables 56



Copyright © 2025 Cisco

# 1. Lab

## 1.1 Overview

### 1.1.1 Learning Objectives

This lab session is an **intermediate level** session intended for engineers with prior **Webex Contact Center** experience and either basic or no knowledge of the Webex Contact Center integration with **Salesforce** customer relationship management (CRM) system.

In this lab session, you will explore the capabilities of the **New Webex Contact Center CRM Connector** for **Salesforce** that enables you to manage voice interactions while accessing customer information within Salesforce. You will gain hands-on experience with seamless screen pops, activity logging, case management, and other features — all integrated into a streamlined, user-friendly agent interface.

### 1.1.2 Disclaimer

This instructional guide is designed to familiarize participants with some of the capabilities of the **New Webex Contact Center CRM Connector** for **Salesforce**. While the lab design and configuration examples can serve as a reference, they are not representative of a real-world design; therefore, not all recommended features are utilized or optimally enabled. For design-related questions, please contact your Cisco representative or a Cisco partner.

### 1.1.3 Lab Topology

This lab utilizes the Webex Contact Center cloud environment.


Copyright © 2025 Cisco

## 1.2 Task 1 - Integrate Webex Contact Center with Saleforce Using the New CRM Connector

Please use the following credentials to complete the tasks:

| | |
|---|---|
| `Control Hub` | https://admin.webex.com |
| `Salesforce` | https://login.salesforce.com/ |
| `WxCC Username` | labuser**ID**@wx1.wbx.ai *(where **ID** is your selected pod number (01 through 10); i.e. labuser**02**@wxccciscolive2024.wbx.ai if selected pod is 2)* |
| `WxCC Password` | webexONE1! |
| `Salesforce Username` | As provided by the instructor |
| `Salesforce Password` | As provided by the instructor |

**Task Objectives**

- Define and configure the Call Center in Salesforce and add users.
- Create a softphone layout and set screen pop preferences.
- Add the Webex Contact Center softphone to the Salesforce Sales app.
- Test the Webex Contact Center softphone integration in Salesforce.

### 1.2.1 **Section 1 - Configure Call Center**

**Attention**

Please use the **Firefox** browser to access, configure, and test within the Salesforce portal.

- Navigate to Salesforce portal and log in with the credentials provided in the Walk-In Lab (WIL) Assistant portal.

**Note**

The package for the WxCC V2 Salesforce connector is already pre-installed. In production environments, it will need to be installed manually and can be retrieved from this link.

- Visit the Github repository to download the latest call center definition file - https://github.com/webex/webex-contact-center-crm-connectors/blob/main/salesforce/OpenCTI.callCenter-meta.xml (click **'Download raw file button'**).


Copyright © 2025 Cisco

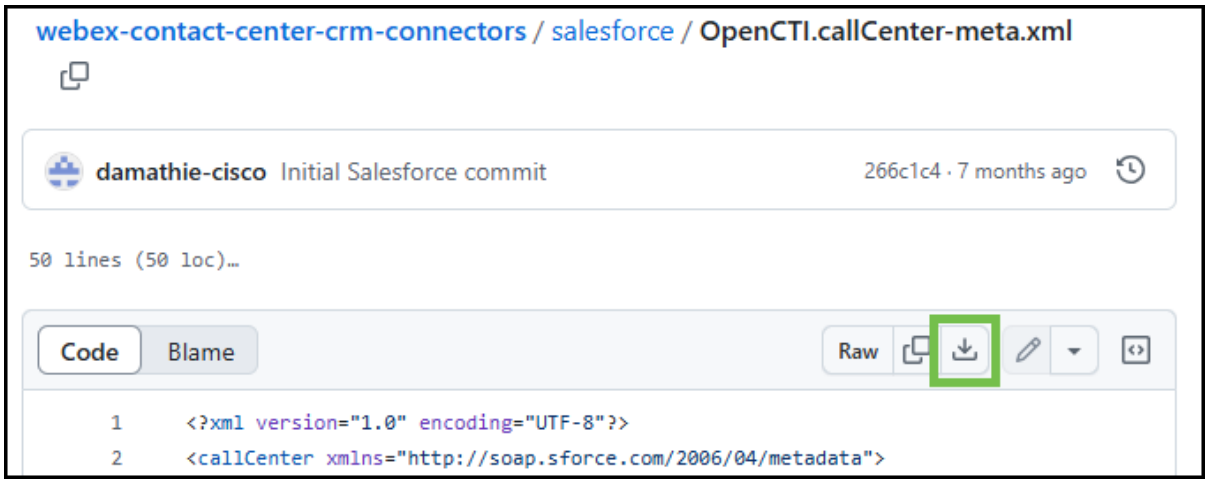


- In the Salesforce portal, navigate to **'Feature Settings > Service > Call Center > Call Centers'** (or type *Call Centers* in the search bar above the left-hand menu).
- Click **'Import'**, choose the call center definition file (downloaded earlier) and click **'Import'** again.

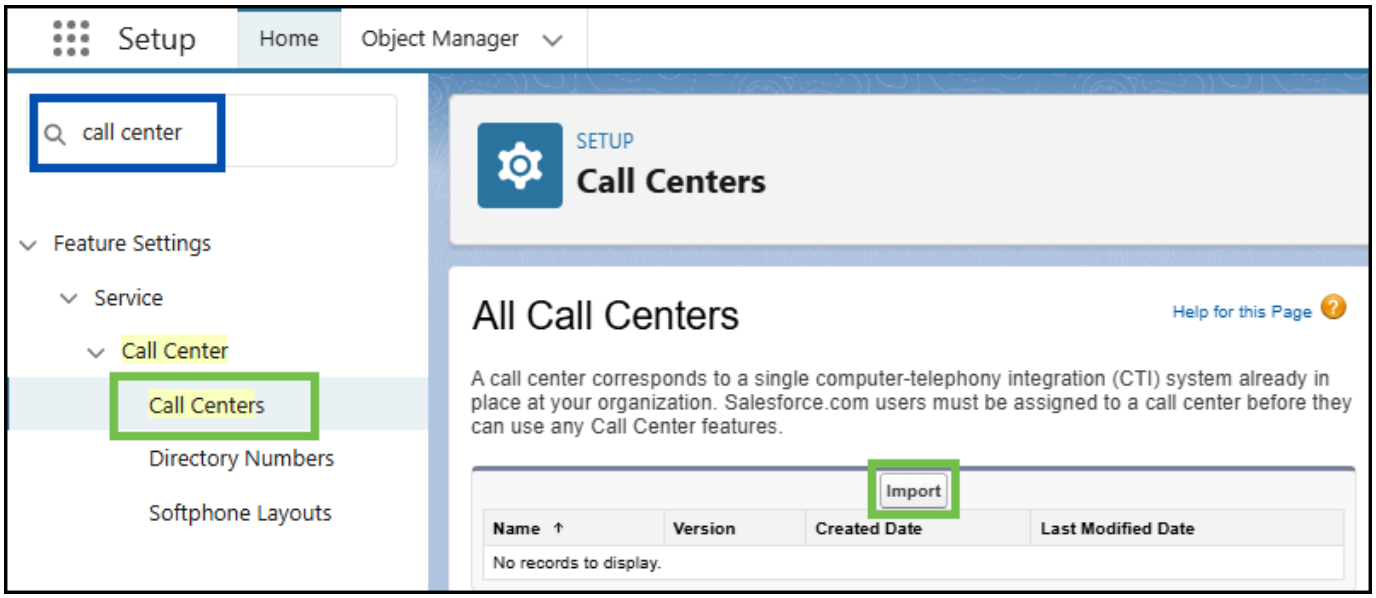


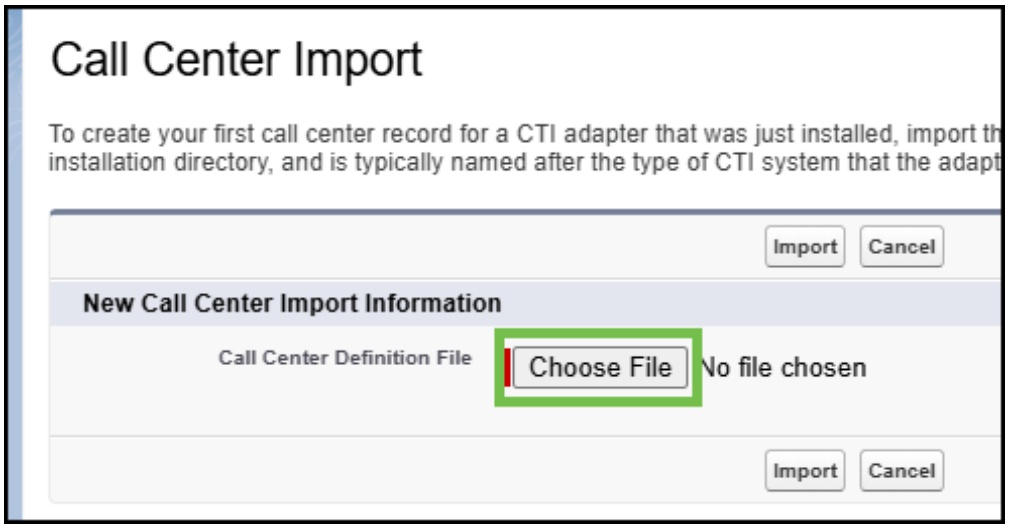


- After the call center definition file is imported, edit it by clicking **'Edit'**.
- Change **'WxCC Region'** to **'us1'**.


Copyright © 2025 Cisco

**Note**

The region defined here should match your Webex Contact Center region (i.e. ca1, anz1, eu1 etc.).

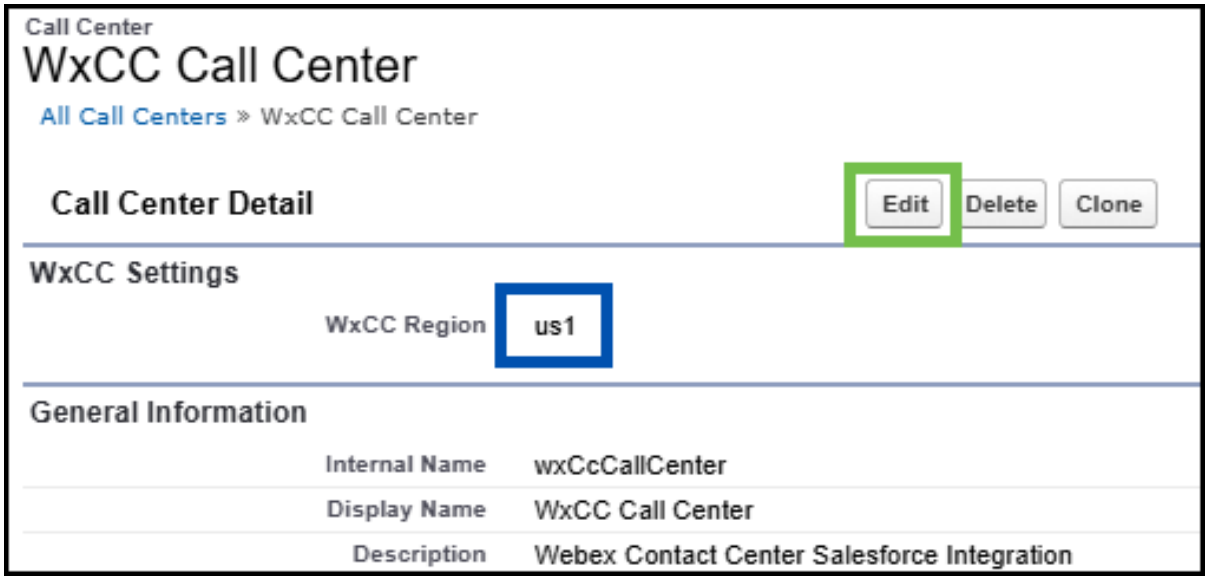


- Click **'Save'**.
- Add users to the Call Center:
- Click **'Manage Call Center Users'** at the bottom of the page and then **'Add More Users'**.
- Click **'Find'**, select the user in use (*User, User*), and click **'Add to Call Center'**.


Copyright © 2025 Cisco

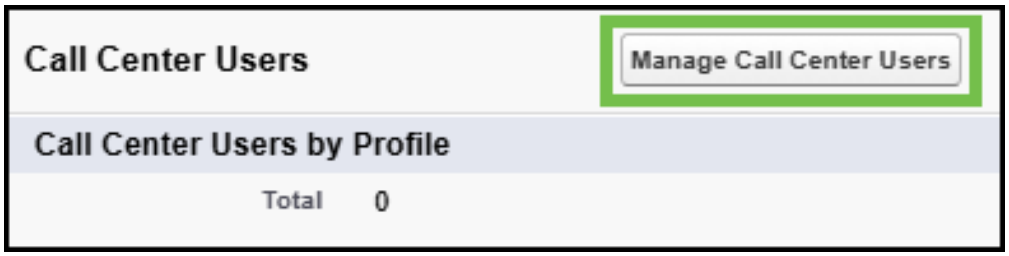


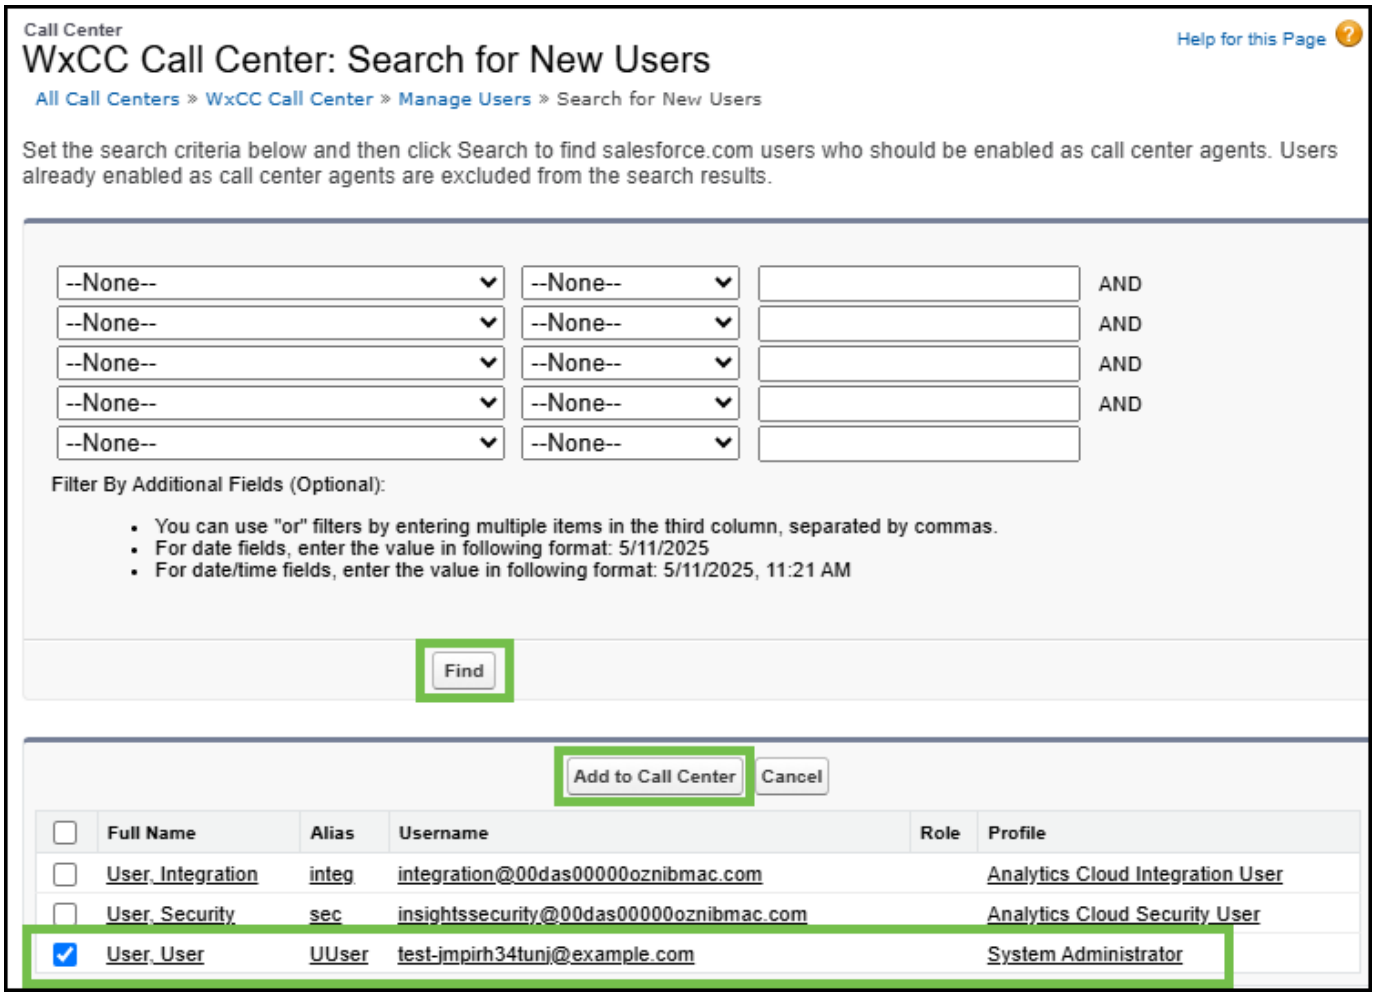


## 1.2.2 Section 2 - Configure Softphone Layout

- Navigate to **'Feature Settings > Service > Call Center > Softphone Layouts'** (or type *Softphone Layouts* in the search bar above the left-hand menu).
- Click **'New'**.


Copyright © 2025 Cisco

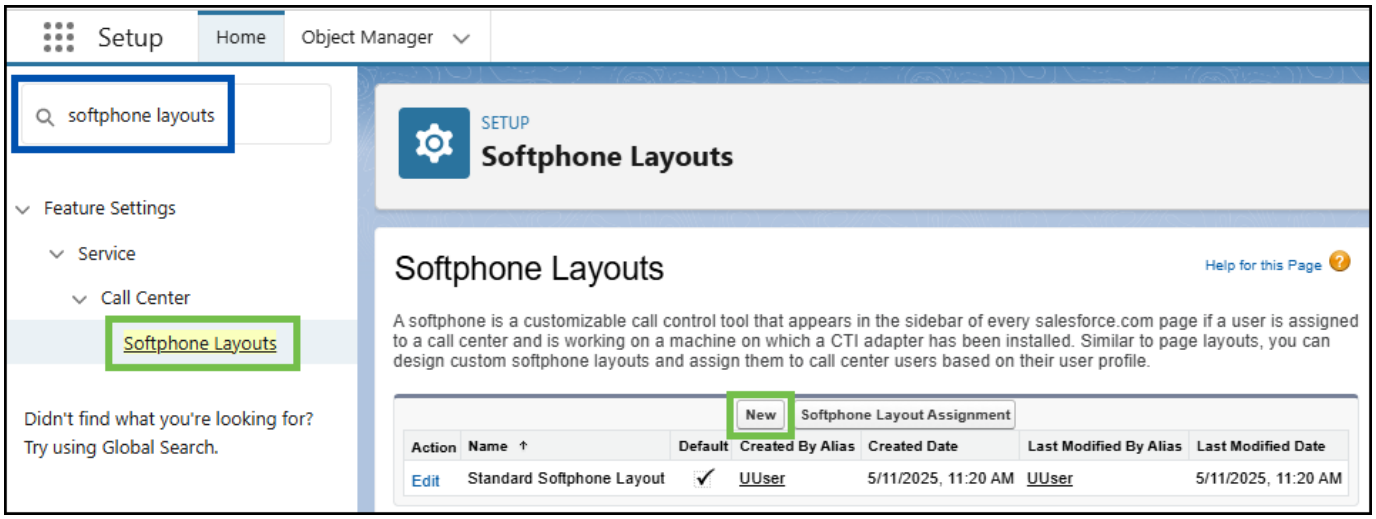


- Provide a name for the **'Softphone Layout'** (e.g., *WxCC layout*).
- Select the **'Is Default Layout'** checkbox.
- Under **'Display these salesforce.com objects'**, add **'Case'**.

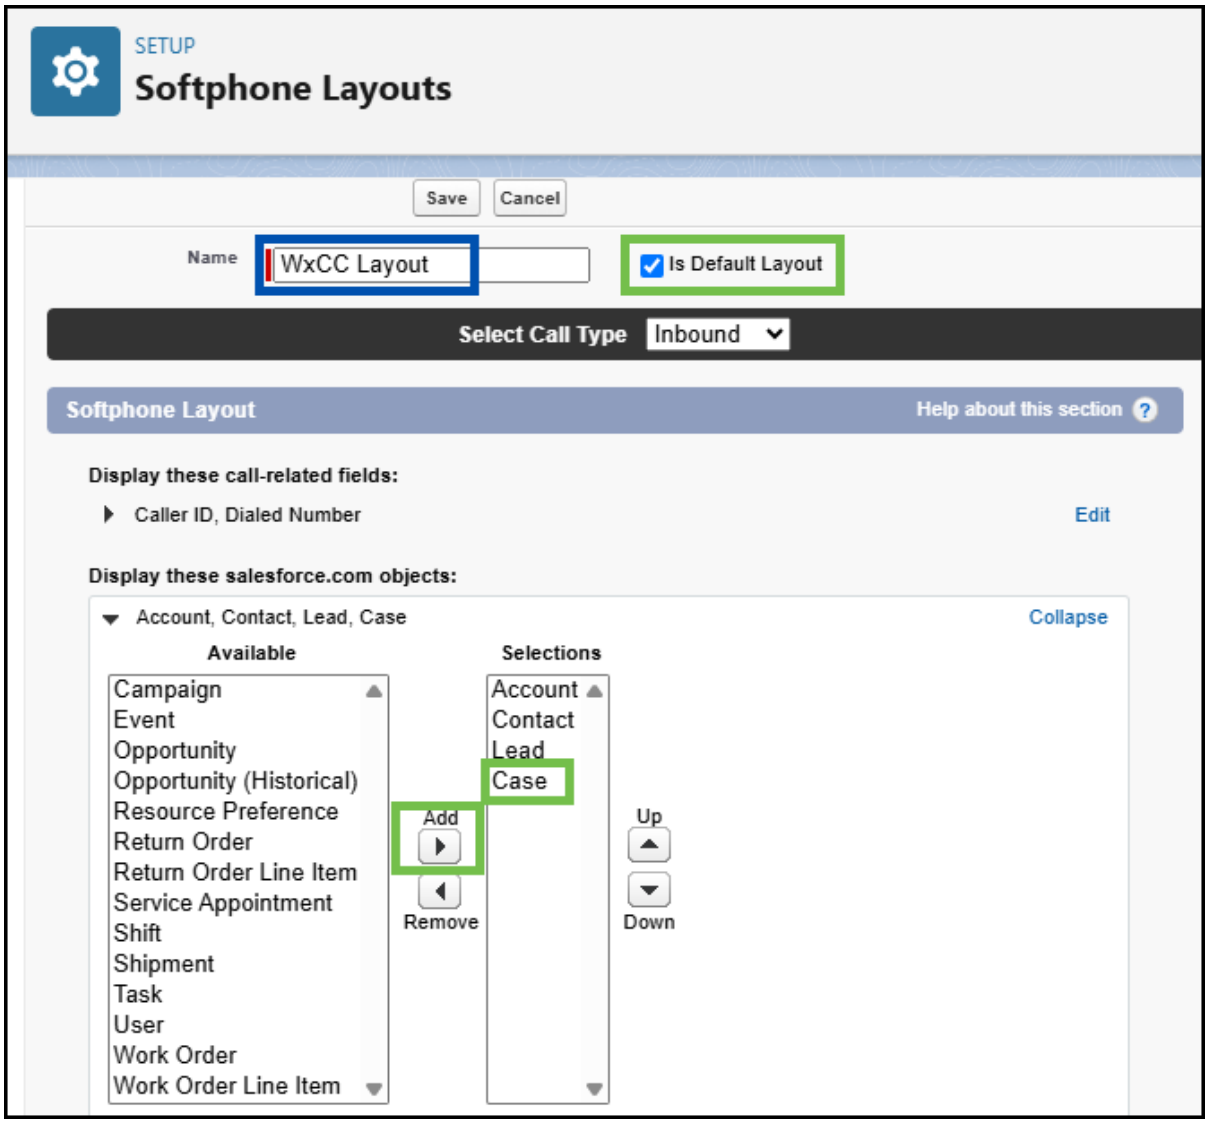


- Under **'Screen Pop Settings'**, expand **'No matching records'**, select **'Pop to new'**, and choose **'Contact'**.


Copyright © 2025 Cisco

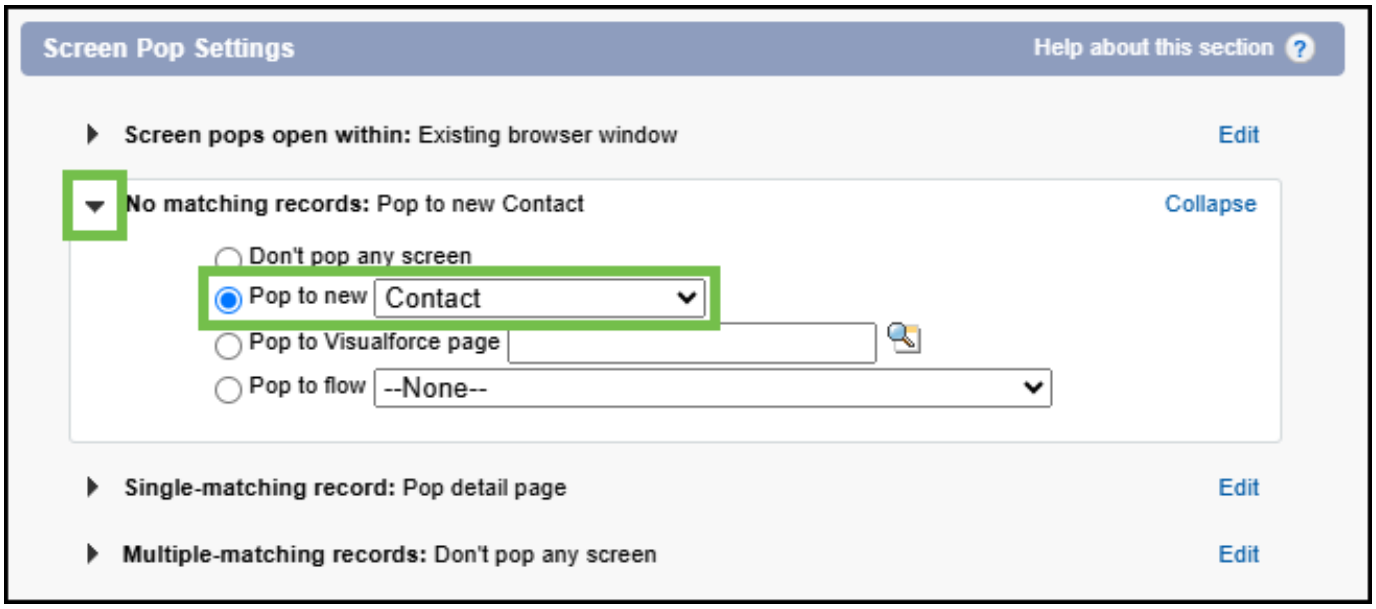


**Note**

Other Salesforce objects can be selected here as well. **'Contact'** is used as an example in this exercise.

- Click **'Save'** at the top.

## 1.2.3 Section 3 - Configure CTI Softphone

- Navigate to **'Apps > App Manager'** (or type *App Manager* in the search bar above the left-hand menu).
- For the **'Sales'** app (line number 17; **'LightningSales'** developer) click **'Edit'** on the right-hand side.

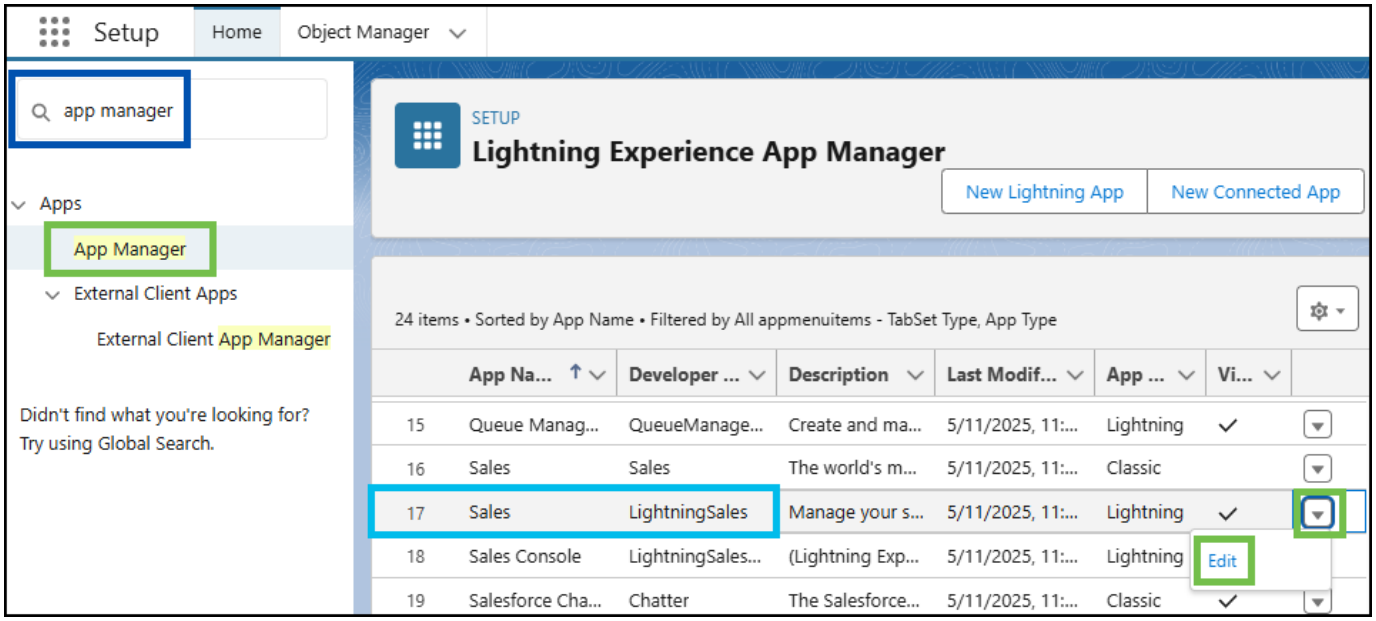


- In the next window, select **'Utility Items (Desktop Only)'**.
- Click **'Add Utility item'** and choose **'Open CTI Softphone'**.


Copyright © 2025 Cisco

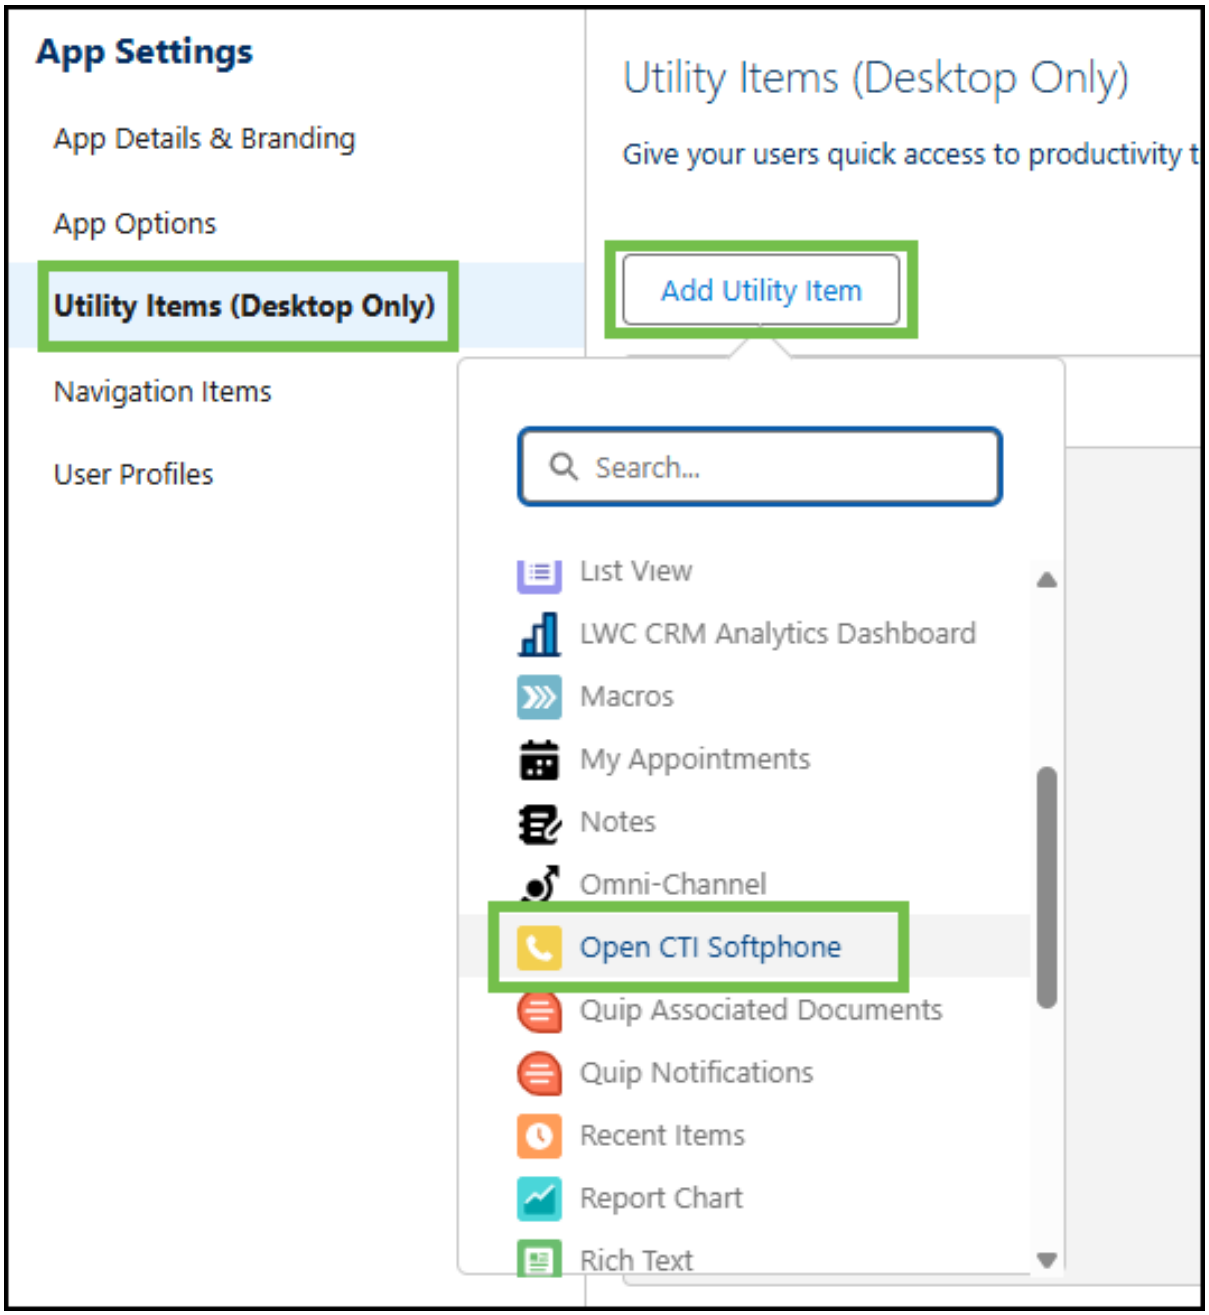


- Click **'Save'** and return to the previous page by clicking the back arrow icon at the top left corner.

## 1.2.4 **Section 4 - Testing**

> **Attention**
>
> Please use the **Firefox** browser to access, configure, and test within the Salesforce portal.

- Click on the **'App Launcher'** icon (top left).
- Search for *Sales* and click on the **'Sales'** option.


Copyright © 2025 Cisco

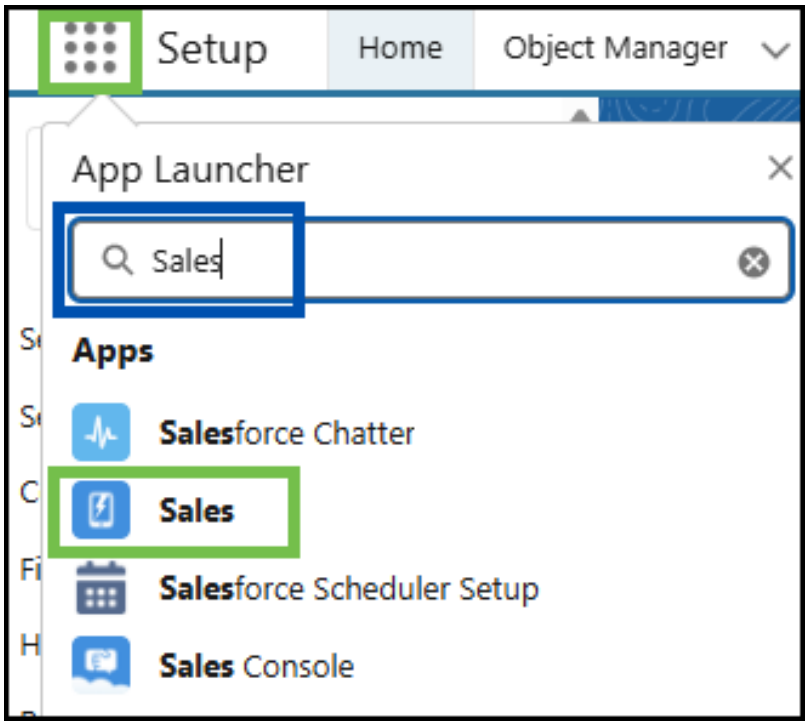


- Open the Webex Contact Center phone widget (bottom left) and login to Webex Contact Center Agent Desktop using the selected Webex Contact Center user credentials (e.g., *labuserID@wxcccciscolive2024.wbx.ai*):
- For the phone number, select **'Extension'** and enter the extension in the format 10**NN** (where **'NN'** is your lab user number, e.g., *labuser**01**@wxcccciscolive2024.wbx.ai*)':
- For the team use **AITeamN** (where **'N'** is your lab user number, e.g., *labuser0**1**@wxcccciscolive2024.wbx.ai*)'.


Copyright © 2025 Cisco

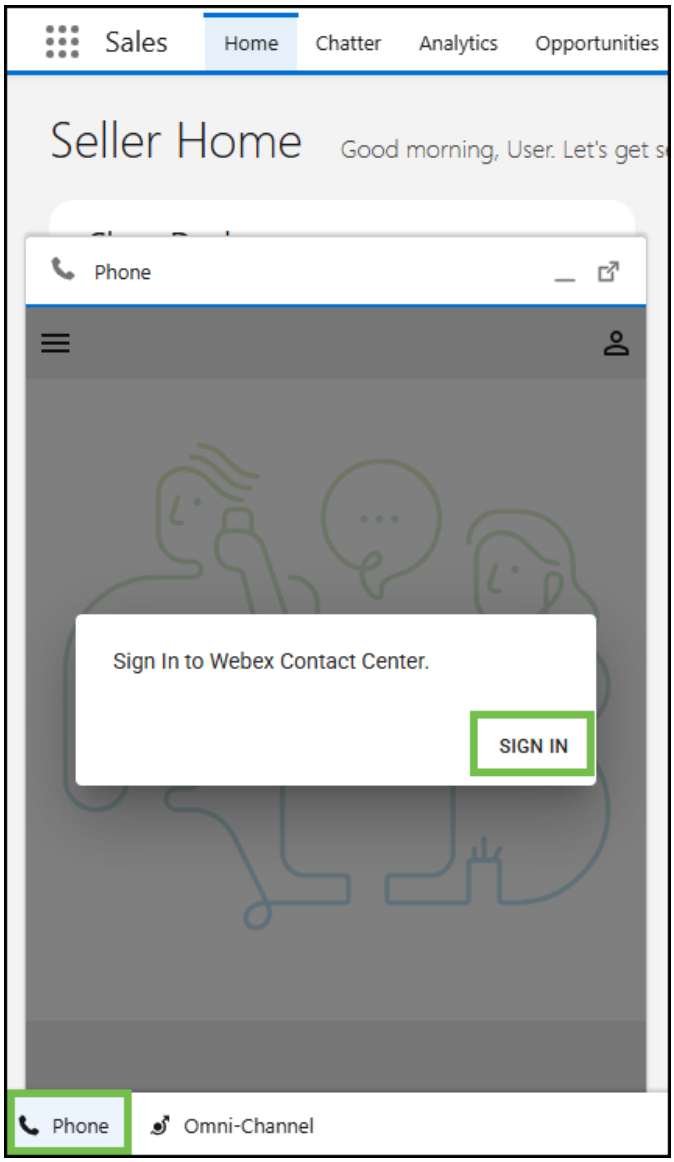


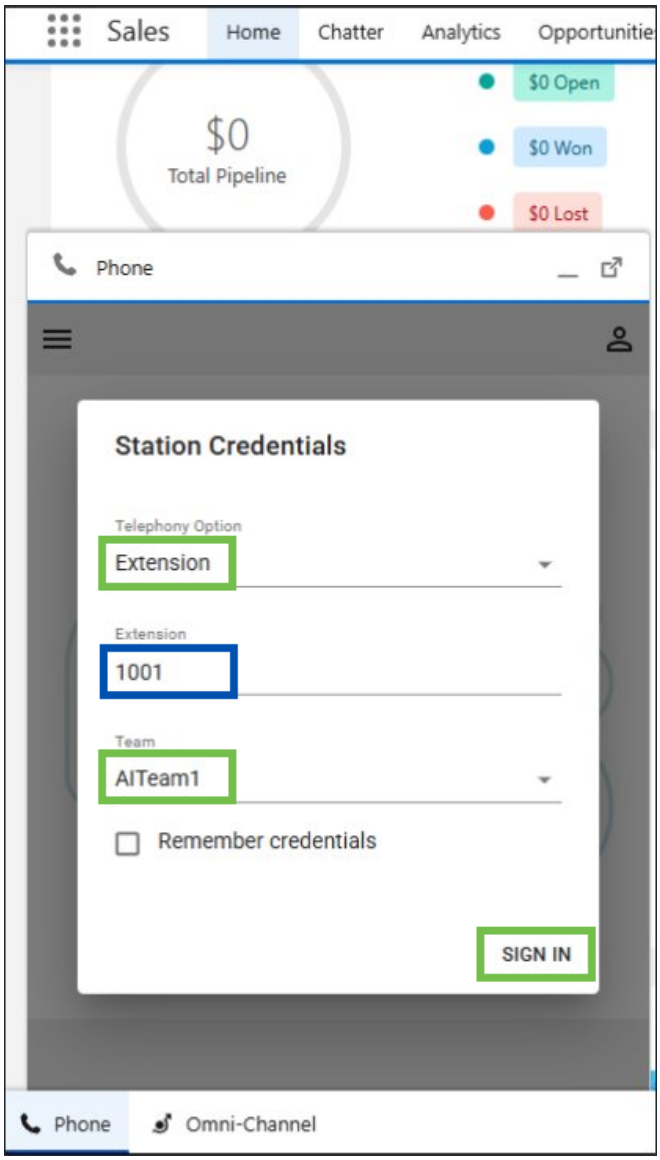




Copyright © 2025 Cisco

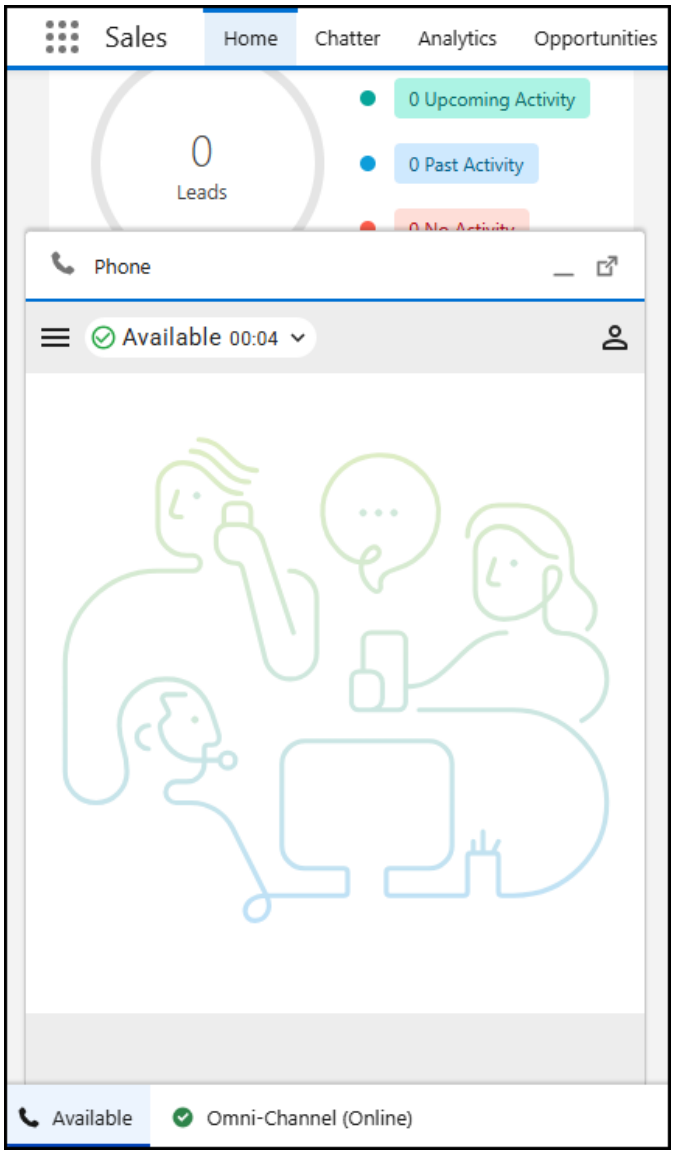


- Congratulations! You have complete the task.


Copyright © 2025 Cisco

## 1.3 Task 2 - Integrate Saleforce Connector with WebRTC

Please use the following credentials to complete the tasks:

| | |
|---|---|
| `Control Hub` | https://admin.webex.com |
| `Salesforce` | https://login.salesforce.com/ |
| `WxCC Username` | labuser**ID**@wx1.wbx.ai *(where **ID** is your selected pod number (01 through 10); i.e. labuser**02**@wxccciscolive2024.wbx.ai if selected pod is 2)* |
| `WxCC Password` | webexONE1! |
| `Salesforce Username` | As provided by the instructor |
| `Salesforce Password` | As provided by the instructor |

**Task Objectives**

- Login with WebRTC on Salesforce.
- Troubleshoot and configure the steps needed to enable WebRTC login

### 1.3.1 Section 1 - Login with WebRTC Option

**Attention**

Please use the **Firefox** browser to access, configure, and test within the Salesforce portal.

- Navigate to Salesforce portal and log in with the credentials provided in the Walk-In Lab (WIL) Assistant portal.

**Note**

The package for the WxCC V2 Salesforce connector is already pre-installed. In production environments, it will need to be installed manually and can be retrieved from this link.

- Visit the Github repository to download the latest call center definition file - https://github.com/webex/webex-contact-center-crm-connectors/blob/main/salesforce/OpenCTI.callCenter-meta.xml (click **'Download raw file button'**).


Copyright © 2025 Cisco

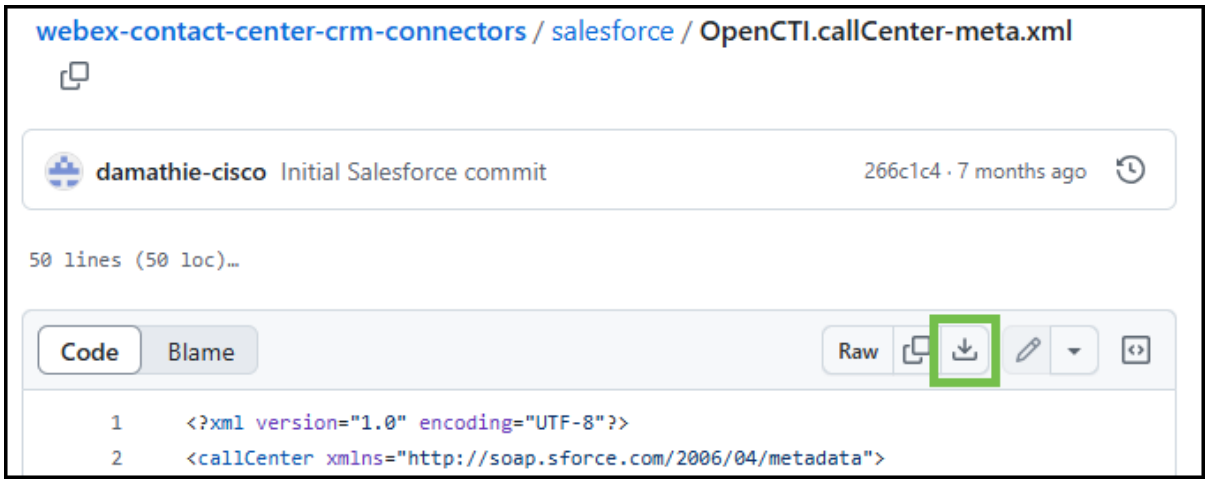


- In the Salesforce portal, navigate to **'Feature Settings > Service > Call Center > Call Centers'** (or type *Call Centers* in the search bar above the left-hand menu).
- Click **'Import'**, choose the call center definition file (downloaded earlier) and click **'Import'** again.

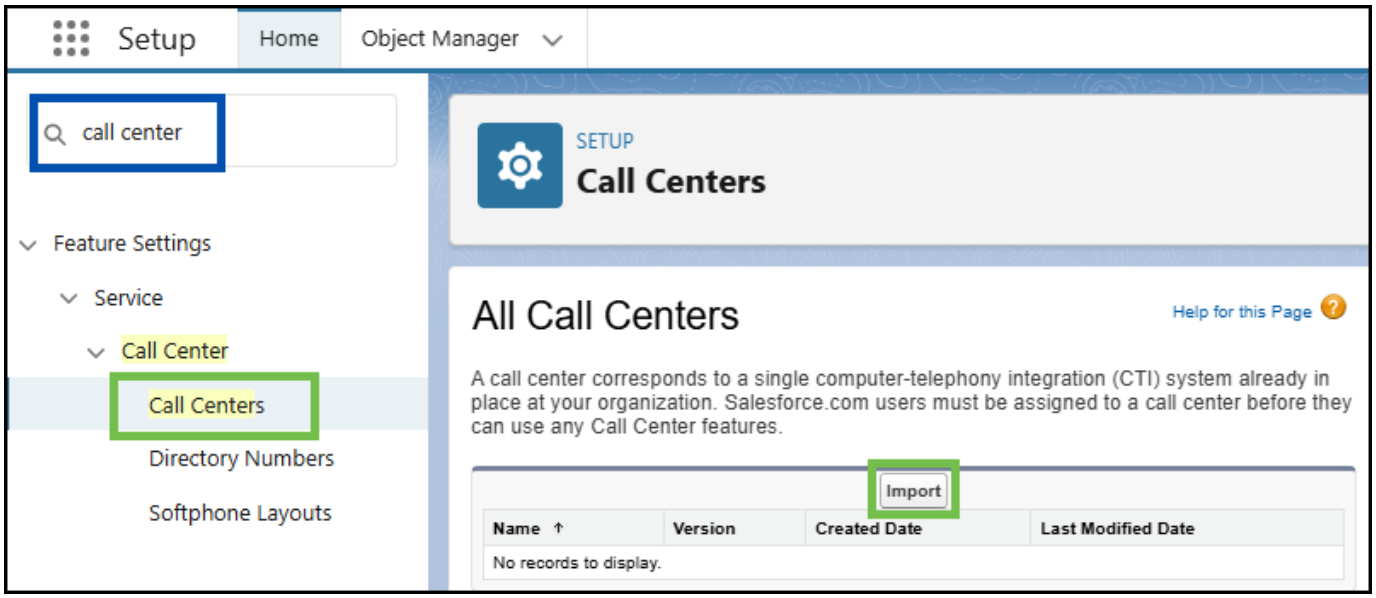


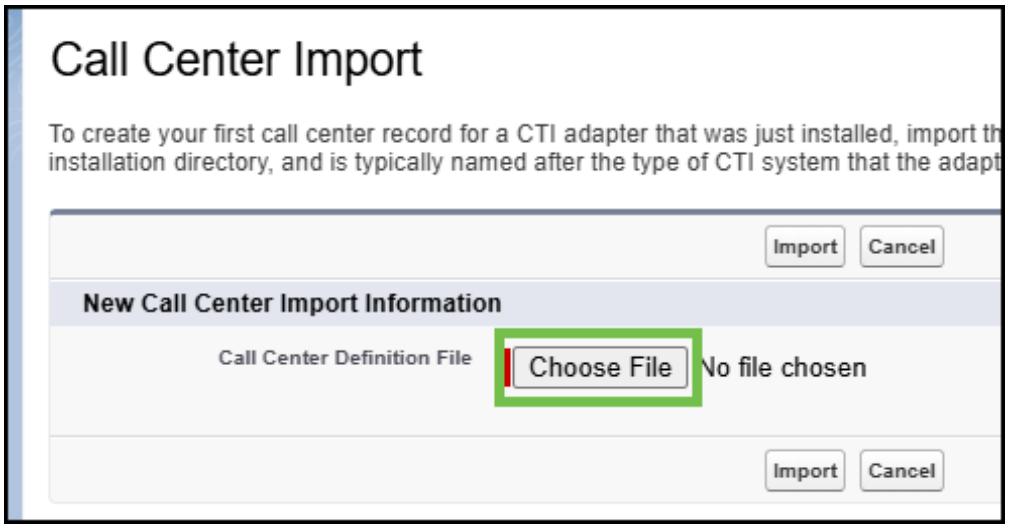


- After the call center definition file is imported, edit it by clicking **'Edit'**.
- Change **'WxCC Region'** to **'us1'**.


Copyright © 2025 Cisco

**Note**

The region defined here should match your Webex Contact Center region (i.e. ca1, anz1, eu1 etc.).

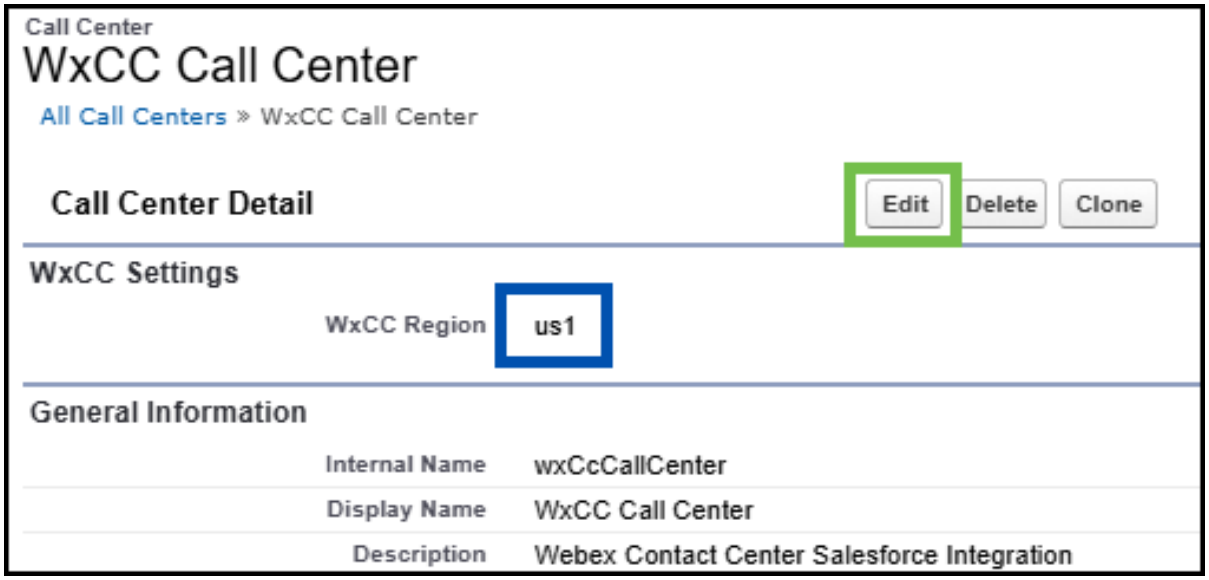


- Click **'Save'**.
- Add users to the Call Center:
- Click **'Manage Call Center Users'** at the bottom of the page and then **'Add More Users'**.
- Click **'Find'**, select the user in use (*User, User*), and click **'Add to Call Center'**.


Copyright © 2025 Cisco

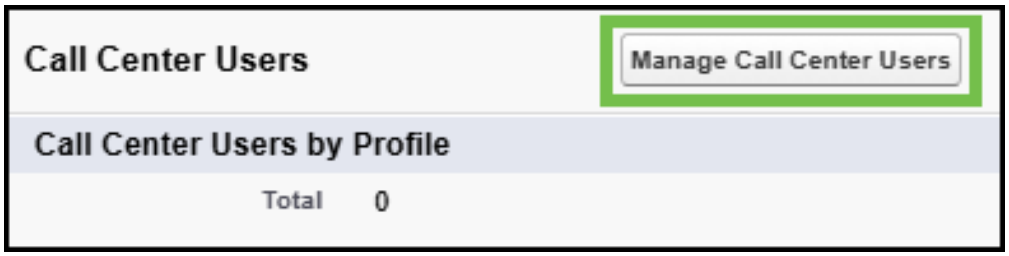


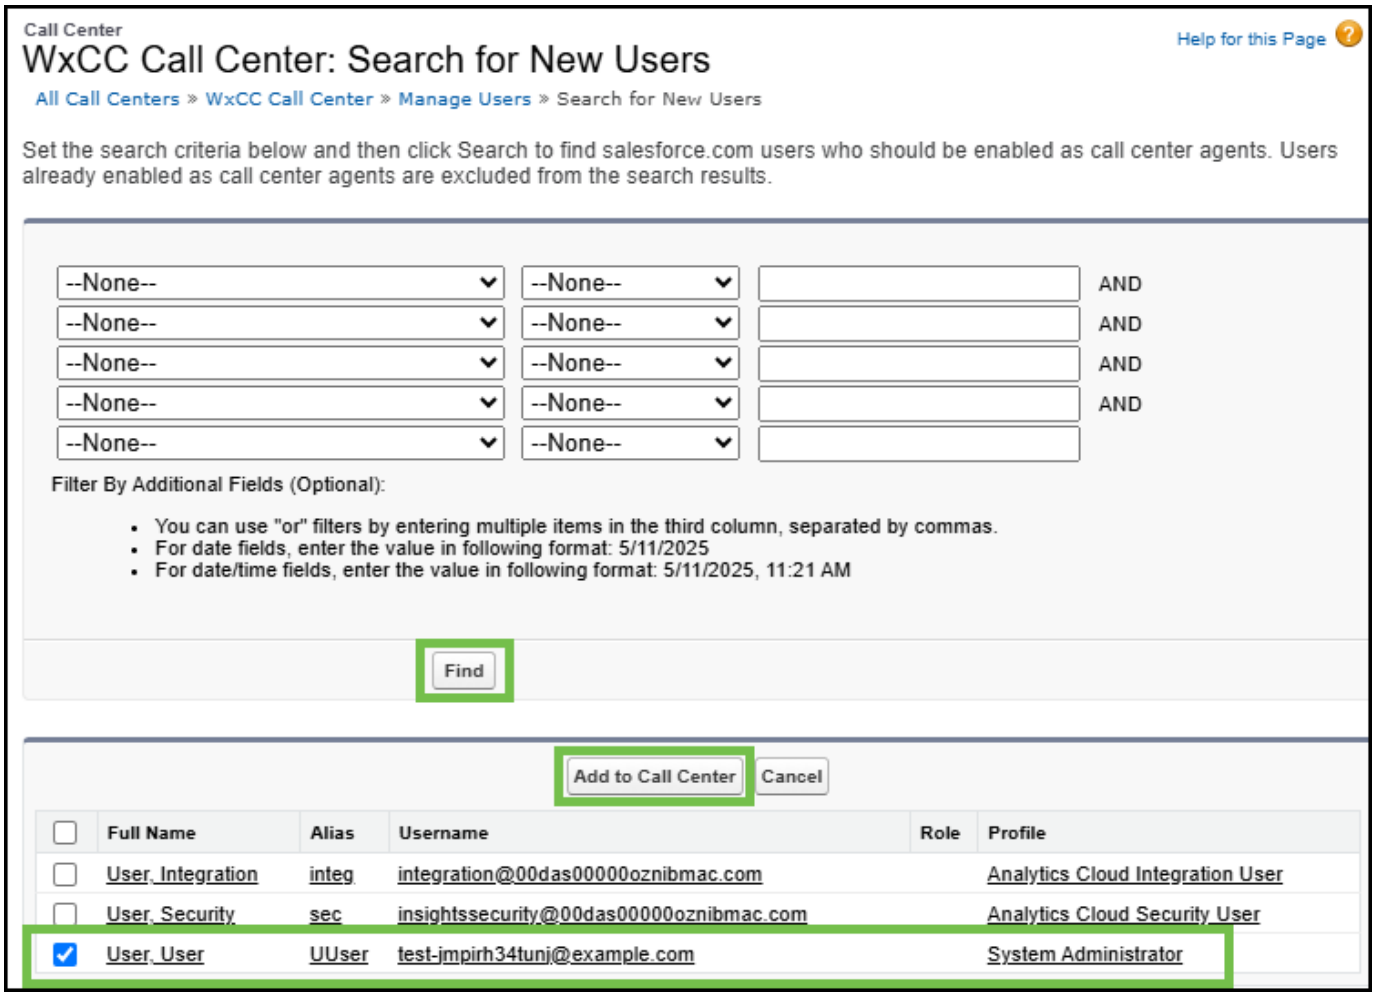


## 1.3.2 Section 2 - Configure Softphone Layout

- Navigate to **'Feature Settings > Service > Call Center > Softphone Layouts'** (or type *Softphone Layouts* in the search bar above the left-hand menu).
- Click **'New'**.


Copyright © 2025 Cisco

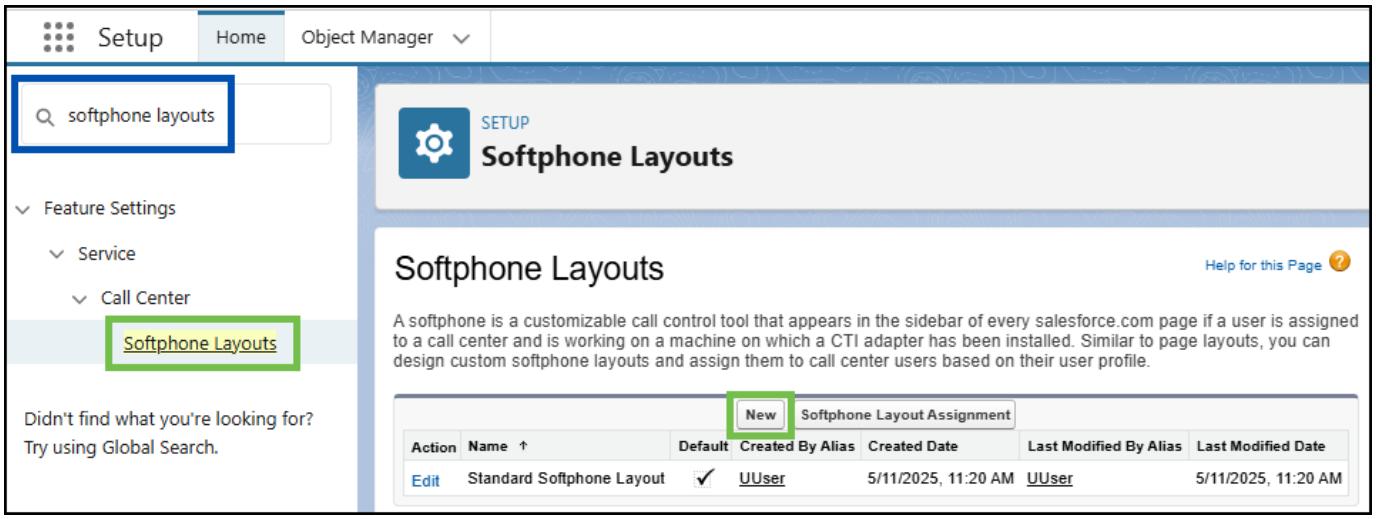


- Provide a name for the **'Softphone Layout'** (e.g., *WxCC layout*).
- Select the **'Is Default Layout'** checkbox.
- Under **'Display these salesforce.com objects'**, add **'Case'**.

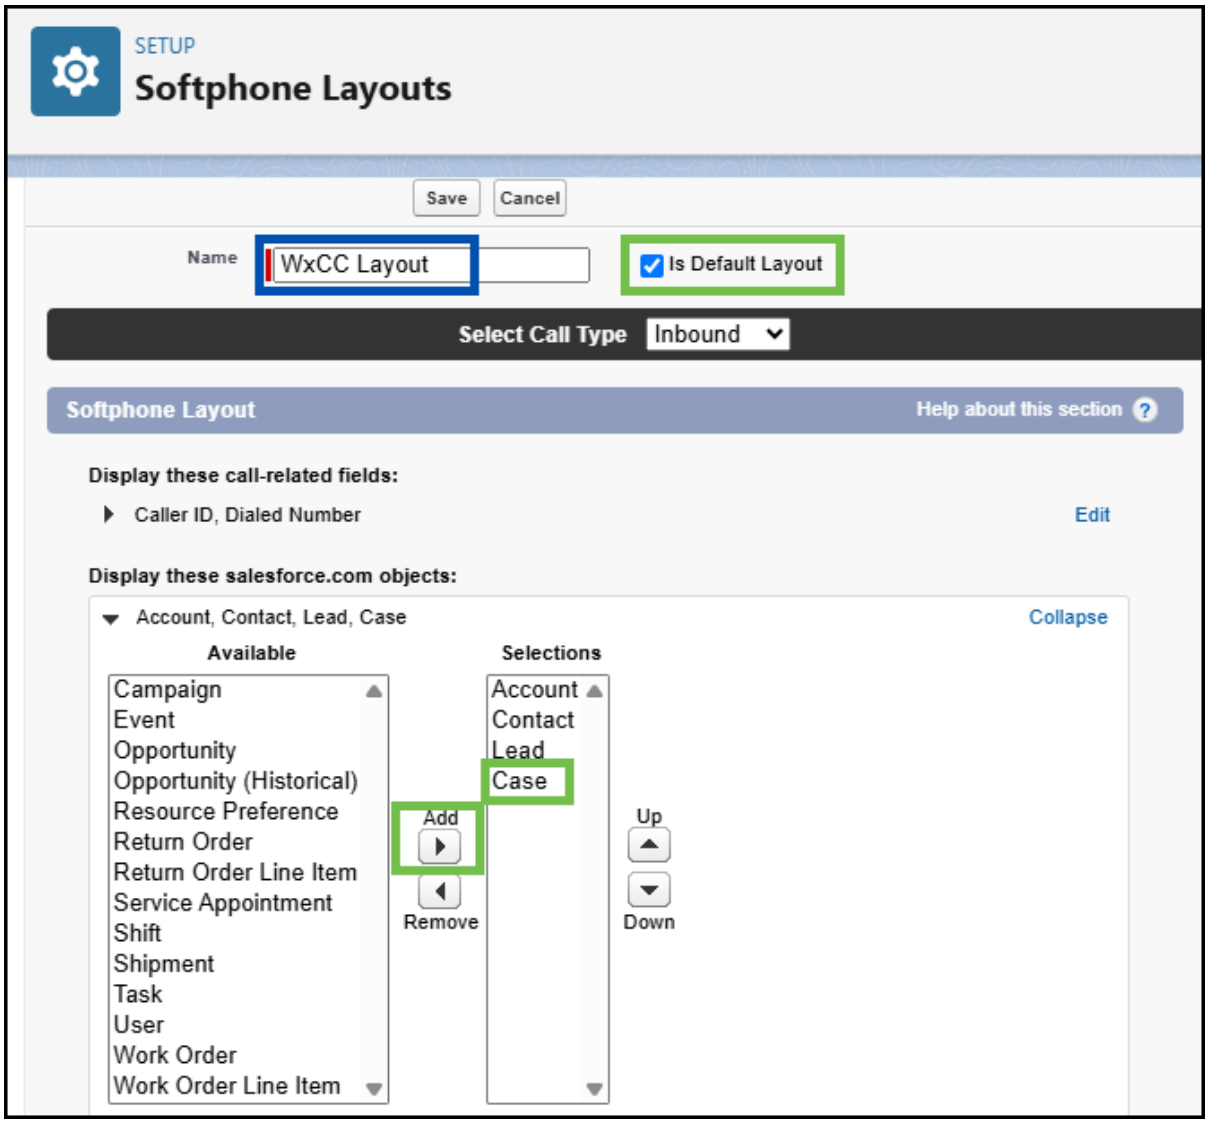


- Under **'Screen Pop Settings'**, expand **'No matching records'**, select **'Pop to new'**, and choose **'Contact'**.


Copyright © 2025 Cisco

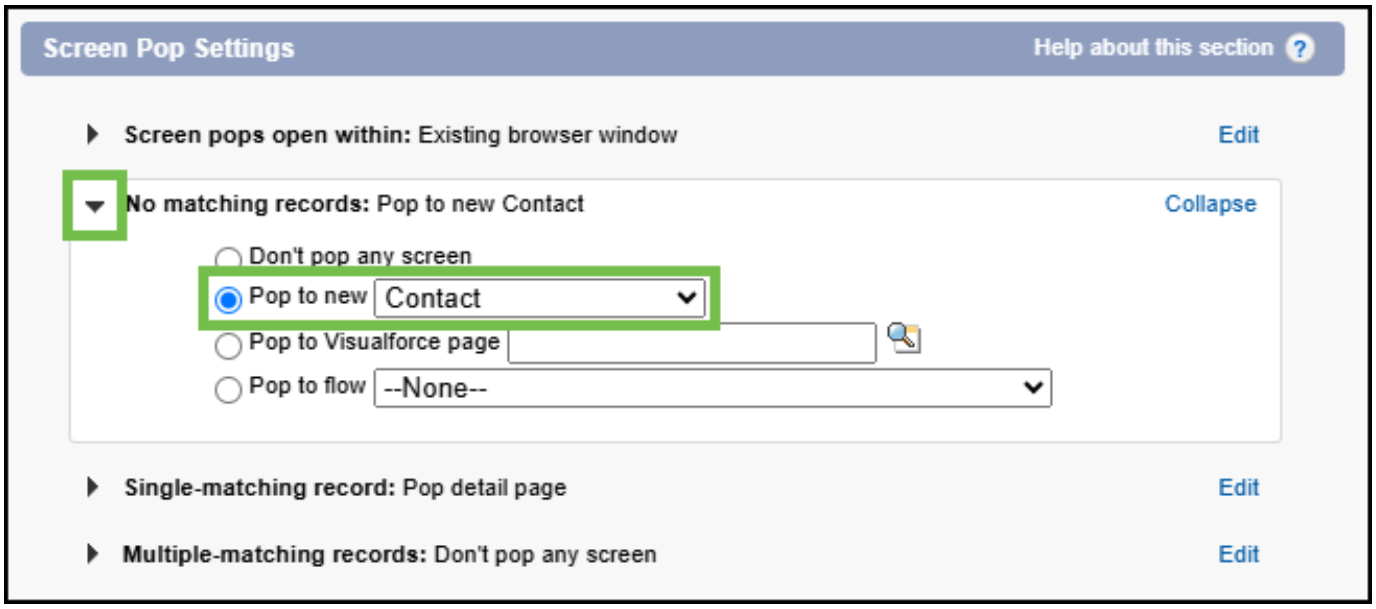


**Note**

Other Salesforce objects can be selected here as well. **'Contact'** is used as an example in this exercise.

- Click **'Save'** at the top.

## 1.3.3 Section 3 - Configure CTI Softphone

- Navigate to **'Apps > App Manager'** (or type *App Manager* in the search bar above the left-hand menu).
- For the **'Sales'** app (line number 17; **'LightningSales'** developer) click **'Edit'** on the right-hand side.

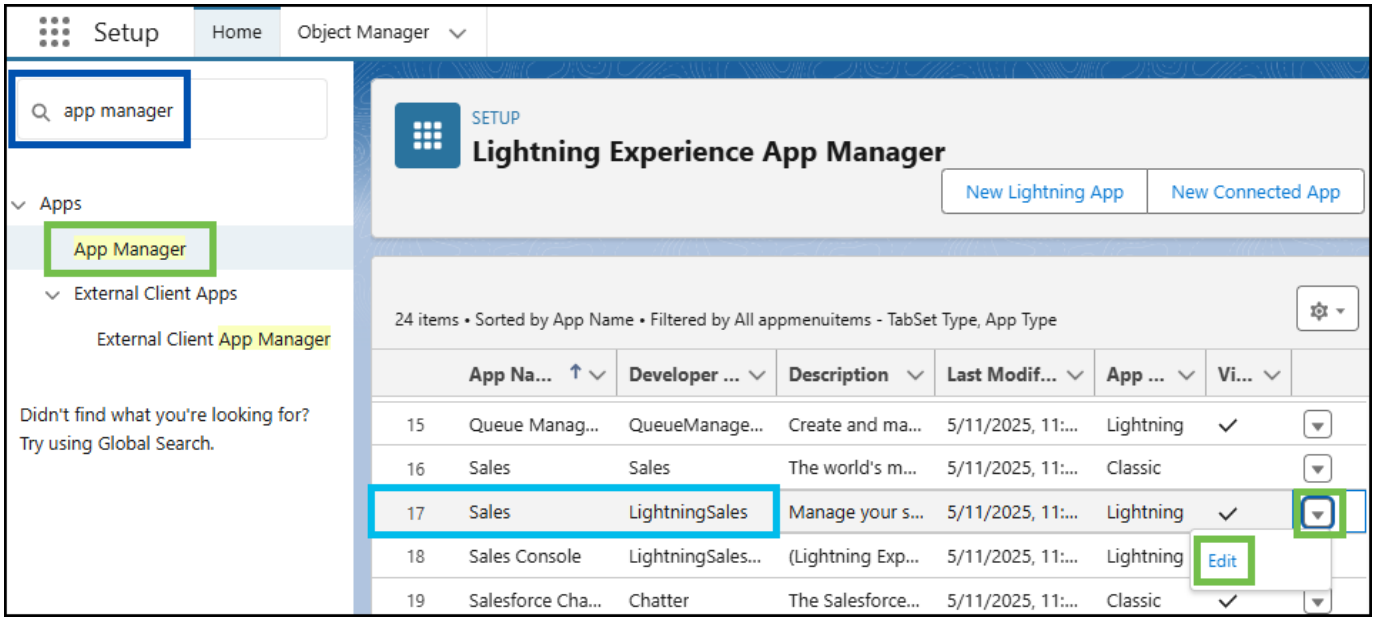


- In the next window, select **'Utility Items (Desktop Only)'**.
- Click **'Add Utility item'** and choose **'Open CTI Softphone'**.


Copyright © 2025 Cisco

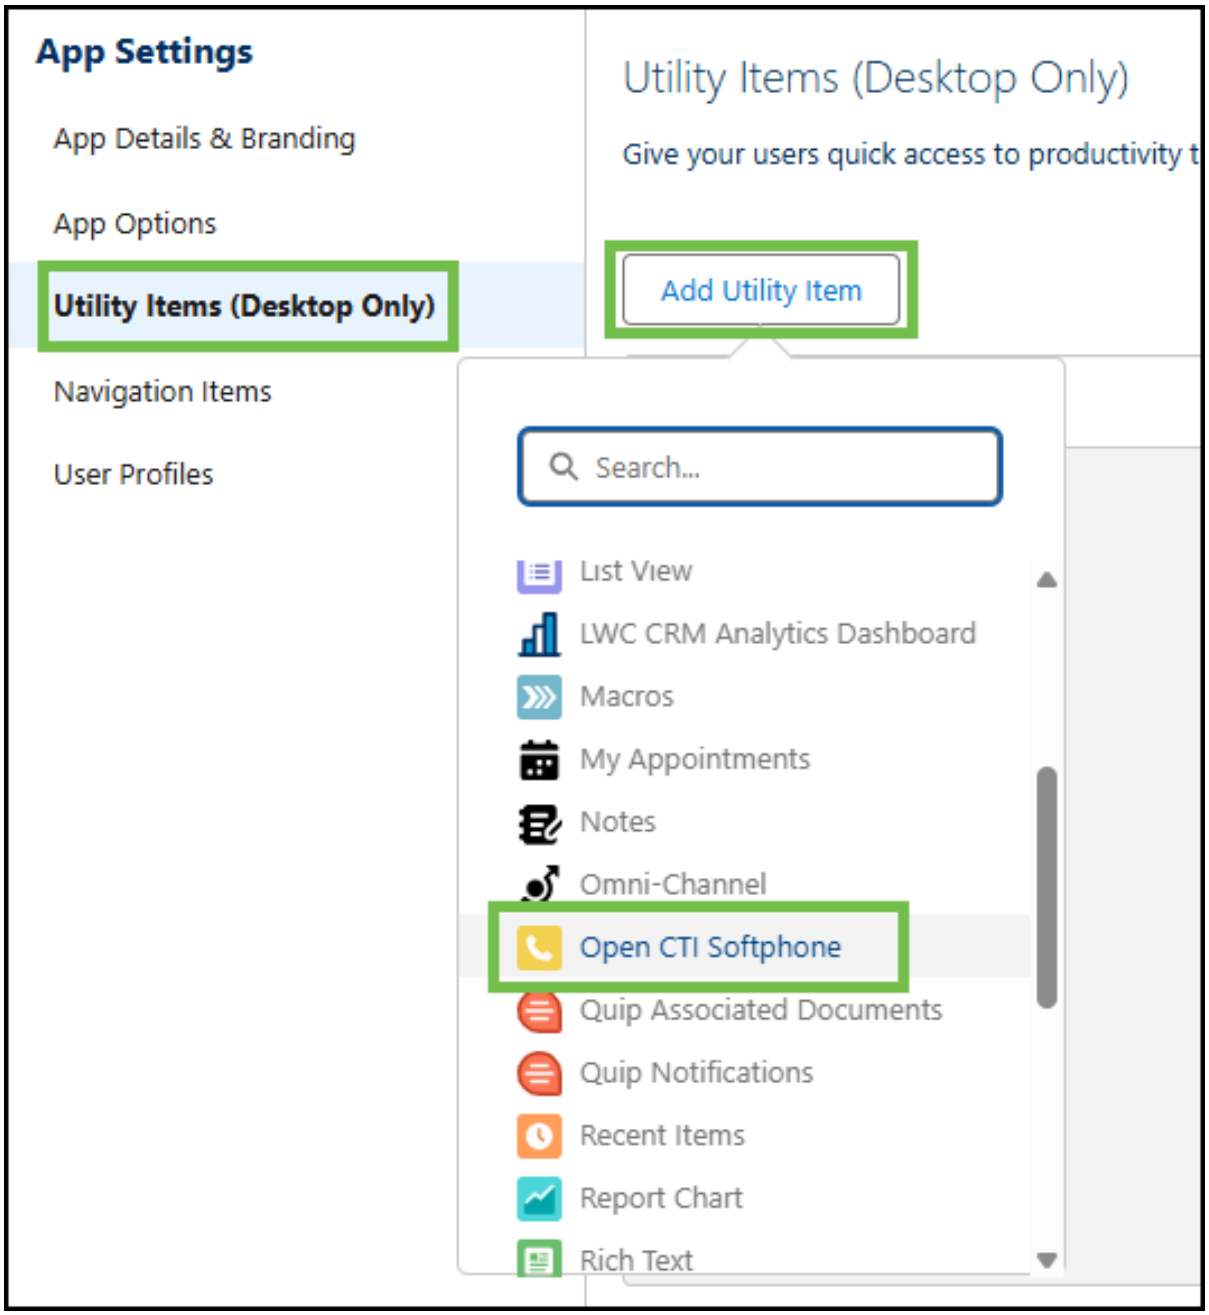


- Click **'Save'** and return to the previous page by clicking the back arrow icon at the top left corner.

## 1.3.4 **Section 4 - Testing**

> **Attention**
>
> Please use the **Firefox** browser to access, configure, and test within the Salesforce portal.

- Click on the **'App Launcher'** icon (top left).
- Search for *Sales* and click on the **'Sales'** option.


Copyright © 2025 Cisco

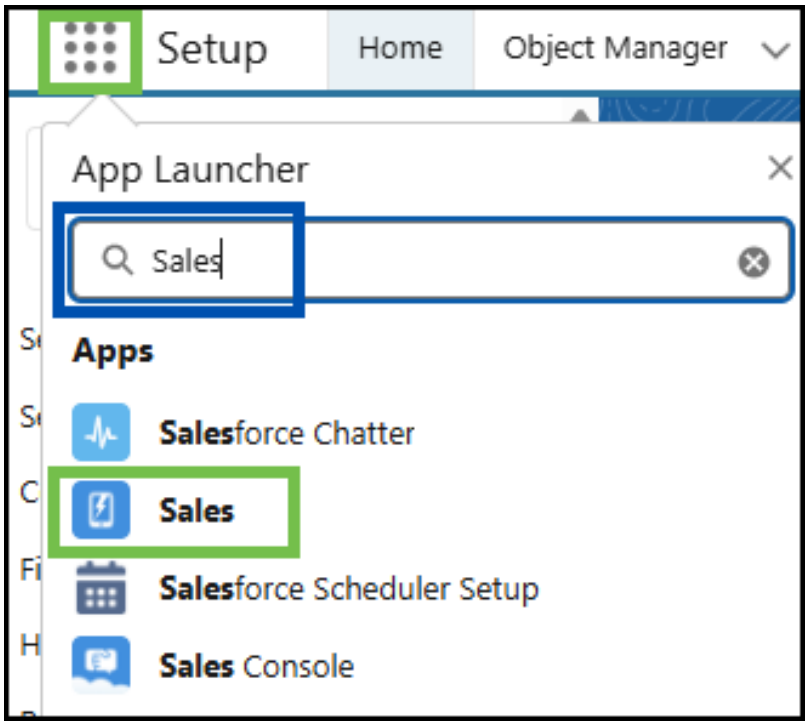


- Open the Webex Contact Center phone widget (bottom left) and login to Webex Contact Center Agent Desktop using the selected Webex Contact Center user credentials (e.g., *labuserID@wxcccciscolive2024.wbx.ai*):
- For the phone number, select **'Extension'** and enter the extension in the format 10**NN** (where **'NN'** is your lab user number, e.g., *labuser**01**@wxcccciscolive2024.wbx.ai*)':
- For the team use **AITeamN** (where **'N'** is your lab user number, e.g., *labuser0**1**@wxcccciscolive2024.wbx.ai*)'.


Copyright © 2025 Cisco

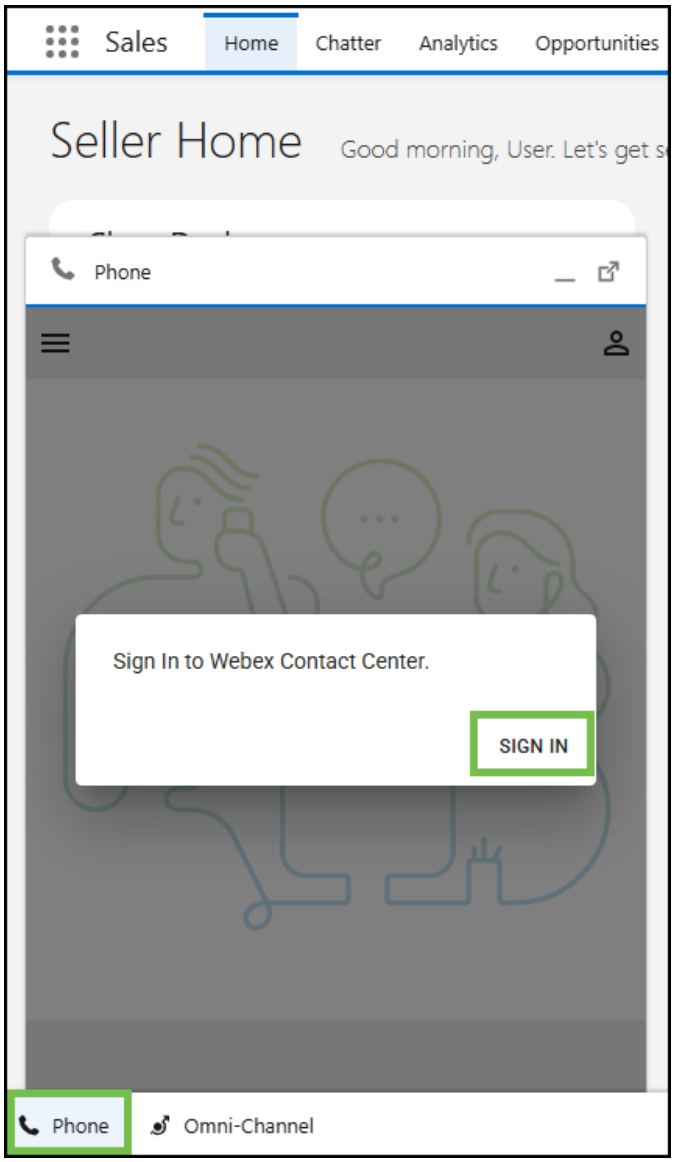


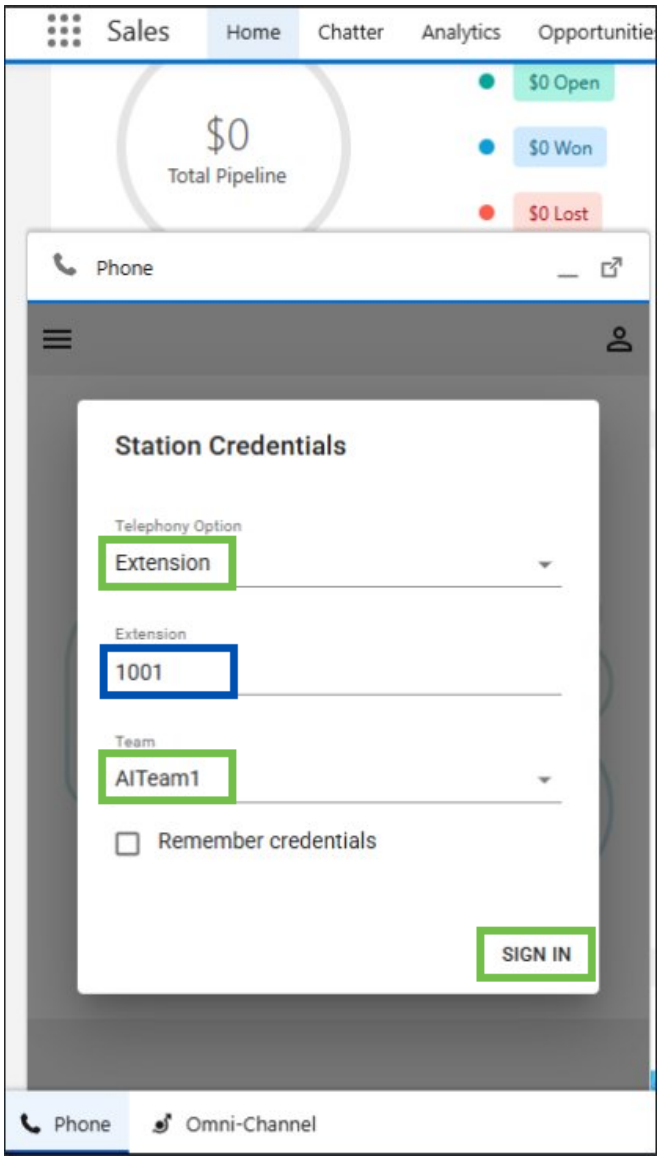




Copyright © 2025 Cisco

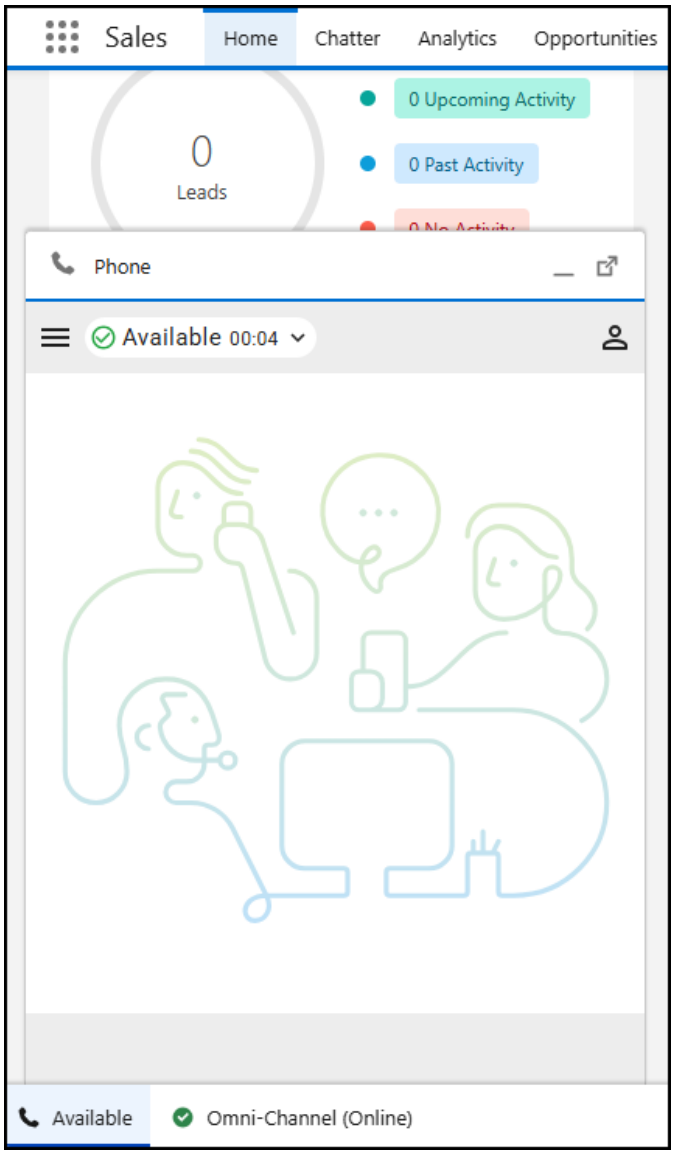


- Congratulations! You have complete the task.


Copyright © 2025 Cisco

## 1.4 Task 3 - Presence Synchronization Between Salesforce and Webex Contact Center

Please use the following credentials to complete the tasks:

| | |
|---|---|
| `Control Hub` | https://admin.webex.com |
| `Salesforce` | https://test.salesforce.com |
| `WxCC Username` | labuser**ID**@wxccciscolive2024.wbx.ai *(where **ID** is your selected pod number (01 through 10); i.e. labuser**02**@wxccciscolive2024.wbx.ai if selected pod is 2)* |
| `WxCC Password` | ciscoLIVE1! |
| `Salesforce Username` | As provided in the Walk-In Lab (WIL) Assistant portal |
| `Salesforce Password` | As provided in the Walk-In Lab (WIL) Assistant portal |

**Info**

Presence is crucial for agent productivity, especially when handling multiple contacts across different platforms. This task focuses on achieving presence synchronization between Webex Contact Center and Salesforce to ensure agents are utilized efficiently.

**Task Objectives**

- Configure Salesforce presence statuses to match Webex Contact Center idle codes.
- Enable presence statuses for the appropriate user profile.
- Set up Omni-Channel state synchronization in Webex Contact Center settings.
- Test state sync between Salesforce Omni-Channel and Webex Contact Center.

### 1.4.1 Section 1 - Create Presence Statuses

**Attention**

Please use the **Firefox** browser to access, configure, and test within the Salesforce portal.

**Note**

For presence synchronization to work between Salesforce and Webex Contact Center, the idle code names in Webex Contact Center must match the presence state names in Salesforce.

- In Salesforce, navigate to **'Setup'** by clicking the gear icon in the top-right corner and selecting **'Setup'**.



Copyright © 2025 Cisco

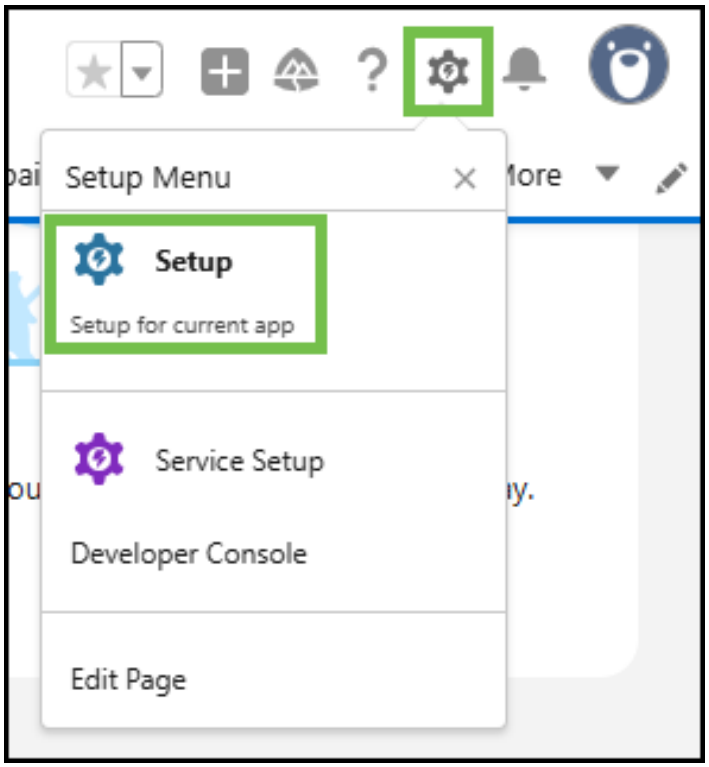


- Go to **'Feature Settings > Service > Omni-Channel > Presence Statuses'** (or type *Presence Statuses* in the search bar in the left-hand menu).

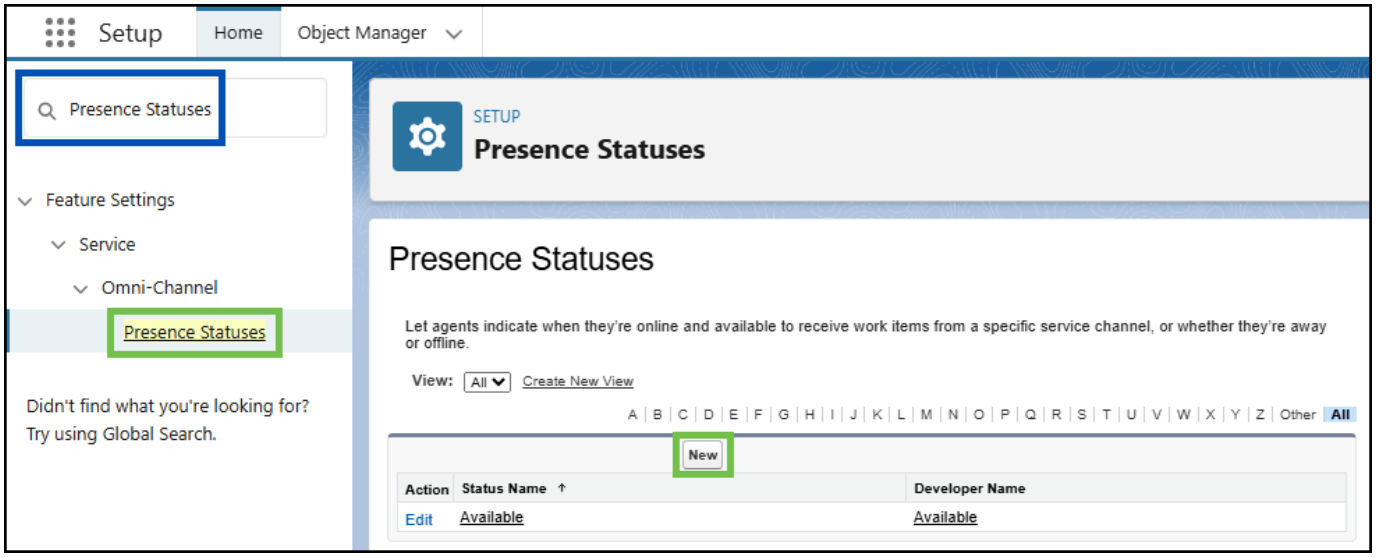


- Create two new **Presence Statuses**:
- Click **'New'**.
- Provide the name **wxccbusy** under **'Status Name'** and select **'Busy'** under **'Status Options'**.
- Click **'Save'**.
- Create another **Presence Status** with the same options but use **sfbusy** under **'Status Name'**.


Copyright © 2025 Cisco

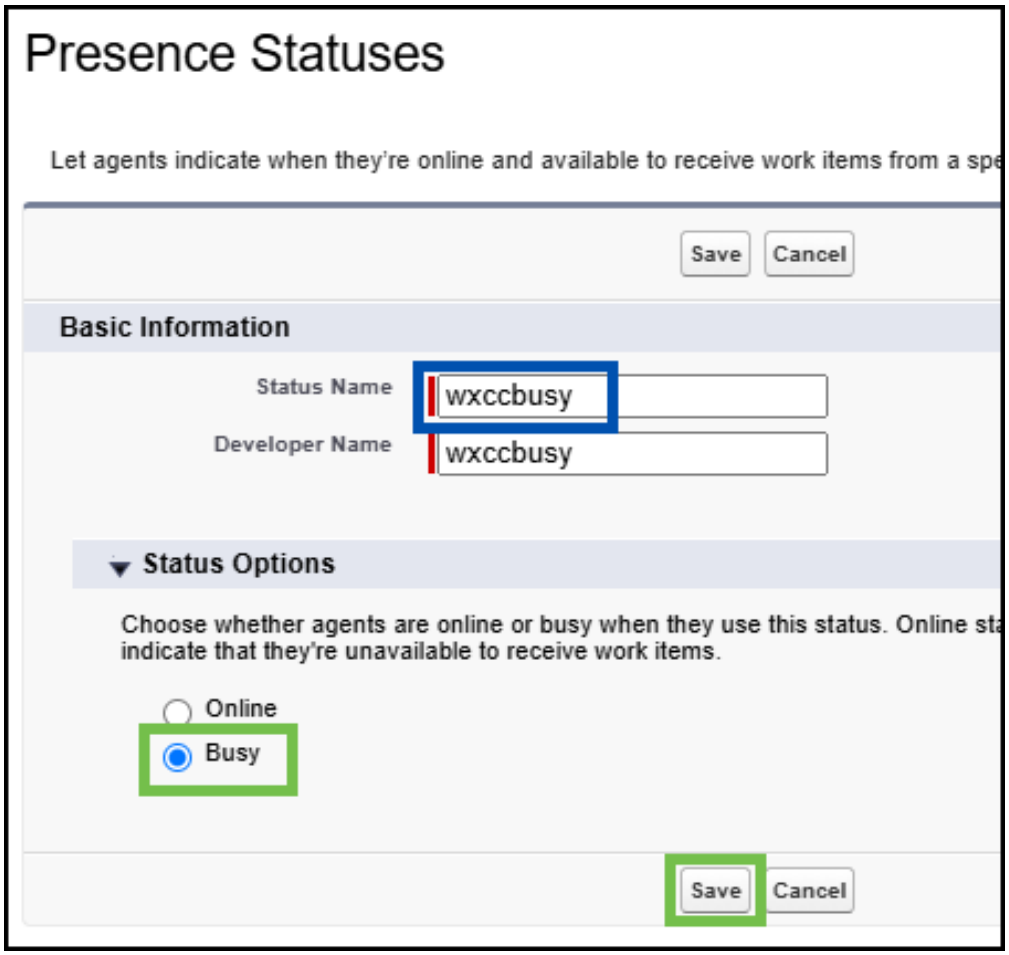




Copyright © 2025 Cisco

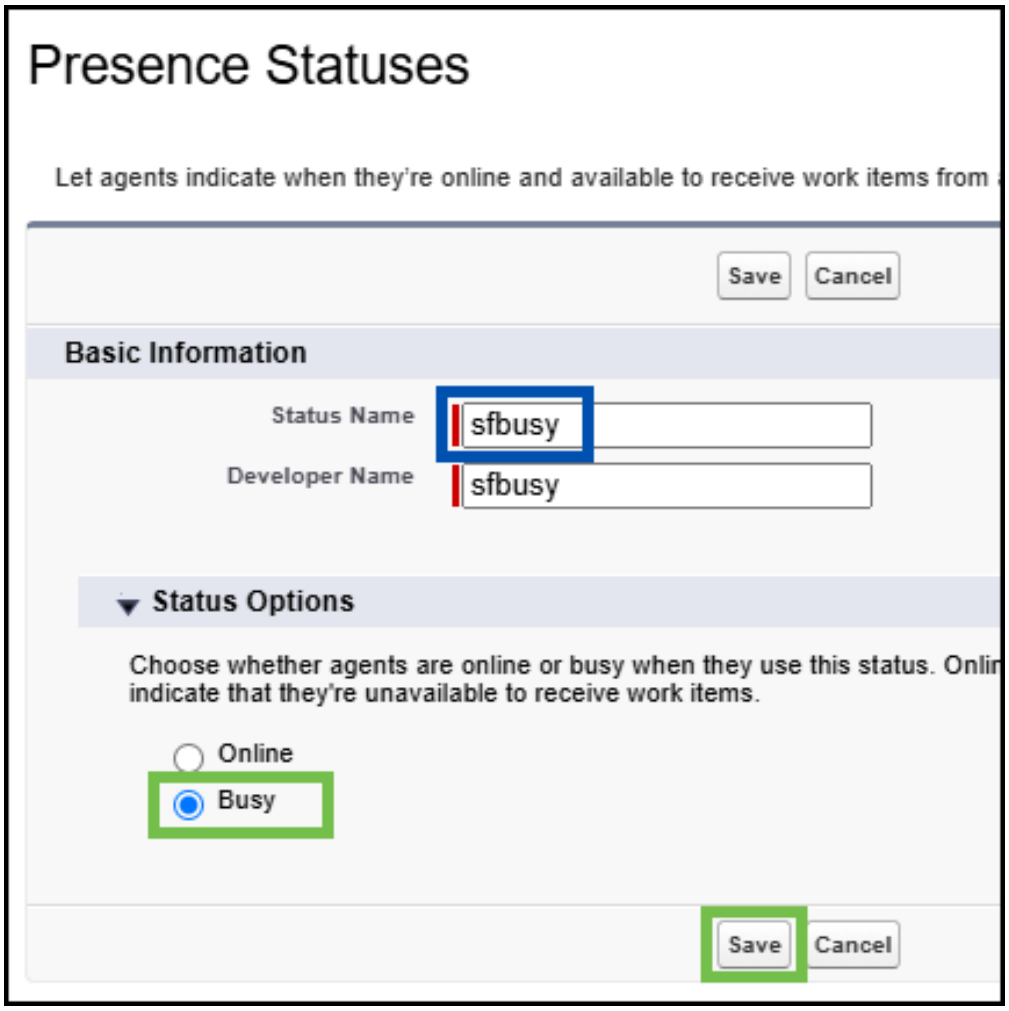


## 1.4.2 Section 2 - Enable Presence Statuses for the User Profile

- Navigate to **'Users > Profiles'** (or type *Profiles* in the search bar in the left-hand menu).
- Locate the **'System Administrator'** profile and click on it (do not click **'Edit'**).

> **Note**
>
> For the purpose of this exercise, the **'System Administrator'** profile is used. Under normal circumstances, any other profile may be used by users.


Copyright © 2025 Cisco

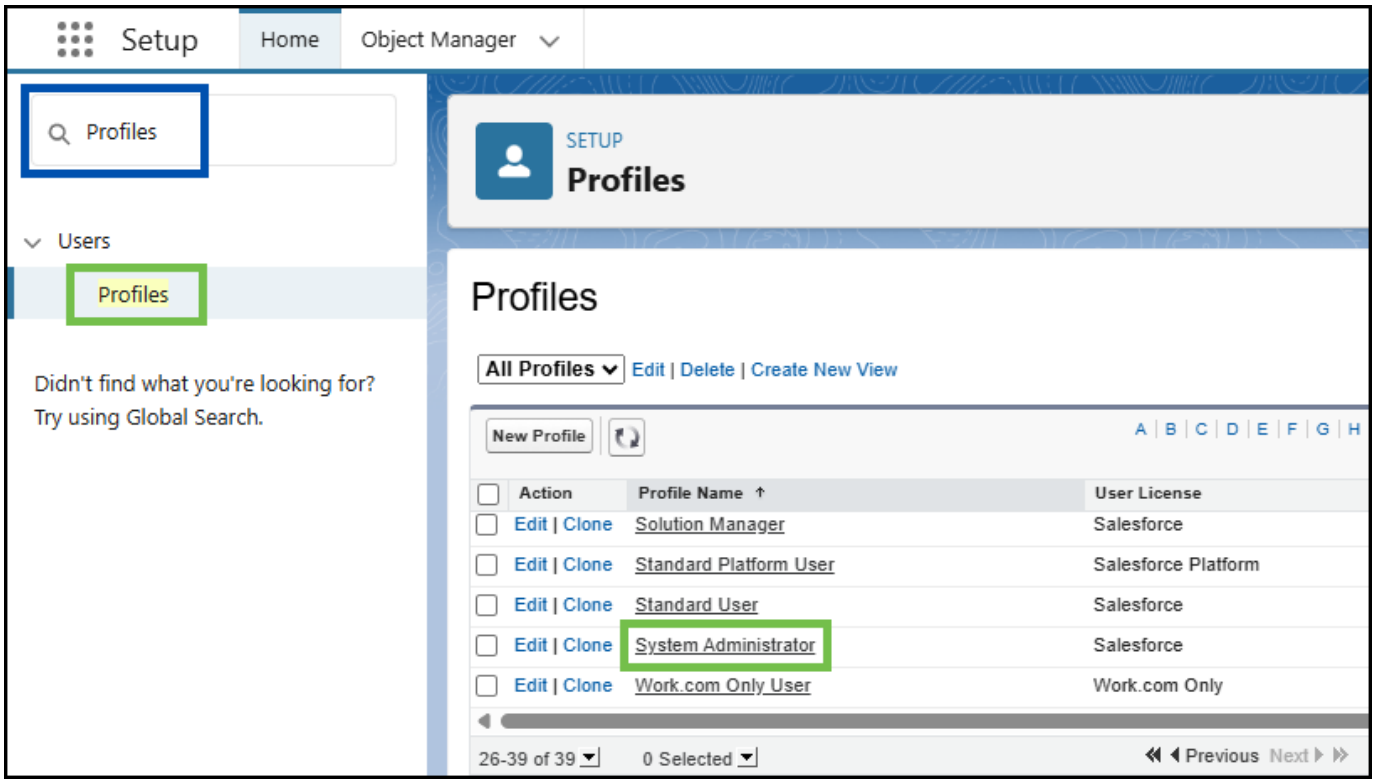


- In the next window, hover over **'Enabled Service Presence Status Access'** and click **'Edit'**.

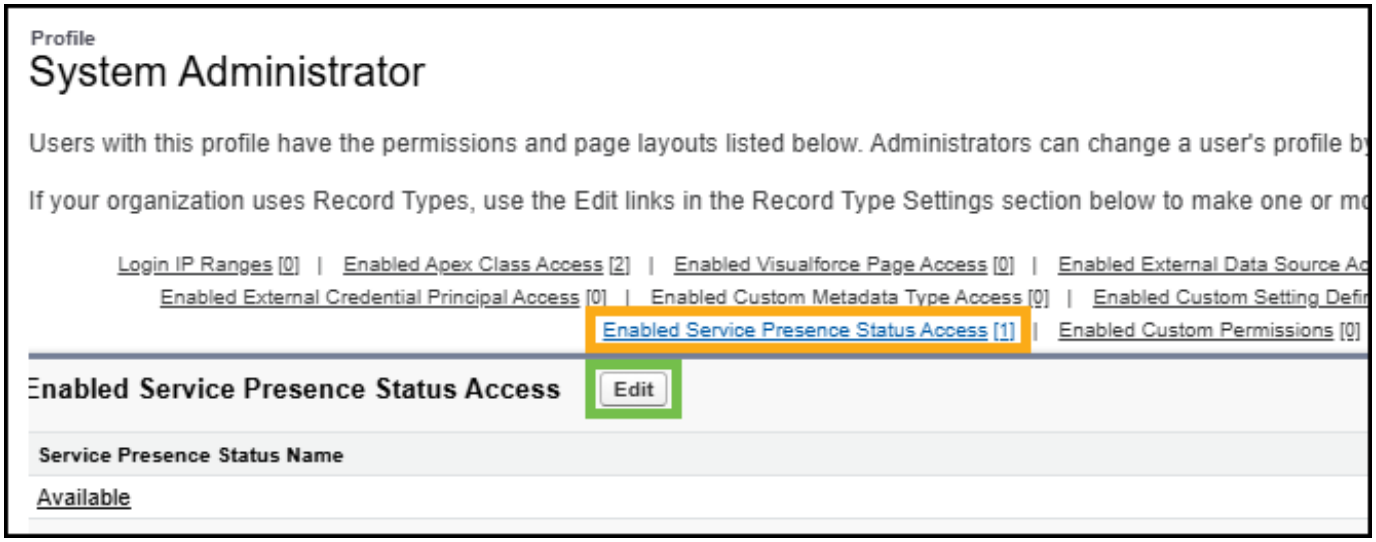


- Move **sfbusy** and **wxccbusy** from **'Available Service Presence Statuses'** to **'Enabled Service Presence Statuses'**.


Copyright © 2025 Cisco

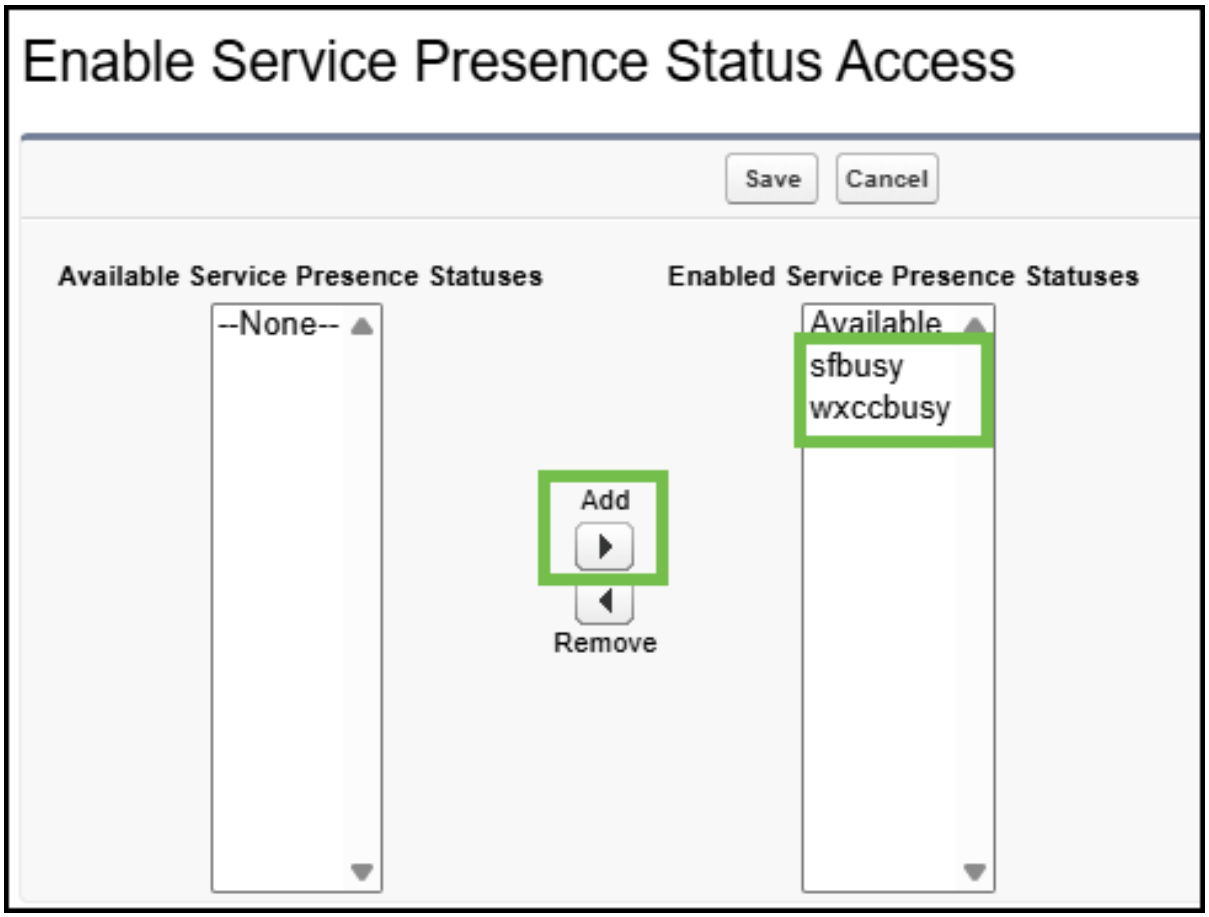


- Click **'Save'**.

### 1.4.3 **Section 3 - Configure Omni-Channel State Sync in Call Center Settings**

- Navigate to **'Feature Settings > Service > Call Center > Call Centers'** (or type *Call Centers* in the search bar in the left-hand menu).
- Click **'Edit'** for **'WxCC Call Center'**.


Copyright © 2025 Cisco

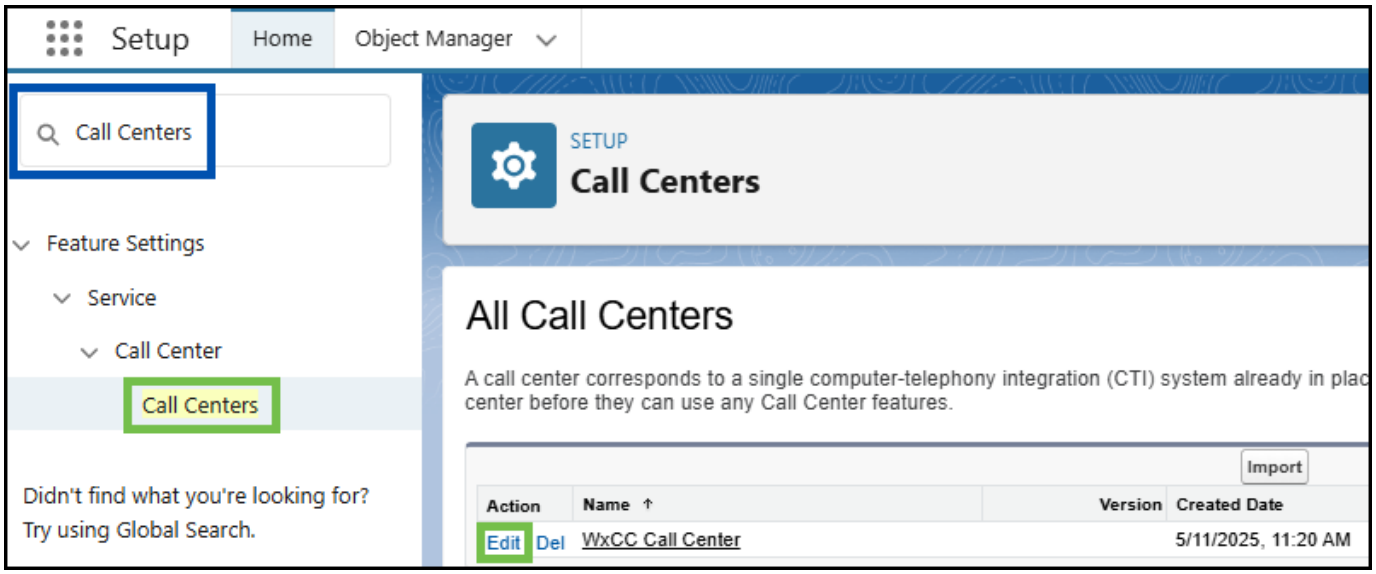


- Under **'Omni-Channel State Sync Configuration'**, do the following:
- Set **'Enable Omni-Channel Sync'** to **true** (type it in manually).
- For **'Omni-Channel Not Ready Reason'**, type **wxccbusy**.
- For **'WxCC Idle Reason Code'**, type **sfbusy**.

**Note**

**'Omni-Channel Not Ready Reason'** is the name of the Salesforce Omni-Channel "Busy" reason status used when the agent receives an inbound call in Webex Contact Center. **'WxCC Idle Reason Code'** is the name of the Webex Contact Center Idle code used when the agent receives an inbound chat in Salesforce.


Copyright © 2025 Cisco

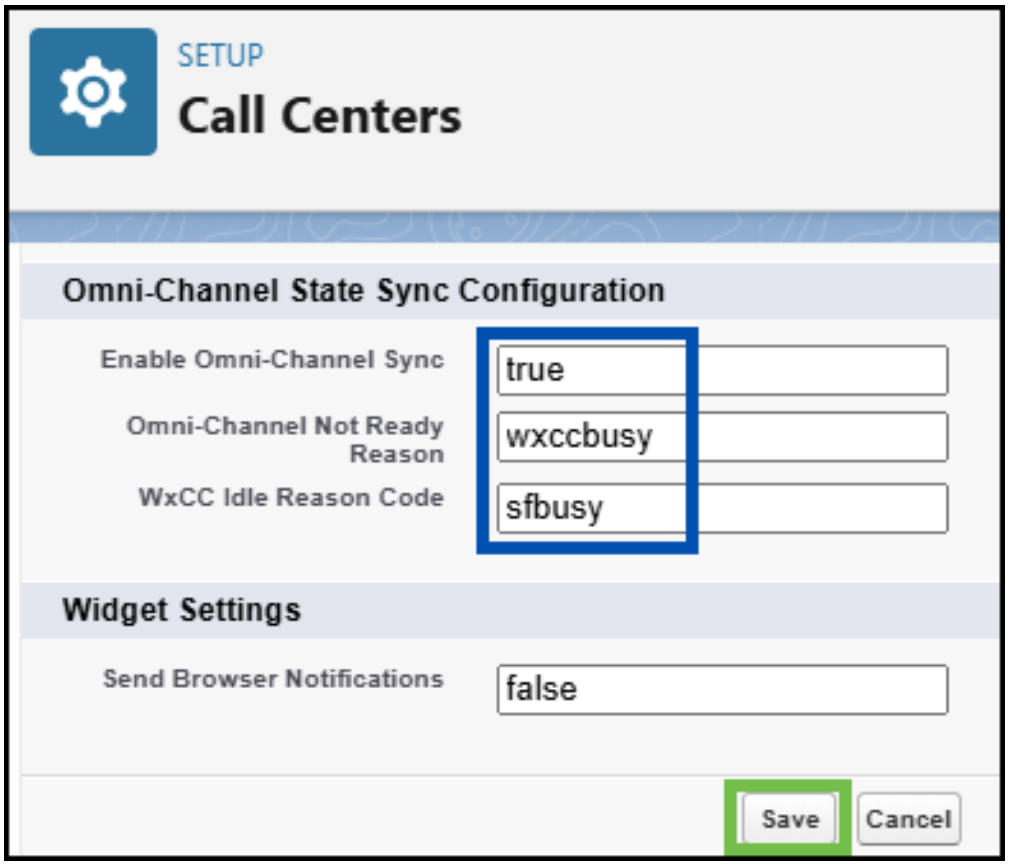


- Click **'Save'**.

> **Note**
>
> For the purpose of this lab, the idle code **sfbusy** has already been created on the Webex Contact Center side.

## 1.4.4 Section 4 - Testing

> **Attention**
>
> Please use the **Firefox** browser to access, configure, and test within the Salesforce portal.

- Refresh Salesforce by logging out and logging back in (make sure to close any other Salesforce tabs).


Copyright © 2025 Cisco

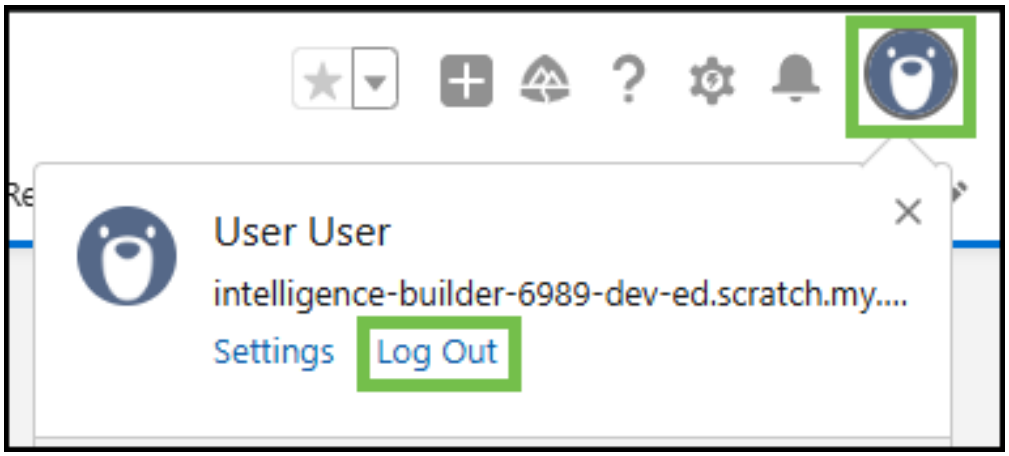


- Click on the **'App Launcher'** icon (top left).
- Search for *Sales* and click on the **'Sales'** option.

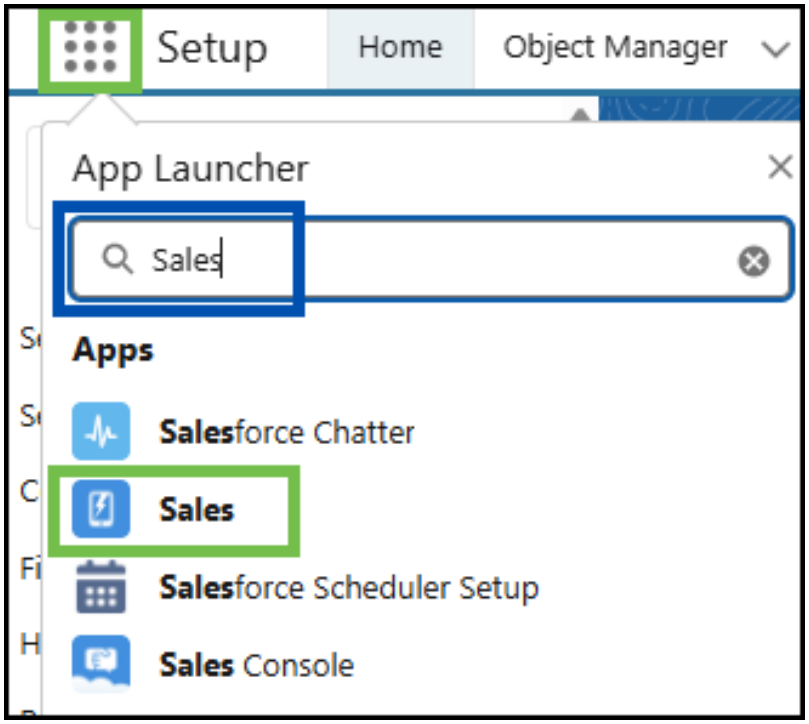


**Reminder**

Please select the **'Extension'** option for the phone number. Use the extension number and team assignment based on your lab user number.

- Open the Webex Contact Center widget (**Phone**) and change the states (e.g., *sfbusy*, *available*) — the Salesforce **Omni-Channel** widget status should follow accordingly.
- Test changing the state from the Salesforce **Omni-Channel** widget — the Webex Contact Center widget should follow as well.

**Note**

**'Omni-Channel Not Ready Reason'** is the name of the Salesforce Omni-Channel "Busy" reason status used when the agent receives an inbound call in Webex Contact Center. Therefore, the **wxccbusy** state on the Omni-Channel widget will only appear when an agent is actively engaged in a Webex Contact Center call (this will be tested in the next tasks)


Copyright © 2025 Cisco

Copyright © 2025 Cisco

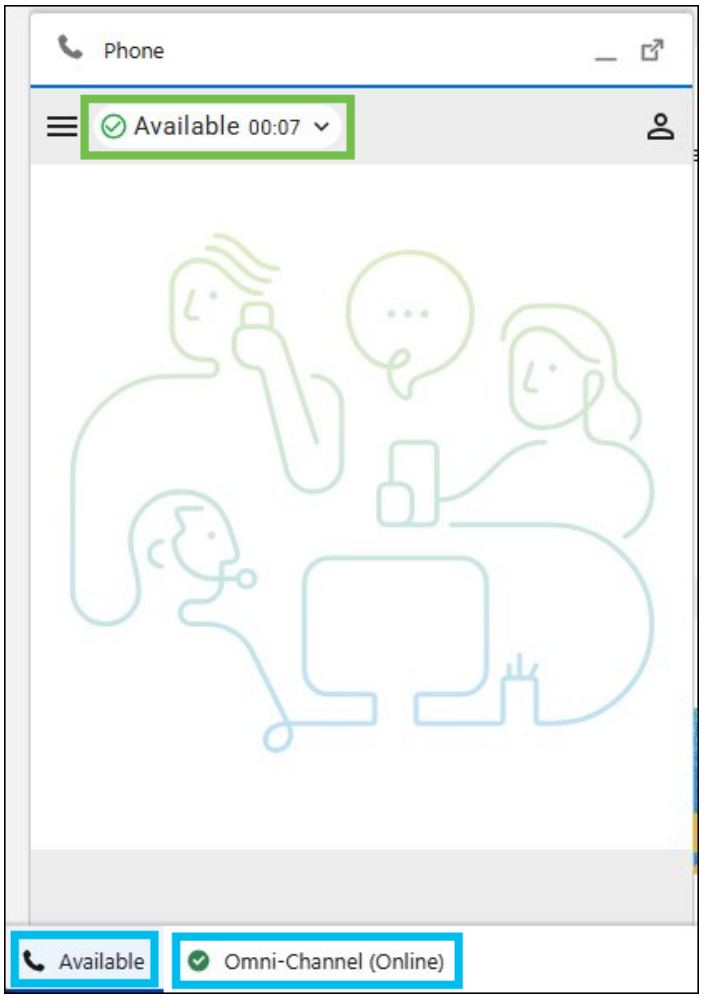


- Congratulations! You have completed the task.


Copyright © 2025 Cisco

## 1.5 Task 4 - Data Lookup Using CAD Variables

Please use the following credentials to complete the tasks:

| | |
|---|---|
| `Control Hub` | https://admin.webex.com |
| `Salesforce` | https://test.salesforce.com |
| `WxCC Username` | labuser**ID**@wxccciscolive2024.wbx.ai *(where **ID** is your selected pod number (01 through 10); i.e. labuser**02**@wxccciscolive2024.wbx.ai if selected pod is 2)* |
| `WxCC Password` | ciscoLIVE1! |
| `Salesforce Username` | As provided in the Walk-In Lab (WIL) Assistant portal |
| `Salesforce Password` | As provided in the Walk-In Lab (WIL) Assistant portal |

**Info**

Utilizing CAD (Call-Associated Data) variables passed from Webex Contact Center enables agents to streamline their workflows and operate more efficiently when addressing customer interactions and requests. These variables provide agents with critical information, such as customer details or interaction context, directly within their interface. By having instant access to this data, agents can reduce the need for manual lookups, save time, and deliver a more personalized and effective customer experience. This not only improves agent productivity but also enhances overall customer satisfaction.

**Task Objectives**

- Configure Call Center in Salesforce for advanced screen pop functionality.
- Customize and publish a Webex Contact Center flow with Salesforce integration.
- Test the integration by triggering a Salesforce contact creation via a phone call.

### 1.5.1 **Section 1 - Salesforce Configuration**

**Attention**

Please use the **Firefox** browser to access, configure, and test within the Salesforce portal.

- Navigate to **'Setup'** by clicking the gear icon in the top-right corner and selecting **'Setup'**


Copyright © 2025 Cisco

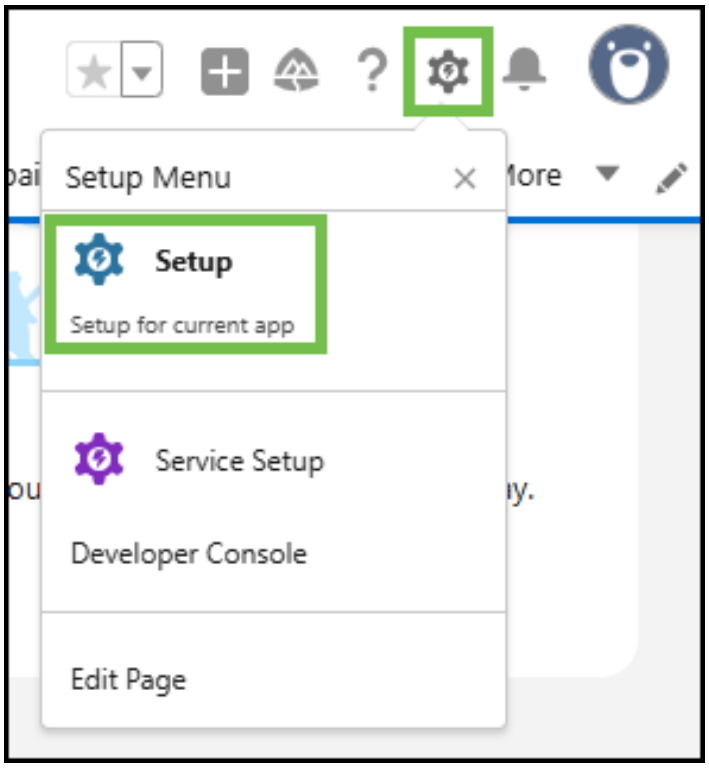


- Go to **'Feature Settings > Service > Call Center > Call Centers'** (or type *Call Centers* in the search bar in the left-hand menu).
- Click **'Edit'** for **'WxCC Call Center'**.

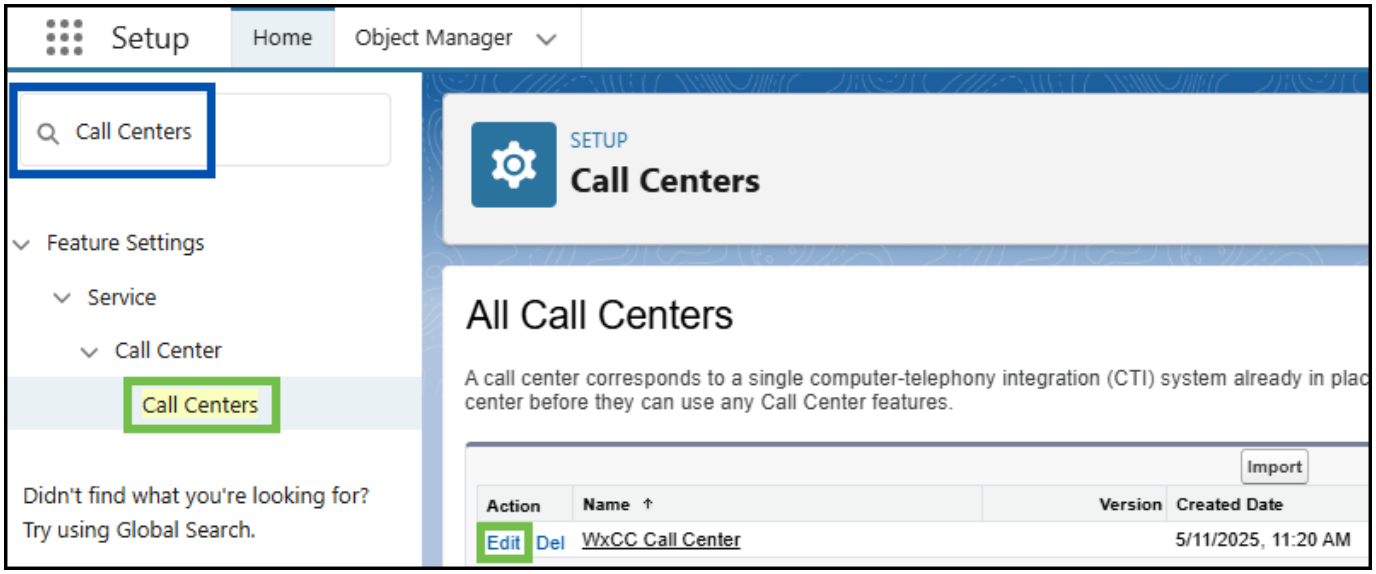


- Under **'Advanced Screen Pop Search Configuration'**, change **'Advanced Screen Pop Enabled'** to **true** (type it in manually).
- For **'CAD Variable Name'**, use *ani*.
- Under **'Screen Pop Settings for No Record Match'**, populate **'Object Field Mappings'** as follows:

```
Phone={ani}
```


Copyright © 2025 Cisco

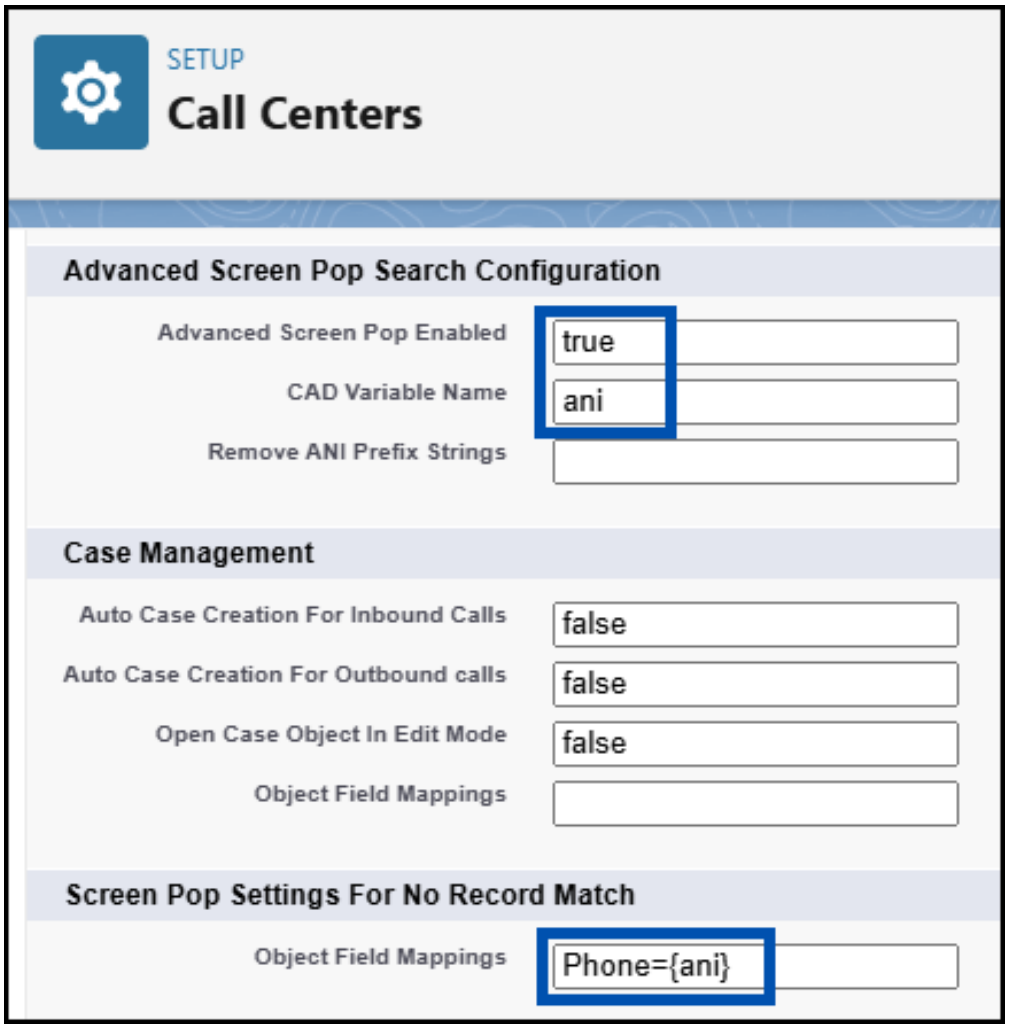


- Click **'Save'**.

## 1.5.2 **Section 2 - Webex Contact Center Configuration**

- Log in to the https://admin.webex.com using the credentials provided at the top of this page.
- After logging in, navigate to the **'Flows'** menu on the left-hand side.


Copyright © 2025 Cisco

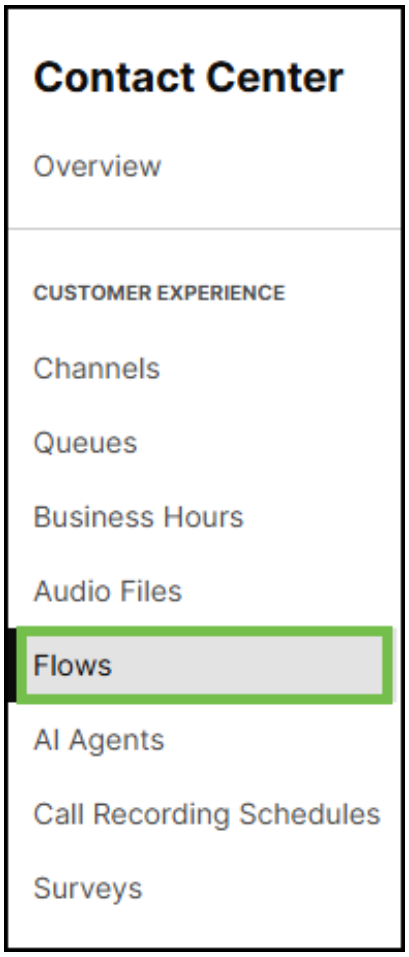


- Copy the flow named **CLUS25_Salesforce_Template_DO_NOT_MODIFY** (the **'Copy'** option is on the right-hand side).

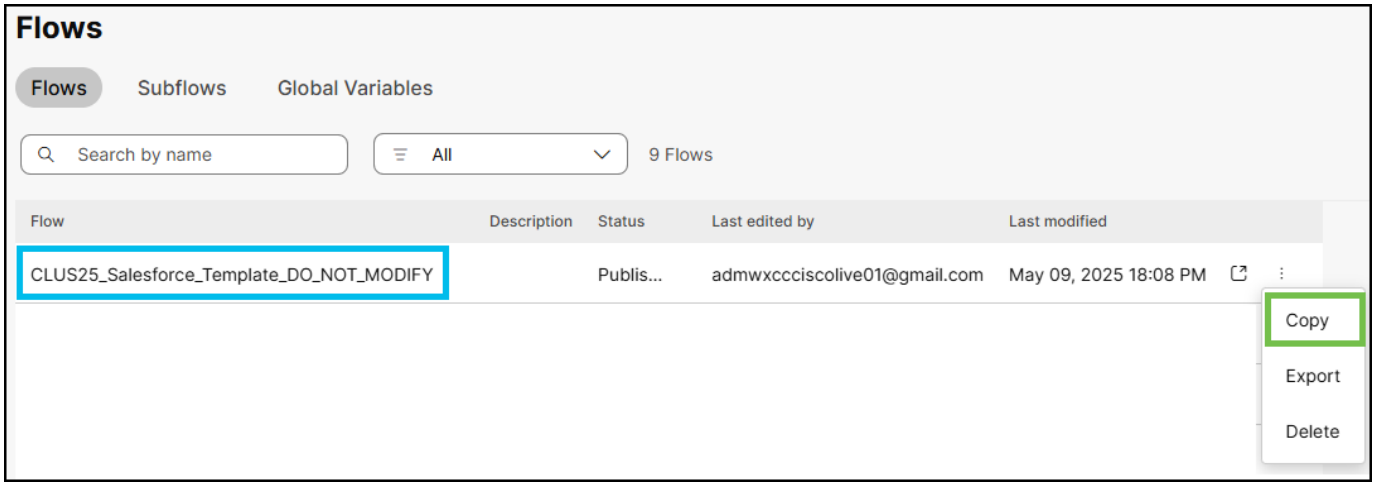


- Open the copied flow by clicking the square 'Go to' button on the right hand side.


Copyright © 2025 Cisco

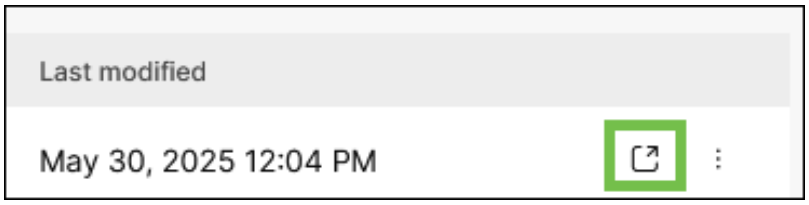


- Rename the flow to something more identifiable and personal (e.g., *labcol2010_andy*) by clicking the dropdown next to the flow name and selecting **'Edit Name'** (make sure **'Edit'** is set to **'On'**).

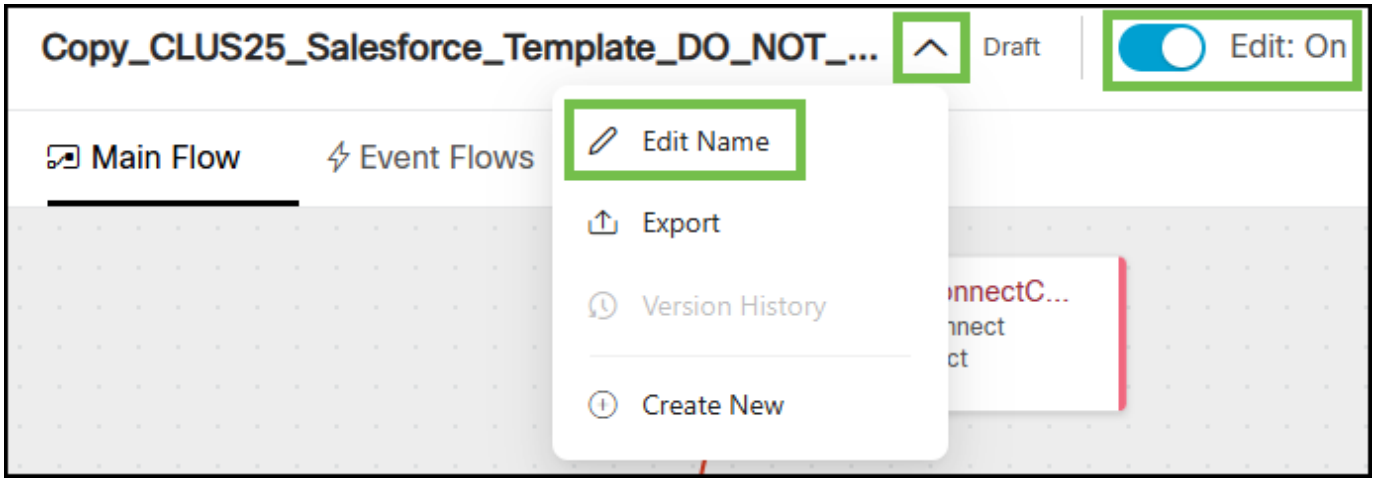


- Click on the **'QueueContact'** node and select **AIQueueN** (where **'N'** is your lab user number, e.g., *labuser07@wxccciscolive2024.wbx.ai*).

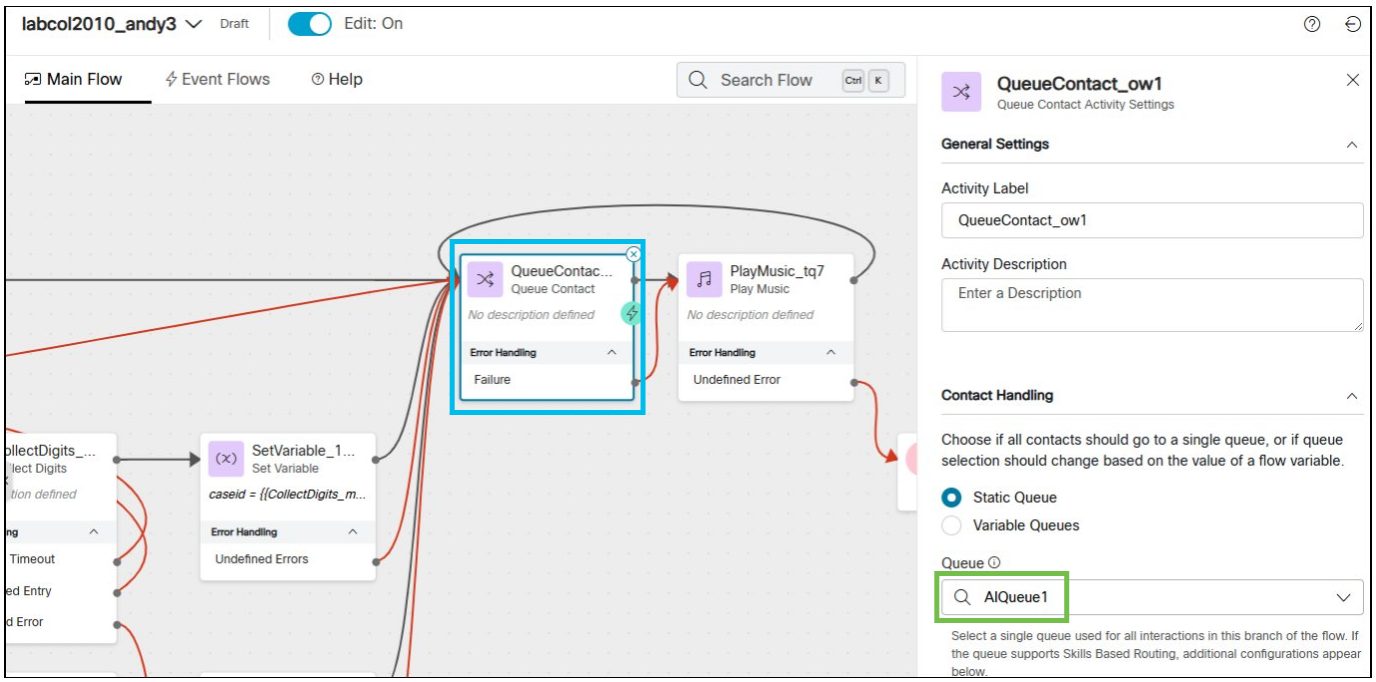


- Click on an empty space in the flow, then on the right-hand side, navigate to **'Custom Variables > Flow Variables'** section.
- Click on **sfurl** flow variable, select the **'Edit'** option (pencil icon), enter the fully qualified domain name (FQDN) from your Salesforce lab (e.g., *basslake-lagoon-6042-dev-ed.scratch.lightning.force.com*; without ***http://***) as the Default Value, and click **'Save'**.


Copyright © 2025 Cisco

**Attention**

The FQDN used for the **sfurl** variable must end with **.scratch.lightning.force.com**. While logged into the Salesforce portal, you can find the name of the Salesforce organization in the browser's address field. Note that the Salesforce Setup page will have a different domain ending (it does not end with **.scratch.lightning.force.com**). To obtain the correct FQDN, you can either navigate to the Salesforce Sales app and copy the full FQDN from the browser's address field there, or copy the Salesforce organization name from the Salesforce Setup page from the browser's address field and append it with **.scratch.lightning.force.com**.


Copyright © 2025 Cisco

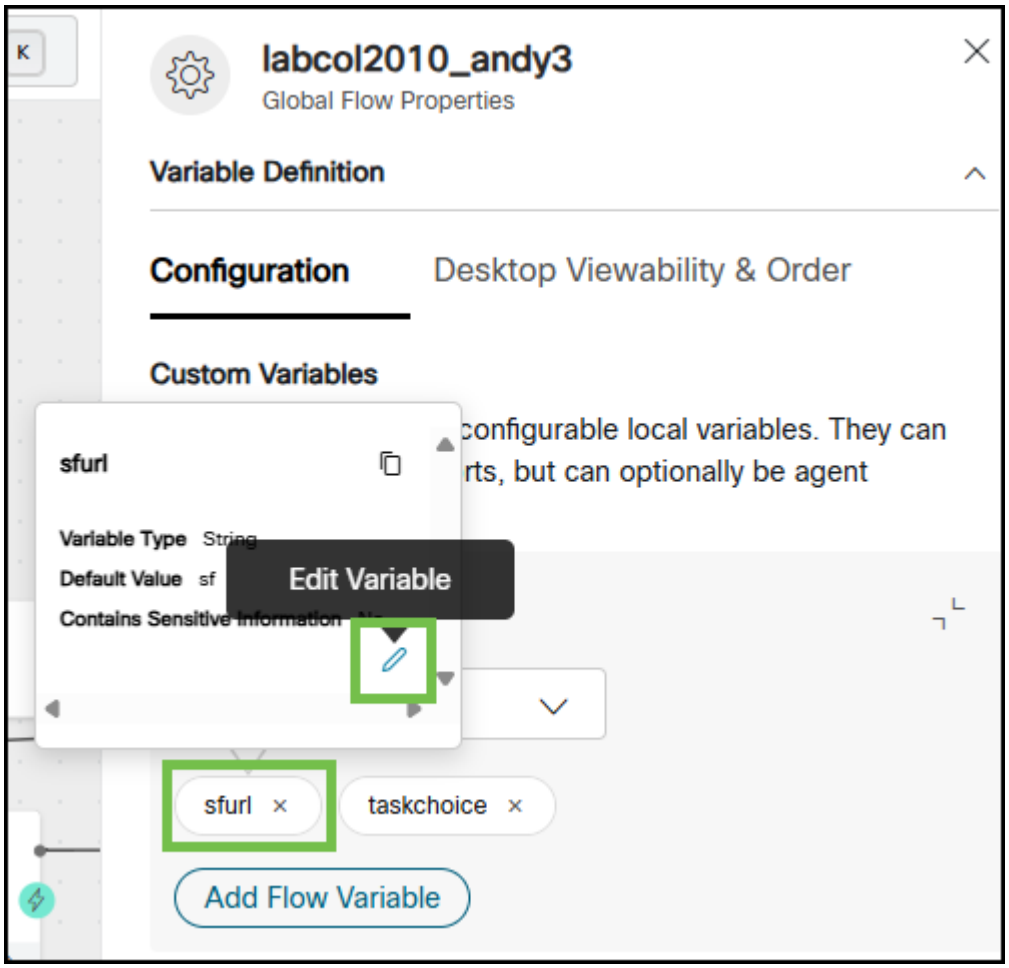



Copyright © 2025 Cisco

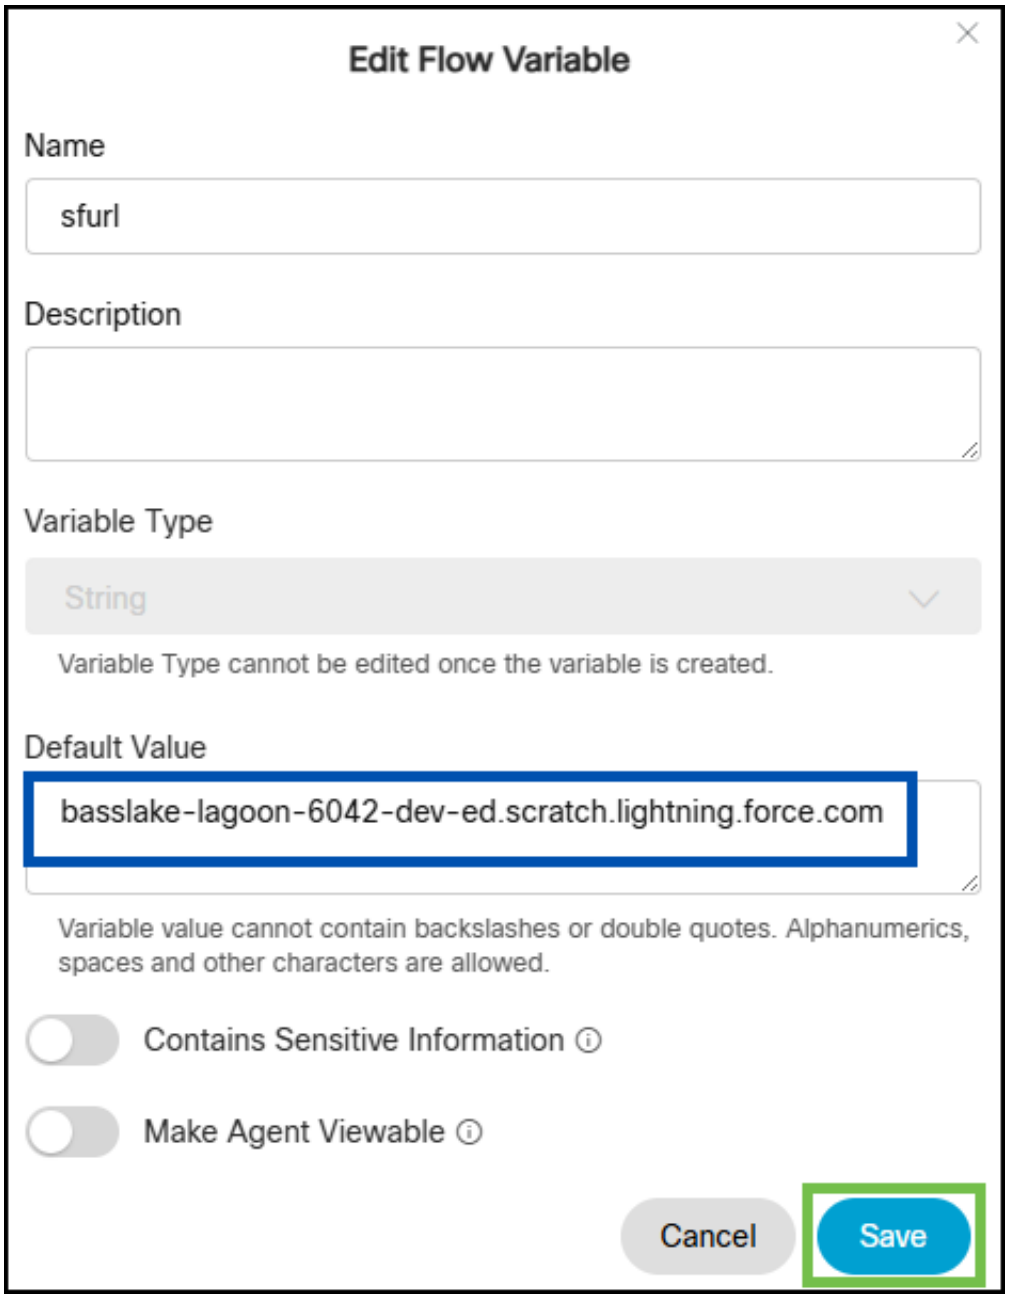


- Turn Flow Validation **'On'** by clicking the **'Validation'** button at the bottom of the page to publish the flow. Once validation is complete, click **'Publish Flow'** and then **'Publish Flow'** again in the next dialog box (**Latest** version label is selected automatically).

- Navigate to the **'Channels'** menu in the Webex Contact Center configuration.


Copyright © 2025 Cisco

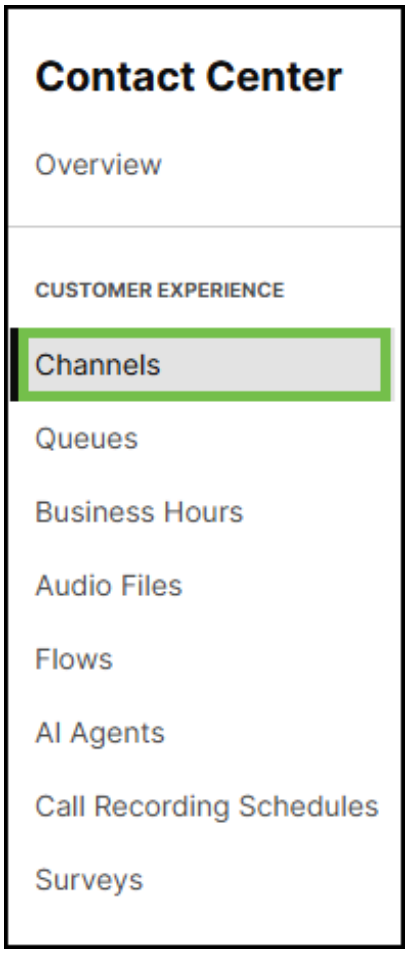


- Open **AIChannelN** (where **'N'** is your lab user number, e.g., *labuser07@wxcccisco live2024.wbx.ai*), associate your newly created flow under 'Routing Flow' (note down the **'Support Number'** associated with this channel - it will be needed later in this lab for testing) and click **'Save'**.


Copyright © 2025 Cisco

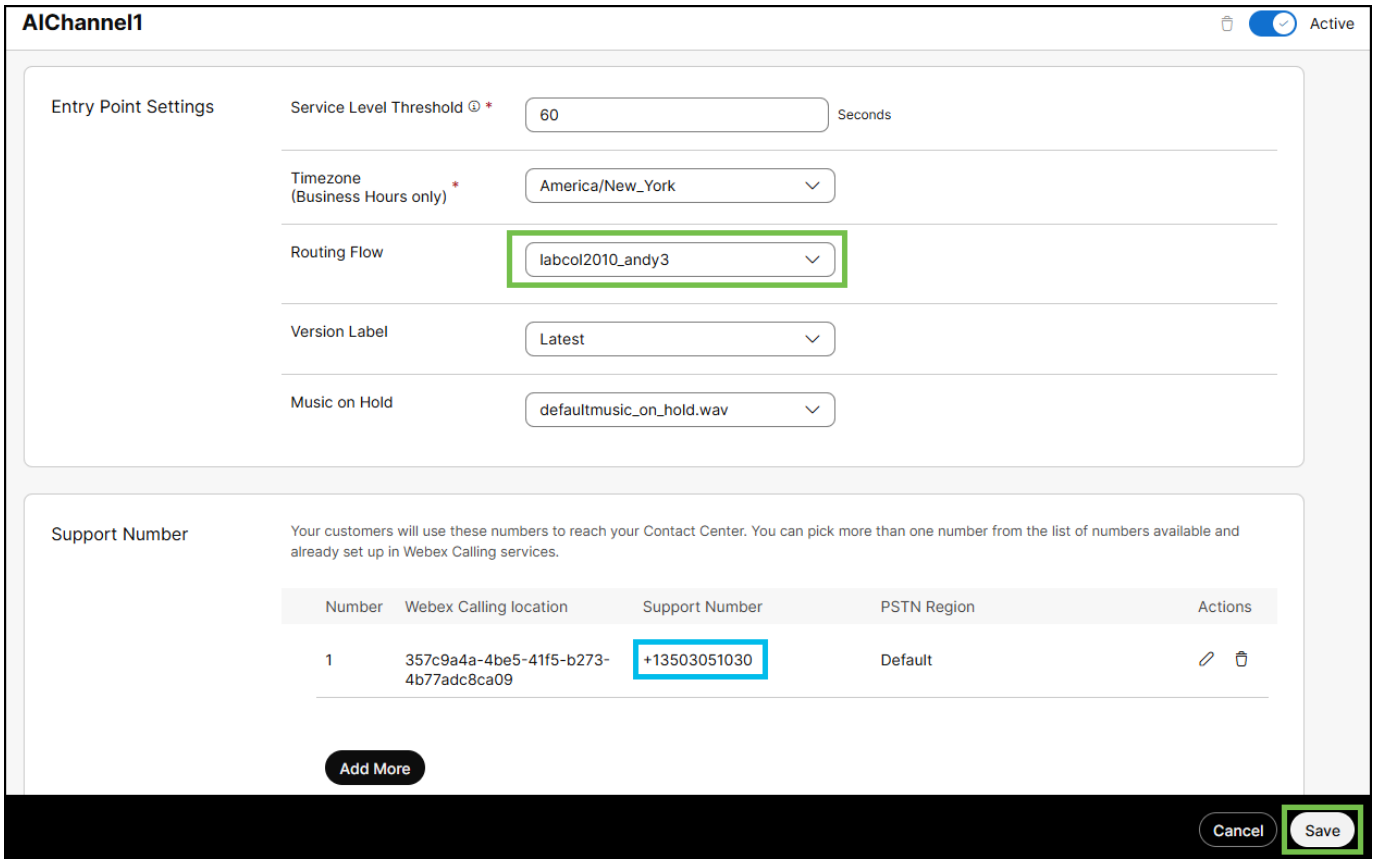


## 1.5.3 Section 3 - Testing

**Attention**

Please use the **Firefox** browser to access, configure, and test within the Salesforce portal.

- Refresh Salesforce by logging out and logging back in (make sure to close any other Salesforce tabs).

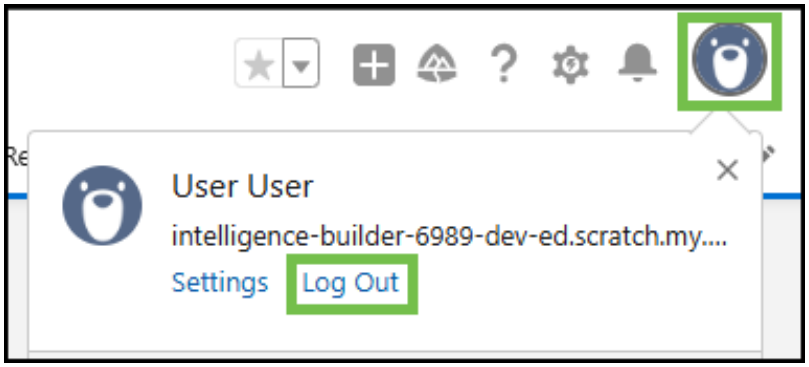


- Click on the **'App Launcher'** icon (top left).
- Search for *Sales* and click on the **'Sales'** option.


Copyright © 2025 Cisco

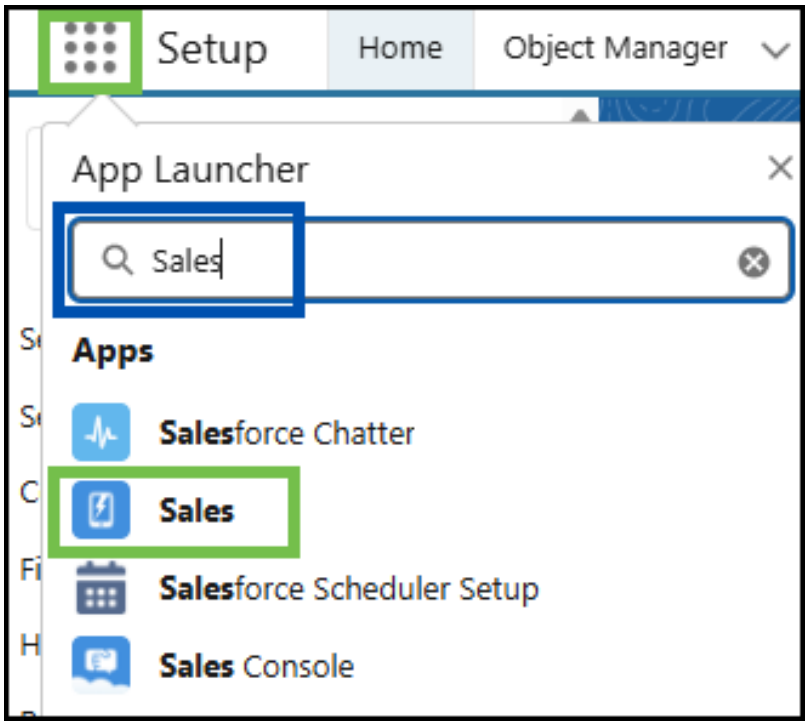


- Open the Webex Contact Center phone widget and login using the selected Webex Contact Center credentials.
- For the team use **AITeamN** (where **'N'** is your lab user number, e.g., *labuser7@wxcccciscolive.wbx.ai*).

> **Reminder**
>
> Please select the **'Extension'** option for the phone number. Use the extension number and team assignment based on your lab user number.

- Make sure that the agent state is set to 'Available' and then call the channel number (noted from the steps above). In the IVR, choose **option 3**.
- Since Salesforce does not recognize your number, a new **Contact** create window will open with the phone number prefilled.
- Provide a name and save the contact in Salesforce.


Copyright © 2025 Cisco

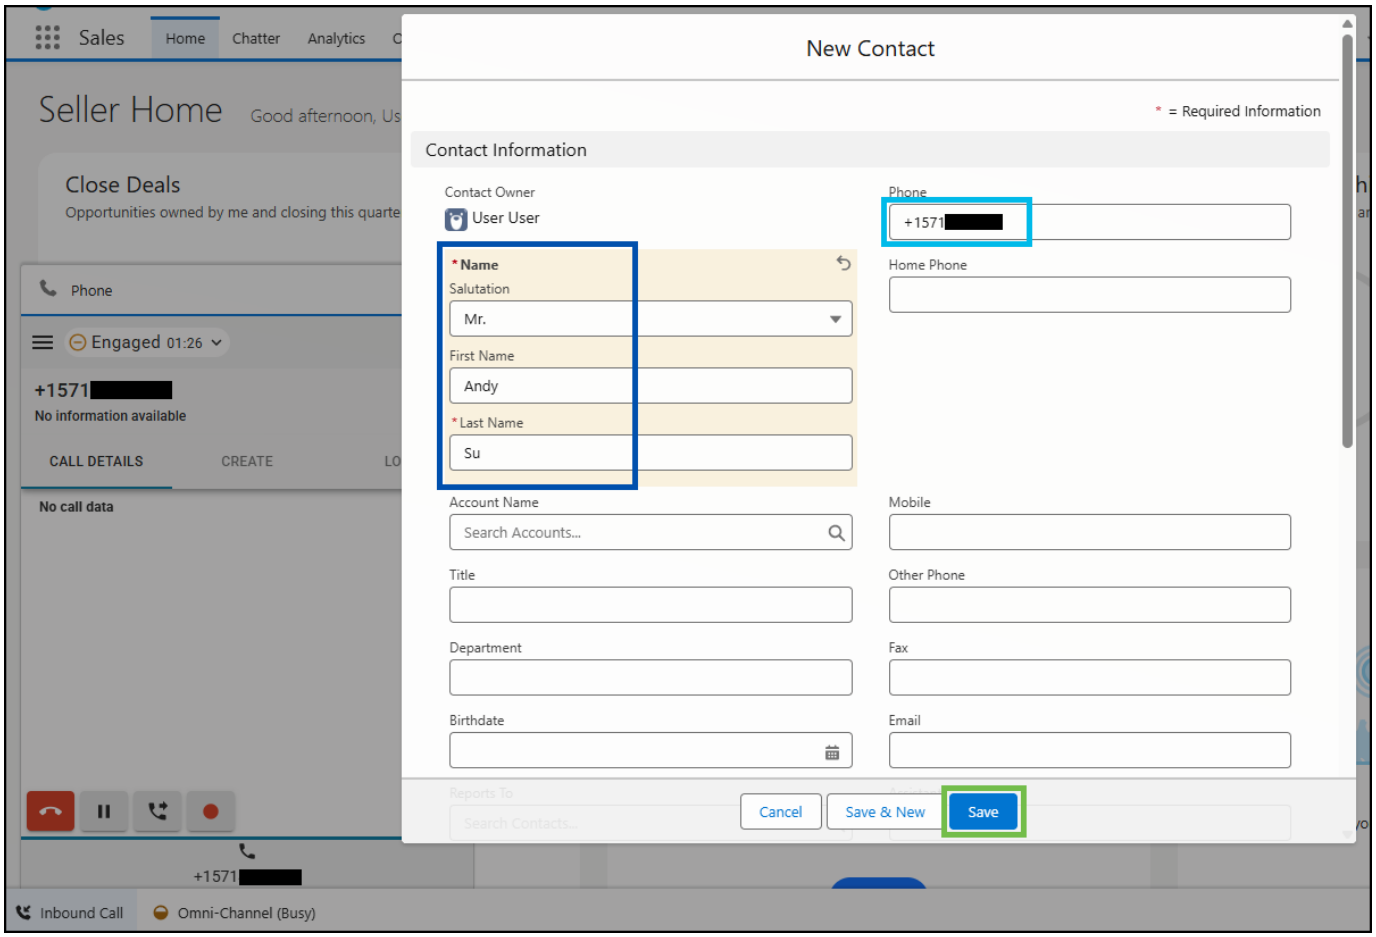


- End the call.
- Wrapup the session, make sure that the agent state is set to 'Available' and make another call. In the IVR, choose **option 3** again.
- This time, the system will open the matching contact, as it was created in the previous step.


Copyright © 2025 Cisco

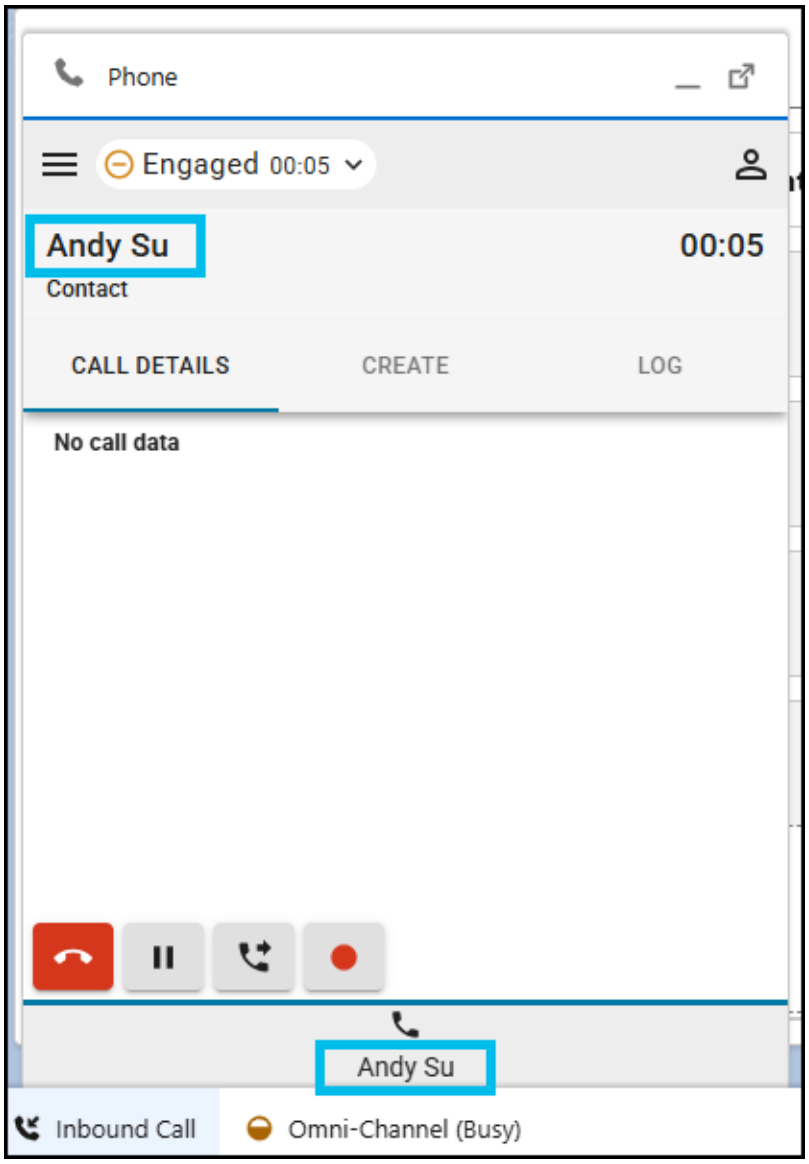


• Congratulations! You have complete the task.


Copyright © 2025 Cisco

## 1.6 Task 5 - Case Lookup Using Custom CAD Variables and Agent Desktop Screen Pop

Please use the following credentials to complete the tasks:

| | |
|---|---|
| `Control Hub` | https://admin.webex.com |
| `Salesforce` | https://test.salesforce.com |
| `WxCC Username` | labuser**ID**@wxccciscolive2024.wbx.ai *(where **ID** is your selected pod number (01 through 10); i.e. labuser**02**@wxccciscolive2024.wbx.ai if selected pod is 2)* |
| `WxCC Password` | ciscoLIVE1! |
| `Salesforce Username` | As provided in the Walk-In Lab (WIL) Assistant portal |
| `Salesforce Password` | As provided in the Walk-In Lab (WIL) Assistant portal |

**Info**

In addition to utilizing global variables collected during the customer's interaction in the Webex Contact Center IVR, this task demonstrates the functionality of the new Webex Contact Center CRM widget for Salesforce with screen pops that operate seamlessly without triggering multiple sign-in alert errors.

**Task Objectives**

- Update Salesforce Call Center settings to enable advanced screen pop with the case variable.
- Test case creation and retrieval in Salesforce via the Webex Contact Center phone widget.
- Have the case list open in a new tab during case retrieval.

### 1.6.1 **Section 1 - Modifying Call Center Options in Salesforce**

**Attention**

Please use the **Firefox** browser to access, configure, and test within the Salesforce portal.

- Navigate to **'Setup'** by clicking the gear icon in the top-right corner and selecting **'Setup'**.



Copyright © 2025 Cisco

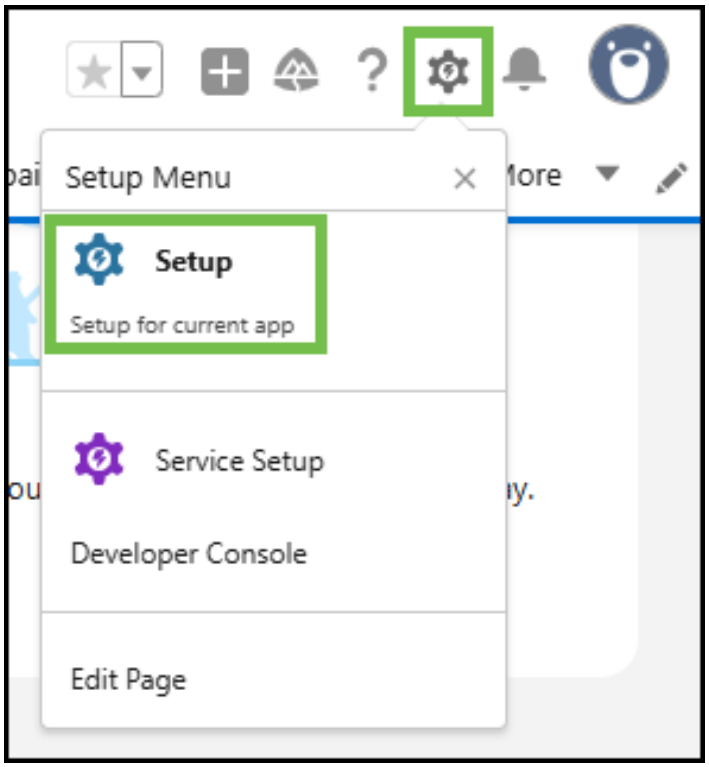


- Go to **'Feature Settings > Service > Call Center > Call Centers'** (or type *Call Centers* in the search bar in the left-hand menu).
- Click **'Edit'** for **'WxCC Call Center'**.

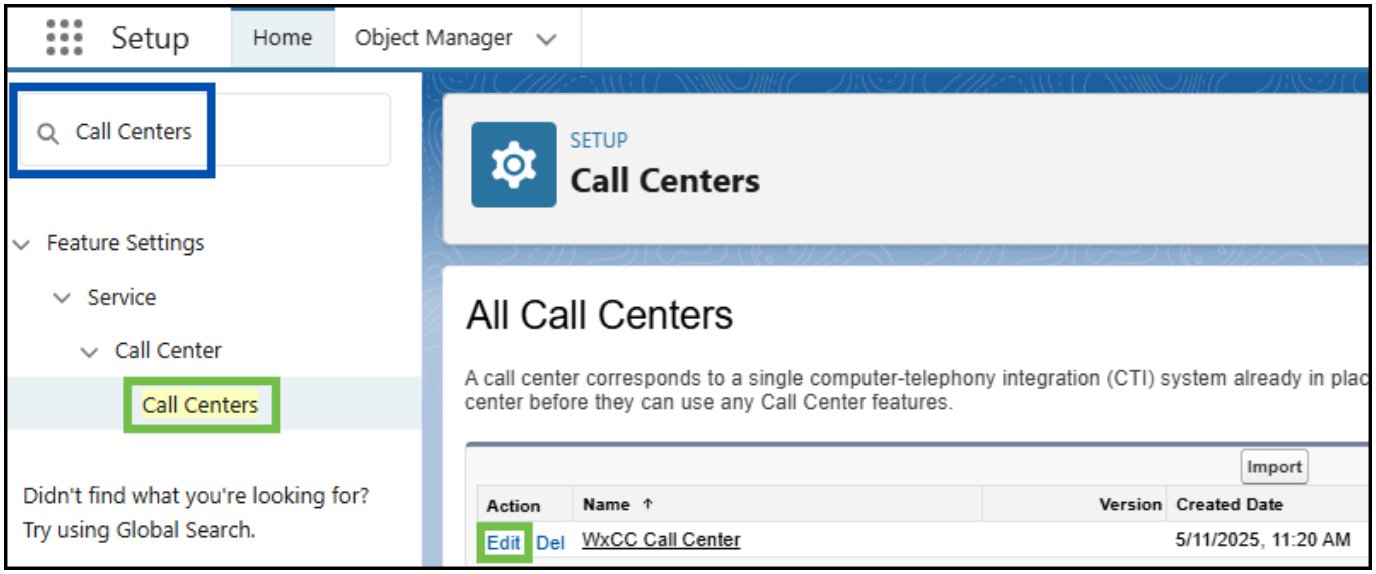


- Under **'Advanced Screen Pop Search Configuration'**, set **'CAD Variable Name'** to **caseid** (type it in manually).


Copyright © 2025 Cisco

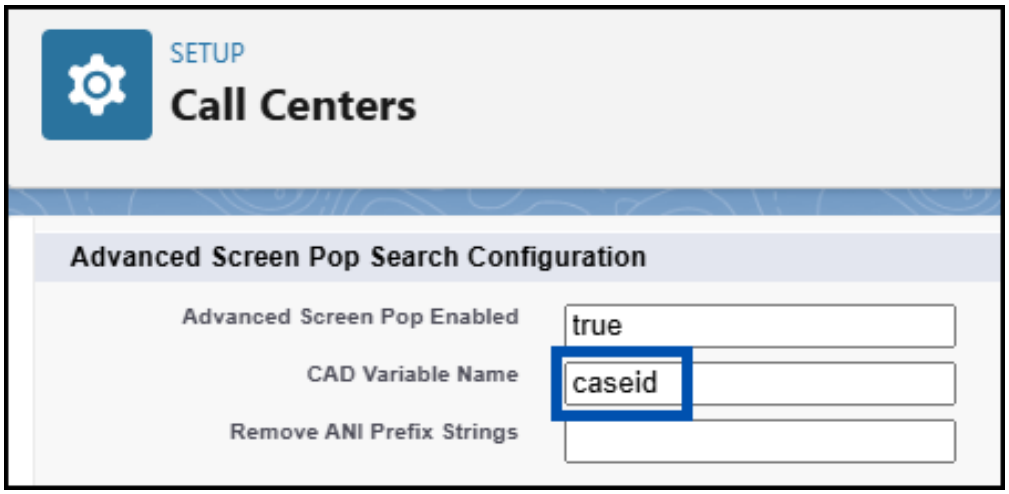


## 1.6.2 Section 2 - Testing

**Attention**

Please use the **Firefox** browser to access, configure, and test within the Salesforce portal.

- Refresh Salesforce by logging out and logging back in (make sure to close any other Salesforce tabs).

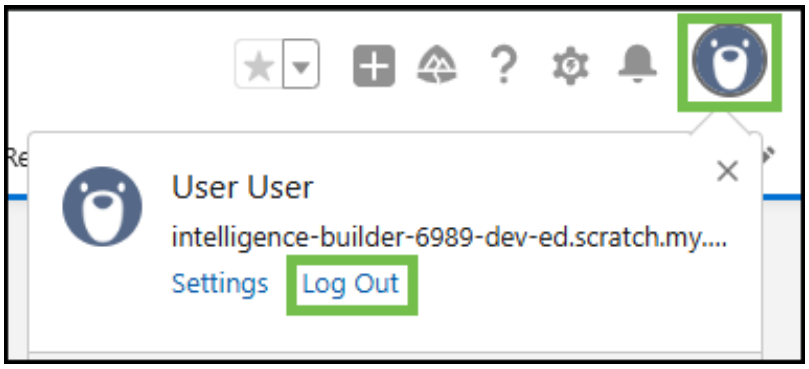


- Click on the **'App Launcher'** icon (top left).
- Search for *Sales* and click on the **'Sales'** option.


Copyright © 2025 Cisco

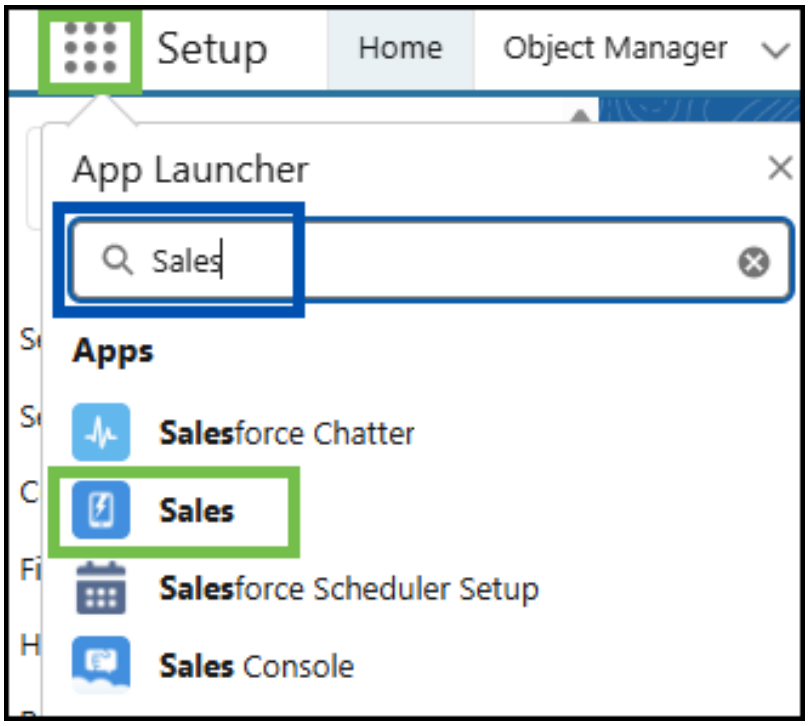


- Open the Webex Contact Center phone widget and login using the selected Webex Contact Center credentials.
- For the team use **AITeamN** (where **'N'** is your lab user number, e.g., *labuser07@wxccciscolive2024.wbx.ai*).

> **Reminder**
>
> Please select the **'Extension'** option for the phone number. Use the extension number and team assignment based on your lab user number.

First call interaction:

- Make sure that the agent state is set to 'Available' and then call the channel number (as noted in the **Task 3**). In the IVR, choose **Option 3**.
- Create a new case through the Webex Contact Center widget and note down the **case number** - it's going to be needed for the second call below.


Copyright © 2025 Cisco

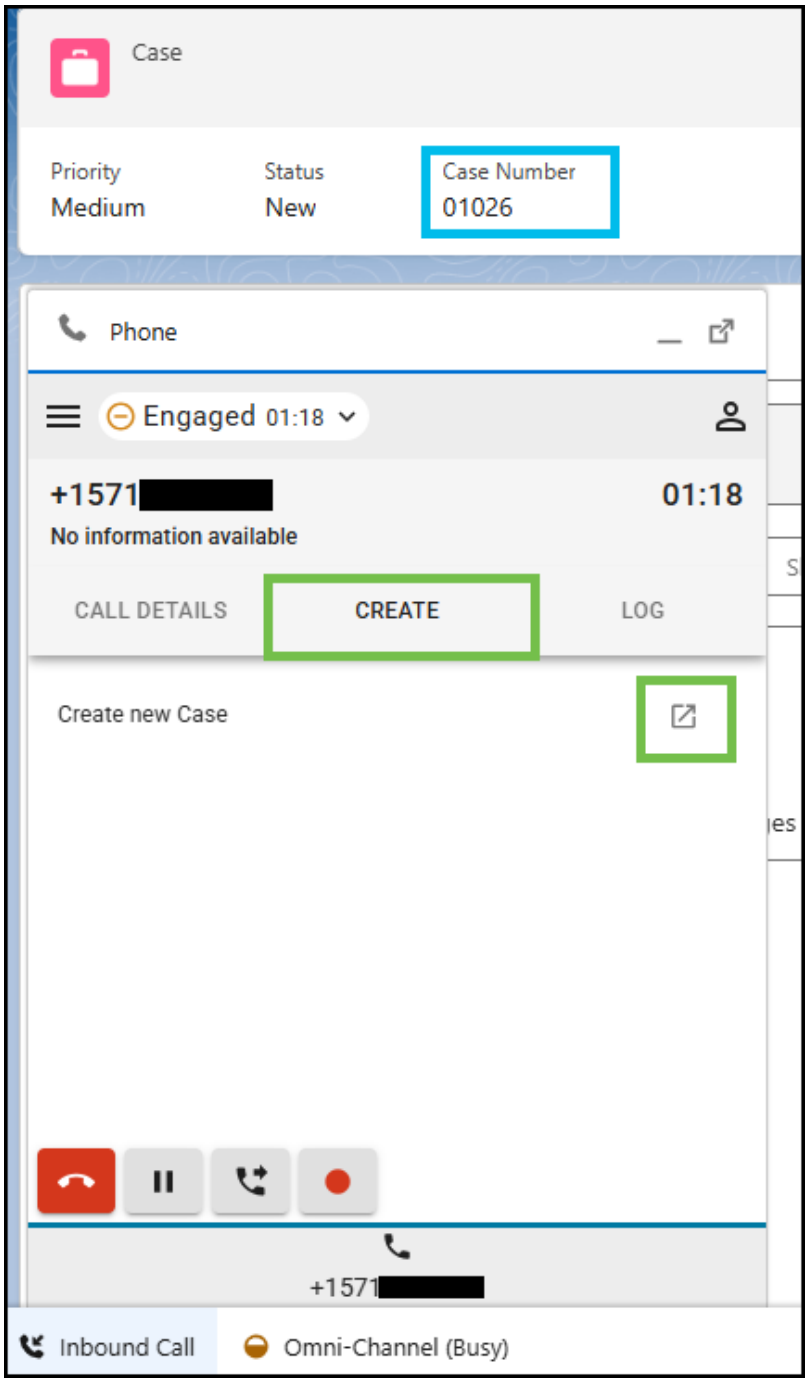


- End the call.
- Wrap up the session.
- Move to the **'Home'** tab in Salesforce Sales page.


Copyright © 2025 Cisco

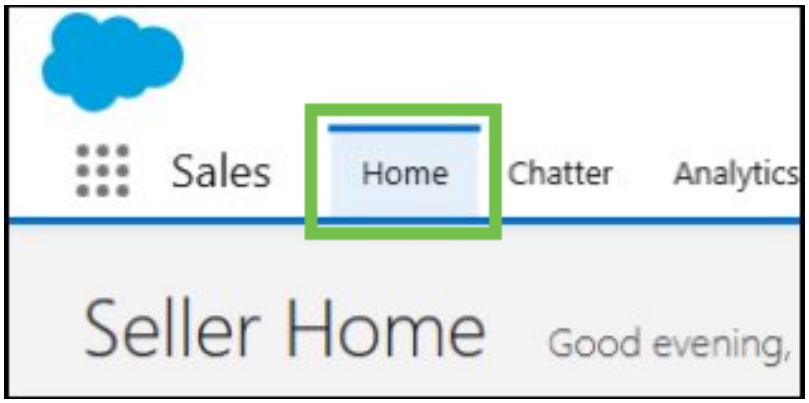


Second call interaction:

- Make sure that agent state is set to 'Available' and then call the channel number again. In the IVR, choose **Option 4**.
- Provide the case number that was created during the previous call.
- The existing case should be displayed, and the case list should be displayed in a new tab.

**Warning**

If a new tab did not open with the case list, ensure that it was not blocked by the browser. A notification will appear in the browser indicating that a new tab popup was blocked. Click on the notification and select the tab link to open the new tab.

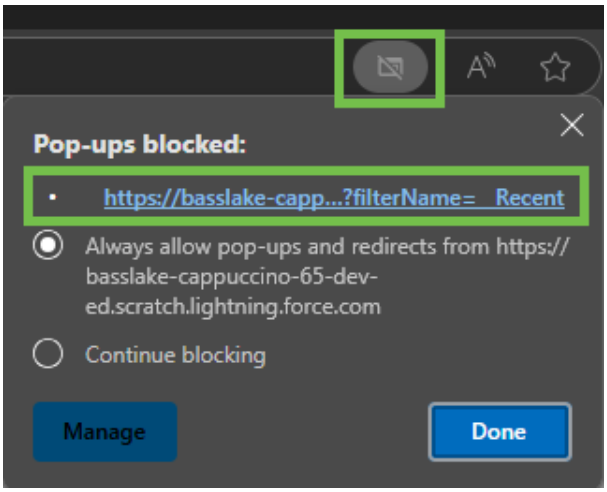



Copyright © 2025 Cisco

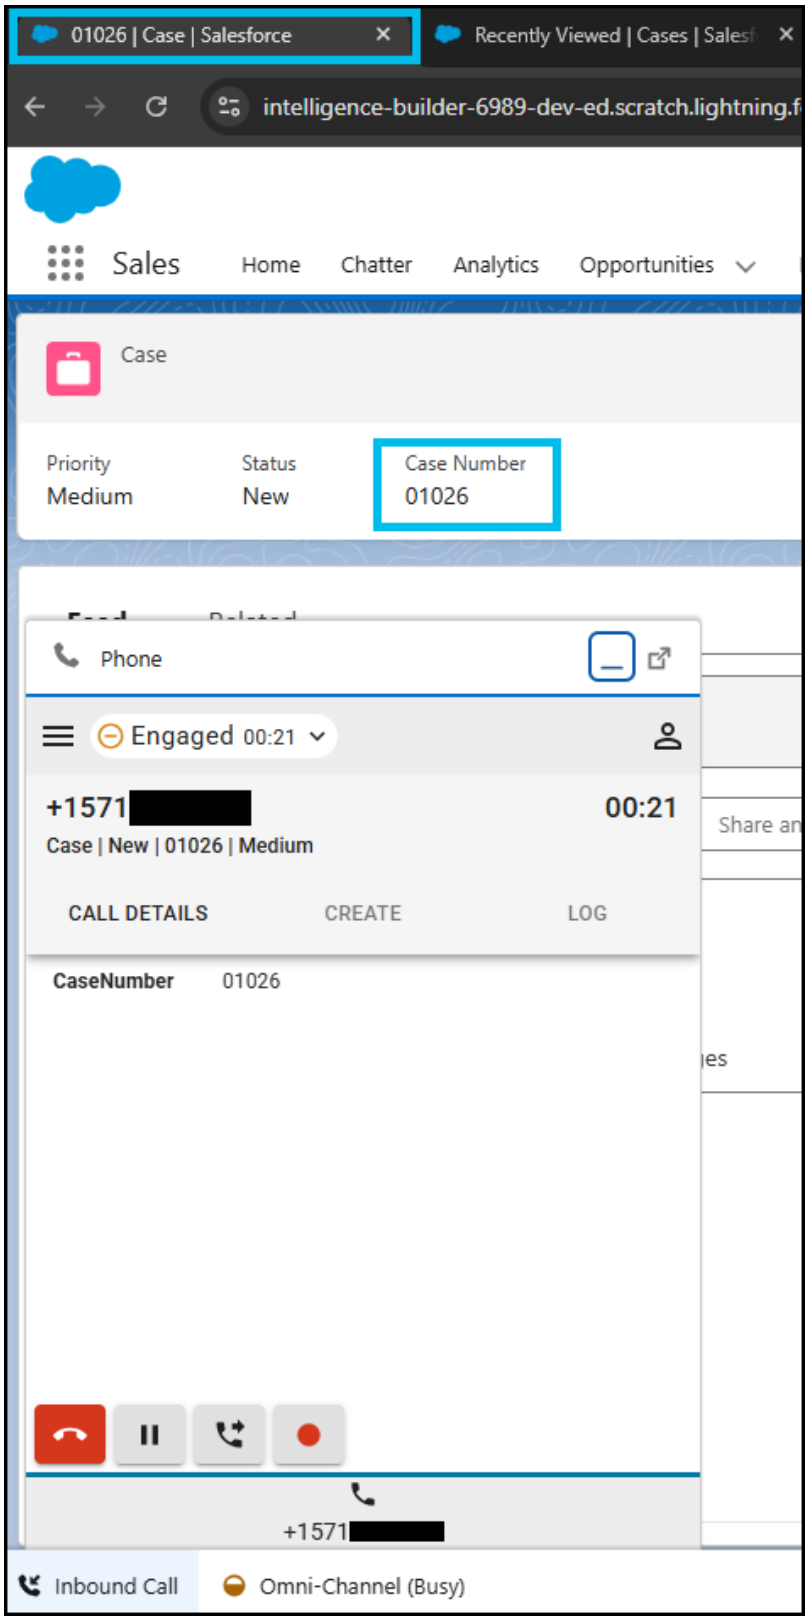




Copyright © 2025 Cisco

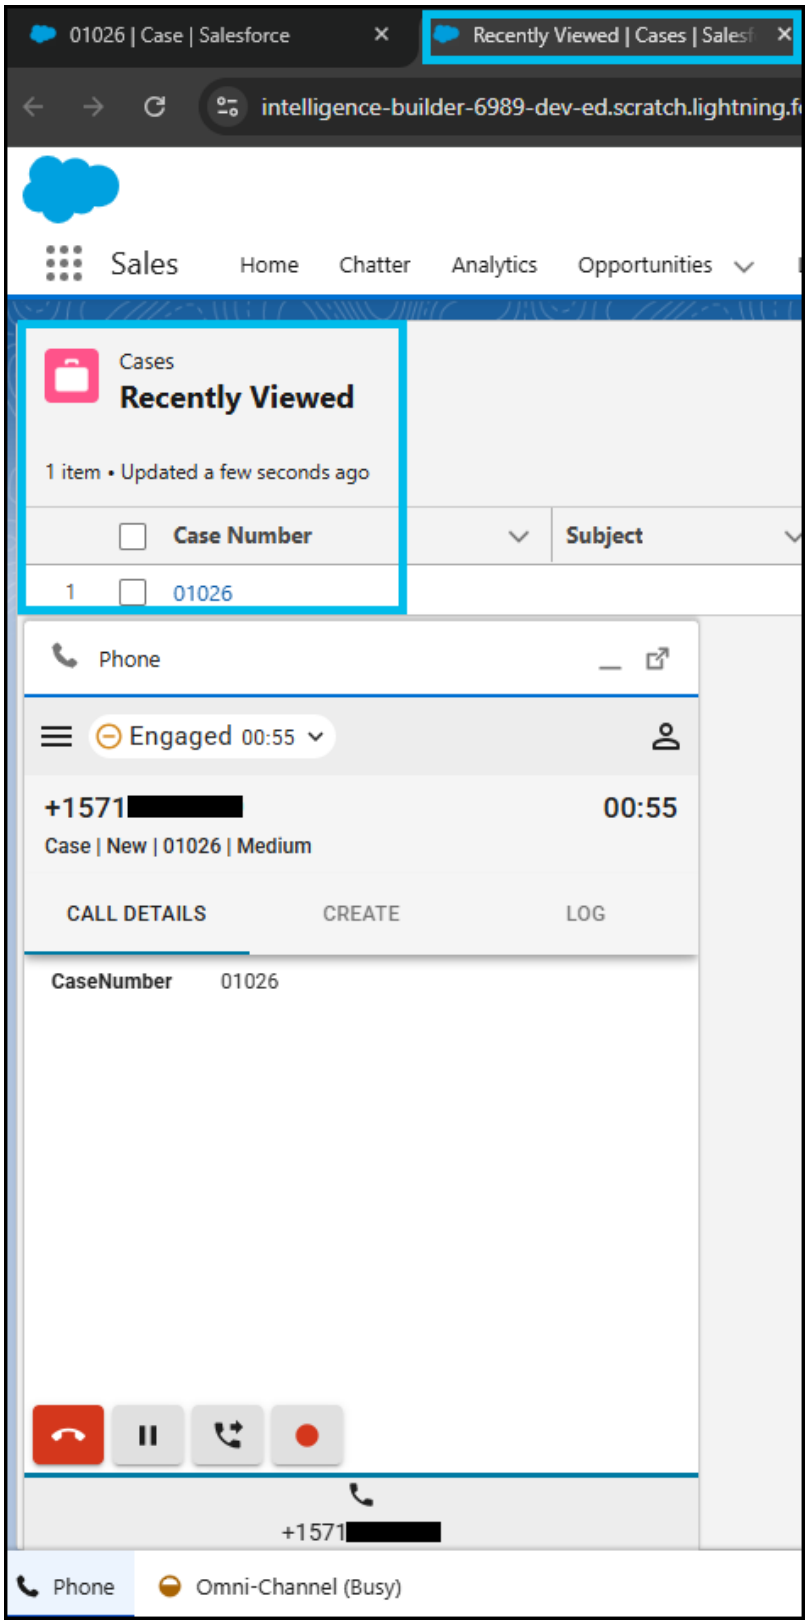


• Congratulations! You have complete the task.



Copyright © 2025 Cisco

## 1.7 Task 6 - Automatic New Case Creation Using Custom CAD Variables

Please use the following credentials to complete the tasks:

| | |
|---|---|
| `Control Hub` | https://admin.webex.com |
| `Salesforce` | https://test.salesforce.com |
| `WxCC Username` | labuser**ID**@wxccciscolive2024.wbx.ai *(where **ID** is your selected pod number (01 through 10); i.e. labuser**02**@wxccciscolive2024.wbx.ai if selected pod is 2)* |
| `WxCC Password` | ciscoLIVE1! |
| `Salesforce Username` | As provided in the Walk-In Lab (WIL) Assistant portal |
| `Salesforce Password` | As provided in the Walk-In Lab (WIL) Assistant portal |

**Info**

This task demonstrates the automatic case creation capability using the new Webex Contact Center (WXCC) Salesforce Connector, leveraging custom CAD variables from Webex Contact Center.

**Task Objectives**

- Enable auto case creation via the Salesforce Call Center configuration file.
- Set up CAD variable field mapping for auto case creation in the Salesforce Call Center settings.
- Test the auto case creation and CAD variable field mapping.

### 1.7.1 Section 1 - Modifying Call Center Options in Salesforce

**Attention**

Please use the **Firefox** browser to access, configure, and test within the Salesforce portal.

- Navigate to **'Setup'** by clicking the gear icon in the top-right corner and selecting **'Setup'**.


Copyright © 2025 Cisco

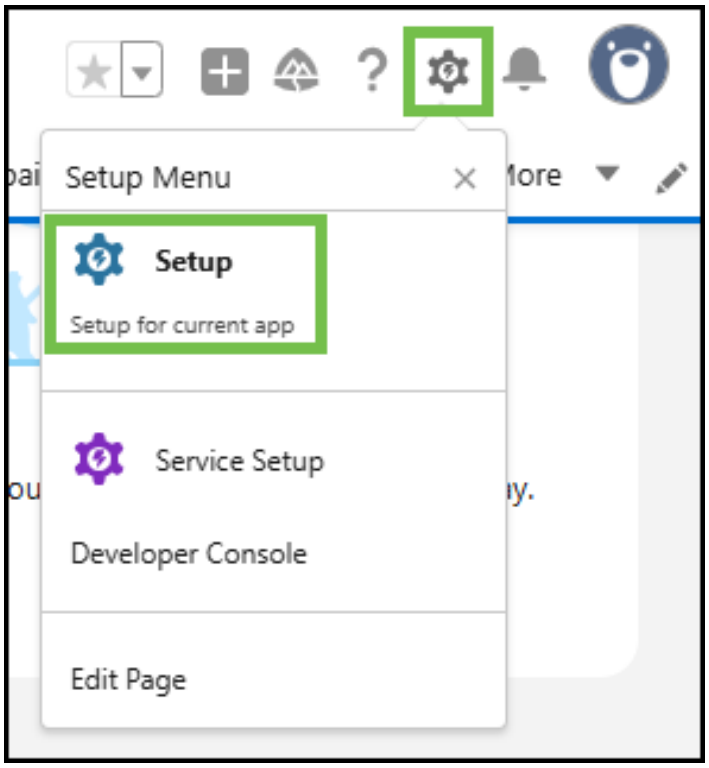


- Go to **'Feature Settings > Service > Call Center > Call Centers'** (or type *Call Centers* in the search bar in the left-hand menu).
- Click **'Edit'** for **'WxCC Call Center'**.

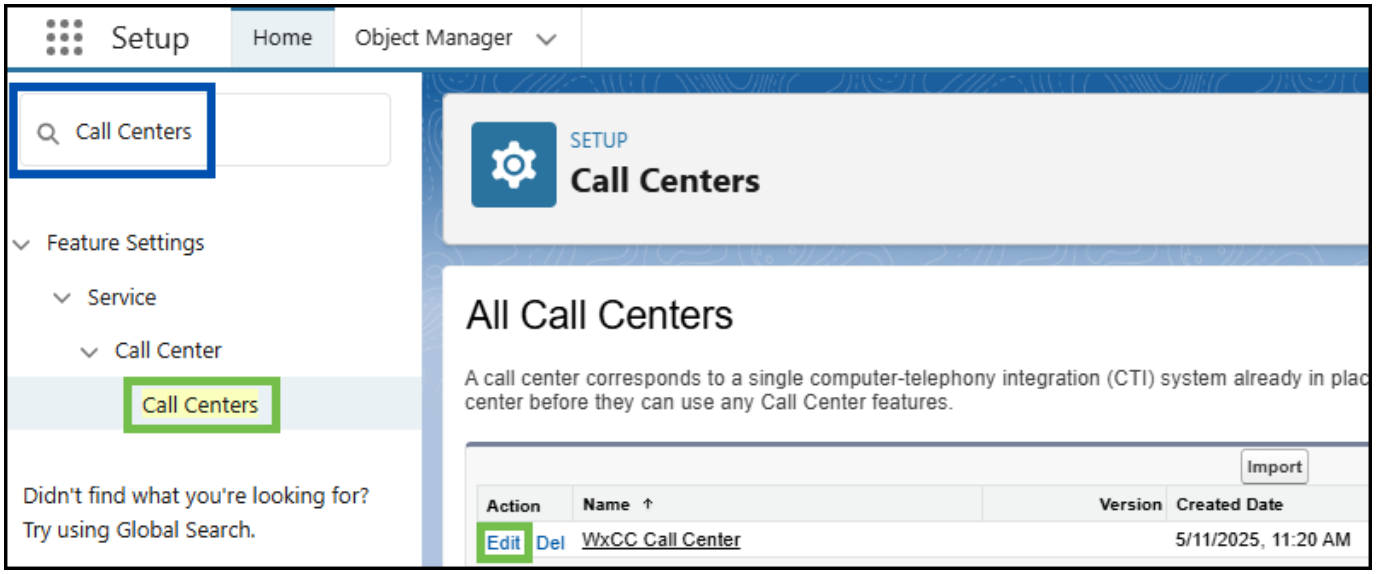


- Under **'Advanced Screen Pop Search Configuration'**, remove **'CAD Variable Name'** value (make it empty).
- Under **'Case Management'**, set **'Auto Case Creation For Inbound Calls'** to **true** (type it in manually) and **'Object Field Mappings'** as follows:

```
Subject={subject},Description={description}
```


Copyright © 2025 Cisco

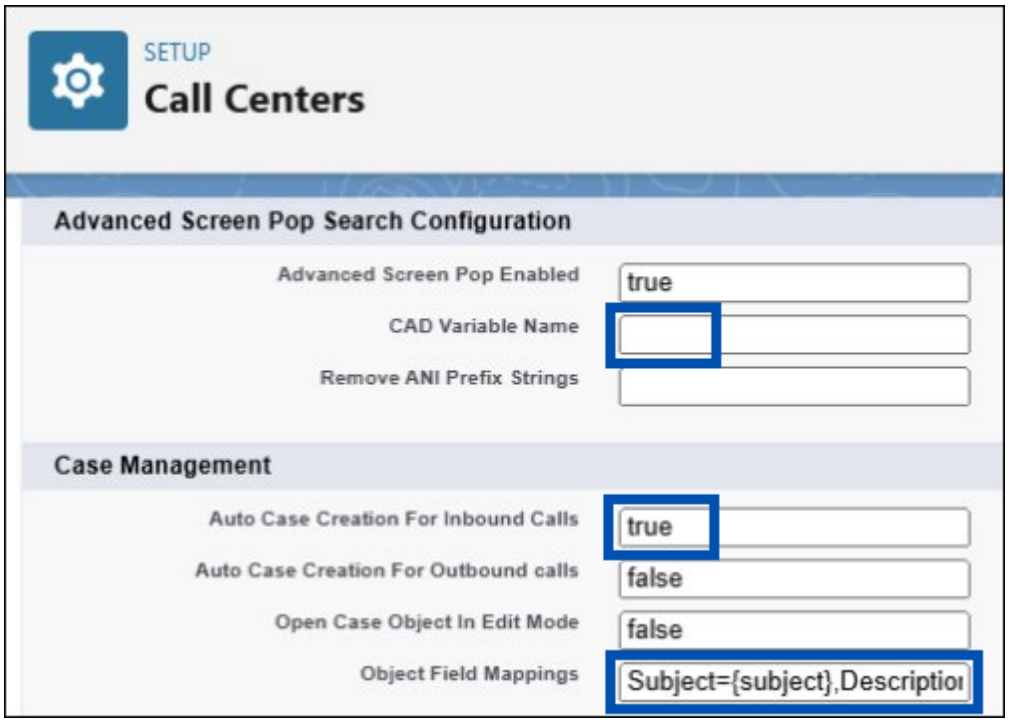


## 1.7.2 Section 2 - Testing

> **Attention**
>
> Please use the **Firefox** browser to access, configure, and test within the Salesforce portal.

- Refresh Salesforce by logging out and logging back in (make sure to close any other Salesforce tabs).

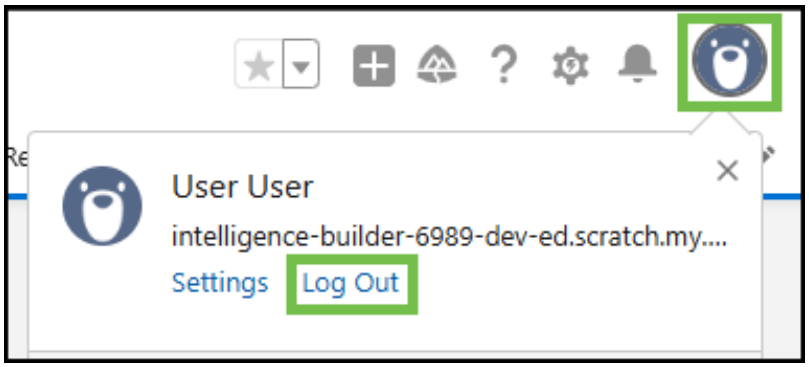


- Click on the **'App Launcher'** icon (top left).
- Search for *Sales* and click on the **'Sales'** option.


Copyright © 2025 Cisco

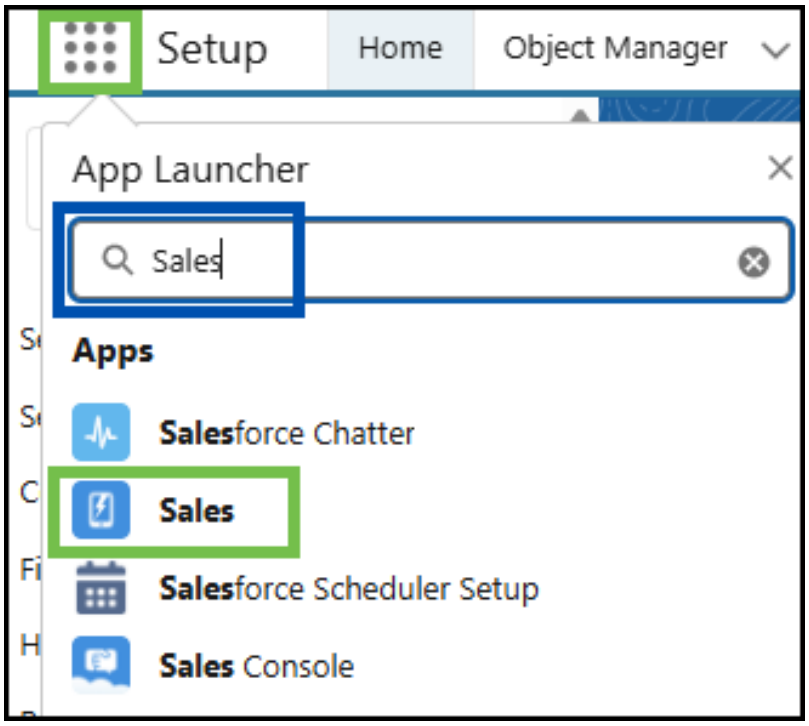


- Open the Webex Contact Center phone widget and login using the selected Webex Contact Center credentials.
- For the team use **AITeamN** (where **'N'** is your lab user number, e.g., *labuser07@wxccciscolive2024.wbx.ai*).

> **Reminder**
>
> Please select the **'Extension'** option for the phone number. Use the extension number and team assignment based on your lab user number.

Making a test call:

- Make sure that agent state is set to 'Available' and then call the channel number (as noted in the **Task 3**). In the IVR, choose **Option 5**.
- A new case is automatically created, and the configured fields are prefilled with the call data.


Copyright © 2025 Cisco

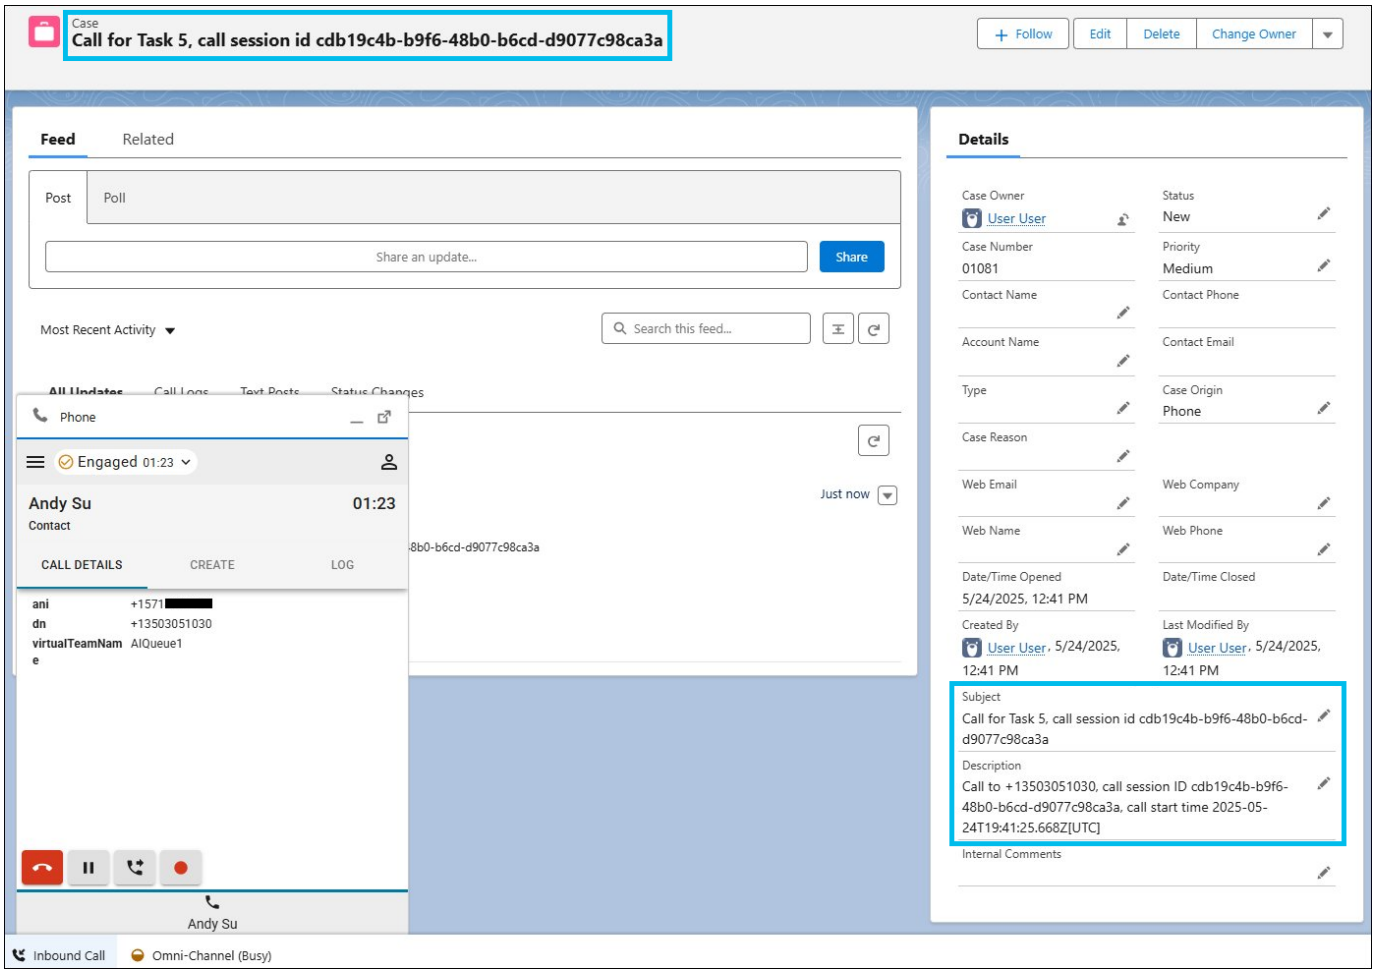


- End the call.
- Congratulations! You have complete the task and the lab!


Copyright © 2025 Cisco