

W12-P1: for midterm <P5Page_xx />

The screenshot shows a web browser at `localhost:3000/p5_xx` displaying a product list interface. The interface includes a search bar, a list of companies (All, Ikea, Marcos, Caressa), a "Clear All" button, and a "Fetch All" button. A red box highlights the "All Products Deleted" message at the top of the product list.

The React DevTools component inspector is open on the right, showing the component tree and the props for the `P5Page_xx` component. The props section shows the following state:

```
props
new entry: ""
```

The hooks section shows the following state:

```
hooks
1 State: []
2 State: {msg: "all products deleted", show: true, type: "da...}
```



The state object is expanded, showing the following properties:

```
show: true
msg: "all products deleted"
type: "danger"
new entry: ""
```

The component is rendered by `App` using `createRoot()` and `react-dom@18.2.0`. The source file is `App_xx.js:24`.



W12-P3: install sass and convert index.css to index.scss

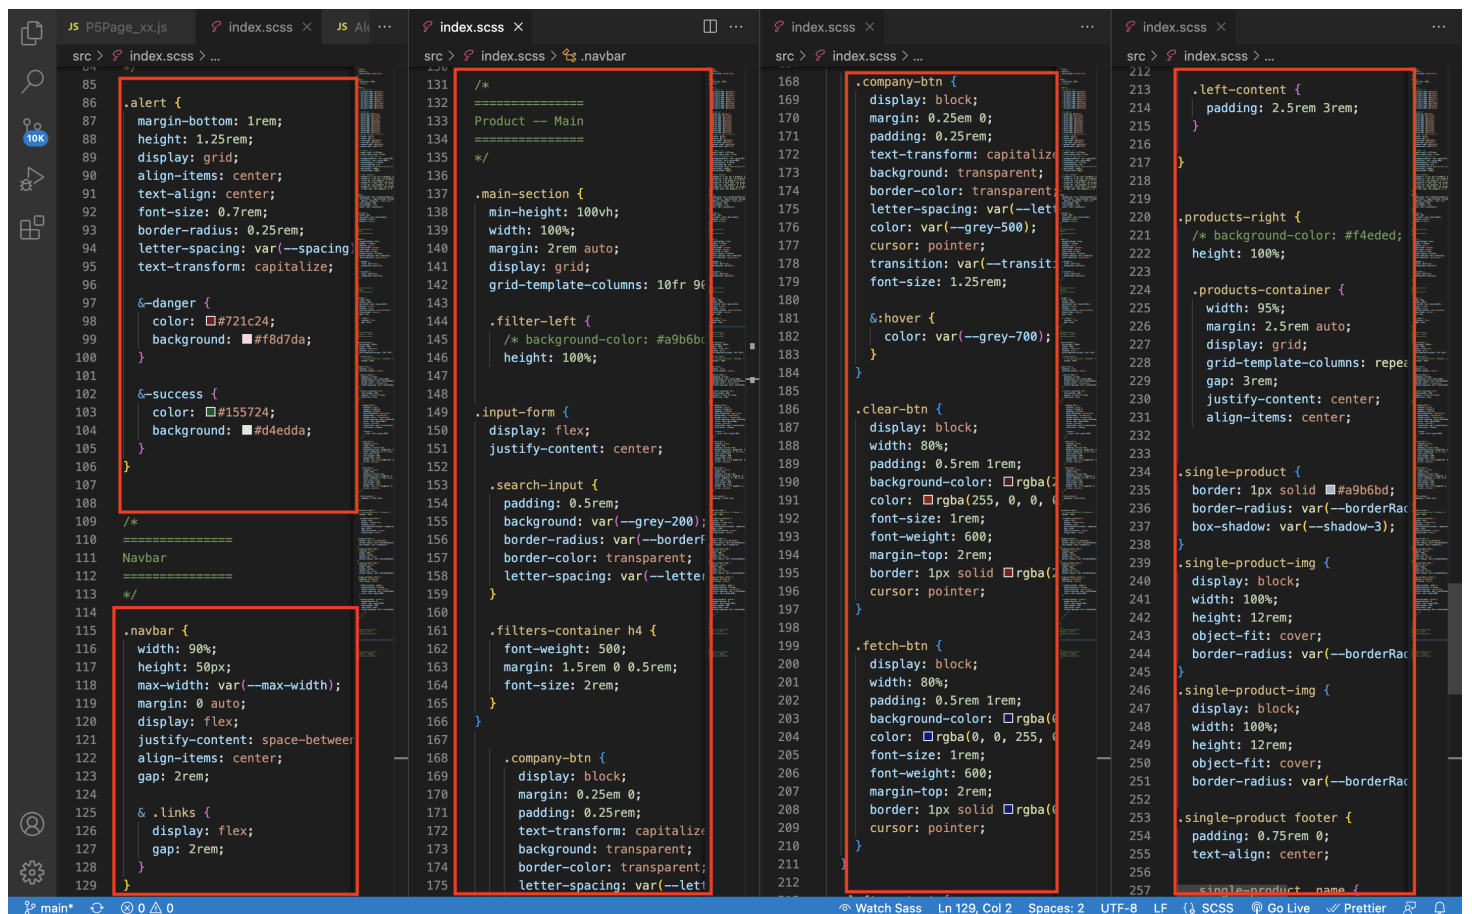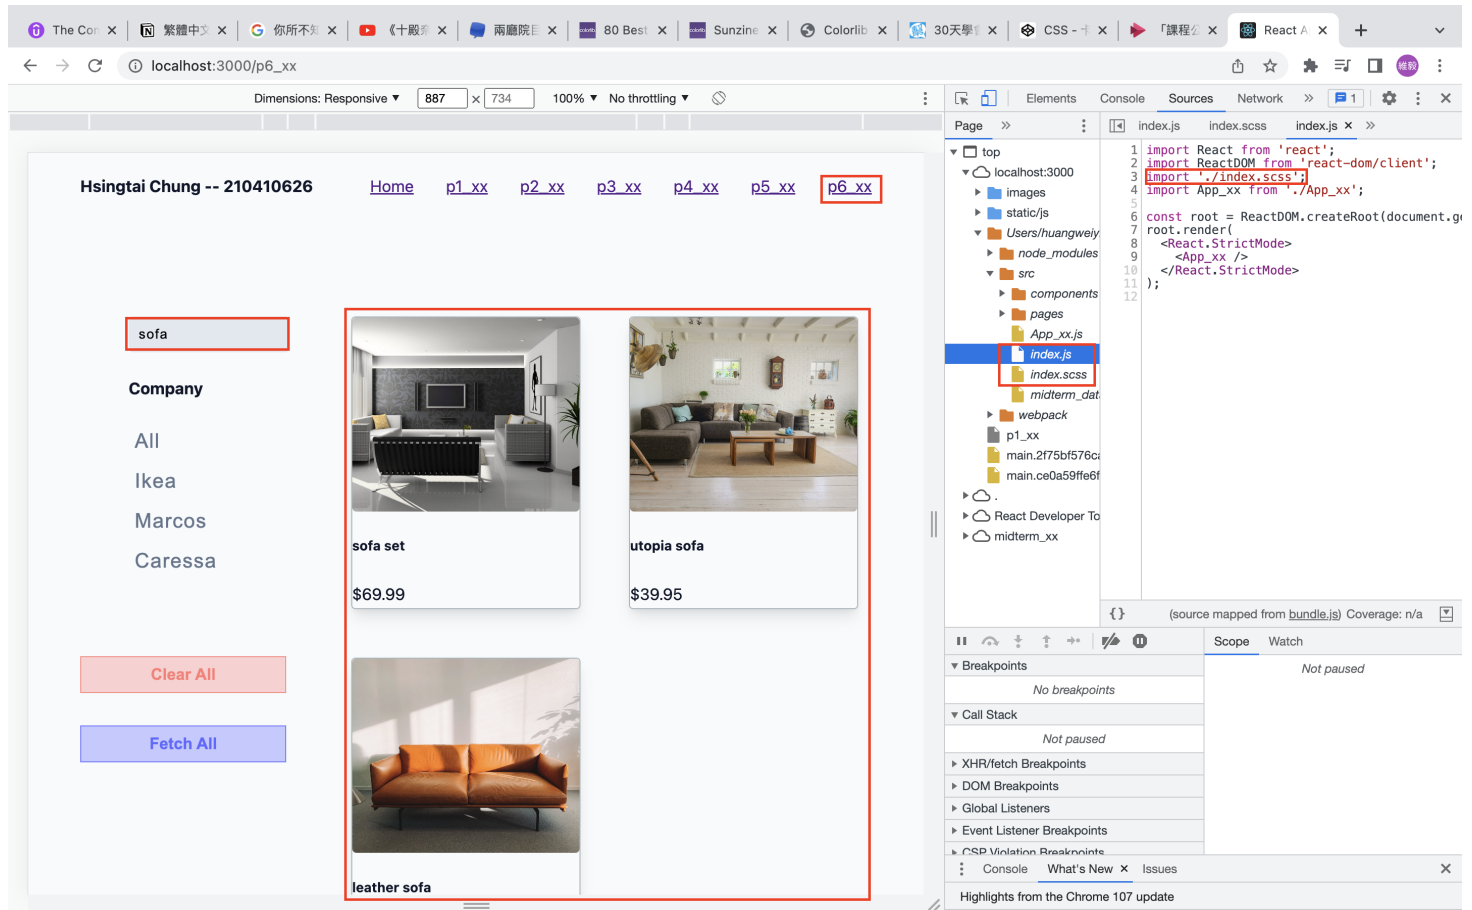



JS P5Page_xx.js

index.scss X

JS Alert_xx.js



src > index.scss > ...

```
79
80  /*
81  =====
82  Alert
83  =====
84  */
85
86  > .alert { ...
106  }
107
108
109  /*
110  =====
111  Navbar
112  =====
113  */
114
115  > .navbar { ...
129  }
130
131  /*
132  =====
133  Product -- Main
134  =====
135  */
136
137  > .main-section { ...
275  }
```

276

277

278

279 `/*`

280 `=====`

281 `Filter -- Left`

282 `=====`

283 `*/`

284

285