Quick Links



Online Demo



Download



FAQ



Latest Docs



Ask a
Question



Report a Bug



Screenshots

This page in other versions: <u>Latest</u> (4.19) | 4.18 | 4.17 | 3.6 | 2.1 | 1.6 | <u>Development</u>

pgAdmin 4 4.19 documentation » Connecting To A Server »

Warning: This documentation is for a pre-release version of pgAdmin 4


previous | next | index

Contents

- Getting Started
- Connecting To A Server
 - Server Group Dialog
 - Server Dialog
 - Master Password
 - Connect to Server
 - Connection Error
 - Import/Export Servers
- Managing Cluster Objects
- Managing Database Objects
- Creating or Modifying a Table
- Management Basics
- Backup and Restore
- <u>Developer Tools</u>
- pgAgent
- pgAdmin Project Contributions
- Release Notes
- Licence

Connect to Server ¶


Use the *Connect to Server* dialog to authenticate with a defined server and access the objects stored on the server through the pgAdmin tree control. To access the dialog, right click on the server name in the *pgAdmin* tree control, and select *Connect Server...* from the context menu.

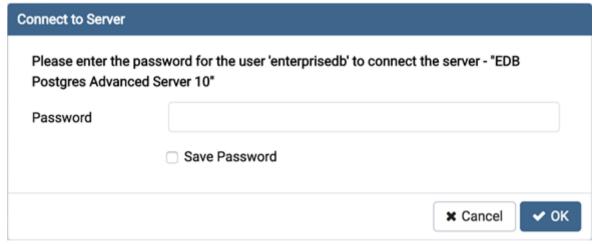

Provide authentication information for the selected server:

- Use the *Password* field to provide the password of the user that is associated with the defined server.
- Check the box next to *Save Password* to instruct the server to save the password for future connections; if you save the password, you will not be prompted when reconnecting to the database server with this server definition.

When using SSH Tunneling, the *Connect to Server* dialog will prompt for the SSH Tunnel and Database server passwords if not already saved.

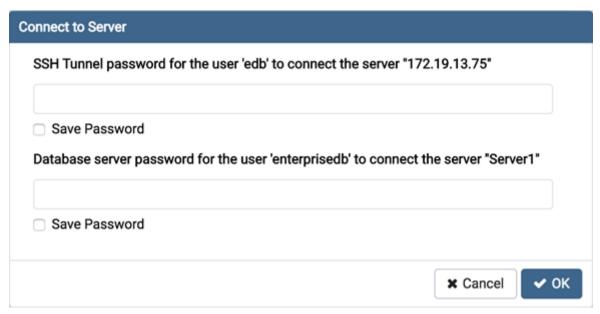

Provide authentication information for the selected server:

- Use the *Password* field to provide the password of the user that is associated with the defined server.
- Check the box next to respective Save Password to instruct the server to save the password for future connections; if you save the password, you will not be prompted when reconnecting to the database server with this server definition.

The pgAdmin client displays a message in a green status bar in the lower right corner when the server connects successfully.

If you receive an error message while attempting a connection, verify that your network is allowing the pgAdmin host and the host of the database server to communicate. For detailed information about a specific error message, please see the <u>Connection Error</u> help page.

To review or modify connection details, right-click on the name of the server, and select *Properties...* from the context menu.